


Texecom power reset · rev A · top side (component side)

Viewed from the TOP, as the engraved legend reads. Scale 2:1 (print at 100%, A4 landscape). Parts sit on this side; most joints are soldered underneath.

SuperMini (U3): USB-C at this edge →

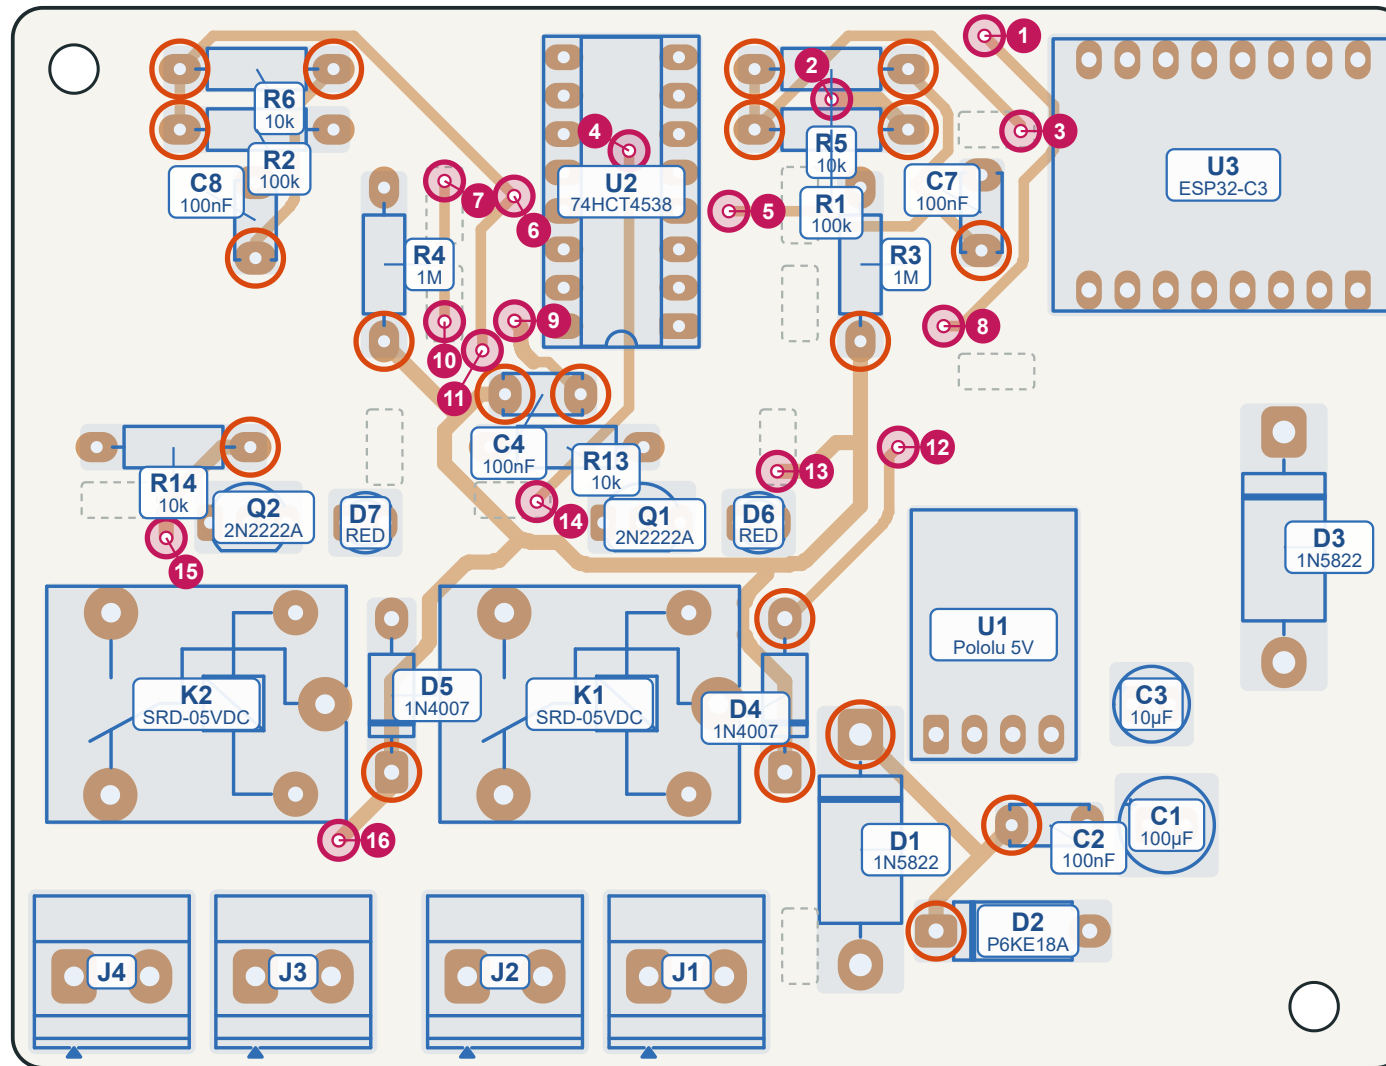

terminal edge (J1-J4)

Top-side parts

C1	100µF	J4	AC OUT
C2	100nF	K1	SRD-05VDC
C3	10µF	K2	SRD-05VDC
C4	100nF	Q1	2N2222A
C7	100nF	Q2	2N2222A
C8	100nF	R1	100k
D1	1N5822	R2	100k
D2	P6KE18A	R3	1M
D3	1N5822	R4	1M
D4	1N4007	R5	10k
D5	1N4007	R6	10k
D6	RED	R13	10k
D7	RED	R14	10k
J1	BAT IN	U1	Pololu 5V
J2	BAT OUT	U2	74HCT4538
J3	AC IN	U3	ESP32-C3

Key

- pad with a top track: solder on top too (20)
- via (wire link, both sides; same numbers as the bottom drawing)
- ⋮ 1206 part on the bottom side

Mount axial and disc parts 1–2mm raised so the ringed top pads can be reached. The rest is soldered on the bottom only (see README §6c).