


WOODY CONTROLLER BODY | BOTTOM PLATE | rev A | 1 per instrument | 1.2 mm aluminium

Bottom plate - plan, seen from above (top face up, the studs' heads in the underside, away from the viewer)

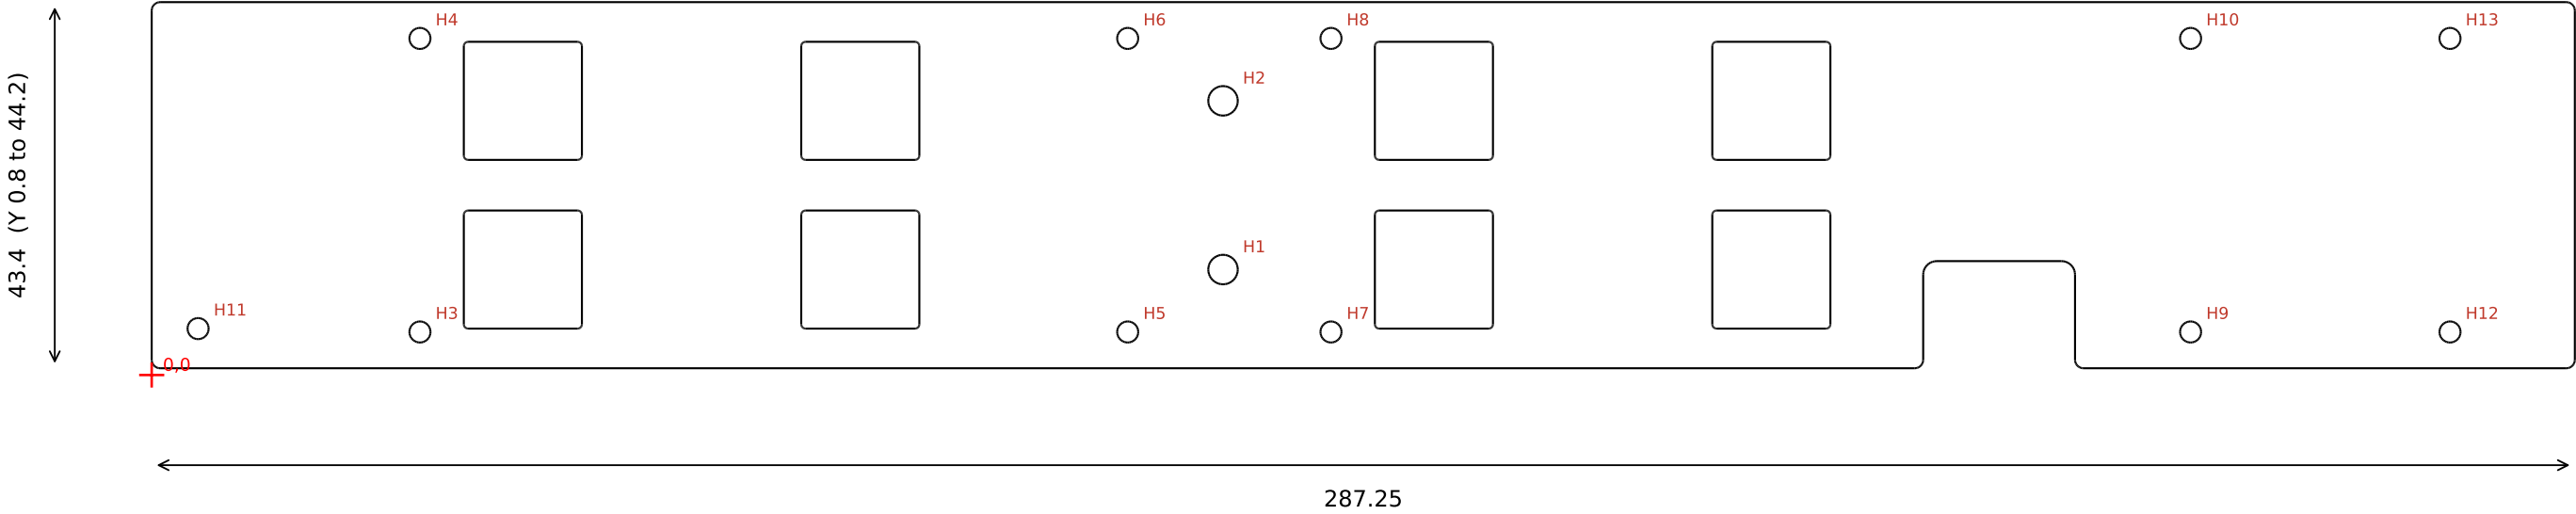

HOLES (part frame, mm)

id	what	X	Y	dia	depth	goes in it (hardware/bom.csv)
H1	U-bolt leg	127	12.5	3.5	through	MECH-UBOLT: U-bolt + 2 nylocs (size: config/body.yaml hardwa
H2	U-bolt leg	127	32.5	3.5	through	MECH-UBOLT: U-bolt + 2 nylocs (size: config/body.yaml hardwa
H3	stud, column	31.8	5.1	2.5	through	MECH-MB-STUD: PEM FHL-M2.5-10ZI self-clinching flush-head st
H4	stud, column	31.8	39.9	2.5	through	MECH-MB-STUD: PEM FHL-M2.5-10ZI self-clinching flush-head st
H5	stud, column	115.7	5.1	2.5	through	MECH-MB-STUD: PEM FHL-M2.5-10ZI self-clinching flush-head st
H6	stud, column	115.7	39.9	2.5	through	MECH-MB-STUD: PEM FHL-M2.5-10ZI self-clinching flush-head st
H7	stud, column	139.8	5.1	2.5	through	MECH-MB-STUD: PEM FHL-M2.5-10ZI self-clinching flush-head st
H8	stud, column	139.8	39.9	2.5	through	MECH-MB-STUD: PEM FHL-M2.5-10ZI self-clinching flush-head st
H9	stud, column	241.7	5.1	2.5	through	MECH-MB-STUD: PEM FHL-M2.5-10ZI self-clinching flush-head st
H10	stud, column	241.7	39.9	2.5	through	MECH-MB-STUD: PEM FHL-M2.5-10ZI self-clinching flush-head st
H11	stud, end mount	5.5	5.5	2.5	through	MECH-MB-STUD: PEM FHL-M2.5-10ZI self-clinching flush-head st
H12	stud, end mount	272.45	5.1	2.5	through	MECH-MB-STUD: PEM FHL-M2.5-10ZI self-clinching flush-head st
H13	stud, end mount	272.45	39.9	2.5	through	MECH-MB-STUD: PEM FHL-M2.5-10ZI self-clinching flush-head st

CUTS AND DEPTH (one file per layer, all in one frame; depths from the face named)

face	depth	what	file (in this folder)
-	through	outline, thumb switch cutouts, stud and U-bolt holes, wip	plate-bottom.dxf

NOTES

- MATERIAL: aluminium, 5052 or 6061, 1.2 thick (config/key-layout.yaml plate_thickness, the register's `plate-thickness`)
- FINISH: un-anodised (mill finish) (config/body.yaml fabrication.plate_finish)
- PROFILE TOL +/-0.13; SWITCH CUTOUTS 8 x 14 square +0.05 / -0.02 (fabrication.cutout_tol); sharp corners not required: the DXF's own
- PEM STUDS: 11 x PEM FHL-M2.5-10ZI self-clinching flush-head stud, low-displacement head, zinc-plated steel (PennEngineering (PEM)), pressed in from the UNDERSIDE, heads flush in it, shanks standing from the top face. Holes H3, H4, H5, H6, H7, H8, H9, H10, H11, H12, H13: 2.5 +0.08 / 0 (hardware.stud_hole), punched or drilled, NOT DEBURRED; >= hardware.stud_edge from any edge; squeezed flush on a flat anvil, never hammered (BOM MECH-MB-STUD)
- COUNTERSINKS: none. Every hole is a plain through-hole
- GROUND: bare metal round every hole that carries a screw head or a stud (ADR 0025)
- QTY PER INSTRUMENT: 1 | BOM PLATE-BOTTOM: 1.20mm aluminium (selected)

OPEN FIGURES this part depends on: 28 tbd, so blocking, of 62 tbd or nominal (each with what decides it: mechanical/fab/open-figures.csv)

stack.cap_clear, stack.side_inset, ends.mouth_cap_t, ends.tail_cap_t, layout.mouth_extra, layout.tail_clear, layout.underside_clear, boards.tall_l, boards.tall_w, boards.sensor_port_offset, boards.sensor_lead_row, boards.chain_plug_proud, boards.umb_adapter_t, boards.kb_end_margin, boards.board_clear, midi.hdr_sz, ethercon.offset_y, hardware.kb_mount_inset, hardware.ubolt_rod_d, hardware.ubolt_hole_clear, hardware.ubolt_span, hardware.ubolt_nut_af, hardware.ubolt_washer_od, routing.tube_lane, routing.chain_ribbon_t, routing.chain_bend_r, routing.chain_raise, routing.chain_slack