


WOODY CONTROLLER BODY | KEY PLATE | rev A | 1 per instrument | 1.2 mm aluminium

Key plate - plan, seen from above (top face up); X along the body from the mouth end, Y across

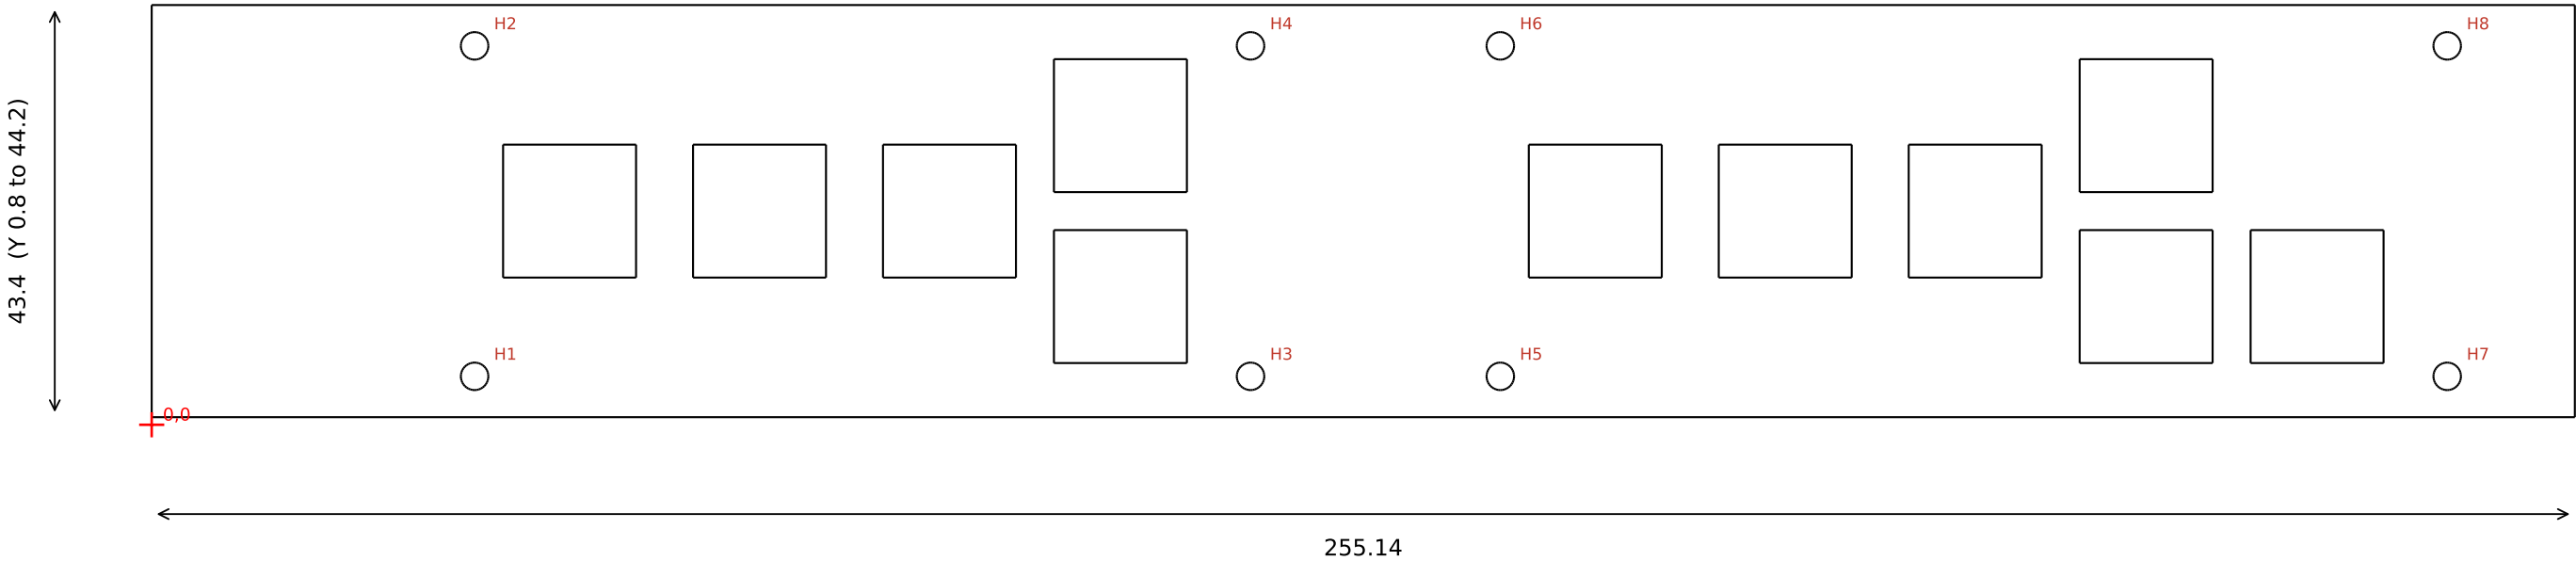

HOLES (part frame, mm)

id	what	X	Y	dia	depth	goes in it (hardware/bom.csv)
H1	column screw clearance	34	5.1	2.9	through	MECH-COL-SCREW: M2.5 low-head cap screw (DIN 7984 or similar
H2	column screw clearance	34	39.9	2.9	through	MECH-COL-SCREW: M2.5 low-head cap screw (DIN 7984 or similar
H3	column screw clearance	115.7	5.1	2.9	through	MECH-COL-SCREW: M2.5 low-head cap screw (DIN 7984 or similar
H4	column screw clearance	115.7	39.9	2.9	through	MECH-COL-SCREW: M2.5 low-head cap screw (DIN 7984 or similar
H5	column screw clearance	142	5.1	2.9	through	MECH-COL-SCREW: M2.5 low-head cap screw (DIN 7984 or similar
H6	column screw clearance	142	39.9	2.9	through	MECH-COL-SCREW: M2.5 low-head cap screw (DIN 7984 or similar
H7	column screw clearance	241.7	5.1	2.9	through	MECH-COL-SCREW: M2.5 low-head cap screw (DIN 7984 or similar
H8	column screw clearance	241.7	39.9	2.9	through	MECH-COL-SCREW: M2.5 low-head cap screw (DIN 7984 or similar

CUTS AND DEPTH (one file per layer, all in one frame; depths from the face named)

face	depth	what	file (in this folder)
-	through	outline, switch cutouts, column screw holes	plate-top.dxf

NOTES

- MATERIAL: aluminium, 5052 or 6061, 1.2 thick (config/key-layout.yaml plate_thickness, the register's `plate-thickness`)
- FINISH: un-anodised (mill finish) (config/body.yaml fabrication.plate_finish)
- PROFILE TOL +/-0.13; SWITCH CUTOUTS 11 x 14 square +0.05 / -0.02 (fabrication.cutout_tol); sharp corners not required: the DXF's own
- NO PRESSED HARDWARE in this plate. The column screws' heads bear on its top face (BOM MECH-COL-SCREW)
- COUNTERSINKS: none. Every hole is a plain through-hole
- GROUND: bare metal round every hole that carries a screw head or a stud (ADR 0025)
- QTY PER INSTRUMENT: 1 | BOM PLATE-TOP: 1.20mm aluminium (selected)

OPEN FIGURES this part depends on: 14 tbd, so blocking, of 25 tbd or nominal (each with what decides it: mechanical/fab/open-figures.csv)

stack.cap_clear, stack.side_inset, ends.mouth_cap_t, ends.tail_cap_t, layout.mouth_extra, layout.tail_clear, layout.underside_clear, boards.sensor_lead_row, boards.umb_adapter_t, boards.kb_end_margin, boards.board_clear, openings.usb_plug_l, openings.usb_overnold, hardware.kb_mount_inset