

Happiso Global

WhatsApp: +8618589025486
Email: contact@happiso.com
Web: www.happiso.com

Mini Redundant

AC INPUT TO DC OUTPUT

输出特性



MODEL	WATTAGE	OUTPUT					
		+5V	+12V	+3.3V	-5V	-12V	+5VSB
MRW-6350P	350W	35A	22A	25A	0.5A	1.2A	2A
MRW-6400P	400W	35A	28A	25A	0.5A	1.2A	2A
MRW-6420P	420W	35A	28A	25A	0.5A	1.2A	2A
REGULATION LOAD		±5%	±5%	±5%	±10%	±10%	±5%
RIPPLE AND NOISE		50mV	120mV	50mV	150mV	150mV	60mV

NEITHER +5V AND +3.3V, NOR +3.3V AND +12V SHOULD EXCEED 40 / 48 / 48A

+5V, +3.3V AND +12V TOTAL MAX : 330/378/398W

操作规格:

温度范围: 操作温度 0°C ~ 40°C, 储存温度 -20°C ~ 80°C

断电后电源维持时间: 16 ms MINIMUM AT NORMAL INPUT VOLTAGE

效率: 63% TYPICAL @ 115V FULL LOAD

电源良好信号: ON DELAY 100 ms TO 500 ms, OFF DELAY 1 ms

输出保护: OPP / OVP / SCP

故障报警方法: LED, BUZZER, TTL SIGNAL

热插拔 / 热插拔冗余功能

平衡负载共享设计

输出电压补偿设计

模块电路采取隔离式设计: BUILT-IN IN THE POWER MODULE

尺寸: 185 (D) X 150 (W) X 86 (H) mm

此电源须搭配机箱组成使用, 不允许单独操作使用, 搭配机箱使用符合 EMC 电磁兼容法规要求

MRW-6350P
MRW-6400P
MRW-6420P

输入特性:

电压范围:

90 ~ 264 VAC FULL RANGE

频率:

47 ~ 63 Hz

输入电流:

8/4 AMPS MAXIMUM AT ANY LOW/HIGH RANGE INPUT VOLTAGE

满载电流:

80/80 AMPS @ 110/220 VAC

功率因数:

≥ 95%, 当输入为 115V, 全载条件下, 设计符合 IEC61000-3-2

EMC

EMI 符合:


IEC61000-3-2, FCC, CISPR 22(EN 55022)

EMS 符合:

EN61000-4-2 ESD, EN61000-4-4 EFT, EN61000-4-5 SURGE

安全符合:

UL, CE, CCC, GSCT

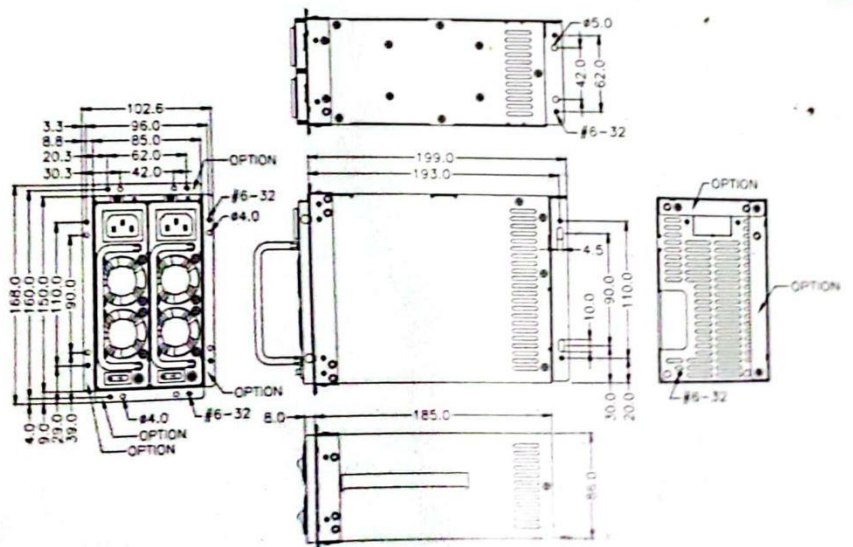

Mini Redundant

Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com

