CE Radio Test Report

APPLICANT	**:**	**Magne AI Global tech limited**
EQUIPMENT	**:**	**MAG1**
BRAND NAME	**:**	**MaQ**
MODEL NAME	**:**	**MA1**
STANDARD	**:**	**ETSI EN 301 893 V2.2.1 (2024-11)**
TEST DATE(S)	**:**	**Mar. 03, 2026 ~ Mar. 17, 2026**

The measurements shown in this test report were made in accordance with the procedures given in ETSI EN 301 893 V2.2.1 (2024-11).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia

ACCREDITED
Cert #5145.02

Sporton International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
ER612311B	Rev. 01	Initial issue of report	May 25, 2026

SUMMARY OF TEST RESULT

CLAUSE (EN 301 893)	TEST PARAMETER	PASS/FAIL	REMARK
Transmitter Parameters			
4.2.1	Centre Frequencies	PASS	-
4.2.2	Channel Bandwidth	PASS	-
4.2.3	RF Output Power, Transmit Power Control (TPC)	PASS	-
4.2.3	Power Density	PASS	-
4.2.4	Transmitter Spurious Emissions	PASS	Under limit 5.11 dB at 6986.50 MHz
4.2.6	Dynamic Frequency Selection (DFS)	PASS	-
4.2.7	Adaptivity	PASS	-
Receiver Parameters			
4.2.5	Receiver Spurious Emissions	PASS	Under limit 6.14 dB at 31.94 MHz
4.2.8	Receiver Blocking	PASS	-
4.2.9	Adjacent channel selectivity	PASS	-
B.2.2.11	Country determination capability	Not Required	Required for RLAN devices that are capable of applying an RF output power of greater than 25 mW EIRP in sub-band 4.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1. General Description

1.1 Applicant

Magne AI Global tech limited
FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET KWUN TONG HK

1.2 Manufacturer

Magne AI Global tech limited
FLAT 1019B,10/F,LIVEN HOUSE,NO.61-63 KING YIP STREET KWUN TONG HK

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	MAG1
Brand Name	MaQ
Model Name	MA1
IMEI / SN Code	Conducted : MGUGLM54300121 Receiver Blocking/Adaptivity: 016813000001410/016813000001428 DFS:016813000000057/016813000000065 Radiation: 016813000001816
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For other wireless features of this EUT, test report will be issued separately.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx / Rx Frequency Range	5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz
Channel Spacing	20MHz Bandwidth : 20MHz 40MHz Bandwidth : 40MHz 80MHz Bandwidth : 80MHz
Maximum EIRP Average Power	**<5150 MHz ~ 5250 MHz>** 802.11a : 16.84 dBm 802.11n HT20 : 17.14 dBm 802.11n HT40 : 12.99 dBm 802.11ac VHT20 : 13.70 dBm 802.11ac VHT40 : 12.72 dBm 802.11ac VHT80 : 12.13 dBm **<5250 MHz ~ 5350 MHz>** 802.11a : 17.58 dBm 802.11n HT20 : 17.80 dBm 802.11n HT40 : 13.81 dBm 802.11ac VHT20 : 14.53 dBm 802.11ac VHT40 : 13.70 dBm 802.11ac VHT80 : 13.13 dBm **<5470 MHz ~ 5725 MHz>** 802.11a : 19.13 dBm 802.11n HT20 : 19.50 dBm 802.11n HT40 : 15.67 dBm 802.11ac VHT20 : 16.28 dBm 802.11ac VHT40 : 15.52 dBm 802.11ac VHT80 : 13.22 dBm
Antenna Type	LDS Antenna
Antenna Gain	5150 MHz ~ 5250 MHz: 3 dBi 5250 MHz ~ 5350 MHz: 3 dBi 5470 MHz ~ 5725 MHz: 4 dBi
Type of Modulation	802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Power Supply	Battery / AC Adapter

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 modes, the whole testing have assessed only 802.11n HT20 / HT40 by referring to the higher output power.
3. The device supports a hotspot mode for 5150 MHz ~ 5250MHz.
4. WLAN operation in 5600 MHz ~ 5650 MHz is notched.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Facility

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Lab.	Sporton International Inc. (Kunshan)
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158
Test Site No.	**Sporton Site No. :** TH01-KS; DFS01-KS; 05CH02-KS

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	05CH02-KS	AUDIX	E3	210616
3.	DFS01-KS	SPORTON	DFS & Adaptivity	1.0

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must complies with the requirements of **ETSI EN 301 893 V2.2.1 (2024-11).**

Note: All test items were verified and recorded according to the standards and without any deviation during the test.

1.9 Test Condition

Normal Voltage	DC 3.87V
Normal Temperature	25℃
Extreme Temperature	-10℃ and 40℃

Note: The test temperature was between -10°C ~ 40°C by manufacturer requested.

2. Test Configuration of Equipment under Test

2.1 Test Consideration

a. During testing, the interface cables and equipment positions were varied according to ETSI EN 301 893 v2.2.1 (2024-11).
b. The complete test system included EUT for RF test.
c. Frequency range of radiation was investigated from 30 MHz to 26GHz.
d. For radiated measurement, pre-scanned in three orthogonal panels (X, Y, Z). The worst cases (Z Plane) were recorded in Appendix B of this report.

2.2 Connection Diagram of Test System

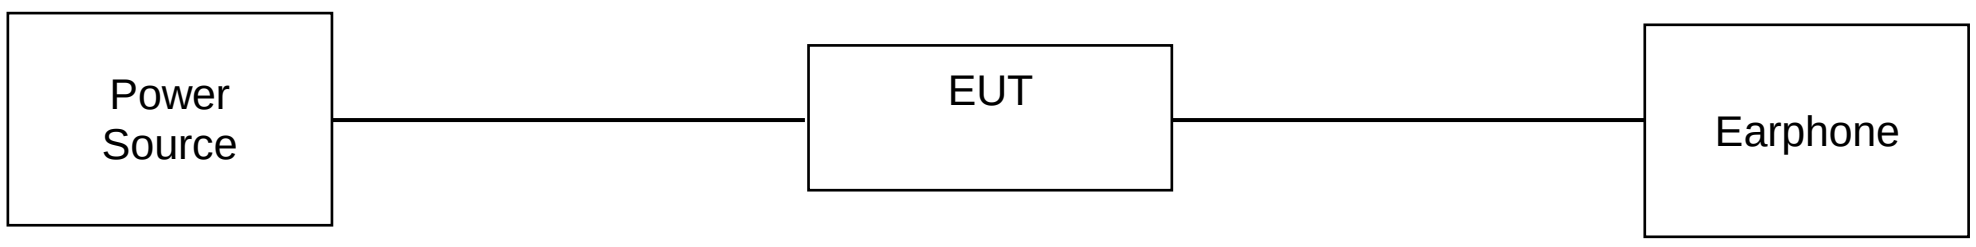

This example is connection diagram of EUT test configurations.
. For detail, please refer to test mode configuration and setup photographs for each test item.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Earphone	Apple	N/A	N/A	N/A	N/A

2.4 EUT Operation Test Setup

For WLAN RF test items, the engineering test program was provided and enabled to make EUT continuous transmitting and receiving signals.

2.5 Test Channel

Test	Clause	Test channel		
		Sub-band 1	Sub-band 2	Sub-band 3
Nominal centre frequency (see note 1)	5.4.2	$C_{1}1$	$C_{2}1$	$C_{3}1$
Occupied bandwidth	5.4.3	$C_{1}1$	$C_{2}1$	$C_{3}1$
RF output power, Power Spectral Density (PSD)	5.4.4	$C_{1}2$, $C_{1}3$	$C_{2}2$, $C_{2}3$	$C_{3}2$, $C_{3}3$
Transmit Power Control (TPC) (see note 1)	5.4.4	n.a.	$C_{2}2$, $C_{2}3$	$C_{3}2$, $C_{3}3$
Transmitter unwanted emissions outside the transmitter's operating bands (see note 1)	5.4.5	$C_{1}1$	$C_{2}1$	$C_{3}1$
Transmitter unwanted emissions within the transmitter's operating bands (for single-channel operation)	5.4.6	$C_{1}2$, $C_{1}3$	$C_{2}2$, $C_{2}3$	$C_{3}2$, $C_{3}3$
Test	**Clause**	**Test channel**		
		Sub-band 1	**Sub-band 2**	**Sub-band 3**
Transmitter unwanted emissions within the transmitter's operating bands (for multi-channel operation in adjacent channels) (see note 3 for multi-channel operation in non-adjacent channels)	5.4.6	$C_{gen}1$, $C_{gen}2$ (see note 4 for channels in the group of adjacent channels not used for transmission)		
Receiver spurious emissions (see note 1)	5.4.7	$C_{1}1$	$C_{2}1$	$C_{3}1$
Dynamic Frequency Selection (DFS)	5.4.8	n.a.	$C_{2}4$	$C_{3}4$ (see note 2)
Adaptivity (channel access mechanism)	5.4.9	$C_{gen}3$		
Receiver blocking	5.4.10	$C_{1}1$	$C_{2}1$	$C_{3}1$
Adjacent channel selectivity	5.4.11	$C_{1}1$	$C_{2}1$	$C_{3}1$

Test channel definitions:

$C_{1}1$, $C_{2}1$, $C_{3}1$: One channel from the channel plan for the sub-band. For occupied bandwidth, testing shall be repeated for every nominal channel bandwidth within the sub-band. For receiver blocking and adjacent channel selectivity, it is sufficient to only perform this test using the lowest nominal channel bandwidth.

$C_{1}2$, $C_{2}2$, $C_{3}2$: The lowest channel for every channel plan within this sub-band. For PSD testing, it is sufficient to only perform this test using the lowest nominal channel bandwidth. For unwanted emissions testing, it is sufficient to only perform this test using a nominal channel bandwidth of 20 MHz.

$C_{1}3$, $C_{2}3$, $C_{3}3$: The highest channel for every channel plan within this sub-band. For PSD testing, it is sufficient to only perform this test using the lowest nominal channel bandwidth. For unwanted emissions testing, it is sufficient to only perform this test using a nominal channel bandwidth of 20 MHz.

$C_{1}4$, $C_{2}4$, $C_{3}4$: One channel from the channel plan for this sub-band. If more than one nominal channel bandwidth is specified for this sub-band, testing shall be performed using the lowest and highest nominal channel bandwidth.

$C_{gen}1$: The lowest channel in the group of adjacent channels for all supported total bandwidths (N).

$C_{gen}2$: The highest channel in the group of adjacent channels for all supported total bandwidths (N).

$C_{gen}3$: One channel (in case of single-channel testing) or a group of adjacent channels (in case of multi-channel testing) from the channel plan.

NOTE 1: In case of more than one channel plan, testing of these specific requirements needs only to be performed using one of the channel plans.

NOTE 2: Where the channel plan includes channels whose nominal channel bandwidth falls completely or partly within the 5 600 MHz to 5 650 MHz band, the tests for the Channel Availability Check (CAC) (and, where implemented, for the off-channel CAC) shall be performed on one of these channels in addition to a channel within the band 5 470 MHz to 5 600 MHz or within the band 5 650 MHz to 5 725 MHz.

NOTE 3: For multi-channel operation in non-adjacent channels, each group of adjacent channels shall be tested individually with the specified test channels.

NOTE 4: If one or more of the channels in the group of adjacent channels might not be used for transmission, channel configurations suitable to verify each of the supported channel edge masks as shown in figure 2, figure 3 and figure 4 shall be tested in addition.

3. Transmitter Parameters

3.1 Centre Frequencies

3.1.1 Limit of Centre Frequencies

SUBCLAUSE 4.2.1.3	
TEST CONDITION	LIMIT
Under all test conditions	fc ±0,002 %

The Nominal Centre Frequencies (fc) for a Nominal Channel Bandwidth of 20 MHz are defined by the following formula:

$fc_n = 5\,160 + (g \times 20)$ MHz, where $0 \le g \le 9$ or $16 \le g \le 28$

Operation on the channel with g = 28 is only permitted where operation in sub-band 4 by RLAN devices is allowed by national frequency usage conditions.

Equipment may have simultaneous transmissions on more than one channel.

An offset (fc_offset) is permitted for each nominal centre frequency. The offset may be different for each nominal centre frequency, but it shall not be greater than 200 kHz. Where an offset is applied, the nominal centre frequencies used by the equipment shall be noted in the test report.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in the section 9 of this test report.

3.1.3 Test Procedure

1. Refer to Section 5.4.2 of ETSI EN 301 893 V2.2.1 (2024-11).
2. EUT is placed in the thermal chamber.
3. The transmitter output port is connected to the spectrum analyzer.
4. Set spectrum analyzer with 100 kHz RBW and 300 kHz VBW.
5. Set thermal chamber temperature and power supply voltage to suitable value.
6. Record f1 and f2 according to clause 5.4.2 of EN 301893.
7. The center frequency is calculated as (f1 + f2) / 2.
8. Repeat step 4 to 6 at different conditions and different channel.

3.1.4 Test Setup

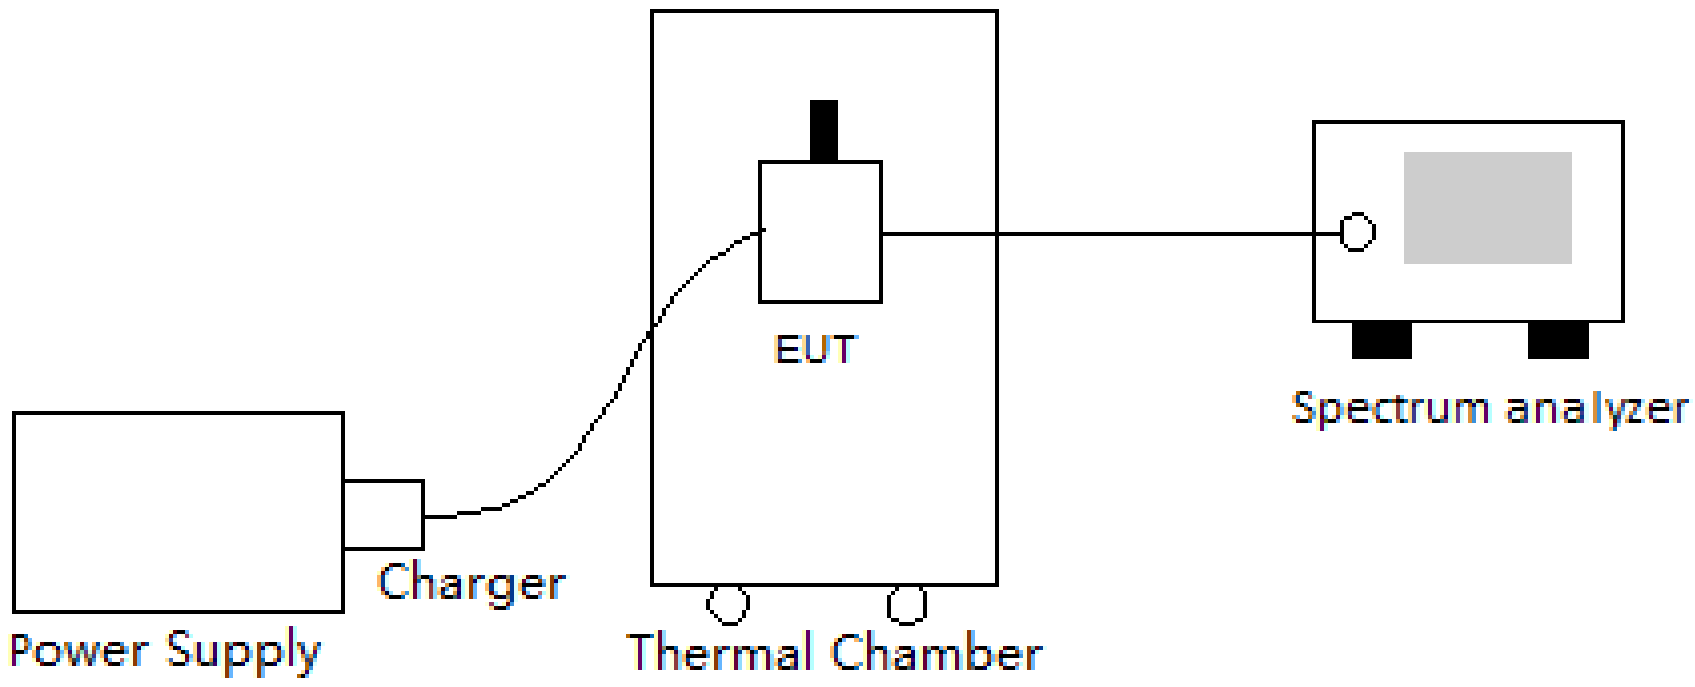

3.1.5 Test Results

Refer to Appendix A.

3.2 Nominal Channel Bandwidth and Occupied Channel Bandwidth

3.2.1 Limit of channel bandwidth

SUBCLAUSE 4.2.2.2	
TEST CONDITION	**LIMIT**
Under all test conditions	The nominal channel bandwidth for a single channel shall be 20 MHz. Alternatively, equipment may implement a lower nominal channel bandwidth with a minimum of 5 MHz, providing it still conforms to the limits defined for nominal centre frequencies (20 MHz raster). For channels whose nominal channel bandwidth falls partly or completely within sub-band 2 or sub-band 3, the occupied bandwidth shall not be less than 80 % of the nominal channel bandwidth. During a Channel Occupancy Time (COT), equipment may operate temporarily with an occupied bandwidth of less than 80 % of its nominal channel bandwidth. The occupied bandwidth shall not be less than 2 MHz. For channels whose nominal channel bandwidth falls completely outside sub-band 2 and sub-band 3, the occupied bandwidth shall be equal or less than the nominal channel bandwidth. In case of smart antenna systems (devices with multiple transmit chains) each of the transmit chains shall meet the requirements specified in this clause. The occupied bandwidth might change with time/payload.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in the section 9 of this test report.

3.2.3 Test Procedure

1. Refer to Section 5.4.3 of ETSI EN 301 893 V2.2.1 (2024-11).
2. The transmitter output port is connected to the spectrum analyzer.
3. Set spectrum analyzer with 100 kHz RBW and 300 kHz VBW.
4. Record the occupied bandwidth for each channel.

3.2.4 Test Setup

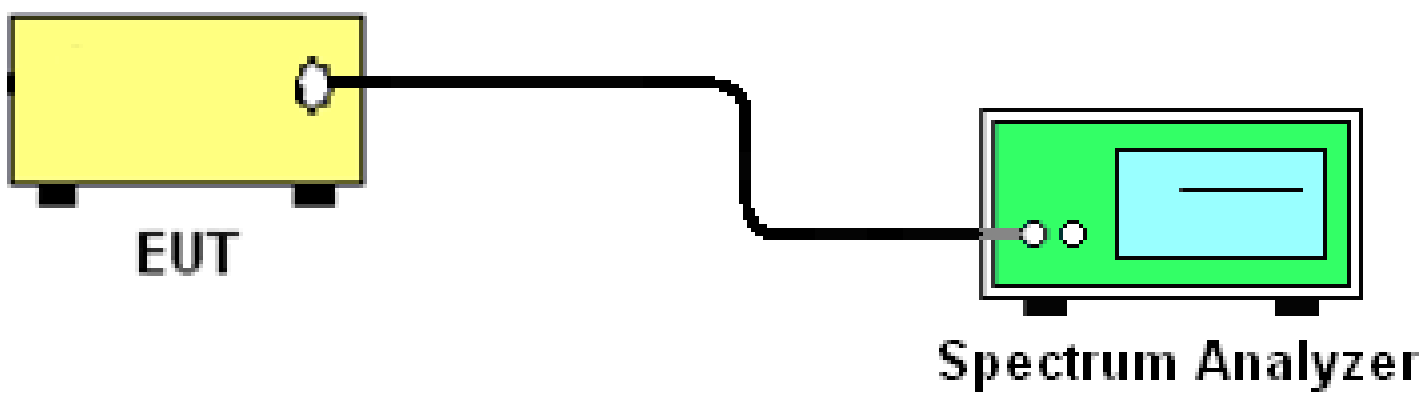

3.2.5 Test Results

Refer to Appendix A.

3.3 RF Output Power

3.3.1 Limit of RF Output Power

X	Radar detection function	
X	TPC Function	
Frequency	Highest Power (dBm)	Lowest Power (dBm)
5150-5250 MHz	23	-
5250-5350 MHz	20	No TPC
5470-5725 MHz	20	No TPC

Symbol Note

V	Support	X	Not Support

Mean e.i.r.p. limits for RF output power and power density at the highest power level

Sub-band	**RF output power limit (dBm)**		**PSD limit (dBm/MHz)**	
	with TPC (see note 3)	**without TPC**	**with TPC**	**without TPC**
Sub-band 1	23	23	10	10
Sub-band 2	23	20	10	7
Sub-band 3 (see note 2)	30 (see note 1)	27 (see note 1)	17 (see note 1)	14 (see note 1)

NOTE 1: Secondary devices without radar detection operating in sub-band 3 shall conform to the limits for sub-band 2.
NOTE 2: National frequency usage conditions may allow devices to operate in sub-band 3 on a channel with a nominal channel bandwidth that extends into sub-band 4.
NOTE 3: If TPC is used, the RF output power in sub-band sb at the lowest power level of the TPC range in sub-band sb ($P_{L,sb}$) shall be at least 6 dB less than the applicable RF output power limit with TPC.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in the section 9 of this test report.

3.3.3 Test Procedure

1. Refer to Section 5.4.4.2.1 of ETSI EN 301 893 V2.2.1 (2024-11).
2. EUT is placed in the thermal chamber.
3. The transmitter output port is connected to the power meter.
4. Set thermal chamber temperature and power supply voltage to suitable value.
5. The conducted power is equal to the reading level on power meter offset with cable loss.
6. The EIRP is equal to the conducted power plus the antenna gain.
7. Repeat step 4 to 6 at different test condition and different channels.

3.3.4 Test Setup

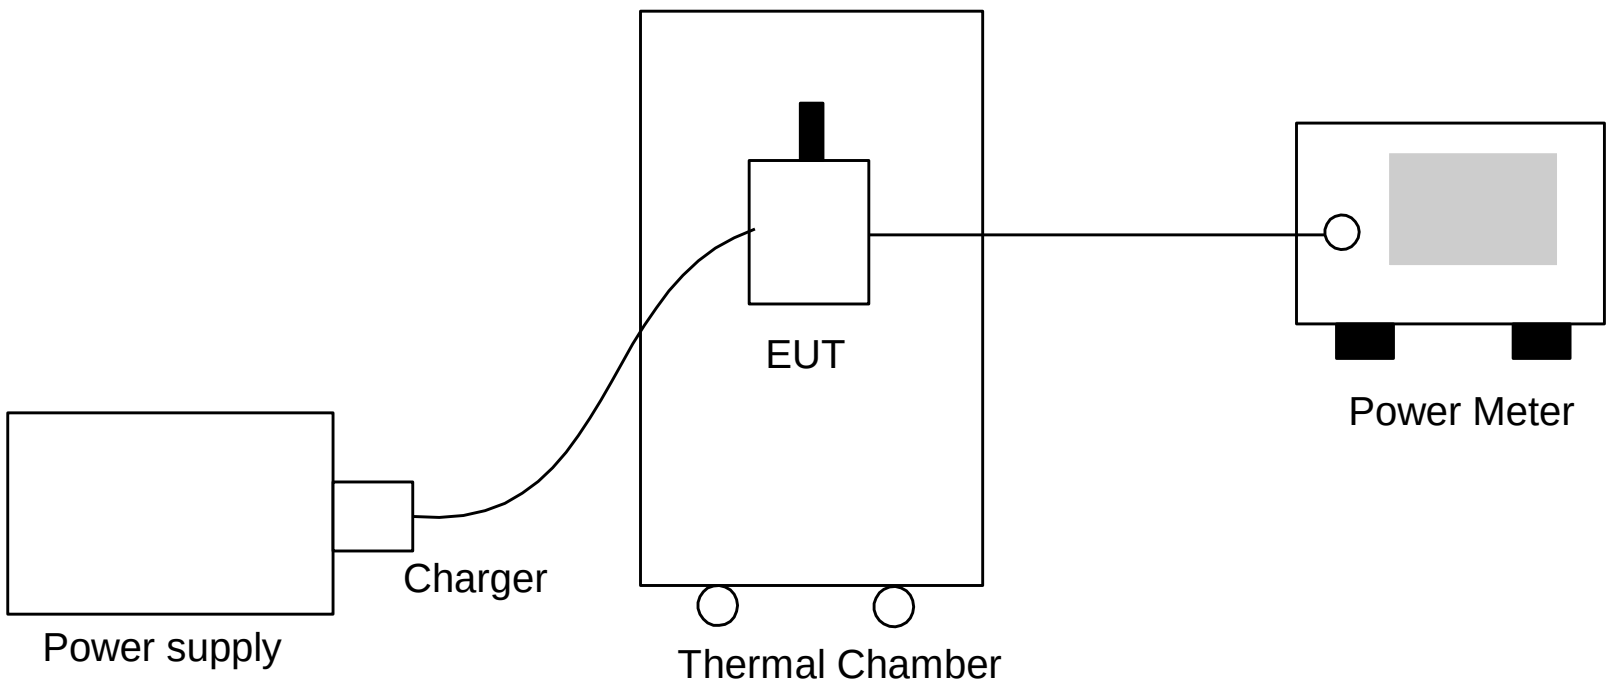

3.3.5 Test Results

TEST RESULTS DATA EIRP Power									
5150-5250-WIFI-Band1									
Mode						Power Setting	Conducted Power (dBm)		
Band	SISO	NTX	Channel	Freq (MHz)	Data Rate		Temperature Normal	Extreme Temperature Low	Extreme Temperature High
							25 °C	-10 °C	40 °C
						Ant 6	Ant 6	Ant 6	Ant 6
11a	SISO	1	36	5180	6Mbps	12.00	13.12	13.84	12.76
11a	SISO	1	48	5240	6Mbps	12.00	12.96	13.67	12.63
HT20	SISO	1	36	5180	MCS0	12.00	13.42	14.14	13.07
HT20	SISO	1	48	5240	MCS0	12.00	13.14	13.84	12.79
HT40	SISO	1	38	5190	MCS0	9.00	9.29	9.99	8.95
HT40	SISO	1	46	5230	MCS0	9.00	9.10	9.84	8.74
VHT20	SISO	1	36	5180	MCS0	9.00	10.04	10.70	9.73
VHT20	SISO	1	48	5240	MCS0	9.00	9.79	10.50	9.49
VHT40	SISO	1	38	5190	MCS0	9.00	9.05	9.72	8.69
VHT40	SISO	1	46	5230	MCS0	9.00	8.97	9.62	8.63
VHT80	SISO	1	42	5210	MCS0	9.00	8.41	9.13	8.09

Mode						PowerSetting	EIRP Power (dBm)			Gain(dBi)	EIRP Power Limit(dBm)	Pass/Fail
Band	SISO	NTX	Channel	Freq (MHz)	Data Rate		Temperature Normal	Extreme Temperature Low	Extreme Temperature High			
							25 °C	-10 °C	40 °C			
						Ant 6	Ant 6	Ant 6	Ant 6	Ant 6		
11a	SISO	1	36	5180	6Mbps	12.00	16.12	16.84	15.76	3.00	23.00	Pass
11a	SISO	1	48	5240	6Mbps	12.00	15.96	16.67	15.63	3.00	23.00	Pass
HT20	SISO	1	36	5180	MCS0	12.00	16.42	17.14	16.07	3.00	23.00	Pass
HT20	SISO	1	48	5240	MCS0	12.00	16.14	16.84	15.79	3.00	23.00	Pass
HT40	SISO	1	38	5190	MCS0	9.00	12.29	12.99	11.95	3.00	23.00	Pass
HT40	SISO	1	46	5230	MCS0	9.00	12.10	12.84	11.74	3.00	23.00	Pass
VHT20	SISO	1	36	5180	MCS0	9.00	13.04	13.70	12.73	3.00	23.00	Pass
VHT20	SISO	1	48	5240	MCS0	9.00	12.79	13.50	12.49	3.00	23.00	Pass
VHT40	SISO	1	38	5190	MCS0	9.00	12.05	12.72	11.69	3.00	23.00	Pass
VHT40	SISO	1	46	5230	MCS0	9.00	11.97	12.62	11.63	3.00	23.00	Pass
VHT80	SISO	1	42	5210	MCS0	9.00	11.41	12.13	11.09	3.00	23.00	Pass

TEST RESULTS DATA EIRP Power									
5250-5350-WIFI-Band2									
Mode						Power Setting	Conducted Power (dBm)		
Band	SISO	NTX	Channel	Freq (MHz)	Data Rate		Temperature Normal	Extreme Temperature Low	Extreme Temperature High
							25 °C	-10 °C	40 °C
						Ant 6	Ant 6	Ant 6	Ant 6
11a	SISO	1	52	5260	6Mbps	12.00	13.44	13.84	13.59
11a	SISO	1	64	5320	6Mbps	12.00	13.87	14.58	13.57
HT20	SISO	1	52	5260	MCS0	12.00	13.63	14.38	13.26
HT20	SISO	1	64	5320	MCS0	12.00	14.13	14.80	13.76
HT40	SISO	1	54	5270	MCS0	9.00	9.69	10.44	9.36
HT40	SISO	1	62	5310	MCS0	9.00	10.16	10.81	9.79
VHT20	SISO	1	52	5260	MCS0	9.00	10.38	11.13	10.04
VHT20	SISO	1	64	5320	MCS0	9.00	10.80	11.53	10.49
VHT40	SISO	1	54	5270	MCS0	9.00	9.58	10.31	9.24
VHT40	SISO	1	62	5310	MCS0	9.00	10.04	10.70	9.74
VHT80	SISO	1	58	5290	MCS0	9.00	9.39	10.13	9.03

Mode						PowerSetting	EIRP Power (dBm)			Gain(dBi)	EIRP Power Limit(dBm)	Pass/Fail
Band	SISO	NTX	Channel	Freq (MHz)	Data Rate		Temperature Normal	Extreme Temperature Low	Extreme Temperature High			
							25 °C	-10 °C	40 °C			
						Ant 6	Ant 6	Ant 6	Ant 6	Ant 6		
11a	SISO	1	52	5260	6Mbps	12.00	16.44	16.84	16.59	3.00	20.00	Pass
11a	SISO	1	64	5320	6Mbps	12.00	16.87	17.58	16.57	3.00	20.00	Pass
HT20	SISO	1	52	5260	MCS0	12.00	16.63	17.38	16.26	3.00	20.00	Pass
HT20	SISO	1	64	5320	MCS0	12.00	17.13	17.80	16.76	3.00	20.00	Pass
HT40	SISO	1	54	5270	MCS0	9.00	12.69	13.44	12.36	3.00	20.00	Pass
HT40	SISO	1	62	5310	MCS0	9.00	13.16	13.81	12.79	3.00	20.00	Pass
VHT20	SISO	1	52	5260	MCS0	9.00	13.38	14.13	13.04	3.00	20.00	Pass
VHT20	SISO	1	64	5320	MCS0	9.00	13.80	14.53	13.49	3.00	20.00	Pass
VHT40	SISO	1	54	5270	MCS0	9.00	12.58	13.31	12.24	3.00	20.00	Pass
VHT40	SISO	1	62	5310	MCS0	9.00	13.04	13.70	12.74	3.00	20.00	Pass
VHT80	SISO	1	58	5290	MCS0	9.00	12.39	13.13	12.03	3.00	20.00	Pass

TEST RESULTS DATA EIRP Power									
5470-5725-WIFI-Band3									
Mode						Power Setting	Conducted Power (dBm)		
Band	SISO	NTX	Channel	Freq (MHz)	Data Rate		Temperature Normal	Extreme Temperature Low	Extreme Temperature High
							25 °C	-10 °C	40 °C
						Ant 6	Ant 6	Ant 6	Ant 6
11a	SISO	1	100	5500	6Mbps	12.00	12.86	13.54	12.53
11a	SISO	1	140	5700	6Mbps	12.00	14.48	15.13	14.11
HT20	SISO	1	100	5500	MCS0	12.00	13.10	13.81	12.74
HT20	SISO	1	140	5700	MCS0	12.00	14.85	15.50	14.50
HT40	SISO	1	102	5510	MCS0	9.00	9.46	10.15	9.16
HT40	SISO	1	134	5670	MCS0	9.00	10.94	11.67	10.63
VHT20	SISO	1	100	5500	MCS0	9.00	9.59	10.30	9.28
VHT20	SISO	1	140	5700	MCS0	9.00	11.57	12.28	11.26
VHT40	SISO	1	102	5510	MCS0	9.00	9.40	10.12	9.04
VHT40	SISO	1	134	5670	MCS0	9.00	10.87	11.52	10.54
VHT80	SISO	1	106	5530	MCS0	9.00	8.57	9.22	8.21

Mode						PowerSetting	EIRP Power (dBm)			Gain(dBi)	EIRP Power Limit(dBm)	Pass/Fail
Band	SISO	NTX	Channel	Freq (MHz)	Data Rate		Temperature Normal	Extreme Temperature Low	Extreme Temperature High			
							25 °C	-10 °C	40 °C			
						Ant 6	Ant 6	Ant 6	Ant 6	Ant 6		
11a	SISO	1	100	5500	6Mbps	12.00	16.86	17.54	16.53	4.00	20.00	Pass
11a	SISO	1	140	5700	6Mbps	12.00	18.48	19.13	18.11	4.00	20.00	Pass
HT20	SISO	1	100	5500	MCS0	12.00	17.10	17.81	16.74	4.00	20.00	Pass
HT20	SISO	1	140	5700	MCS0	12.00	18.85	19.50	18.50	4.00	20.00	Pass
HT40	SISO	1	102	5510	MCS0	9.00	13.46	14.15	13.16	4.00	20.00	Pass
HT40	SISO	1	134	5670	MCS0	9.00	14.94	15.67	14.63	4.00	20.00	Pass
VHT20	SISO	1	100	5500	MCS0	9.00	13.59	14.30	13.28	4.00	20.00	Pass
VHT20	SISO	1	140	5700	MCS0	9.00	15.57	16.28	15.26	4.00	20.00	Pass
VHT40	SISO	1	102	5510	MCS0	9.00	13.40	14.12	13.04	4.00	20.00	Pass
VHT40	SISO	1	134	5670	MCS0	9.00	14.87	15.52	14.54	4.00	20.00	Pass
VHT80	SISO	1	106	5530	MCS0	9.00	12.57	13.22	12.21	4.00	20.00	Pass

3.4 Power Density

3.4.1 Limit of Power Density

X	Radar detection function		
X	TPC Function		
Frequency		Power Density (dBm/MHz)	
5150-5250 MHz		10	
5250-5350 MHz		7	
5470-5725 MHz		7	
Symbol Note			
V	Support	X	Not Support

Mean e.i.r.p. limits for RF output power and power density at the highest power level

Sub-band	RF output power limit (dBm)		PSD limit (dBm/MHz)	
	with TPC (see note 3)	without TPC	with TPC	without TPC
Sub-band 1	23	23	10	10
Sub-band 2	23	20	10	7
Sub-band 3 (see note 2)	30 (see note 1)	27 (see note 1)	17 (see note 1)	14 (see note 1)

NOTE 1: Secondary devices without radar detection operating in sub-band 3 shall conform to the limits for sub-band 2.

NOTE 2: National frequency usage conditions may allow devices to operate in sub-band 3 on a channel with a nominal channel bandwidth that extends into sub-band 4.

NOTE 3: If TPC is used, the RF output power in sub-band sb at the lowest power level of the TPC range in sub-band sb ($P_{L,sb}$) shall be at least 6 dB less than the applicable RF output power limit with TPC.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in the section 9 of this test report.

3.4.3 Test Procedure

1. Refer to Section 5.4.4.2.1.3.3 Option 2: For equipment without continuous transmission capability and without the capability to transmit with a constant duty cycle.
2. From all the saved results, the highest value is the maximum Power Density (e.i.r.p.) for the UUT.

3.4.4 Test Setup

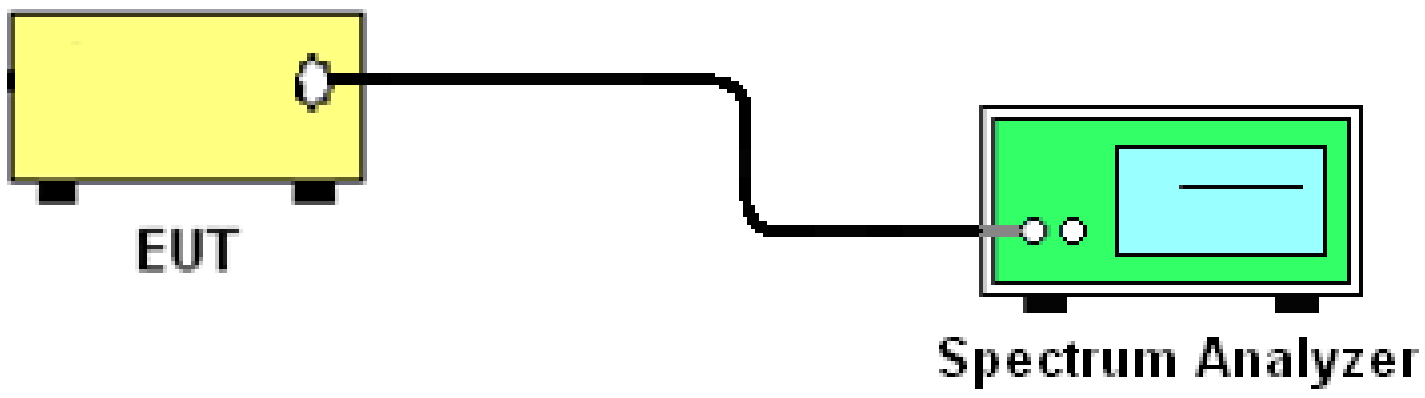

3.4.5 Test Results

Refer to Appendix A.

3.5 Transmitter Unwanted Emissions Outside of Band

Transmitter unwanted emissions outside the 5 GHz RLAN bands are radio frequency emissions outside the 5 GHz RLAN bands.

3.5.1 Limit of Transmitter Unwanted Emissions Outside of Band

In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are ERP for emissions up to 1 GHz and EIRP for emissions above 1 GHz.

SUBCLAUSE 4.2.4.1.2		
FREQUENCY RANGE	MAXIMUM POWER	BANDWIDTH
30 MHz ≤ f < to 87,5 MHz	-36 dBm	100 KHz
87,5MHz ≤ f ≤118MHz	-54 dBm	100 KHz
118 MHz < f < 174 MHz	-36 dBm	100 KHz
174 MHz ≤ f ≤230 MHz	-54 dBm	100 KHz
230 MHz < f < 470 MHz	-36 dBm	100 KHz
470 MHz ≤ f ≤ 694 MHz	-54 dBm	100 KHz
694 MHz < f ≤ 1 GHz	-36 dBm	100 KHz
1 GHz < f ≤ 26 GHz	-30 dBm	1 MHz

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in the section 9 of this test report.

3.5.3 Test Procedures

Refer to Section 5.4.5 of ETSI EN 301 893 V2.2.1 (2024-11).

Test Results Explanation:

Level (dBm) = Read Level (dBm) + Factor (dB)

Over Limit (dB) = Level (dBm) – Limit Line (dBm)

3.5.4 Test Setup

- **Test Setup of Radiated Measurement**

<Below 1GHz>

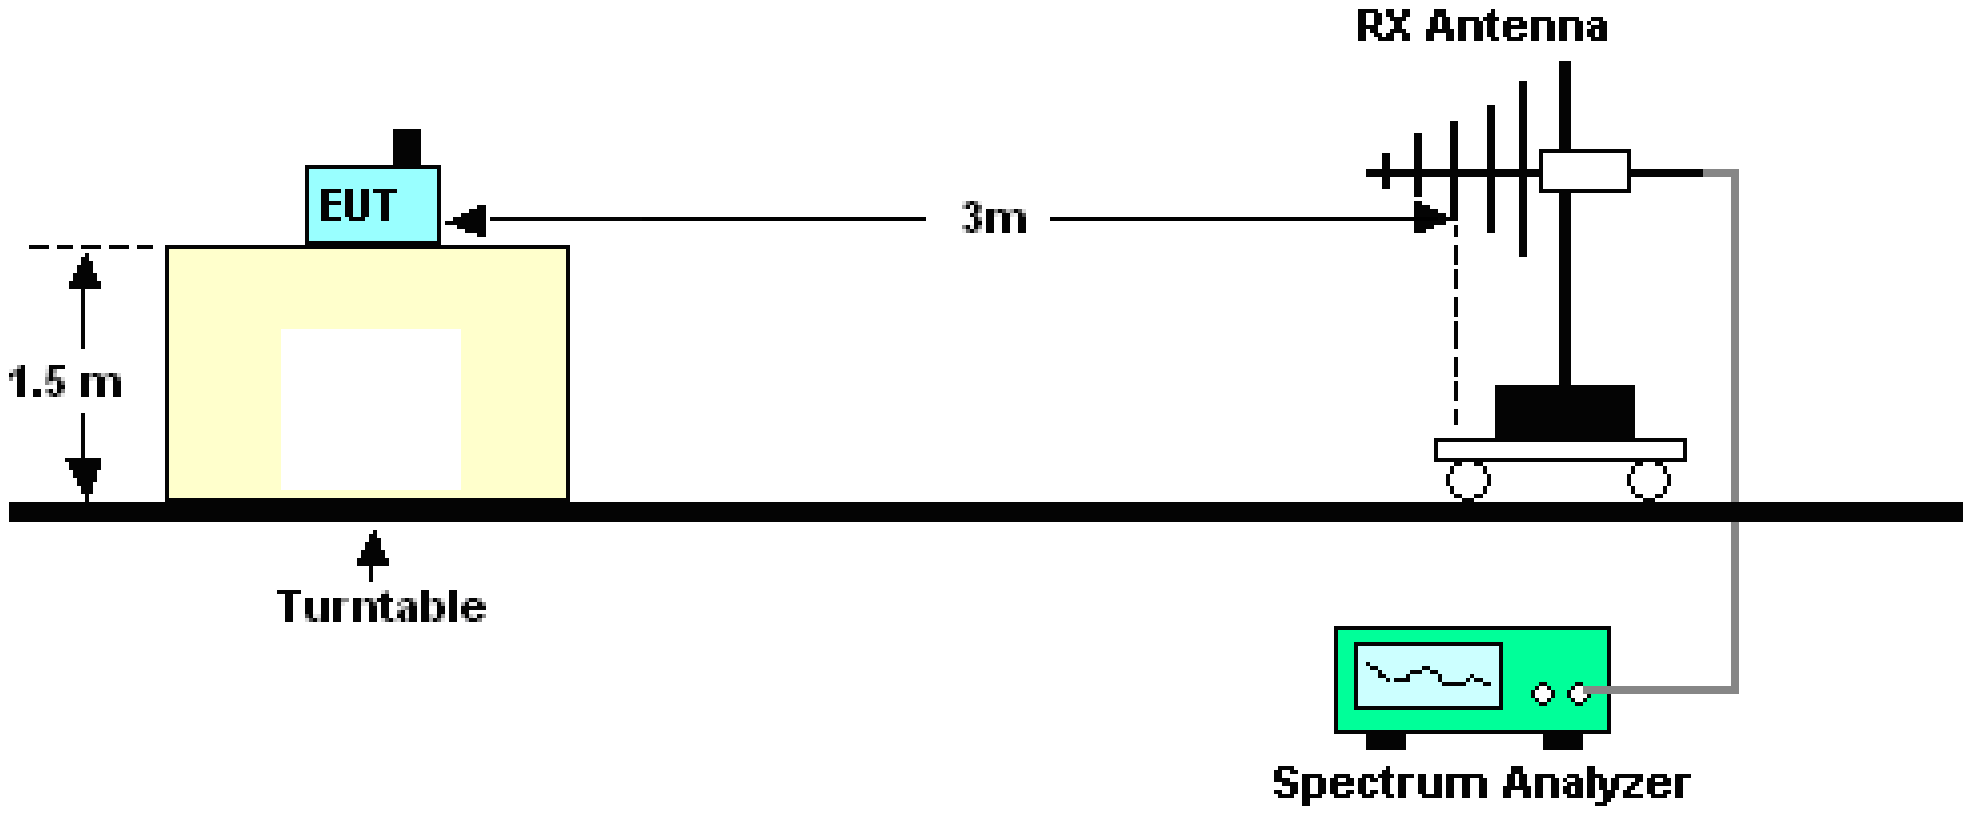

<Above 1GHz>

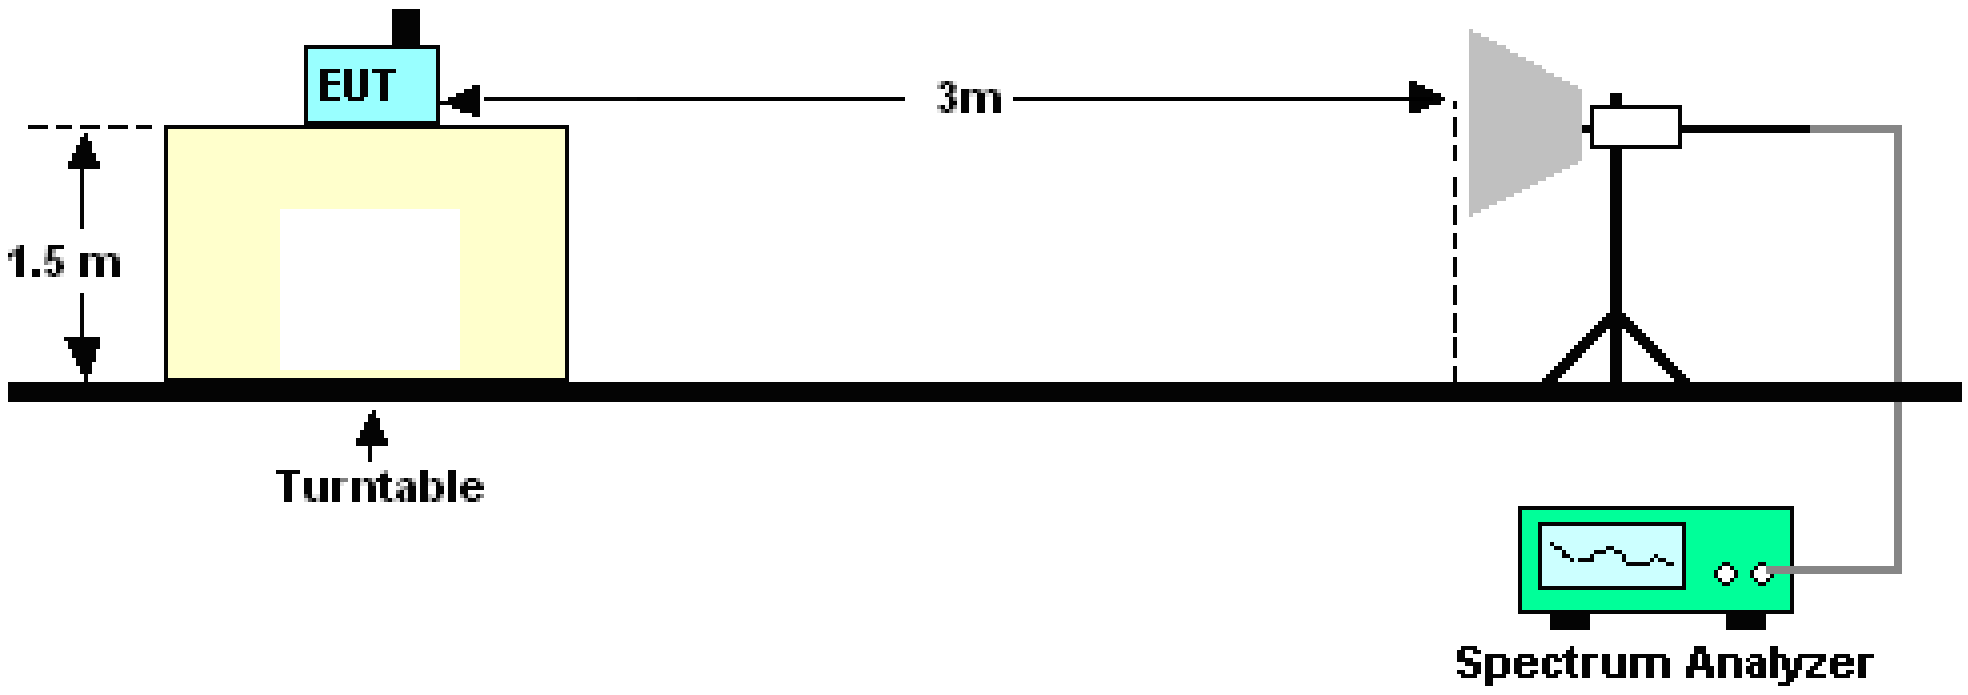

3.5.5 Test Result of Radiated Measurement

Please refer to Appendix B.

3.6 Transmitter Unwanted Emissions within the 5GHz RLAN Band

3.6.1 Limit of Transmitter Unwanted Emissions within the Band

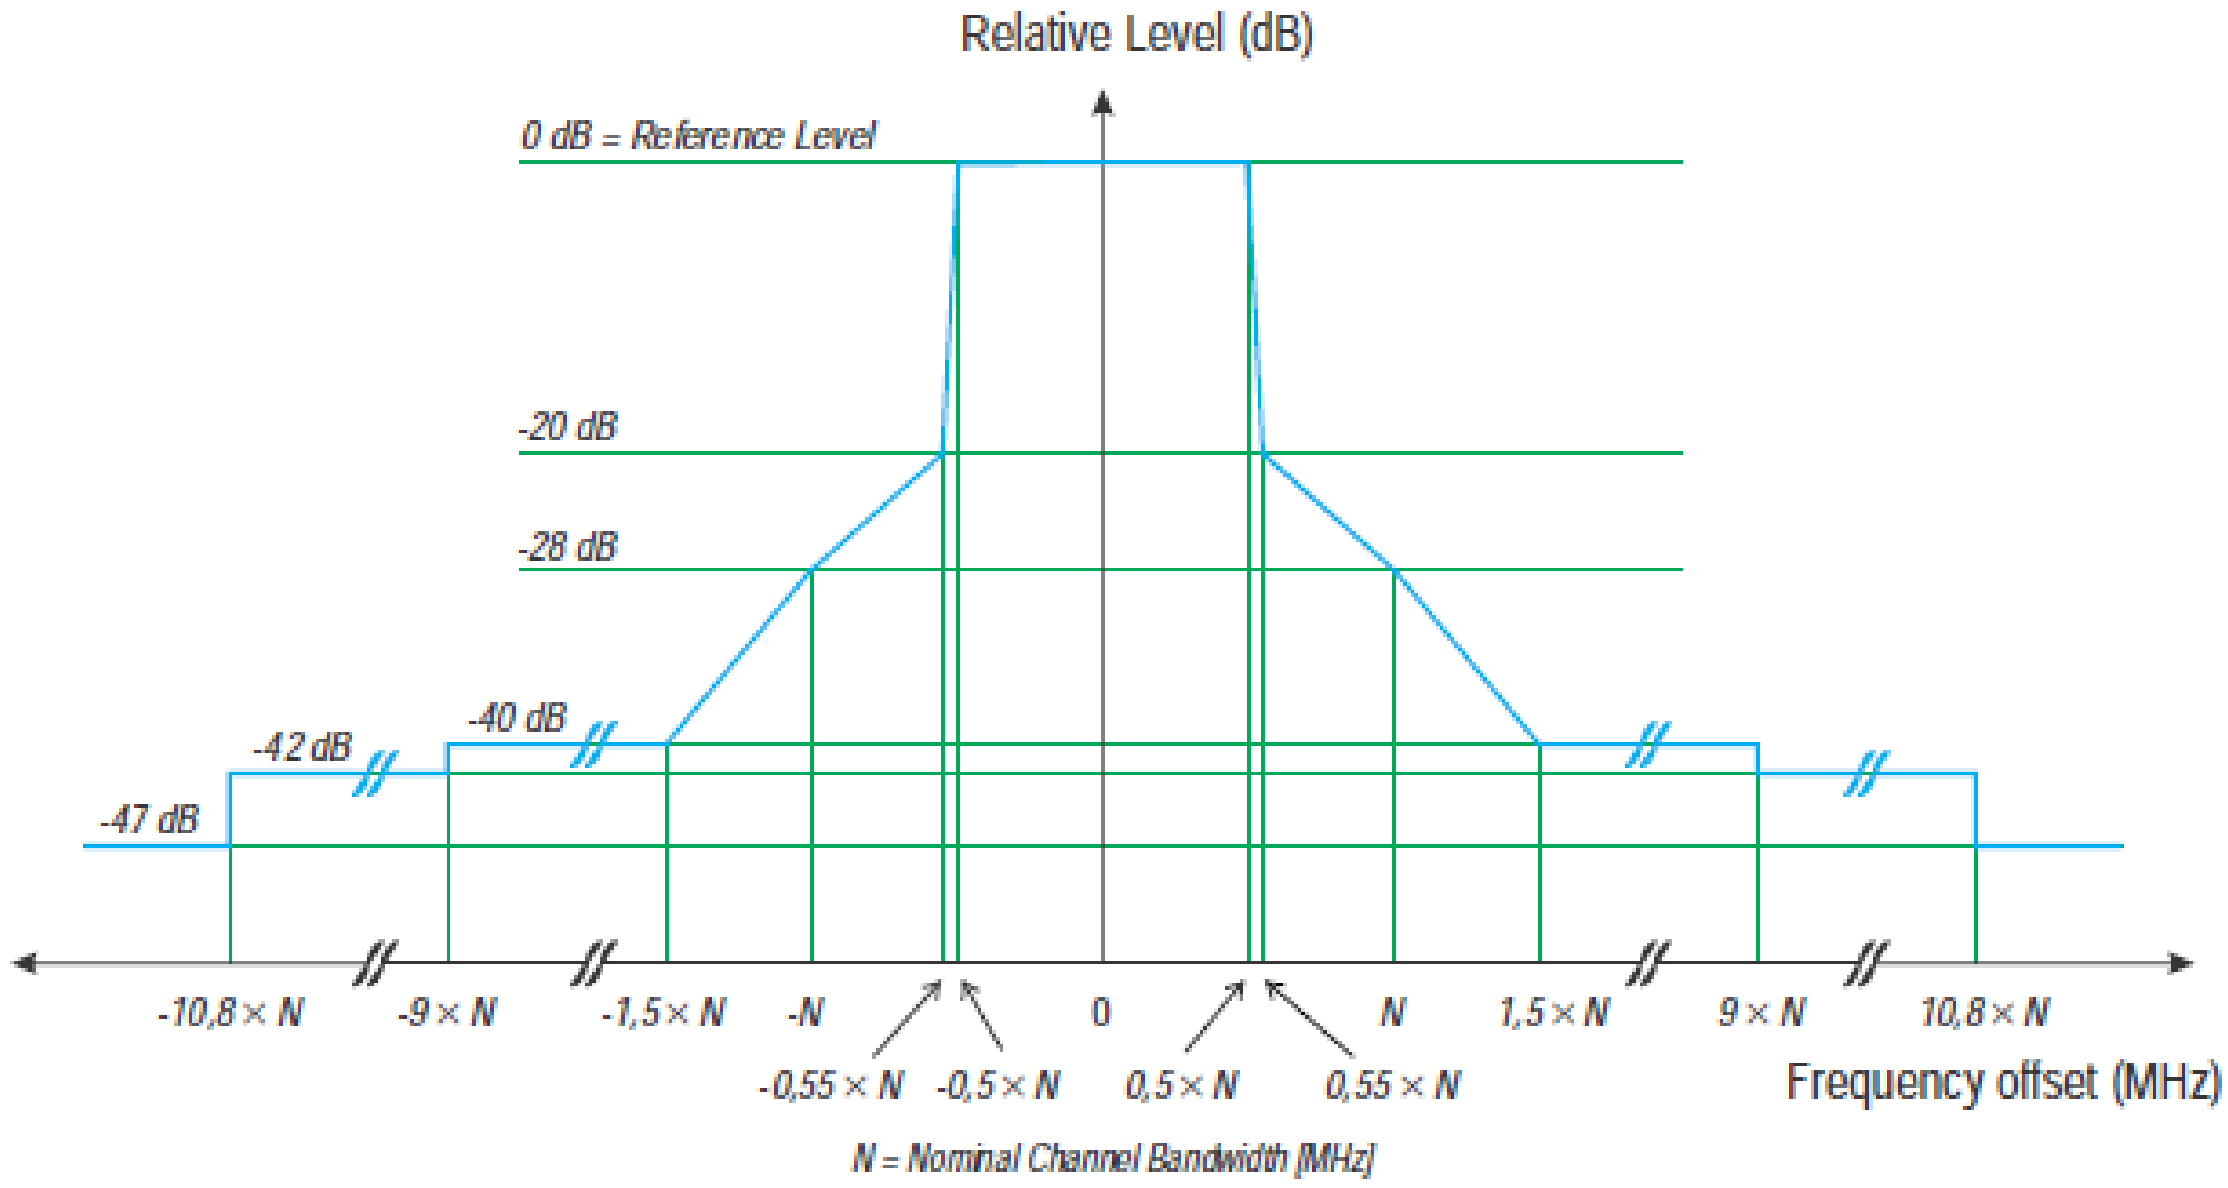

3.6.2 Measuring Instruments

Please refer to the measuring equipment list in the section 9 of this test report.

3.6.3 Test Procedures

Refer to Section 5.4.6 of ETSI EN 301 893 V2.2.1 (2024-11).

Option 2: For equipment without continuous transmission capability in 5.4.6.2.1.2 will be followed. This option can also be used as an alternative to option 1 for systems operating in a continuous transmission mode.

3.6.4 Test Setup

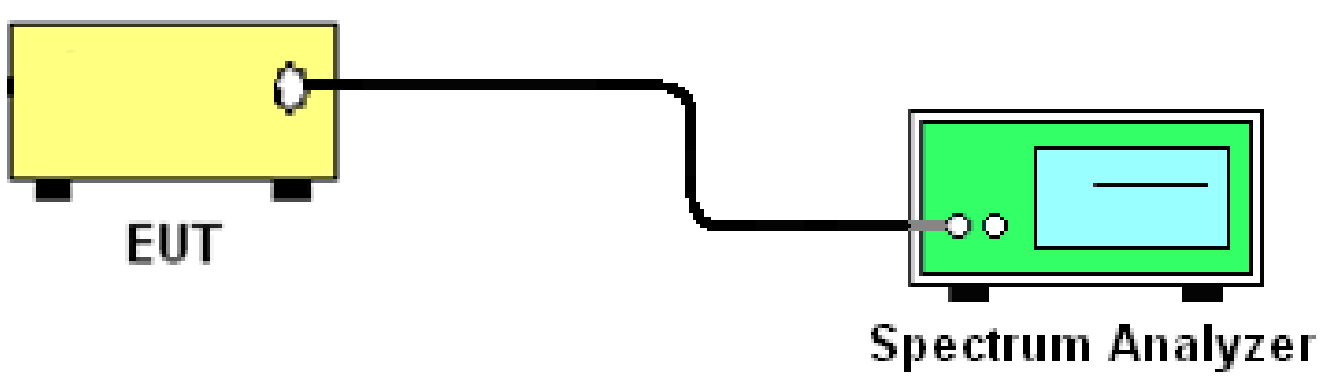

3.6.5 Test Results

Please refer to Appendix A.

3.7 Dynamic Frequency Selection (DFS)

3.7.1 EUT Operating Mode

EUT is considered as a slave device (without radar detection).

EUT Operating Mode	Master	Slave, without radar detection function	Slave, with radar detection function
	☐	☒	☐

3.7.2 Limit of DFS

DFS is required for RLAN devices in the frequency ranges 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz. Radar detection is not required in the frequency range 5 150 MHz to 5 250 MHz.

Applicability of DFS requirements

Requirement	DFS Operational mode		
	Master	Slave without radar detection (see table D.2)	Slave with radar detection (see table D.2)
Channel Availability Check	✓	Not required	✓ (note2)
Off-Channel CAC (note 1)	✓	Not required	✓ (note2)
In-Service Monitoring	✓	Not required	✓
Channel Shutdown	✓	✓	✓
Non-Occupancy Period	✓	Not required	✓
Uniform Spreading	✓	Not required	Not required
NOTE 1: If implemented. NOTE 2: A secondary device with radar detection is not required to perform a CAC or off-channel CAC at initial use of a channel but only before returning to the use of a channel where it has detected a radar signal by in-service monitoring. Where the secondary device with radar detection is under the control of its primary device and does not start transmissions on the channel until connected to that primary device, then the secondary device with radar detection does not have to perform a CAC or off-channel CAC and may rely on the CAC performed by the primary device to enable in-service monitoring.			

DFS requirement values

Parameter	Value
Channel Availability Check Time	60 seconds (see note 1)
Maximum Off-Channel CAC Time	4 hours (see Note 2)
Channel Move Time	10 seconds
Channel Closing Transmission Time	1 second.
Non-occupancy period	Minimum 30 minutes
Note 1: For channels whose nominal bandwidth falls completely or partly within the band 5600-5650 MHz, the Channel Availability Check Time shall be 10 minutes. Note 2: For channels whose nominal bandwidth falls completely or partly within the band 5600-5650 MHz, the Maximum Off-Channel CAC Time shall be 24 hours.	

Radar Detection Threshold

EIRP Spectral Density (dBm/MHz)	Value (see notes 1 and 2)
10	-62dBm
NOTE 1: This is the level at the input of the receiver of a RLAN device with a maximum EIRP density of 10 dBm/MHz and assuming a 0 dBi receive antenna. For devices employing different EIRP spectral density and/or a different receive antenna gain G (dBi) the DFS threshold level at the receiver input follows the following relationship: DFS Detection Threshold (dBm) = -62 +10 -EIRP Spectral Density (dBm/MHz) + G (dBi), however the DFS threshold level shall not be lower than -64 dBm assuming a 0 dBi receive antenna gain. NOTE 2: Secondary devices with a maximum EIRP of less than 23 dBm do not have to implement radar detection unless these devices are used in fixed outdoor point-to-point or fixed outdoor point-to-multipoint applications.	

DFS Radar Signal Parameter

Radar test signal # (Note 1 to 3)	Pulse width W [µs]		Pulse repetition frequency PRF (PPS)		Number of different PRFs	Pulses per burst for each PRF (PPB) (Note 5)
	Min	Max	Min	Max		
1	0.5	5	200	1000	1	10 (Note 6)
2	0.5	15	200	1600	1	15 (Note 6)
3	0.5	15	2 300	4000	1	25
4	20	30	2 000	4000	1	20
5	0.5	2	300	400	2/3	10 (Note 6)
6	0.5	2	400	1200	2/3	15 (Note 6)
Reference	1	1	700	700	1	18

NOTE 1: Radar test signals 1 to 4 are constant PRF based signals. See figure D.1. These radar test signals are intended to simulate also radars using a packet based Staggered PRF. See figure D.2.
NOTE 2: Radar test signal 4 is a modulated radar test signal. The modulation to be used is a chirp modulation with a ±2,5 MHz frequency deviation which is described below.

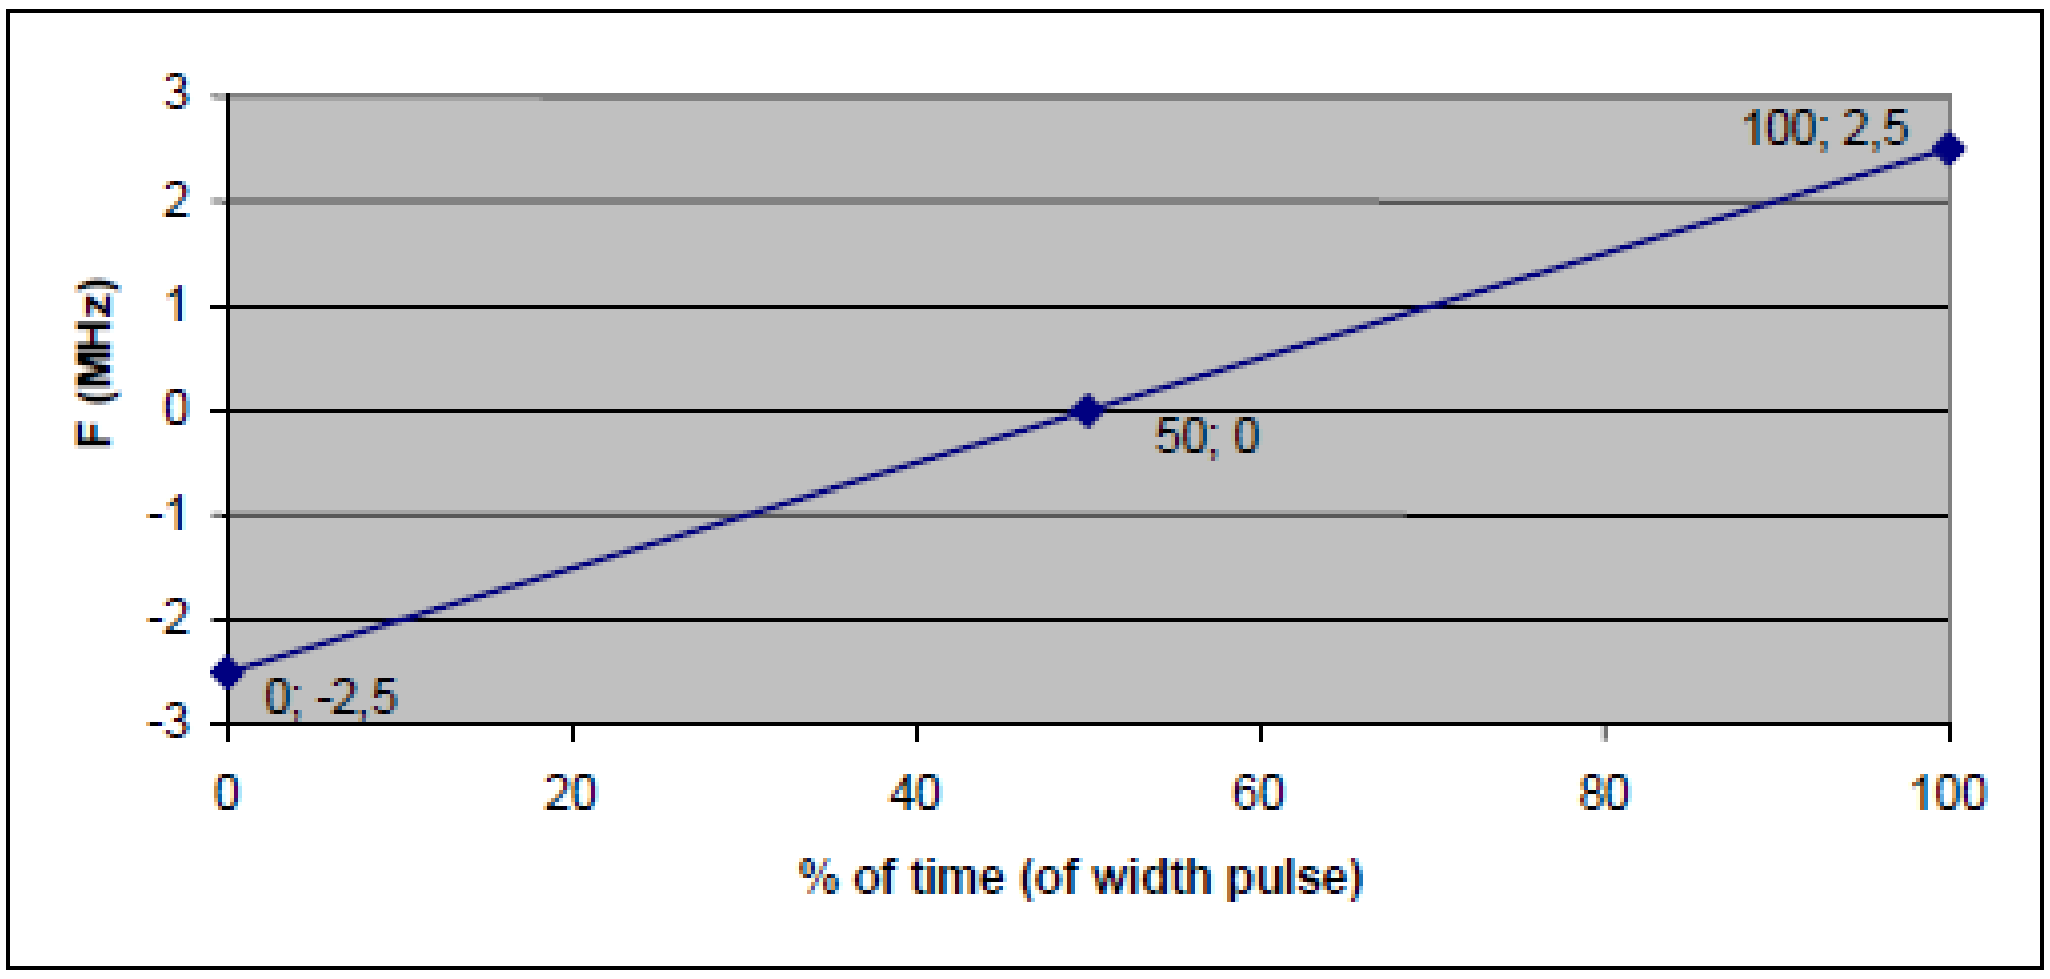

NOTE 3: Radar test signals 5 and 6 are single pulse based Staggered PRF radar test signals using 2 or 3 different PRF values. For radar test signal 5, the difference between the PRF values chosen shall be between 20 PPS and 50 PPS. For radar test signal 6, the difference between the PRF values chosen shall be between 80 PPS and 400 PPS. See figure D.3.
NOTE 4: Apart for the Off-Channel CAC testing, the radar test signals above shall only contain a single burst of pulses. See figures D.1, D.3 and D.4. For the Off-Channel CAC testing, repetitive bursts shall be used for the total duration of the test. See figures D.2 and D.5. See also clauses 4.7.2.2, 5.3.8.2.1.3.1 and 5.3.8.2.1.3.2.
NOTE 5: The total number of pulses in a burst is equal to the number of pulses for a single PRF multiplied by the number of different PRFs used.
NOTE 6: For the CAC and Off-Channel CAC requirements, the minimum number of pulses (for each PRF) for any of the radar test signals to be detected in the band 5 600 MHz to 5 650 MHz shall be 18.

3.7.3 Test Procedures

Channel Shutdown

The steps below define the procedure to verify the Channel Shutdown process and to determine the Channel Closing Transmission Time, the Channel Move Time and the Non-Occupancy Period. This is illustrated in figure 6.

a) When the EUT is a master device, a slave device will be used that associates with the EUT.

When the EUT is a slave device without a Radar Interference Detection function, the EUT shall associate with a master device.

In both cases, it is assumed that the channel selection mechanism for the Uniform Spreading requirement is disabled in the master.

a) The EUT shall transmit a test transmission sequence in accordance transmitter minimum activity ratio of 30 % measured over an interval of 100 ms on the selected channel Chr.

b) At a certain time T0, a single burst test signal is generated on Chr using the reference DFS test signal defined in table D.3 and at a level of up to 10 dB above the Radar Detection Threshold level on the selected channel. T1 denotes the end of the radar burst.

c) The transmissions of the EUT following instant T1 on the selected channel shall be observed for a period greater than or equal to the Channel Move Time limit. The aggregate duration (Channel Closing Transmission Time) of all transmissions from the EUT during the Channel Move Time shall be compared to the limit.

NOTE: The aggregate duration of all transmissions of the EUT does not include quiet periods in between transmissions of the EUT.

d) T2 denotes the instant when the EUT has ceased all transmissions on the channel. The time difference between T1 and T2 shall be measured. This value (Channel Move Time) shall be noted and compared with the limit.

e) Following instant T2, the selected channel shall be observed for a period equal to the Non-Occupancy Period (T3-T2) to verify that the EUT does not resume any transmissions on this channel.

f) When the EUT is a slave device with a Radar Interference Detection function the steps b) to f) shall be repeated with the generator connected to the EUT.

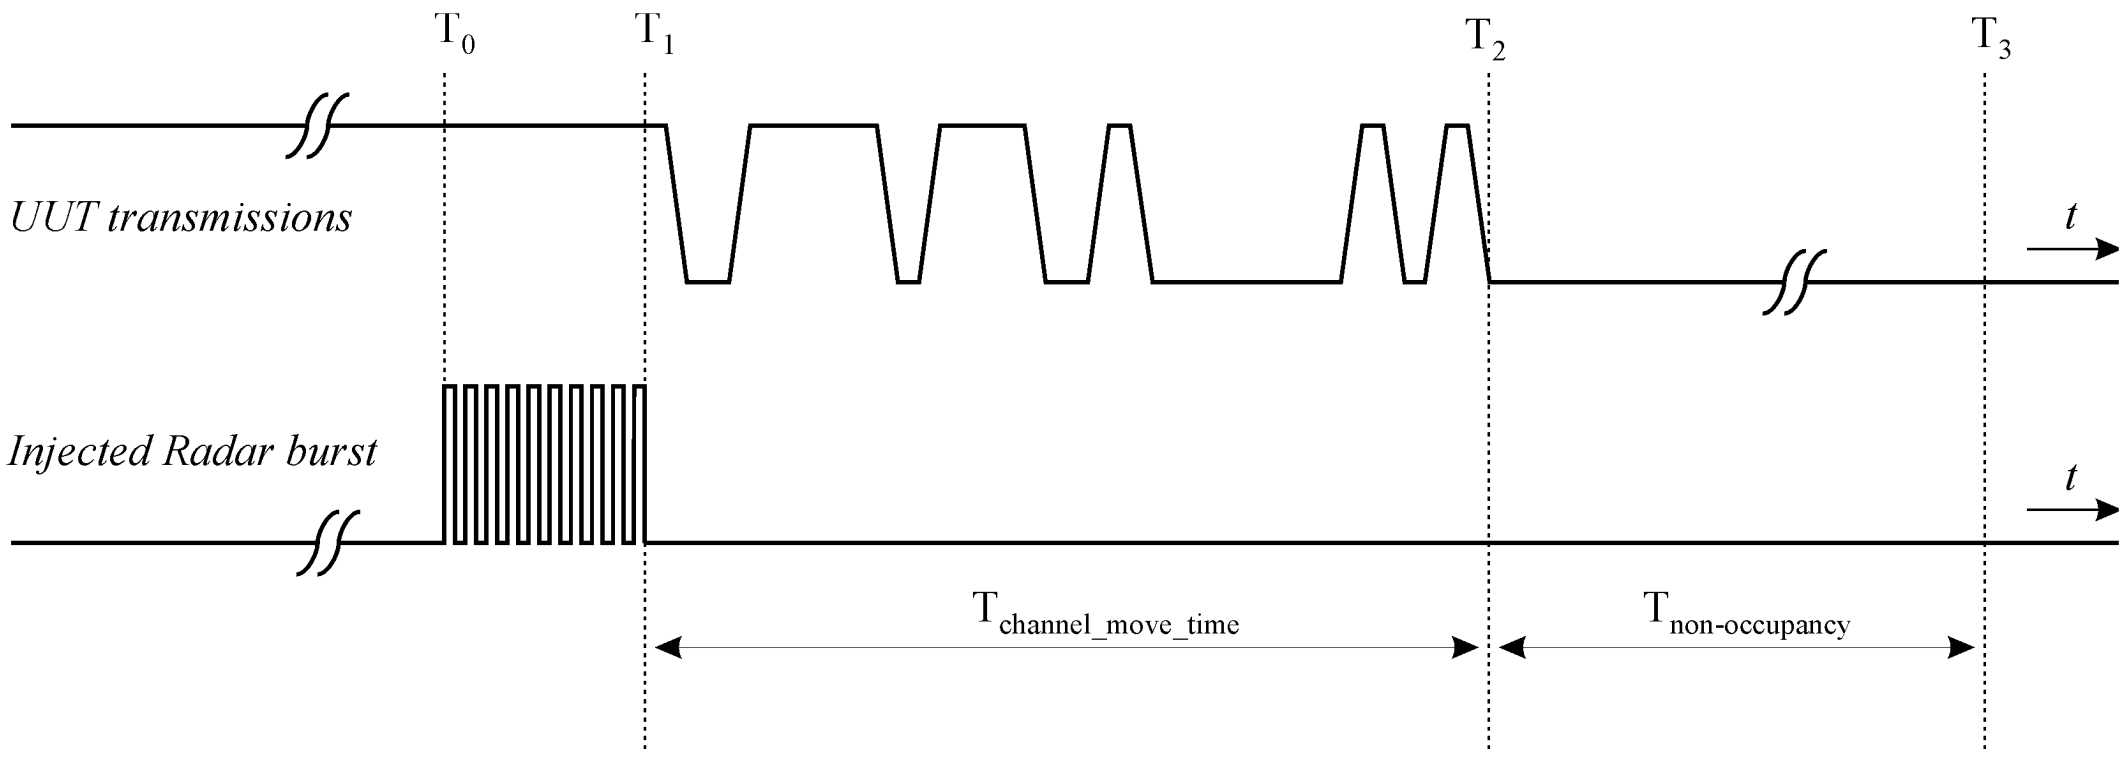

Figure 6: Channel Closing Transmission Time, Channel Move Time and Non-Occupancy Period

3.7.4 Test Setup

Conducted Test Setup Photo

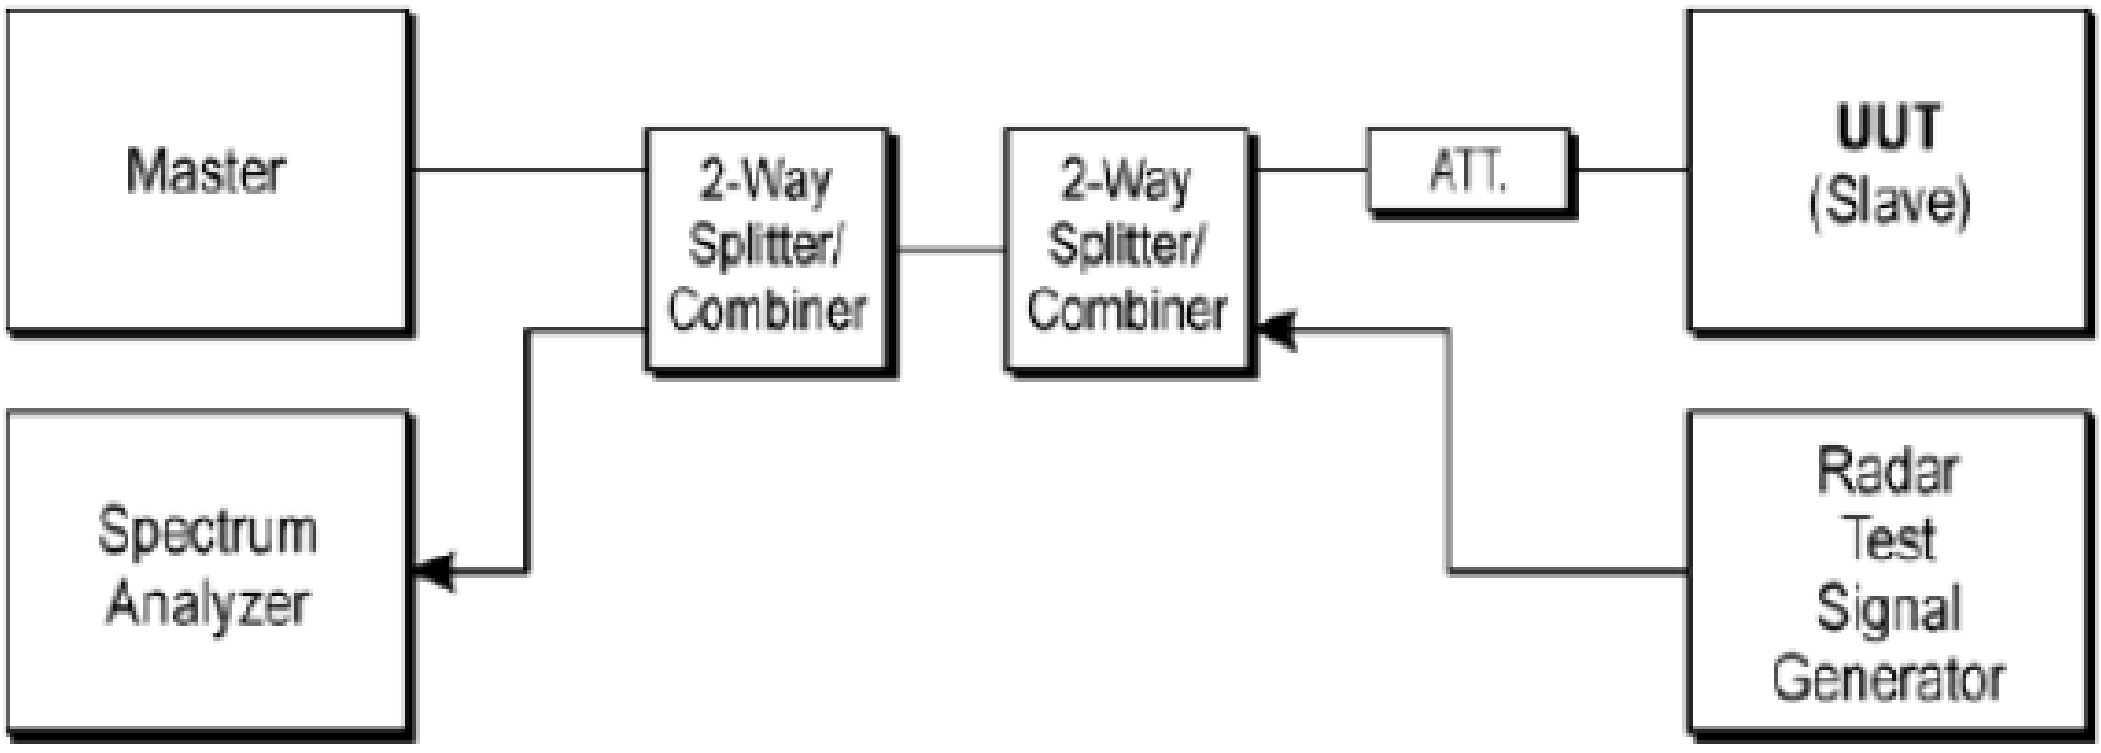

3.7.5 Test Result of Slave without Radar Detection

Test Engineer :	Eloise	Temperature :	22.5℃	Relative Humidity :	46%

BW / Channel	Test Item	Test Result	Limit	Pass/Fail
20MHz / 5300 MHz	Channel Move Time	909.23ms	< 10s	Pass
	Channel Closing Transmission Time	46ms	< 1s	Pass
20MHz / 5500 MHz	Channel Move Time	829.628ms	< 10s	Pass
	Channel Closing Transmission Time	21.2ms	< 1s	Pass
80MHz / 5290 MHz	Channel Move Time	880.829ms	< 10s	Pass
	Channel Closing Transmission Time	30.4ms	< 1s	Pass
80MHz / 5530 MHz	Channel Move Time	864.429ms	< 10s	Pass
	Channel Closing Transmission Time	42ms	< 1s	Pass

3.7.6 Radar Waveform calibration Plot

Radar test signal (5300MHz / 20 MHz)

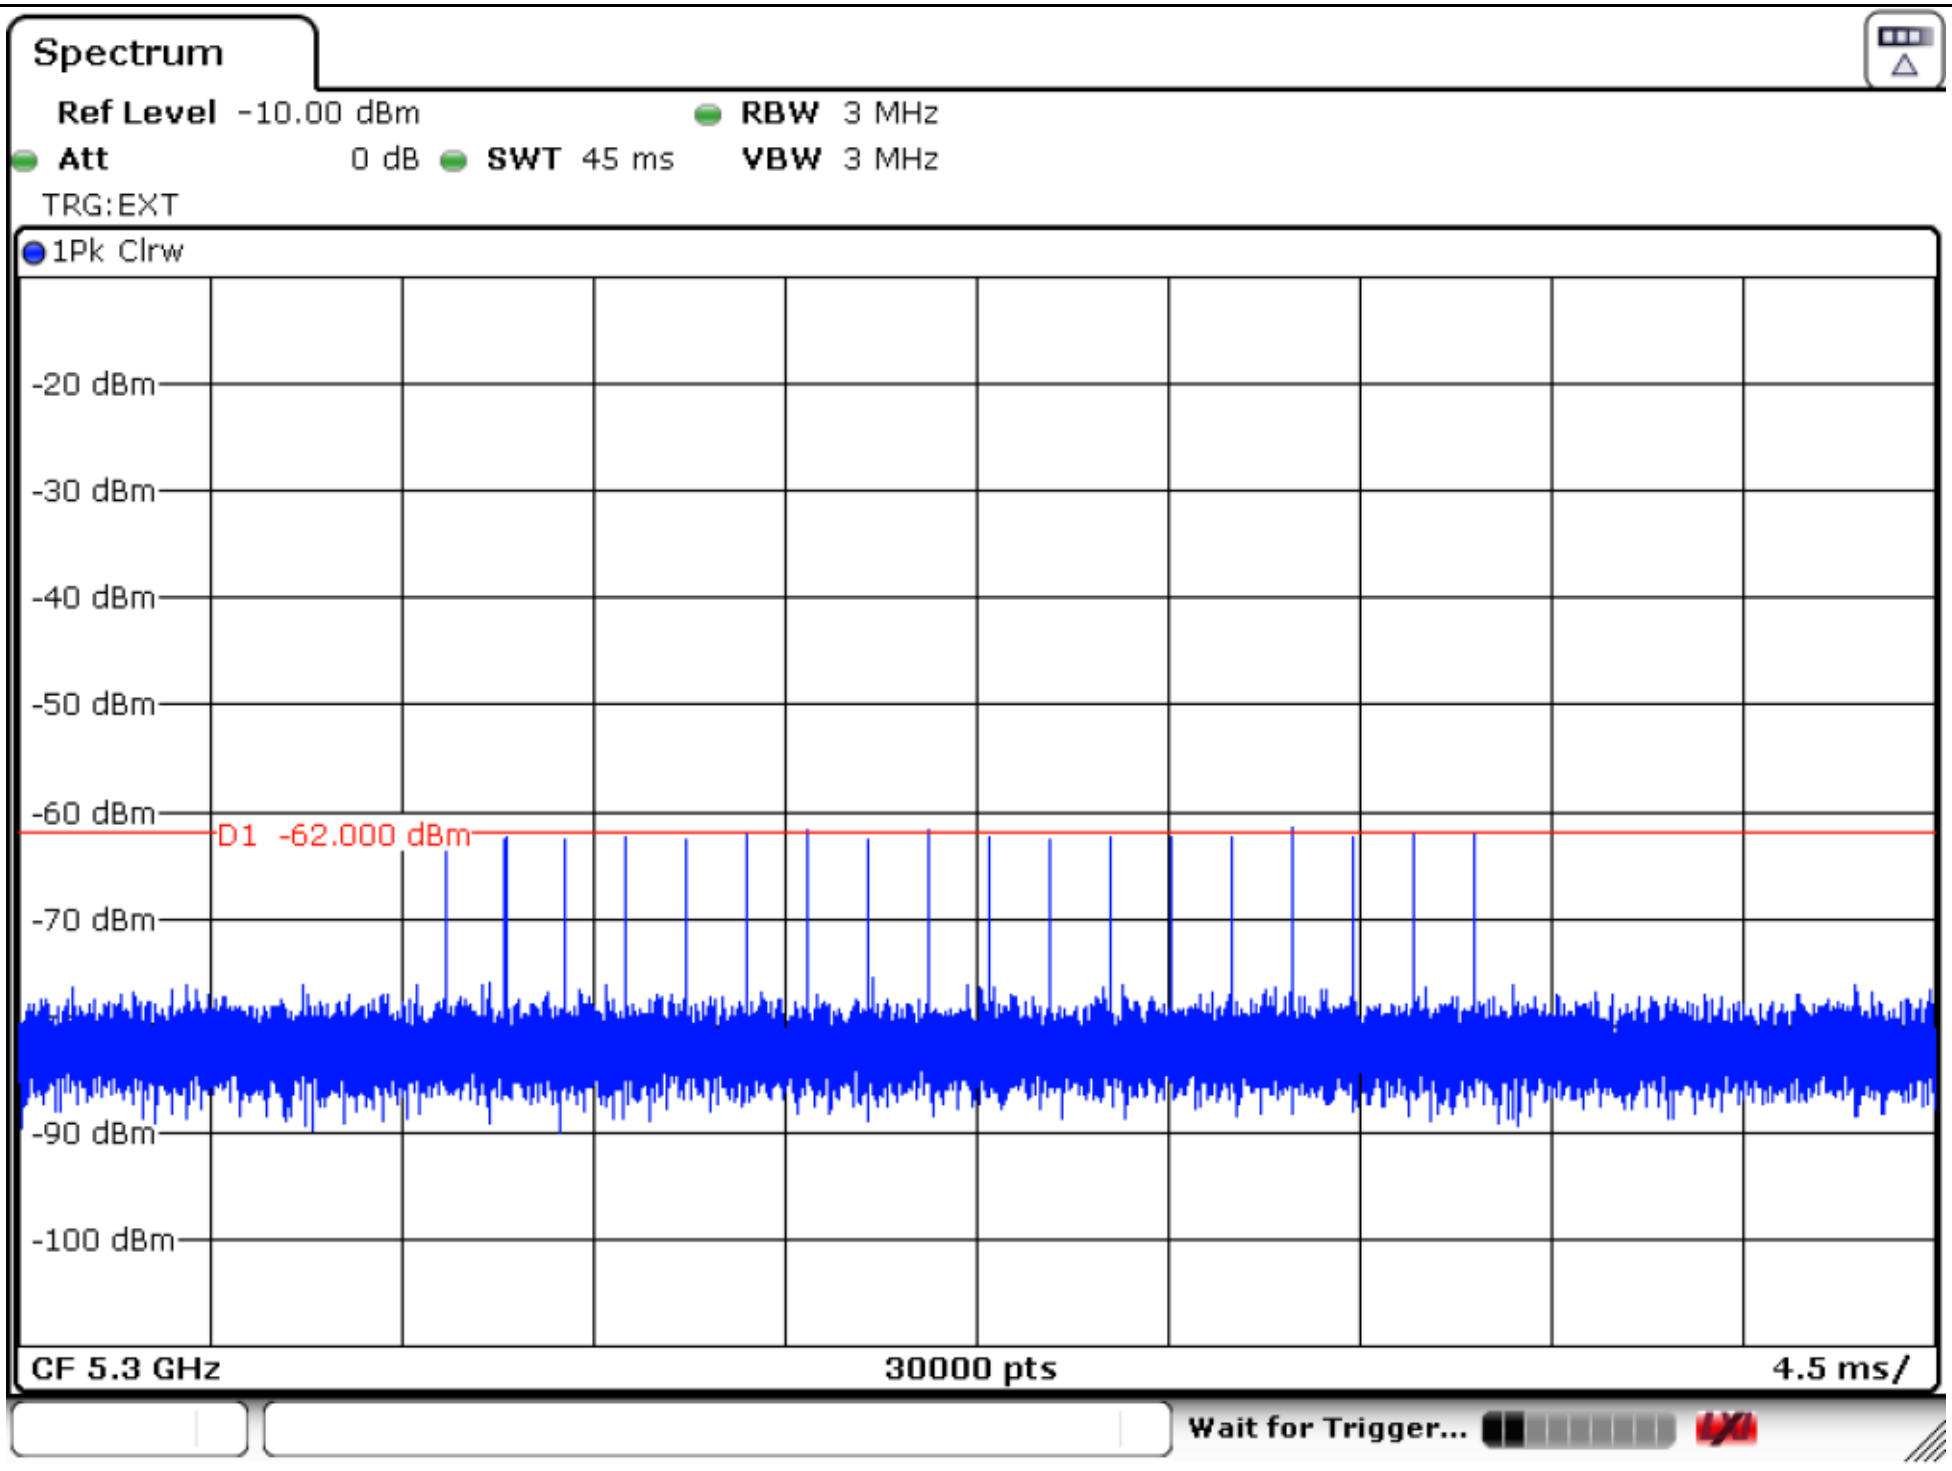

Radar test signal (5500MHz / 20 MHz)

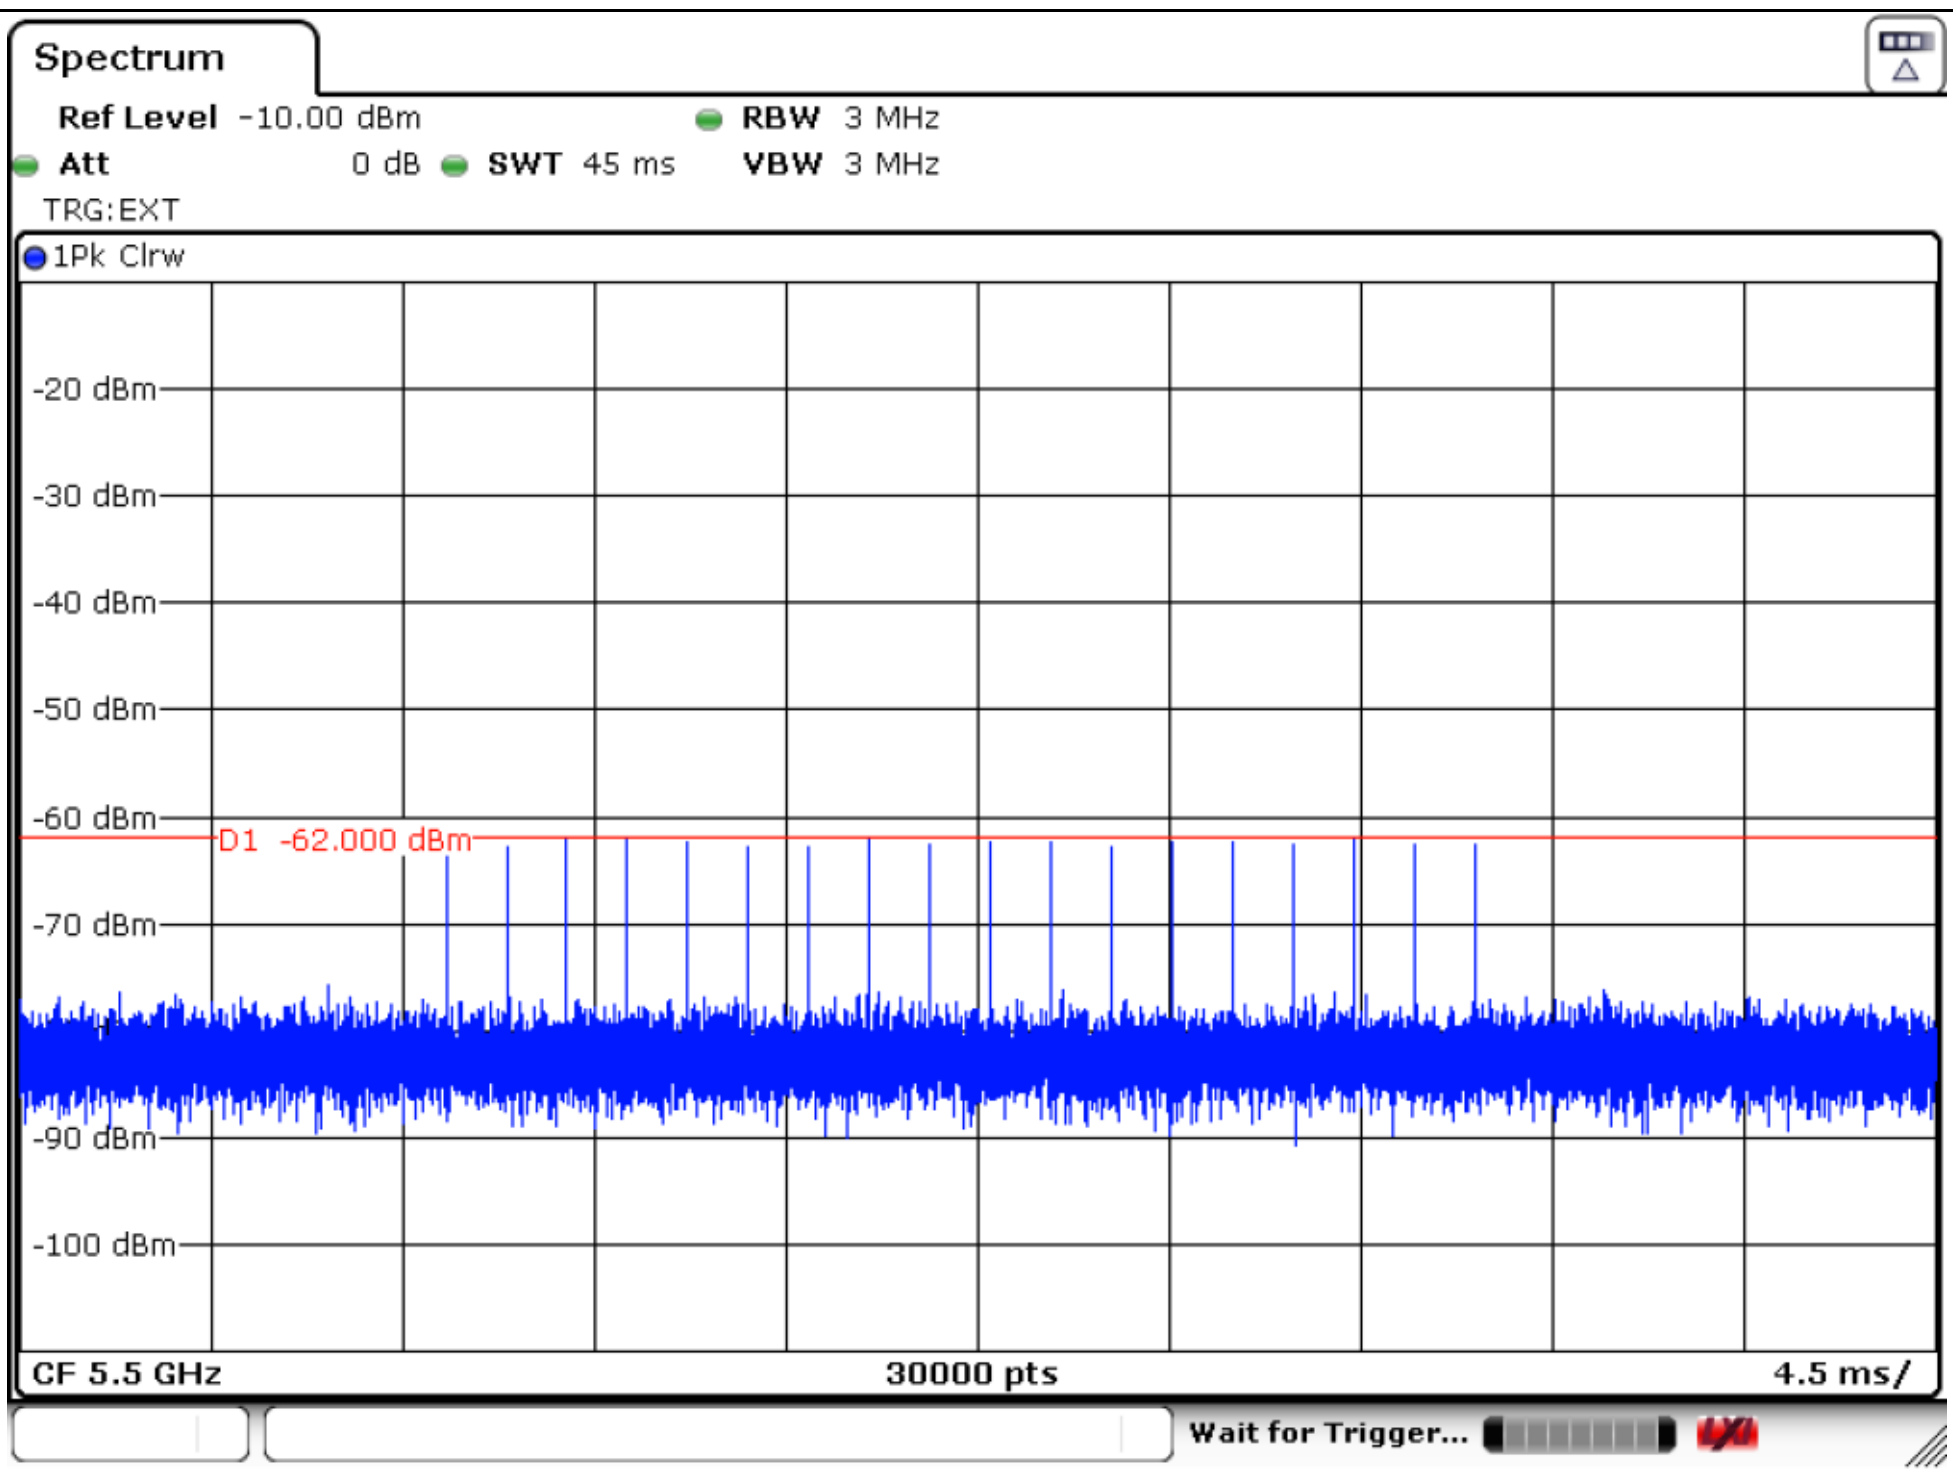

Radar test signal (5290MHz / 80 MHz)

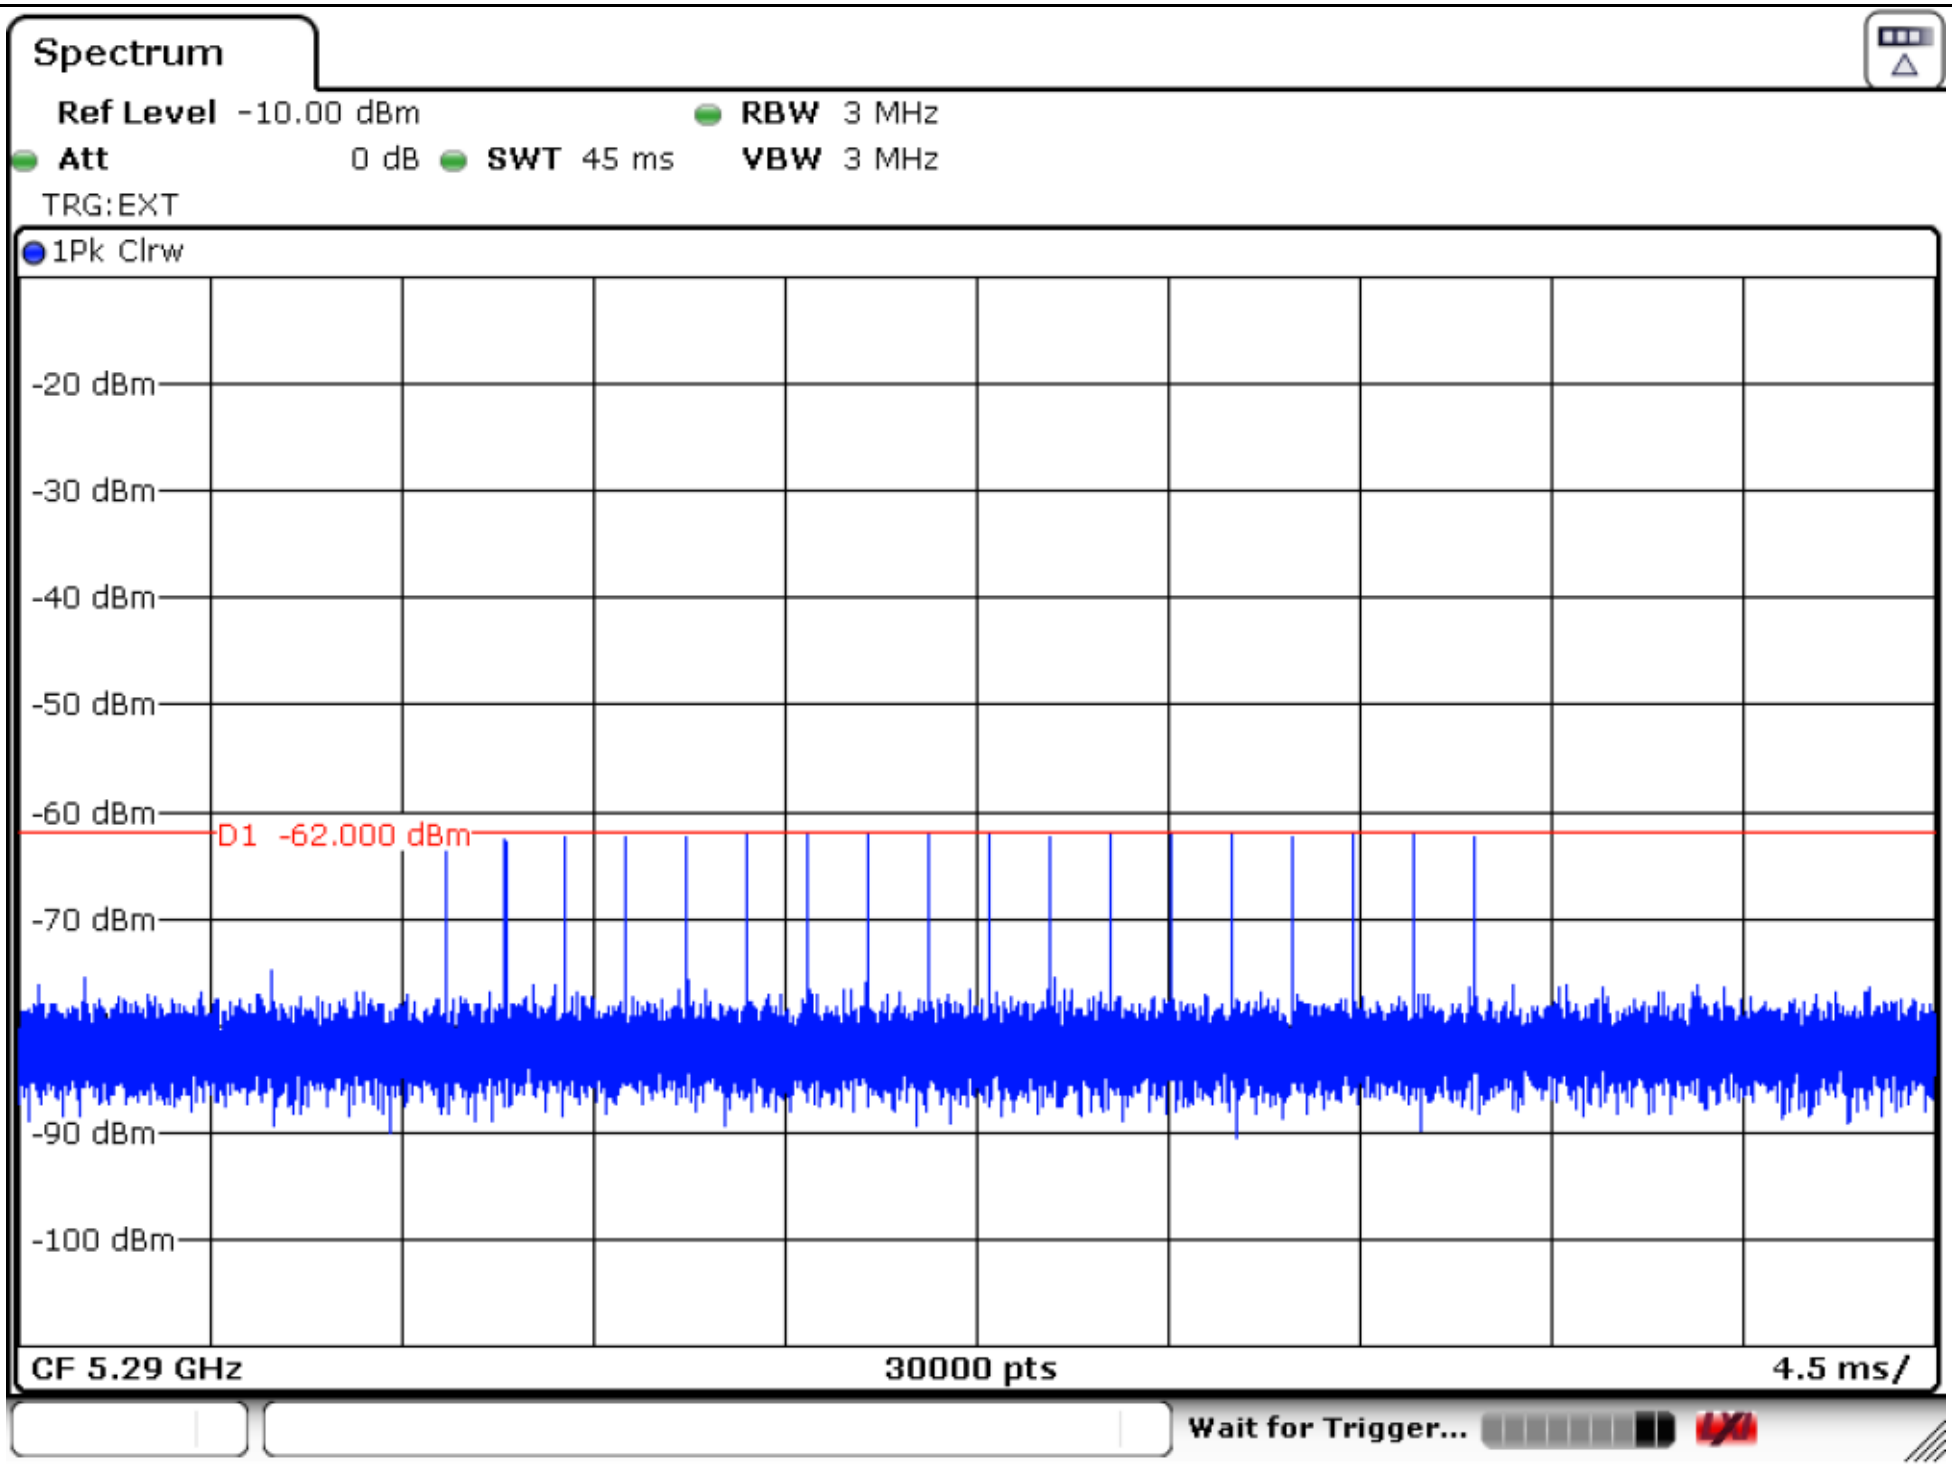

Radar test signal (5530MHz / 80 MHz)

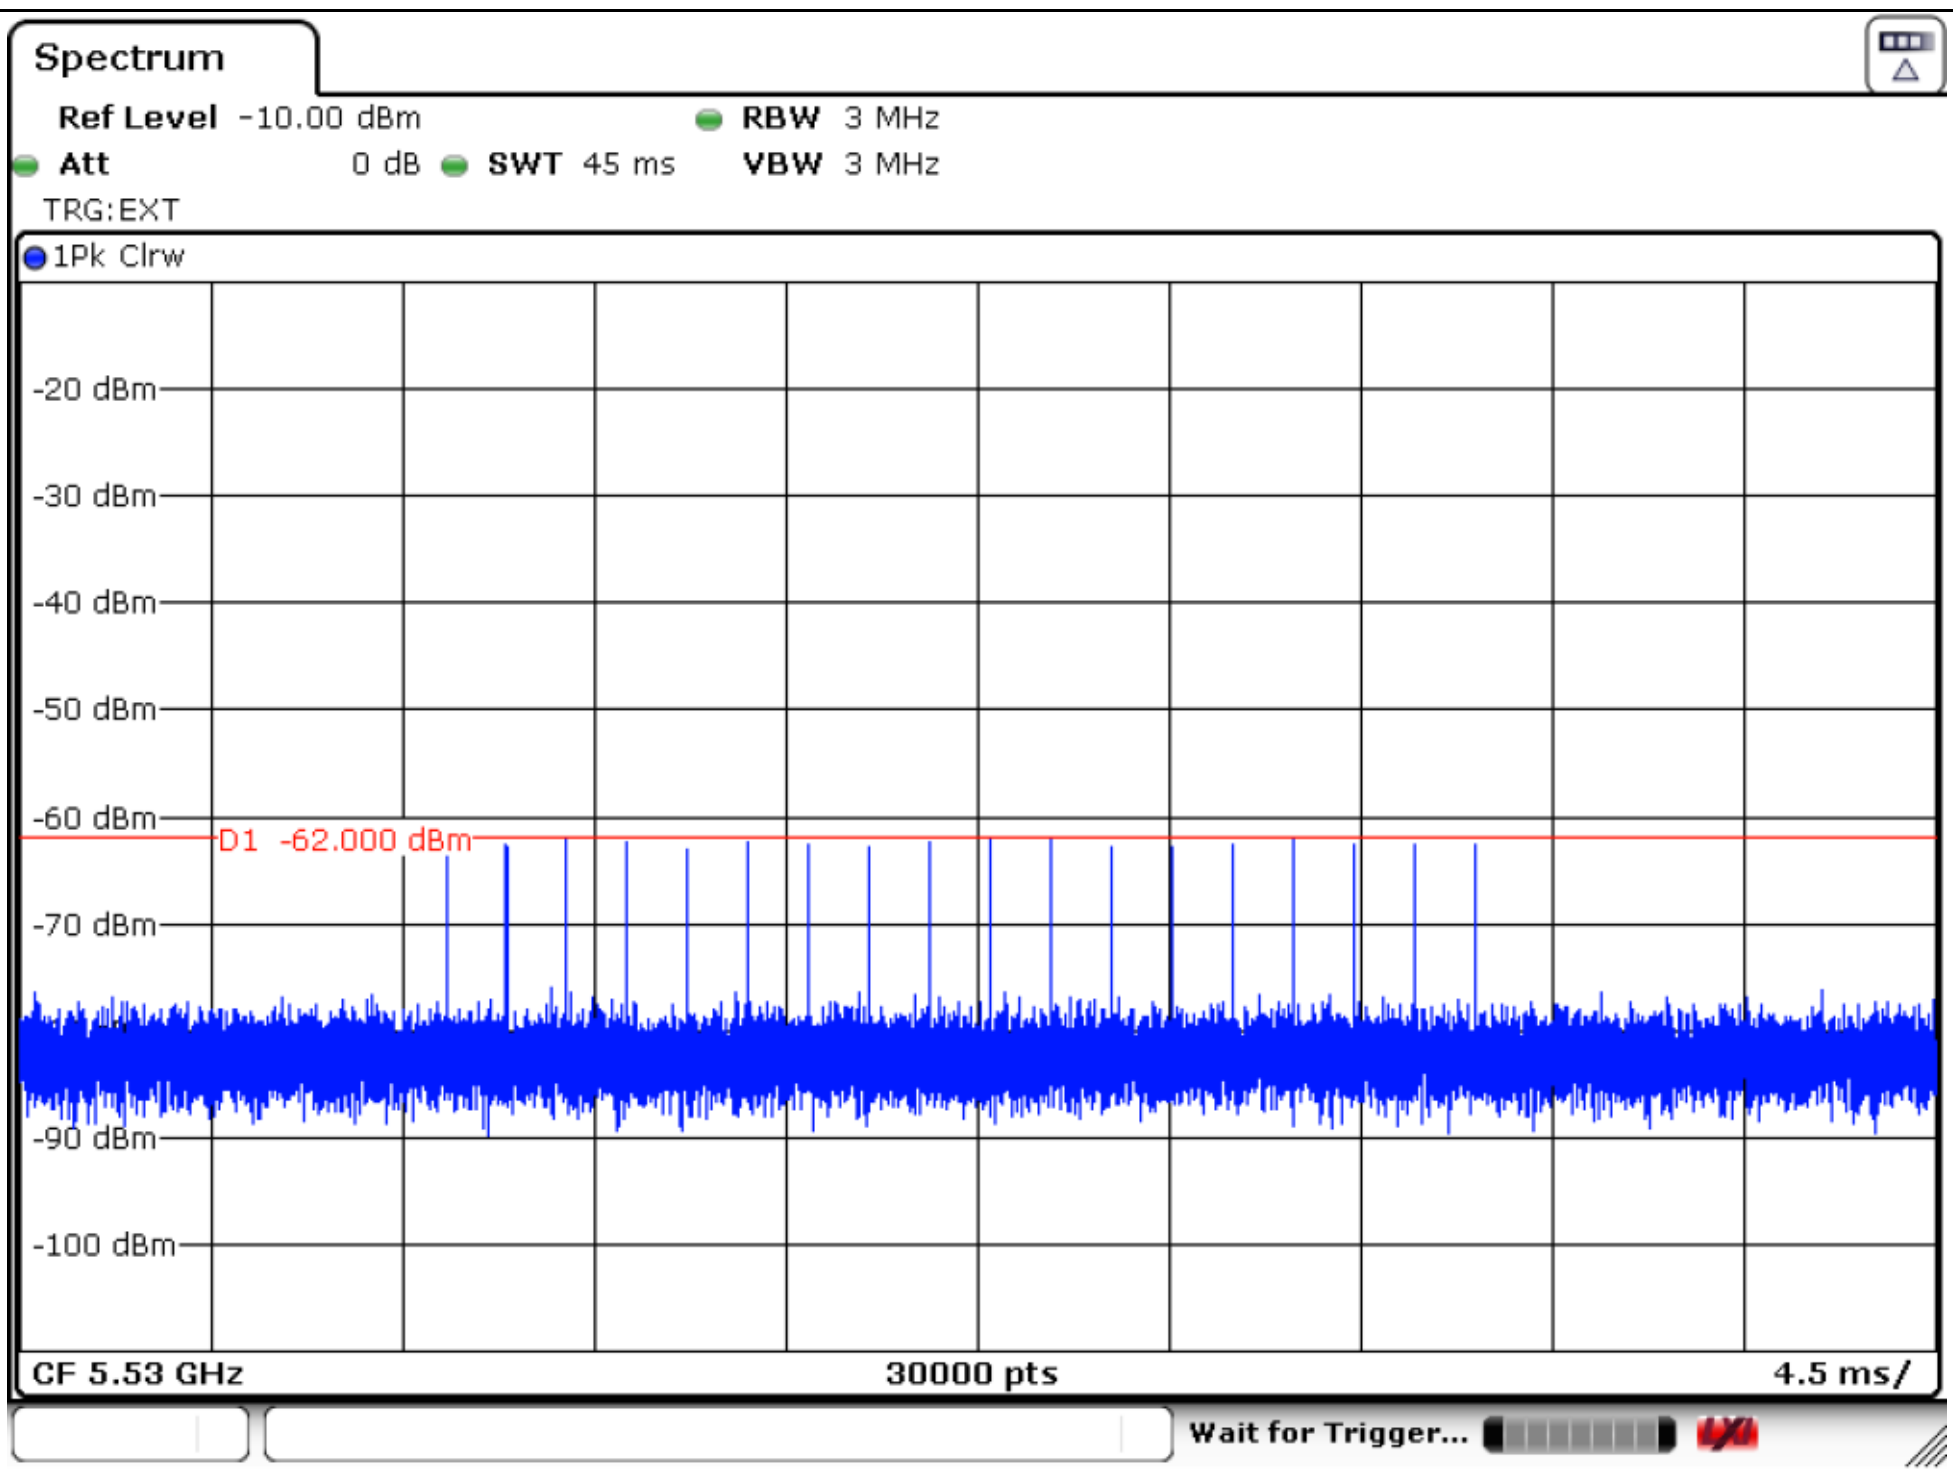

3.7.7 Data Traffic Plot

EUT data traffic (Slave)

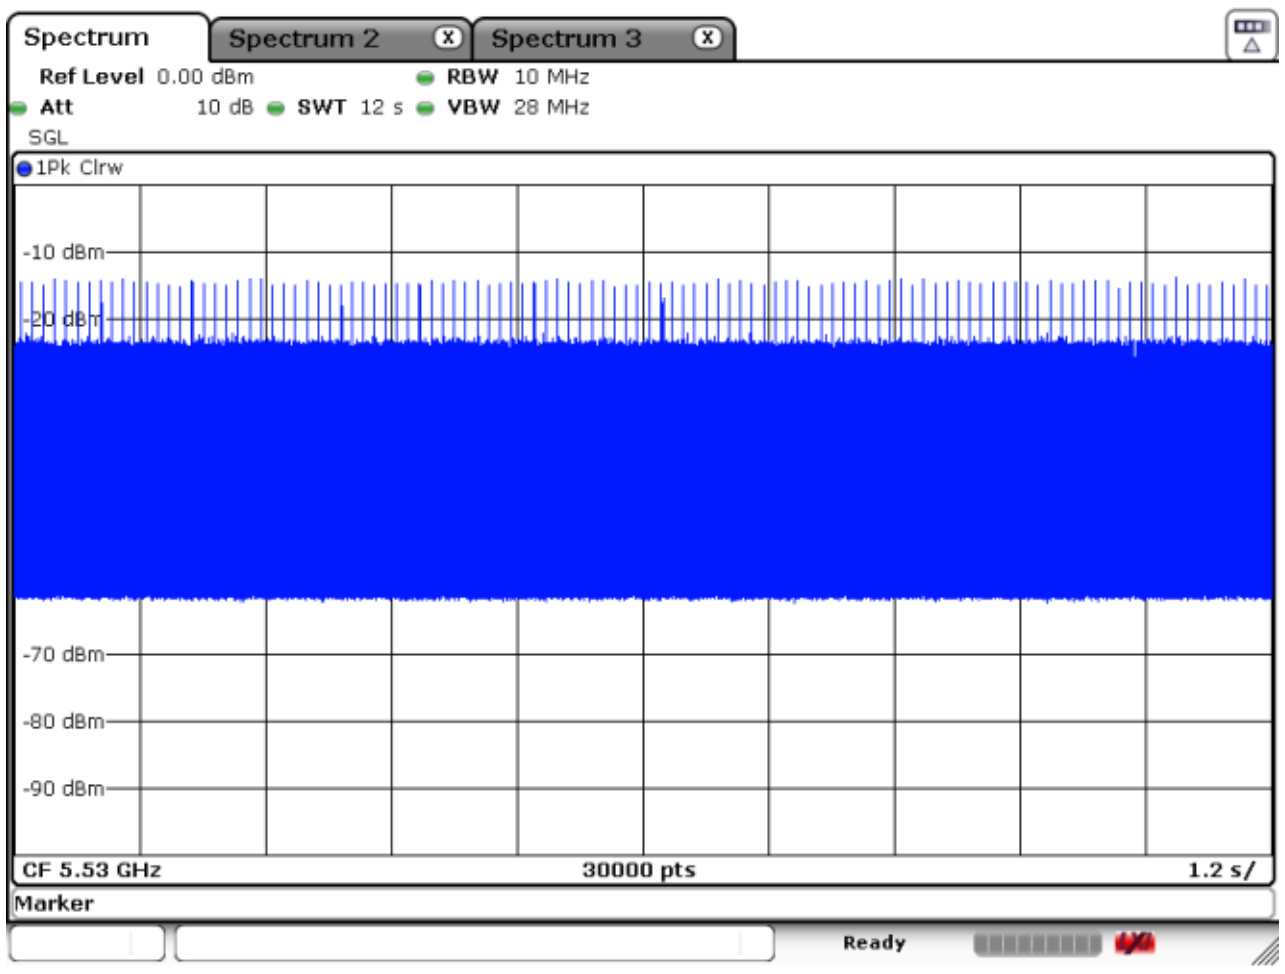

Access Point data traffic (Master)

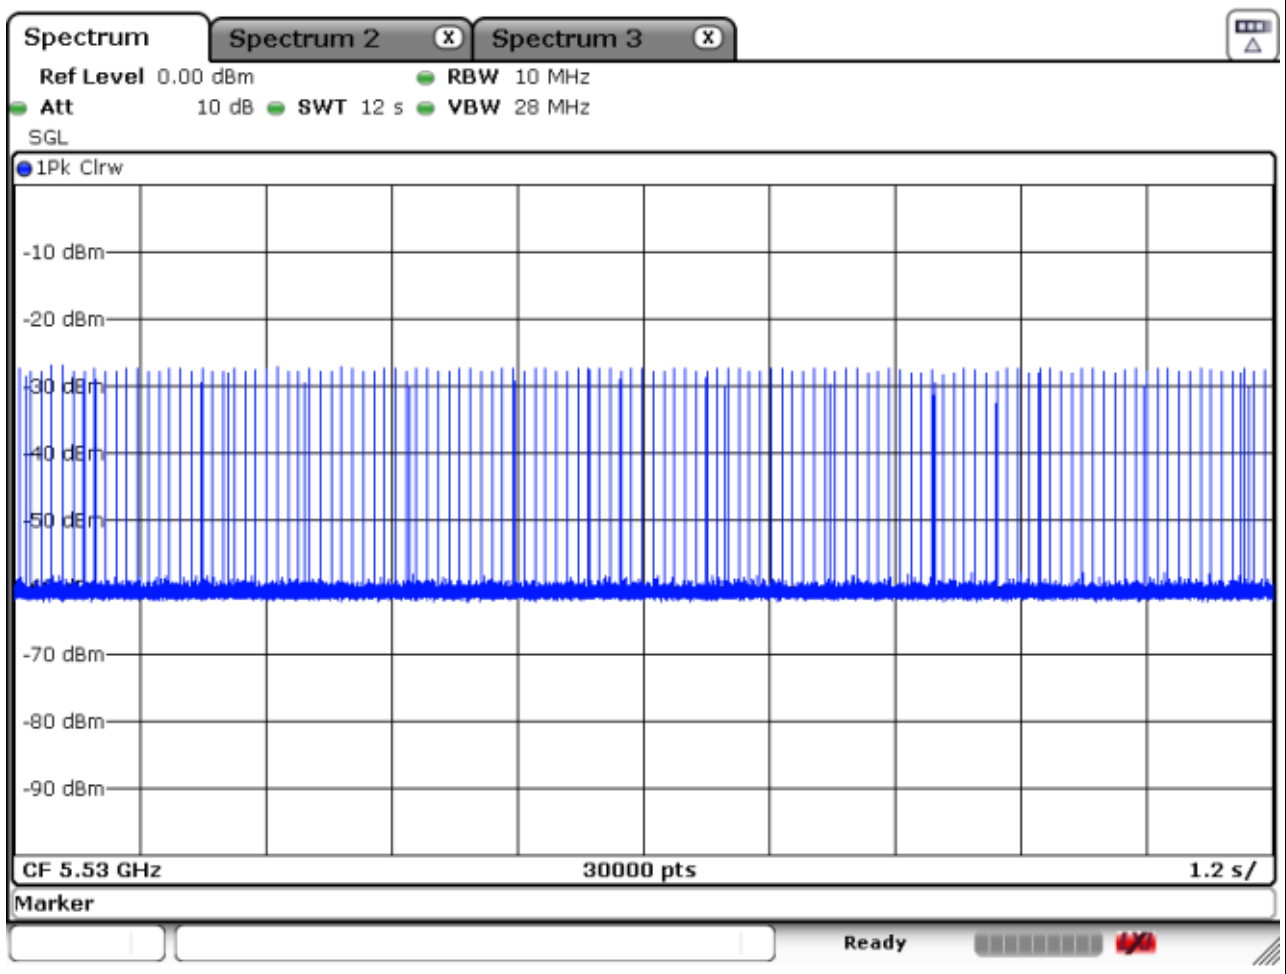

Noise Floor (No transmission)

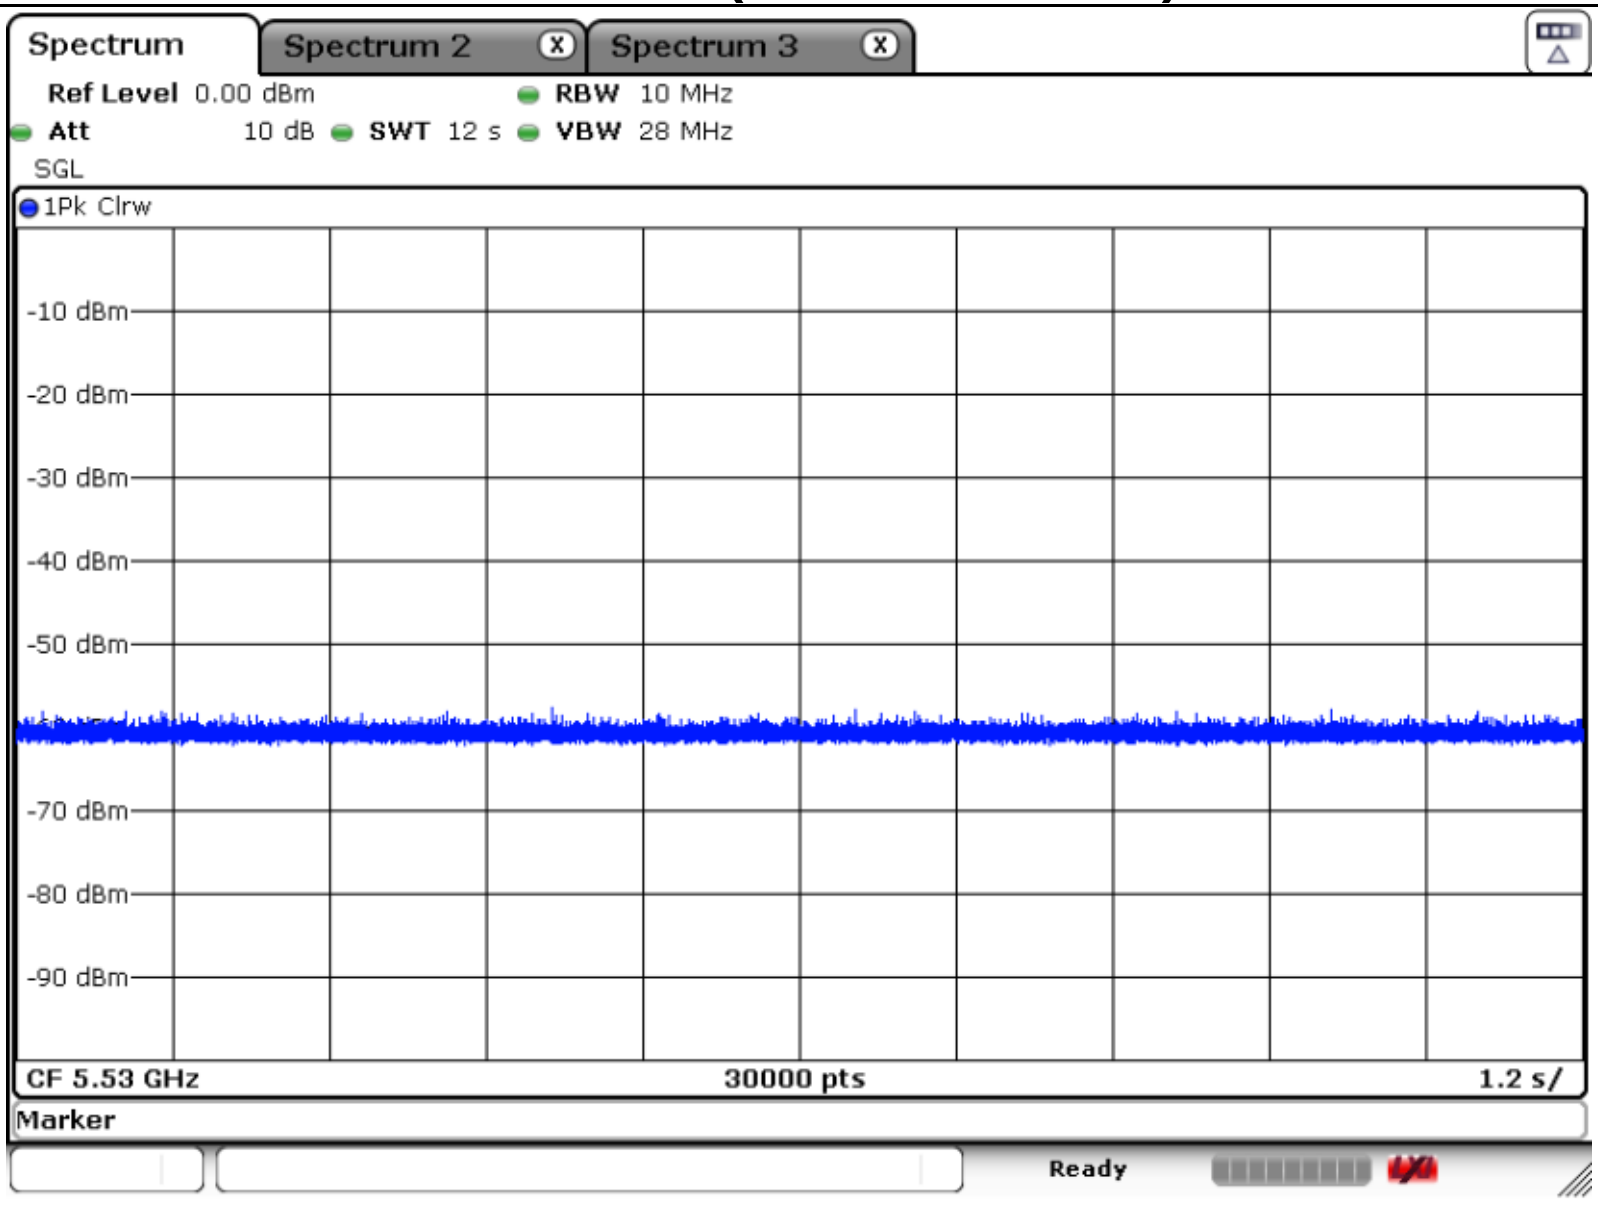

3.7.8 Test Plots of Slave without Radar Detection Channel Shutdown

Channel Move Time: <10 sec **Channel Closing Transmission Time:46ms**		**Nominal Channel Bandwidth 20MHz**
Test Frequency: 5300 MHz	**Channel Move Time:909.23ms**	**After end radar burst, within 10 sec**

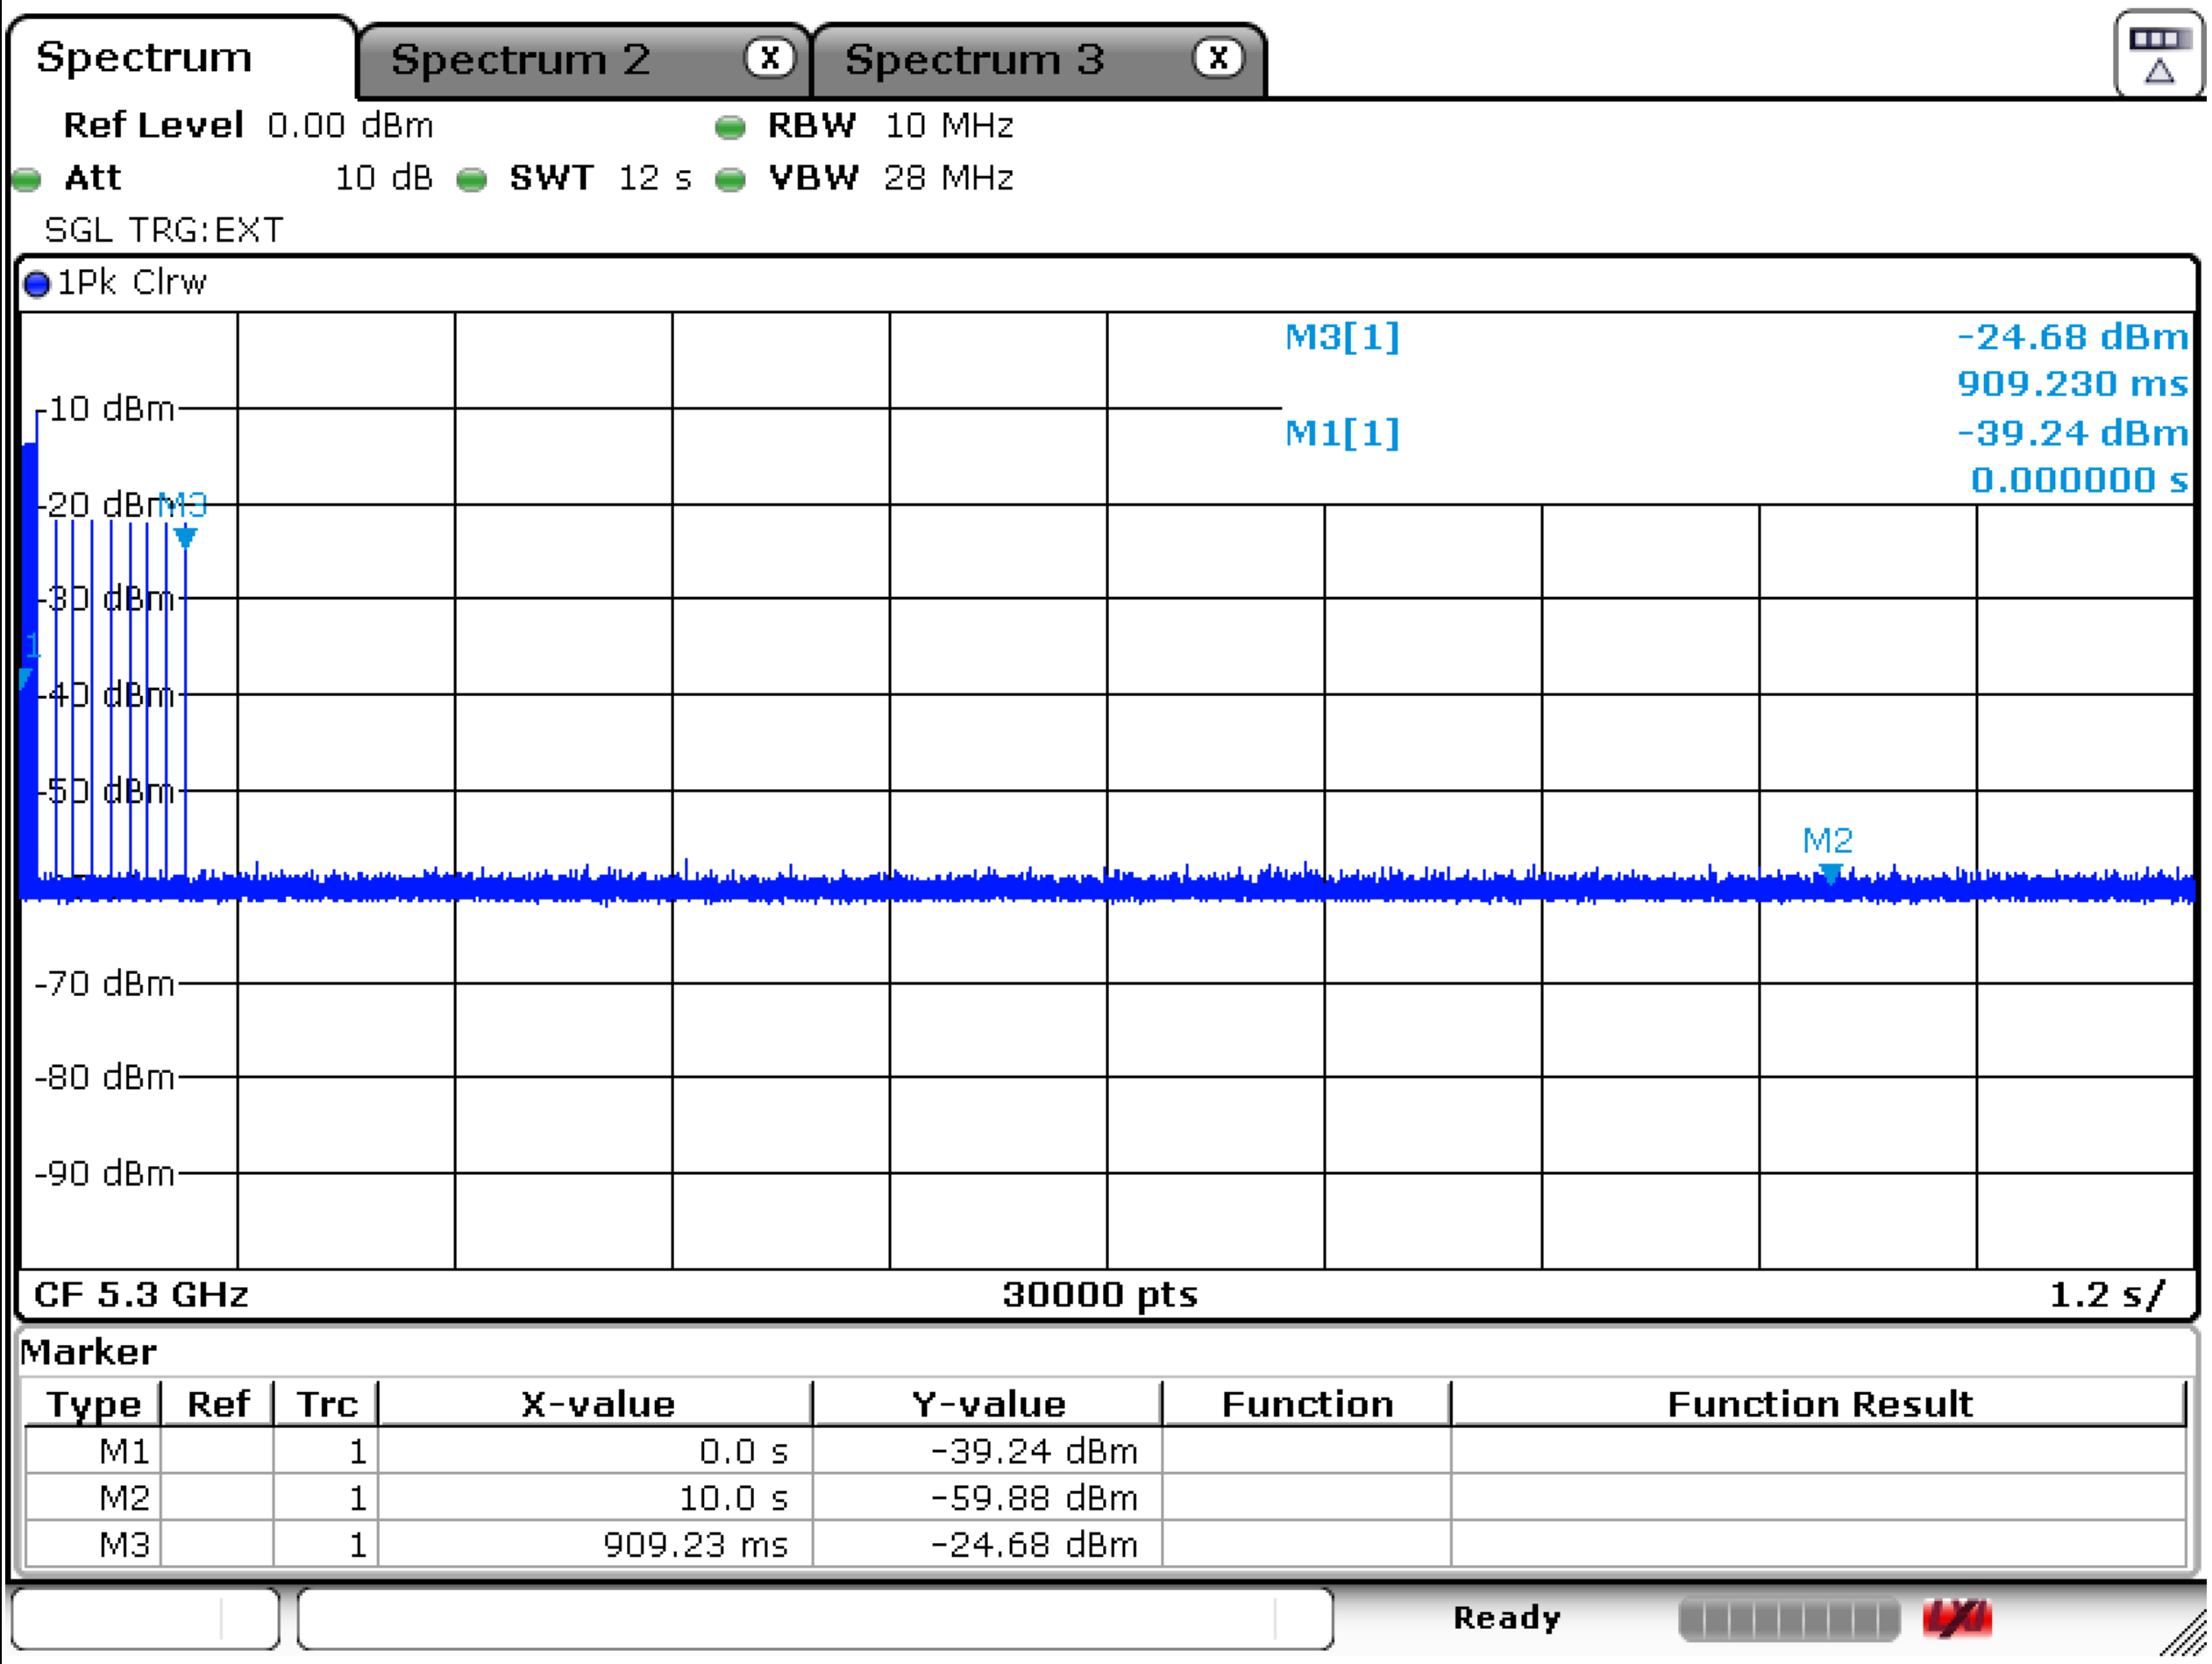

Dwell = S/B = 12000ms/30000 = 0.4ms, C = N x Dwell =115x 0.4 =46ms

Channel Move Time: <10 sec Channel Closing Transmission Time:21.2ms		Nominal Channel Bandwidth 20MHz
Test Frequency: 5500 MHz	Channel Move Time:829.628ms	After end radar burst, within 10 sec

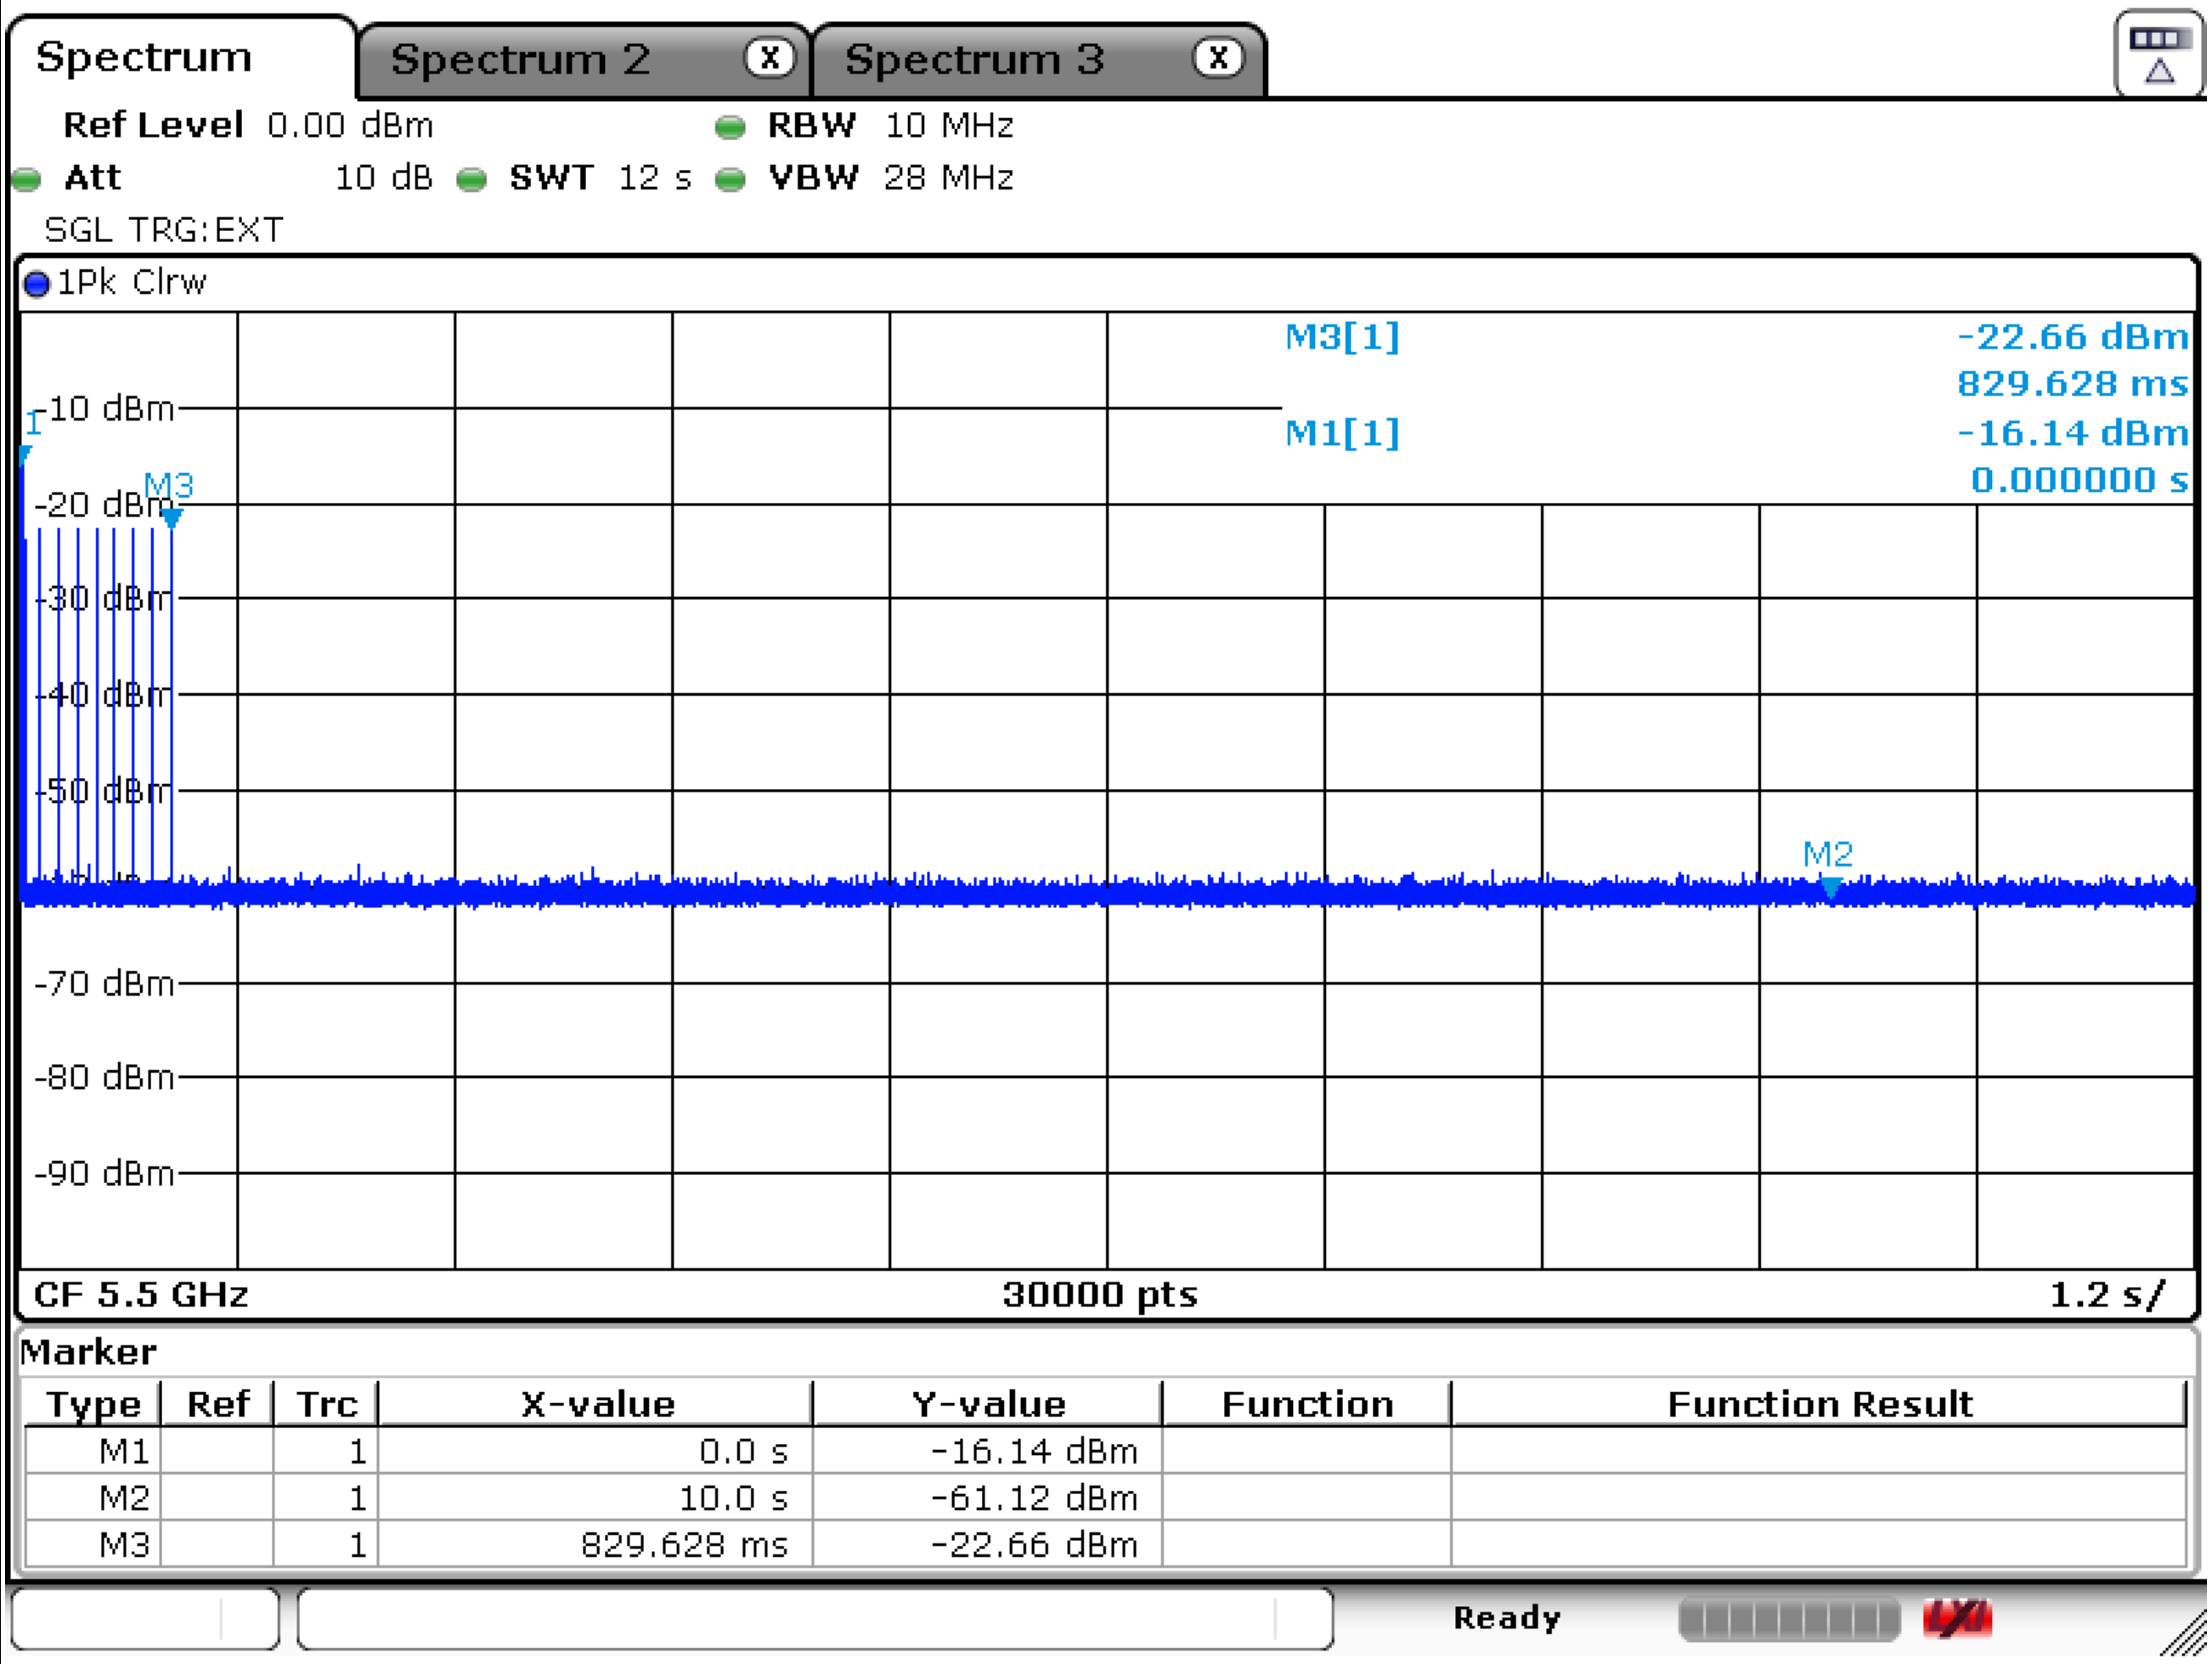

Dwell = S/B = 12000ms/30000 = 0.4ms, C = N x Dwell =53x 0.4 =21.2ms

Channel Move Time: <10 sec Channel Closing Transmission Time:30.4ms		Nominal Channel Bandwidth 80MHz
Test Frequency: 5290MHz	Channel Move Time:880.829ms	After end radar burst, within 10 sec

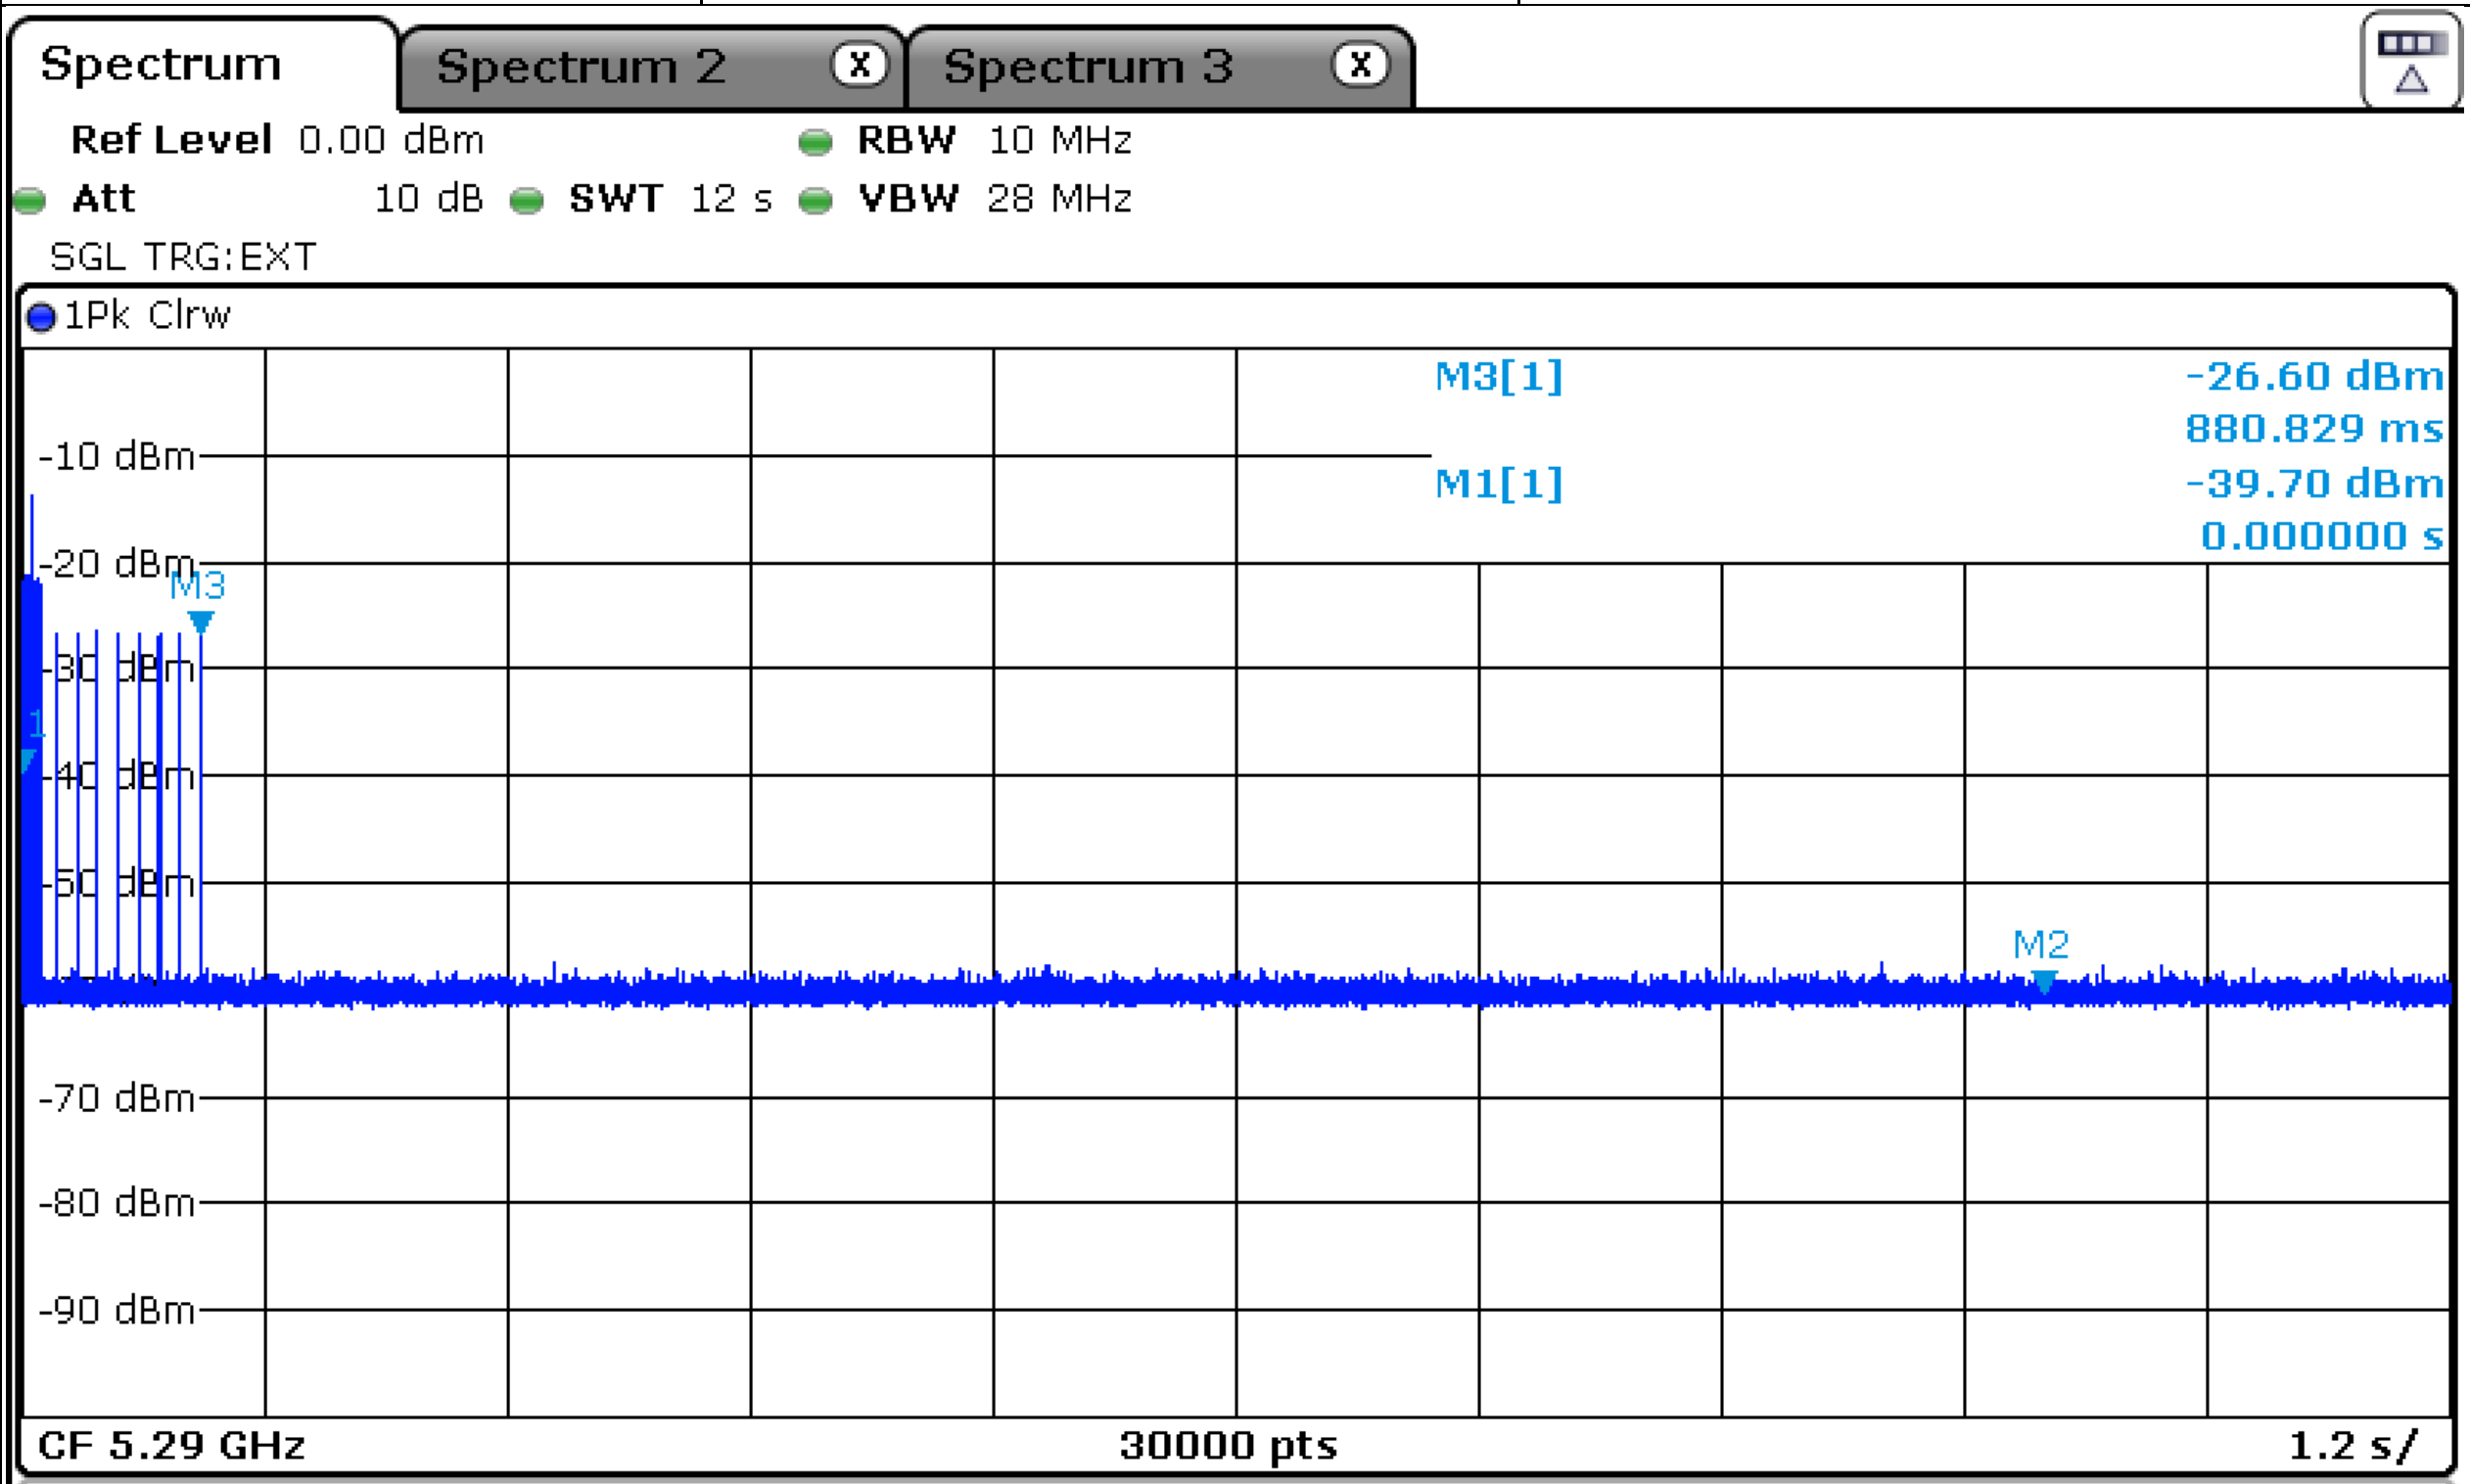

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	0.0 s	-39.70 dBm		
M2		1	10.0 s	-60.39 dBm		
M3		1	880.829 ms	-26.60 dBm		

Dwell = S/B = 12000ms/30000 = 0.4ms, C = N x Dwell =76x 0.4 =30.4ms

Channel Move Time: <10 sec Channel Closing Transmission Time:42ms		Nominal Channel Bandwidth80MHz
Test Frequency: 5530 MHz	Channel Move Time:864.429ms	After end radar burst, within 10 sec

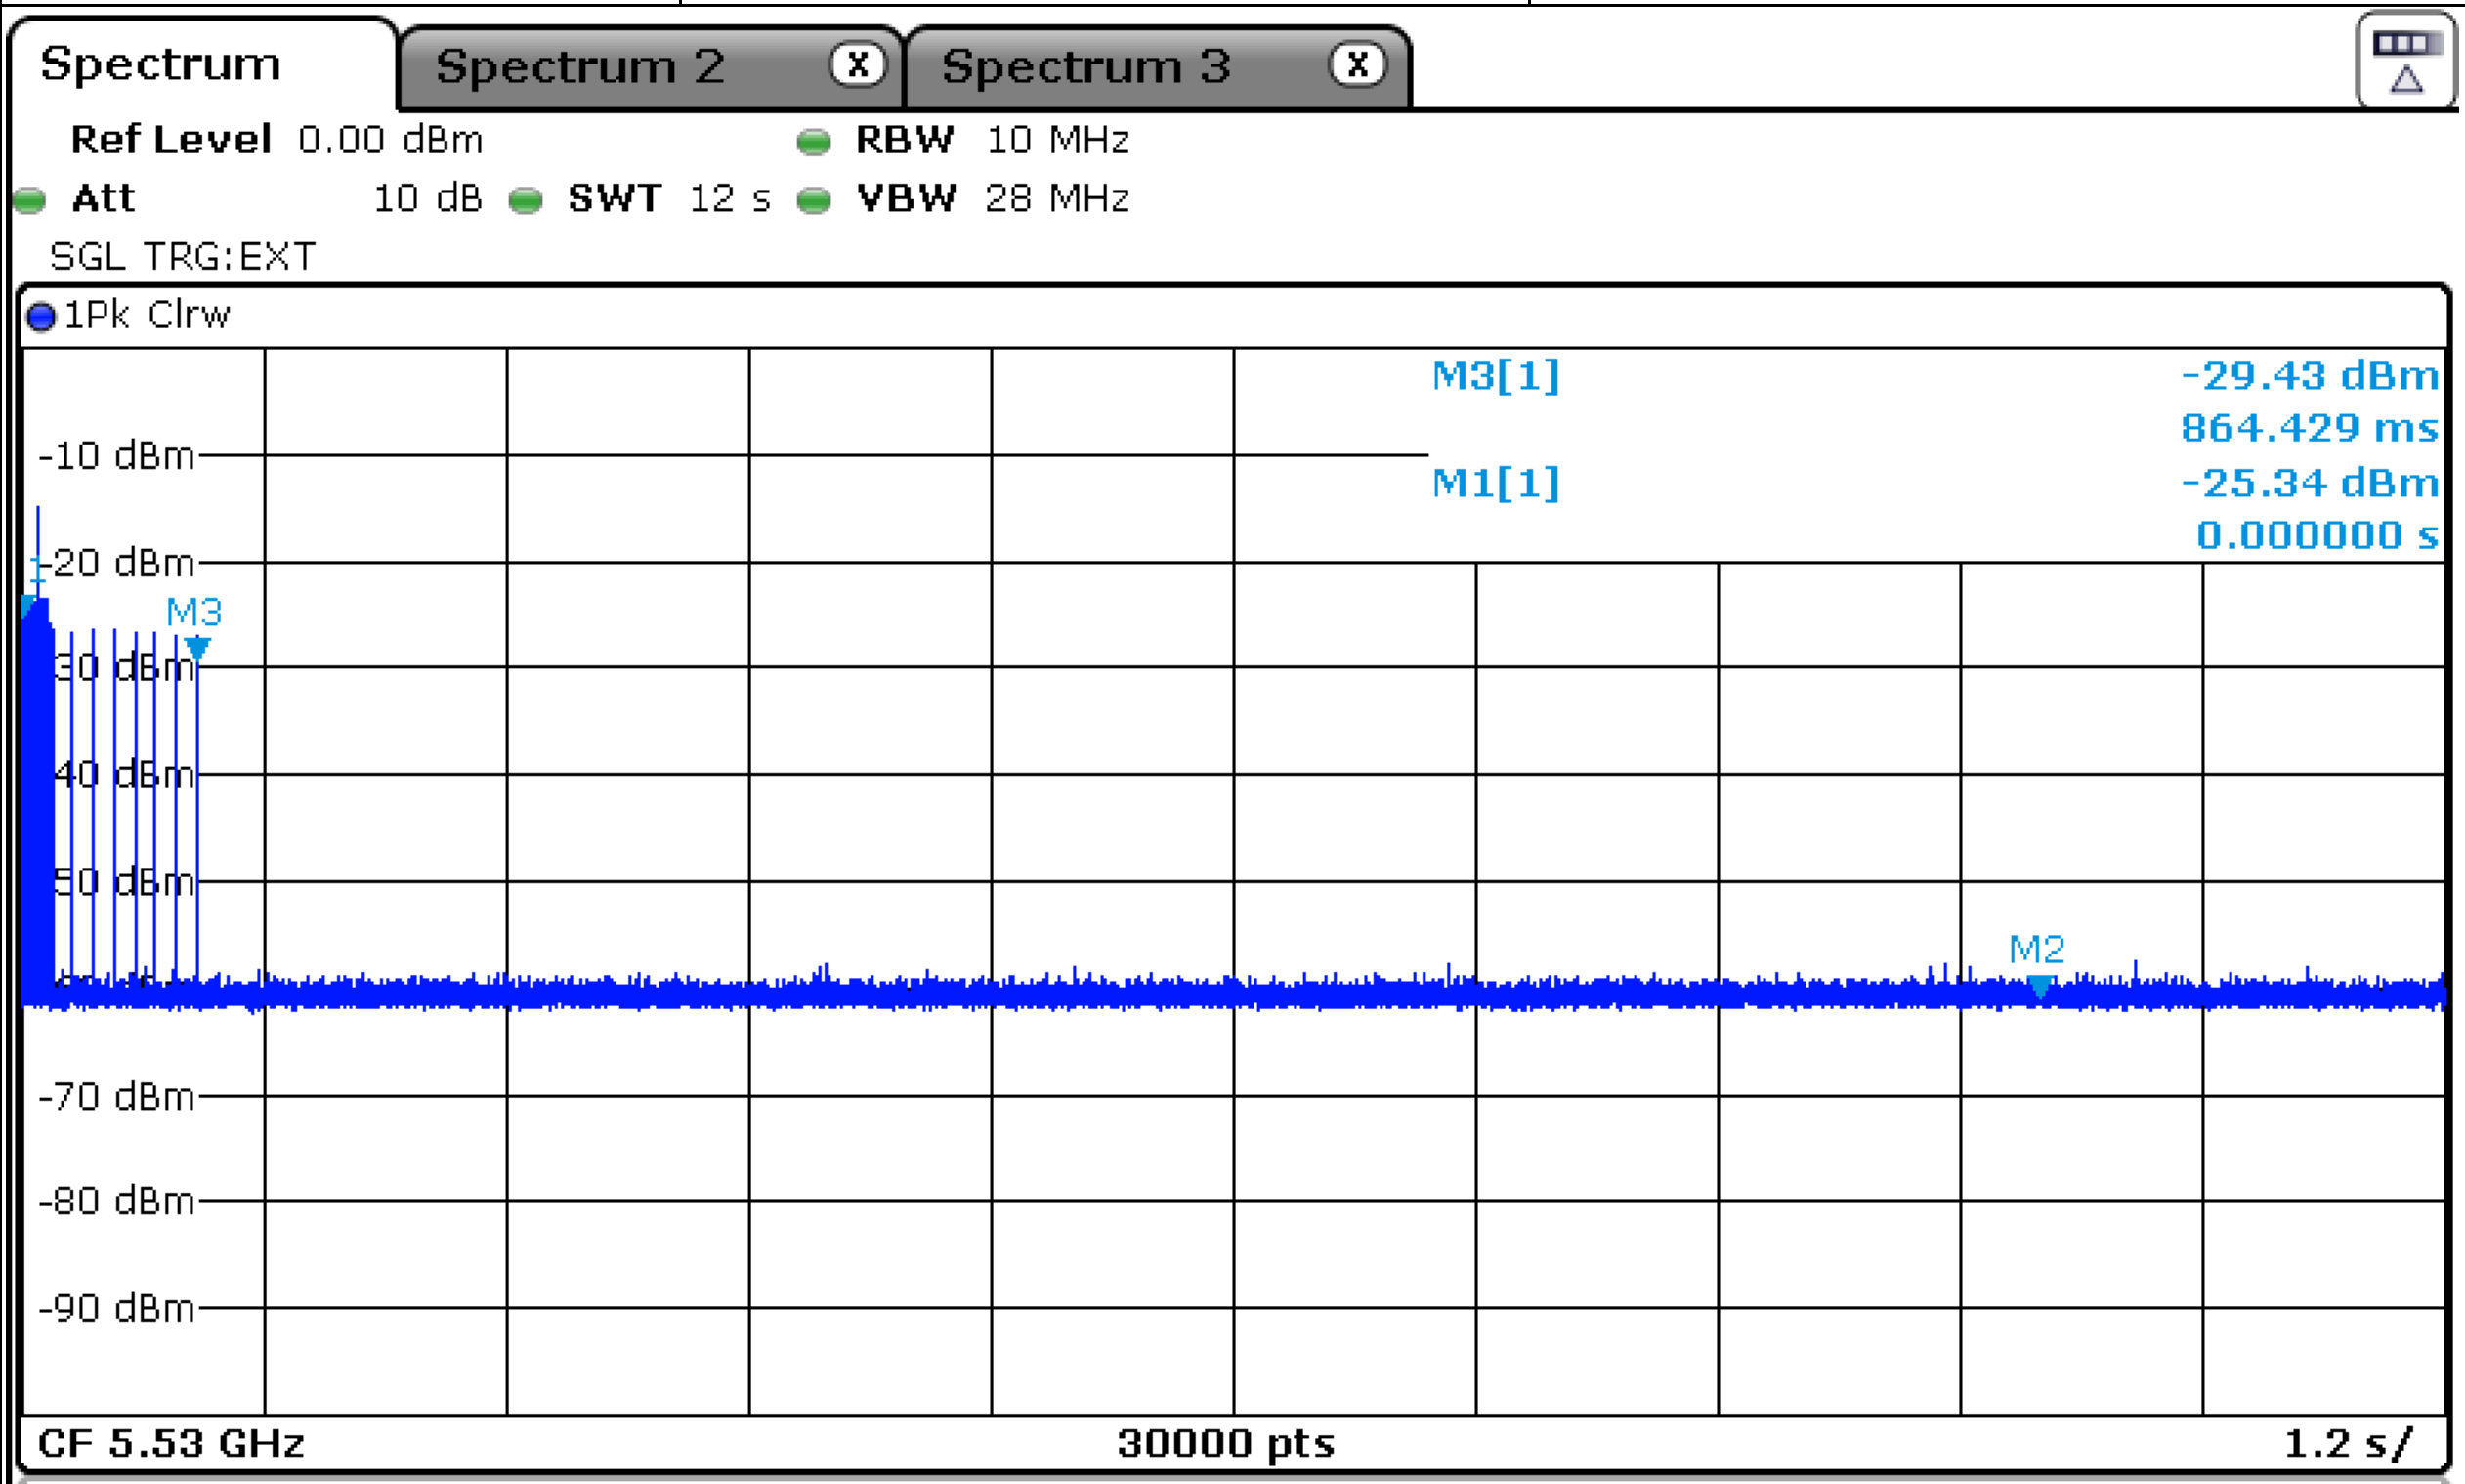

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	0.0 s	-25.34 dBm		
M2		1	10.0 s	-61.06 dBm		
M3		1	864.429 ms	-29.43 dBm		

Dwell = S/B = 12000ms/30000 = 0.4ms, C = N x Dwell =105x 0.4 =42ms

3.8 User Access Restrictions

3.8.1 Definition and Requirement

User Access Restrictions are restraints implemented in the RLAN to restrict access for the user to certain hardware and/or software settings of the equipment.

3.8.2 Description

Manufacturer shall implement the requirement for marketing units.

4. Receiver Parameters

4.1 Receiver Spurious Emissions

4.1.1 Limit of Receiver Spurious Emissions

In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are ERP for emissions up to 1 GHz and EIRP for emissions above 1 GHz.

SUBCLAUSE 4.2.5.2		
FREQUENCY RANGE	MAXIMUM POWER	MEASURED BANDWIDTH
30 MHz ≤ f ≤ 1 GHz	-57 dBm	100 KHz
1 GHz < f ≤ 26 GHz	-47 dBm	1 MHz
NOTE: Information in this table is based on ERC Recommendation 74-01 [i.13], Annex 2, Table 6.		

4.1.2 Measuring Instruments

Please refer to the measuring equipment list in the section 9 of this test report.

4.1.3 Test Procedures

Refer to Section 5.4.7 of ETSI EN 301 893 V2.2.1 (2024-11).

Test Results Explanation:

Level (dBm) = Read Level (dBm) + Factor (dB)

Over Limit (dB) = Level (dBm) – Limit Line (dBm)

4.1.4 Test Setup

- **Test Setup of Radiated Measurement**

< Below 1GHz >

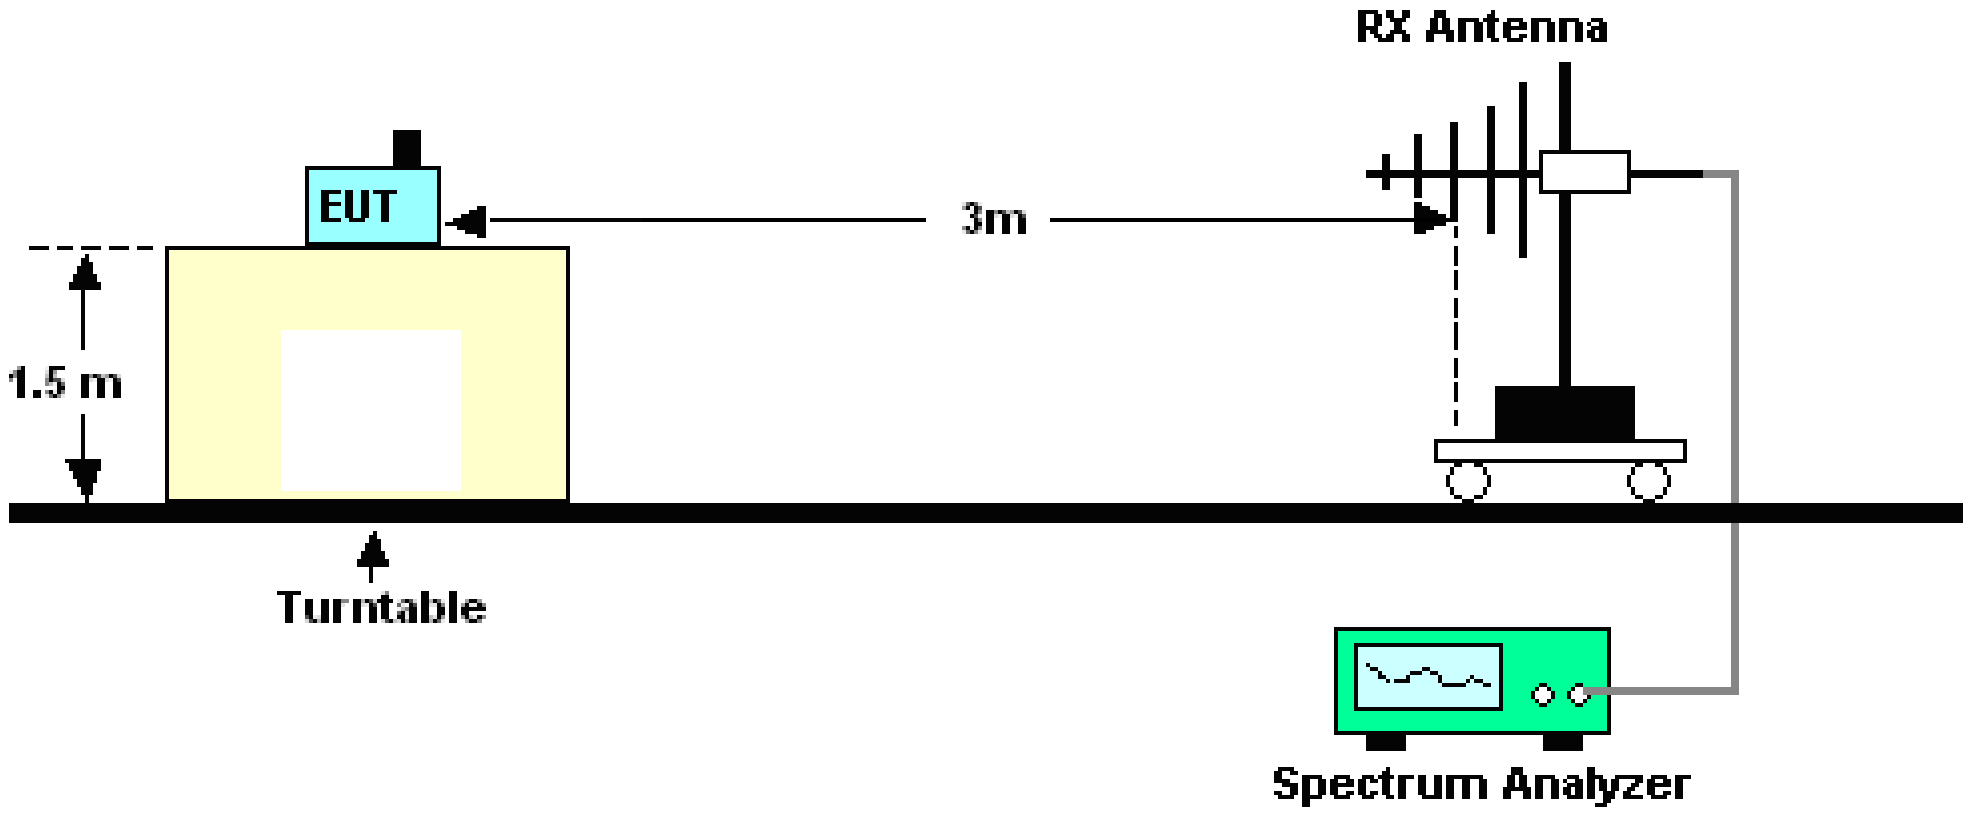

< Above 1GHz >

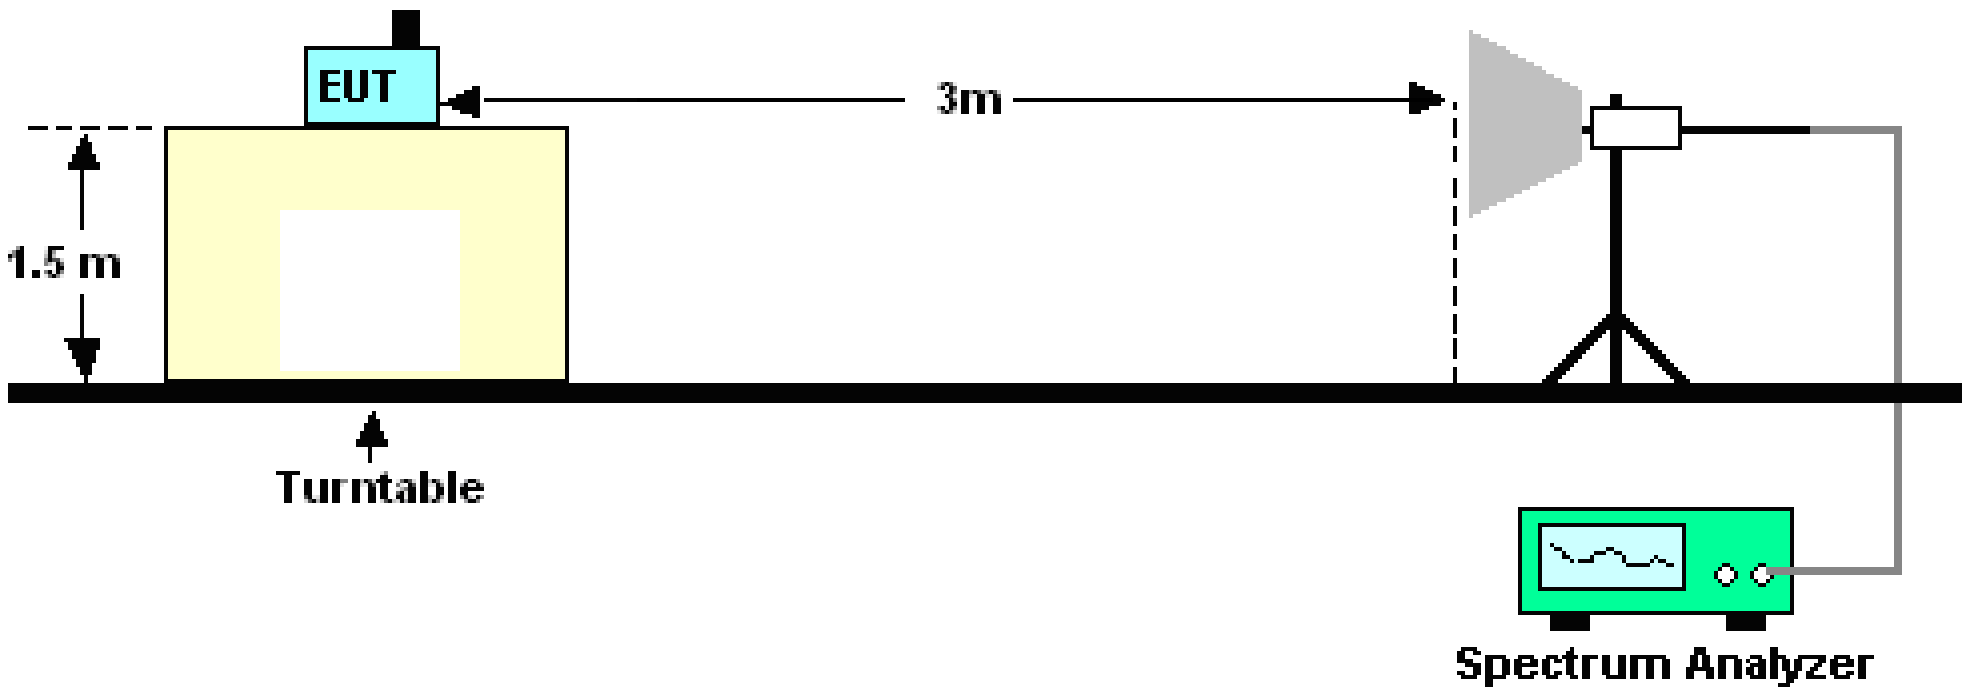

4.1.5 Test Result of Radiated Measurement

Please refer to Appendix B.

4.2 Receiver Blocking Test

4.2.1 Limit of Receiver Blocking Test

The minimum performance criterion shall be a PER less than or equal to 10%.

Wanted signal mean power from companion device [dBm]	Blocking signal frequency [MHz]	Blocking signal power [dBm]		Type of blocking signal
		Master or Slave with radar detection	Slave without radar detection	
Pmin + 6 dB	5 100	-53	-59	Continuous Wave
Pmin + 6 dB	4 900 5 000 5 975	-47	-53	Continuous Wave
NOTE: Pmin is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria in the absence of any blocking signal.				

4.2.2 Measuring Instruments

Please refer to the measuring equipment list in the section 9 of this test report.

4.2.3 Test Procedures

1. Refer to Section 5.4.10 of ETSI EN 301 893 V2.2.1 (2024-11).
2. For systems using multiple receive chains only one chain (antenna port) need to be tested. All other receiver inputs shall be terminated.

4.2.4 Test Setup

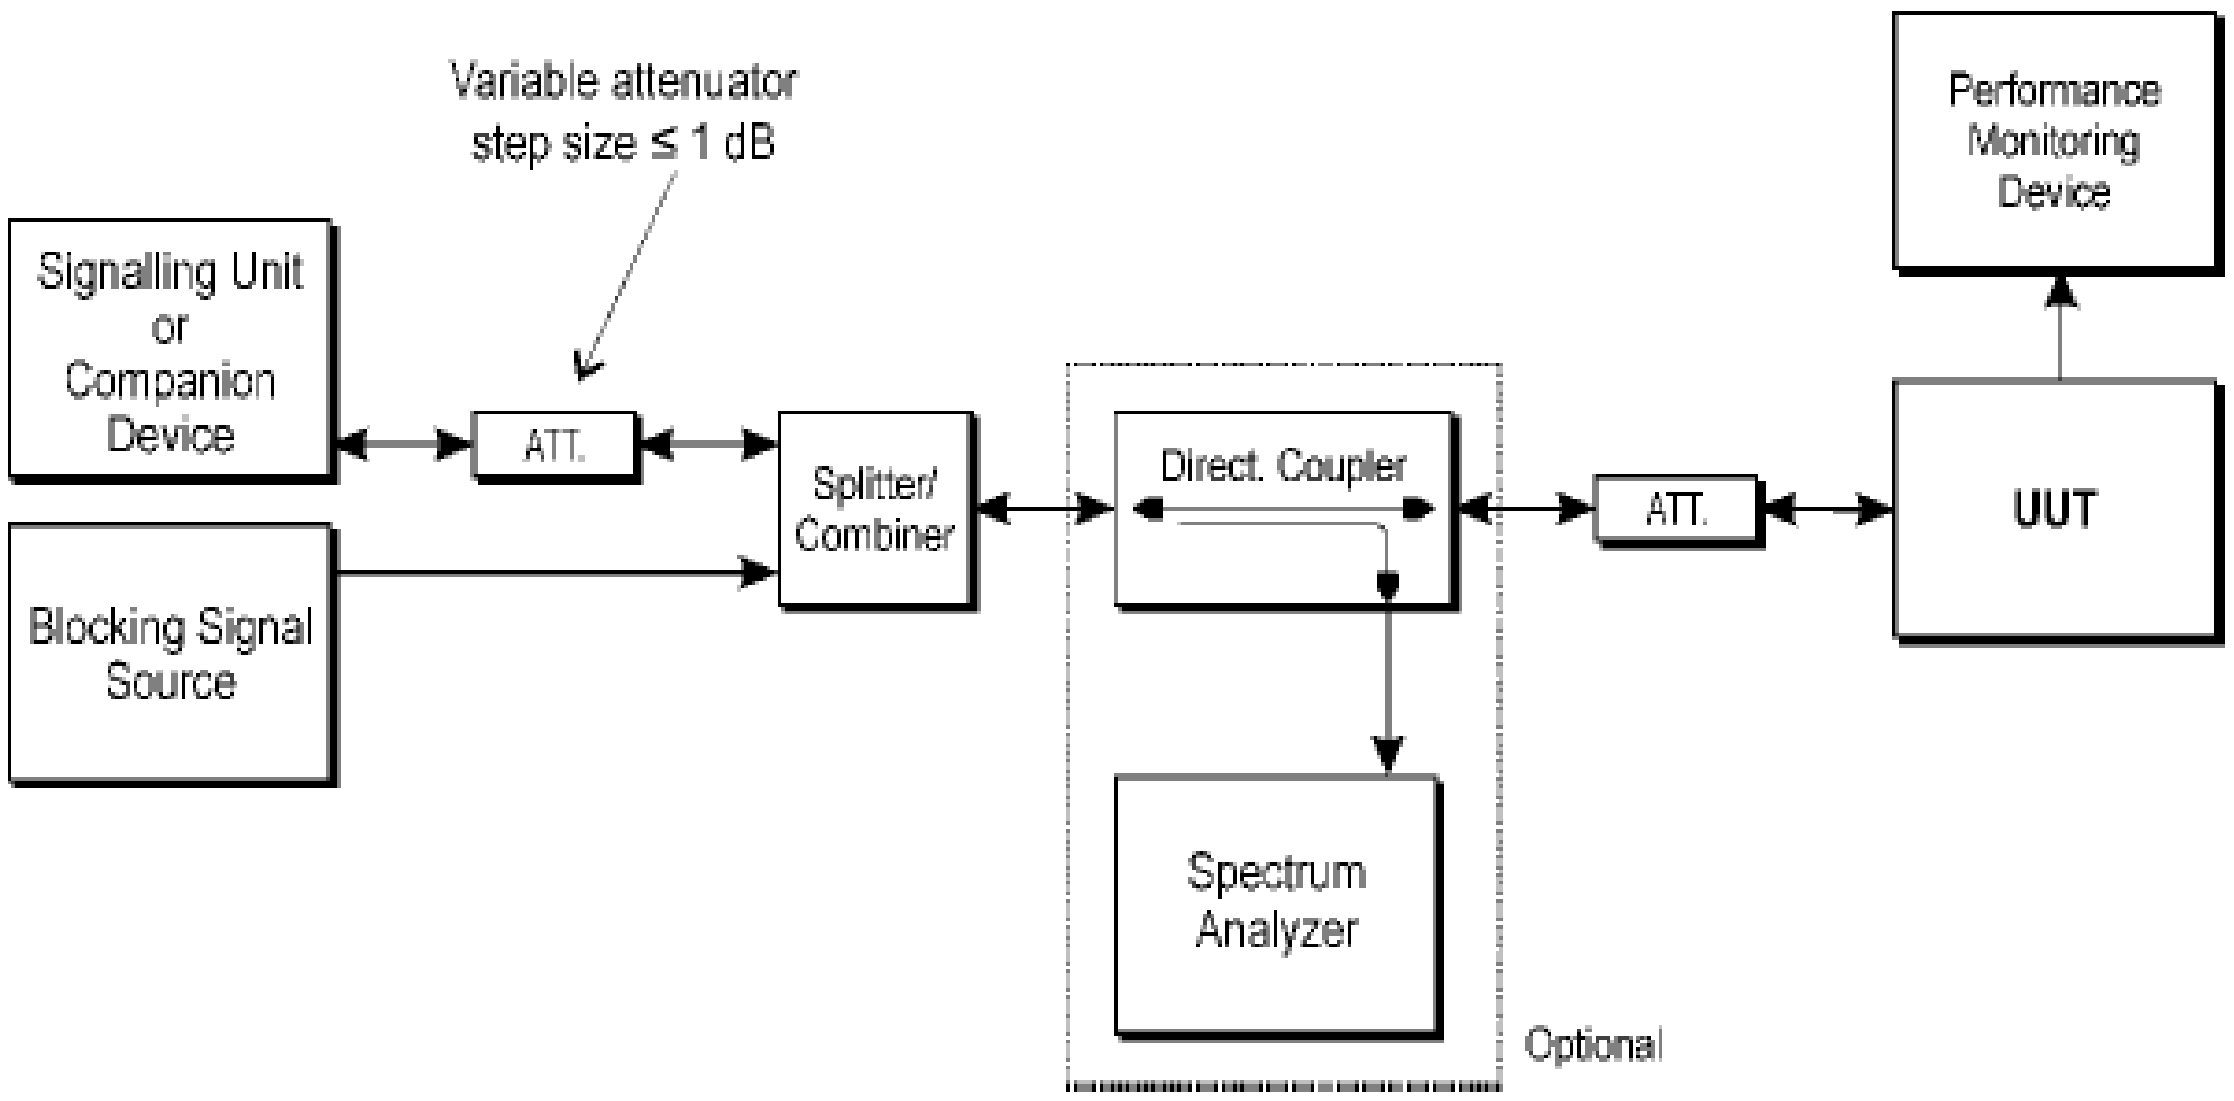

4.2.5 Test Results of Receiver Blocking

Pmin = CMW500 burst power - path cable loss - attenuator.

WiFi 802.11a 6Mbps Channel 36				
Wanted signal From companion	Blocking signal Frequency(MHz)	Blocking signal Power(dBm)		PER (%)
		Master	Slave	Slave
Pmin + 6dB	5100	-53	-59	0.1
Pmin + 6dB	4900	-47	-53	0
Pmin + 6dB	5000	-47	-53	0
Pmin + 6dB	5975	-47	-53	0
Pmin = -92 dBm (TX burst power)				

WiFi 802.11a 6Mbps Channel 52				
Wanted signal From companion	Blocking signal Frequency(MHz)	Blocking signal Power(dBm)		PER (%)
		Master	Slave	Slave
Pmin + 6dB	5100	-53	-59	0.1
Pmin + 6dB	4900	-47	-53	0
Pmin + 6dB	5000	-47	-53	0.1
Pmin + 6dB	5975	-47	-53	0.3
Pmin = -93 dBm (TX burst power)				

WiFi 802.11a 6Mbps Channel 100				
Wanted signal From companion	Blocking signal Frequency(MHz)	Blocking signal Power(dBm)		PER (%)
		Master	Slave	Slave
Pmin + 6dB	5100	-53	-59	0.1
Pmin + 6dB	4900	-47	-53	0.1
Pmin + 6dB	5000	-47	-53	0.1
Pmin + 6dB	5975	-47	-53	0.3
Pmin = -92 dBm (TX burst power)				

Hotspot Mode :

WiFi 802.11a 6Mbps Channel 36				
Wanted signal From companion	Blocking signal Frequency(MHz)	Blocking signal Power(dBm)		PER (%)
		Master	Slave	Master
Pmin + 6dB	5100	-53	-59	0
Pmin + 6dB	4900	-47	-53	0.1
Pmin + 6dB	5000	-47	-53	0
Pmin + 6dB	5975	-47	-53	0.1
Pmin = -91 dBm (TX burst power)				

4.3 Adjacent channel selectivity

4.3.1 Limit of Adjacent channel selectivity

For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER test to be performed, the minimum performance criterion shall be no loss of the wireless transmission function needed for the intended use of the equipment.

Wanted signal mean power from companion device (dBm)	Interferer signal frequency offset range (MHz)	Interferer signal power (dBm) (see note 2)	Type of interferer signal
P_{min} + 10 dB	20± 0,2	P_{min} + 26 dB	Same as the wanted signal with an equivalent Channel Bandwidth
NOTE 1: P_{min} is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined clause 4.2.9.3 in the absence of any interfering signal. NOTE 2: The level specified for the interferer signal applies at the lowest data rate.			

4.3.2 Measuring Instruments

See list of measuring equipment of this test report.

4.3.3 Test Procedures

1. Refer to Section 5.4.10 of ETSI EN 301 893 V2.2.1 (2024-11).
2. For systems using multiple receive chains only one chain (antenna port) need to be tested. All other receiver inputs shall be terminated.

4.3.4 Test Setup

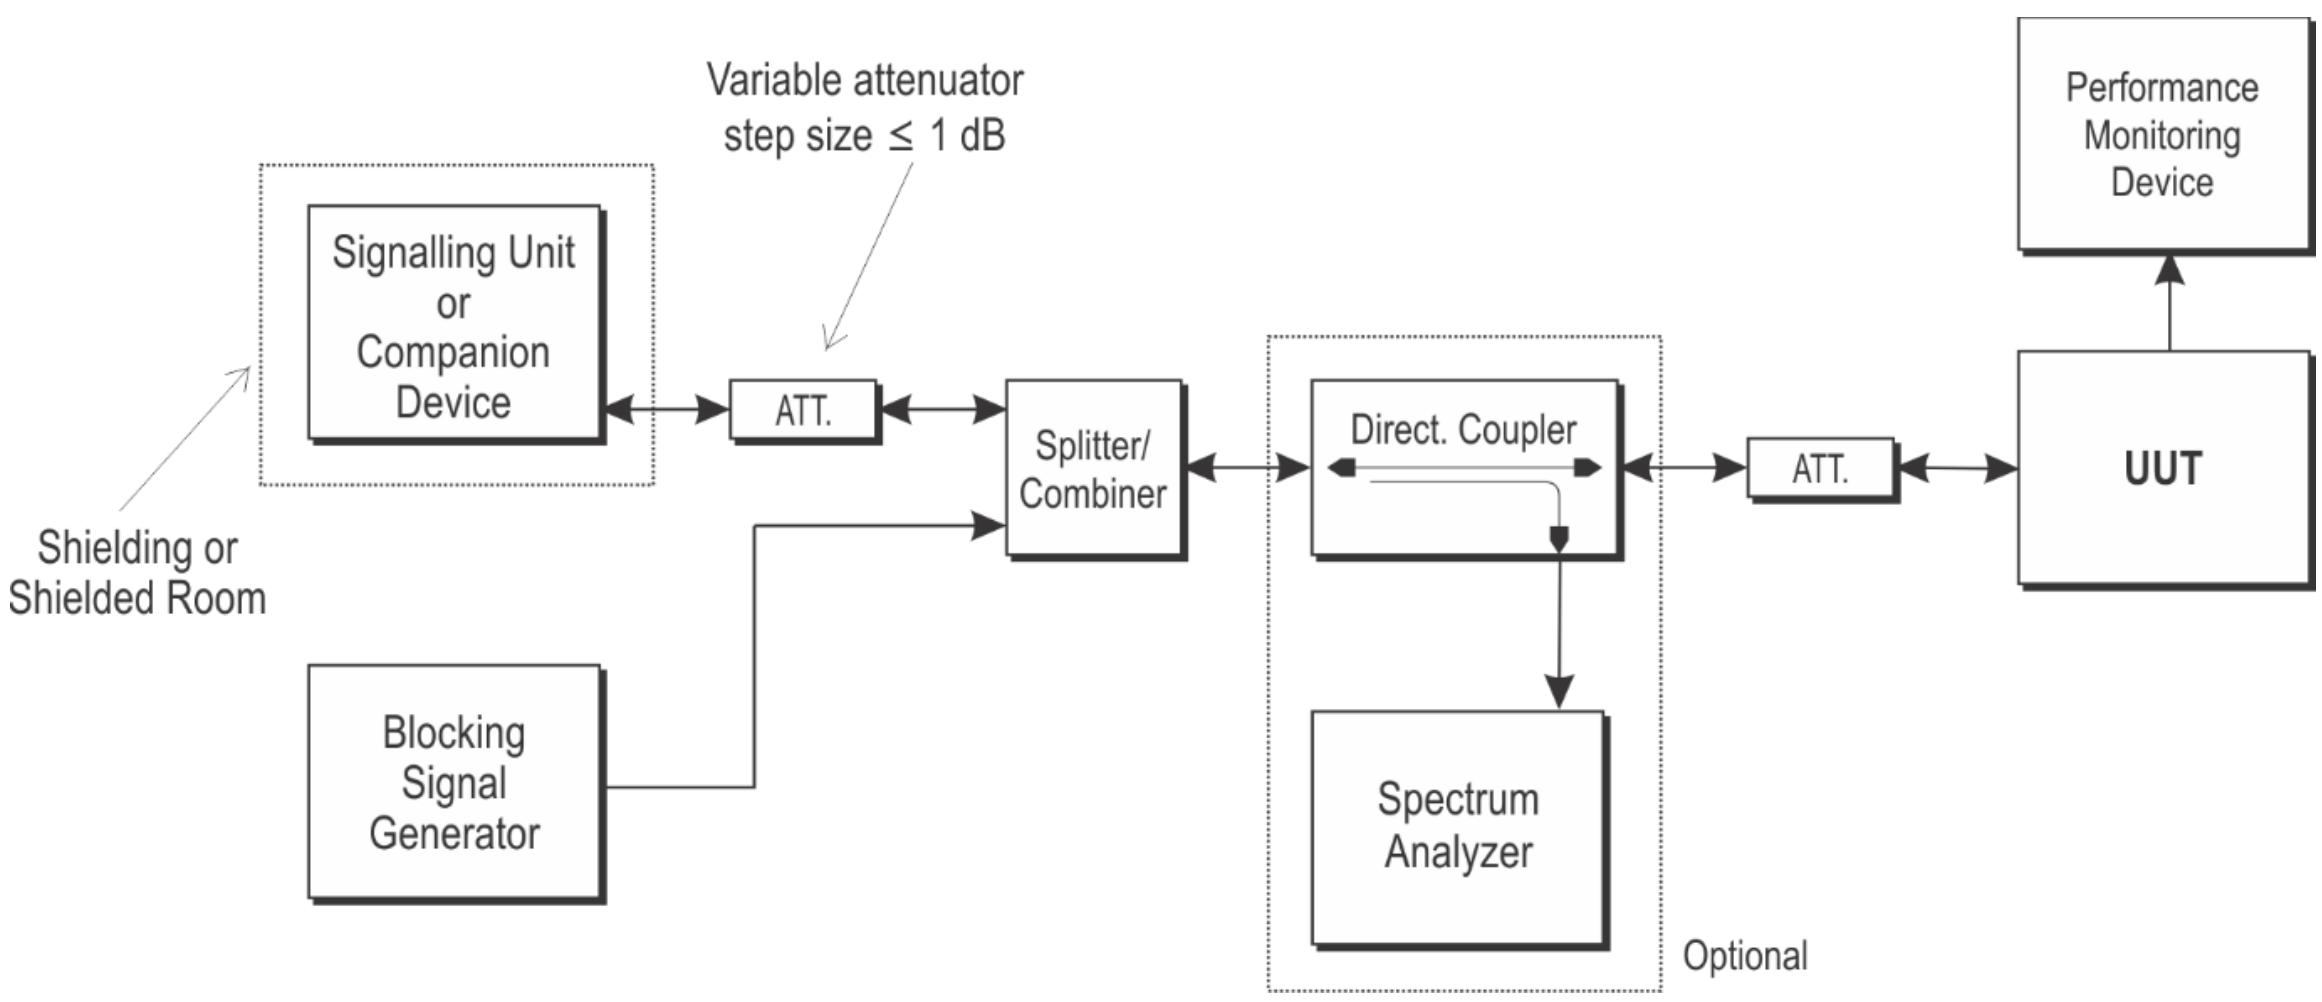

4.3.5 Test Results of Receiver Adjacent Channel Selectivity

Pmin = CMW270 burst power - path cable loss - attenuator.

WiFi 802.11a 6Mbps Channel 36			
Wanted signal From companion	Interferer signal Frequency(MHz)	Interferer signal Power(dBm)	PER (%)
Pmin + 10dB	5160	P_{min} + 26 dB	2.7
Pmin + 10dB	5200	P_{min} + 26 dB	7.5
PER =5.3% when Pmin= -92dBm before blocker is injected.			

WiFi 802.11a 6Mbps Channel 52			
Wanted signal From companion	Interferer signal Frequency(MHz)	Interferer signal Power(dBm)	PER (%)
Pmin + 10dB	5240	P_{min} + 26 dB	5.7
Pmin + 10dB	5280	P_{min} + 26 dB	5.1
PER =9.9% when Pmin= -93dBm before blocker is injected.			

WiFi 802.11a 6Mbps Channel 100			
Wanted signal From companion	Interferer signal Frequency(MHz)	Interferer signal Power(dBm)	PER (%)
Pmin + 10dB	5480	P_{min} + 26 dB	6.4
Pmin + 10dB	5520	P_{min} + 26 dB	5.6
PER = 6.3% when Pmin= -92dBm before blocker is injected.			

Note: Packet Error rate shall be less than 10% declared by the manufacturer.

Hotspot Mode :

WiFi 802.11a 6Mbps Channel 36			
Wanted signal From companion	Interferer signal Frequency(MHz)	Interferer signal Power(dBm)	PER (%)
Pmin + 10dB	5160	P_{min} + 26 dB	2
Pmin + 10dB	5200	P_{min} + 26 dB	5.7
PER =5.2% when Pmin= -91dBm before blocker is injected.			

5. Adaptivity Test

5.1 Adaptivity Parameters

whether the equipment is Frame Based Equipment (FBE) or Load Based Equipment (LBE)	
☐	UUT is a Frame Based Equipment (FBE)
☒	UUT is a Load Based Equipment (LBE)

With regards to Adaptivity for Load Based Equipment (LBE)		
whether the LBE equipment operates as a Supervising and/or as a Supervised Device		
☒	UUT that can operate as a Supervised Device	
	☐	UUT is capable to make use of note 1 in Table 8
	All the Priority Classes implemented by the LBE equipment	
	☒	UUT implements priority class # 1
	☒	UUT implements priority class # 2
	☒	UUT implements priority class # 3
	☒	UUT implements priority class # 4
☒	UUT that can operate as a Supervising Device	
	☒	UUT is capable to make use of note 1 in Table 7
	☐	UUT is capable to make use of note 2 in Table 7
	All the Priority Classes implemented by the LBE equipment	
	☒	UUT implements priority class # 1
	☒	UUT implements priority class # 2
	☒	UUT implements priority class # 3
	☒	UUT implements priority class # 4
If the UUT is an Initiating Device and/or a Responding Device		
☒	UUT is an Initiating Device	
☒	UUT is a Responding Device	
UUT's theoretical maximum radio performance (e.g. maximum throughput): 433Mbps		

Table 7: Priority Class dependent Channel Access parameters for *Supervising Devices*

Class #	p_0	CW_{min}	CW_{max}	maximum Channel Occupancy Time (COT)
4	1	3	7	2 ms
3	1	7	15	4 ms
2	3	15	63	6 ms (see note 1 and note 2)
1	7	15	1 023	6 ms (see note 1)

NOTE 1: The maximum *Channel Occupancy Time* (COT) of 6 ms may be increased to 8 ms by inserting one or more pauses. The minimum duration of a pause shall be 100 µs. The maximum duration (Channel Occupancy) before including any such pause shall be 6 ms. Pause duration is not included in the channel occupancy time.
NOTE 2: The maximum Channel Occupancy Time (COT) of 6 ms may be increased to 10 ms by extending CW to CW × 2 + 1 when selecting the random number q for any backoff(s) that precede the Channel Occupancy that may exceed 6 ms or which follow the Channel Occupancy that exceeded 6 ms. The choice between preceding or following a Channel Occupancy shall remain unchanged during the operation time of the device.
NOTE 3: The values for p, CW_{min}, CW_{max} are minimum values. Greater values are allowed.

Table 8: Priority Class dependent Channel Access parameters for *Supervised Devices*

Class #	p_0	CW_{min}	CW_{max}	maximum Channel Occupancy Time (COT)
4	2	3	7	2 ms
3	2	7	15	4 ms
2	3	15	1 023	6 ms (see note 1)
1	7	15	1 023	6 ms (see note 1)

NOTE 1: The maximum *Channel Occupancy Time* (COT) of 6 ms may be increased to 8 ms by inserting one or more pauses. The minimum duration of a pause shall be 100 µs. The maximum duration (Channel Occupancy) before including any such pause shall be 6 ms. Pause duration is not included in the channel occupancy time.
NOTE 2: the values for p, CW_{min}, CW_{max} are minimum values. Greater values are allowed.

All measurements shall have temporal resolution of less than or equal to 1 µs.

The measurement equipment shall be able to observe UUT behavior of at least [10 000] Channel Occupancy Times (COTs) at the aforementioned temporal resolution. This data may be recorded in segments. In that case, the COTs shall be extracted from each data segment. The combined set of all COTs shall be analyzed as described in clause 5.4.9.3.2.4.

For 802.11n HT40 or bandwidth above 40MHz modes, clause 4.2.7.3.2.3 Multi-channel Operation Load Based Equipment being capable of simultaneous transmissions in adjacent or non-adjacent Operating Channels shall implement either option 1 or option 2 below.	
☐	Option 1: LBE may use any combination/grouping of channels out of the list of channels identified by the nominal centre frequencies, if it satisfies the channel access requirements (channel access mechanism) for an initiating device on each such operating channel. For equipment also capable of operating in sub-band 4, the combination/grouping of channels may include channels identified by the nominal centre frequencies. The same channel access requirements apply.
☒	Option 2: LBE that uses a combination/grouping of adjacent channels that is a subset of the 40 MHz, 80 MHz or 160 MHz groups of adjacent channels may transmit on any of the operating channels

5.1.1 Limit of Adaptivity

An operating channel is an occupied channel as long as transmissions in that channel are present at a power level greater than the Energy Detection Threshold (EDT). The power level is determined by integrating the received power over the channel and then normalized to per MHz power. The received power shall be determined at the interface between the equipment and the antenna assembly. If no transmissions are present at a power level greater than the EDT, the operating channel is an unoccupied channel. Equipment may consist of one or more devices. The EDT is proportional to the equipment's maximum configured RF output power and shall be:

$$EDT = \begin{cases} -75\ \text{dBm/MHz} & \text{for } P_{max} \leq 18\ \text{dBm} \\ -80\ \text{dBm/MHz} + (23\ \text{dBm} - P_{max}) & \text{for } 18\ \text{dBm} < P_{max} < 23\ \text{dBm} \\ -80\ \text{dBm/MHz} & \text{for } P_{max} \geq 23\ \text{dBm} \end{cases}$$

The EDT is an absolute level that applies at all times independent of background noise of other signals being present in the channel.

Short Control Signalling Transmissions

Within an observation period of 50 ms, the number of Short Control Signalling Transmissions by the equipment shall be equal to or less than 50 , and the total duration of the equipment’s Short Control Signalling Transmissions shall be less than 2 500 µs within said observation period.

5.1.2 Limit of Maximum Channel Occupancy Time (COT)

Refer to clause 5.4.9.3.2.5.1 of the ETSI EN 301 893 V2.2.1 (2024-11).
For Priority Class 2, is defined as below:
None of the Channel Occupancy Times shall exceed the following limits:
8 ms if the UUT makes use of note 1 in table 7
6 ms if the UUT does not make use of note 1 in table7.

5.1.3 Limit of Channel Access Mechanism Test

Refer to clause 5.4.9.3.2.4 of the ETSI EN 301 893 V2.2.1 (2024-11).
For Priority Class 2, bin Bn is defined as below:
If the UUT is a Supervised Device or if the UUT is a Supervising Device not making use of note 2 in table 7 in clause 4.2.7.3.2.4, bin Bn is defined as:

$$B_n = \begin{cases} [0,41[\ \mu s, & n = 0 \\ [41 + 9 \times (n-1), 41 + 9 \times n[\ \mu s, & 1 \le n \le 15 \\ [176, \infty[\ \mu s, & n = 16 \end{cases}$$

It shall be verified whether the UUT complies with the below maximum probabilities: each cumulative probability p(n) of all Idle Periods recorded in bins [B0 … Bn] shall not exceed the following maximum probability

$$p(n) \le \begin{cases} 0{,}05, & n = 0 \\ 0{,}12, & n = 1 \\ 0{,}12 + (n-1) \times 0{,}0625, & 2 \le n \le 15 \\ 1, & n > 15 \end{cases}$$

5.1.4 Measurement Instruments

The measuring equipment is listed in the section 9 of this test report.

5.1.5 Test Procedures

Refer to Section 5.4.9 of ETSI EN 301 893 V2.2.1 (2024-11).
For 802.11a and 802.11n HT20 modes, clause 5.4.9.3.2.2: Procedure to verify the capability to detect other RLAN transmissions on the Operating Channel is used.
For 802.11n HT40 or bandwidth above 40MHz modes, clause 5.4.9.3.2.3.2: Equipment implementing Option 2 for multi-channel operation is used.
The traffic source shall fill the UUT's buffers causing the UUT to always have transmissions queued (full buffer condition) towards the companion device to allow demonstration of compliance of the adaptive mechanism on the channel being tested.

5.1.6 Test Setup

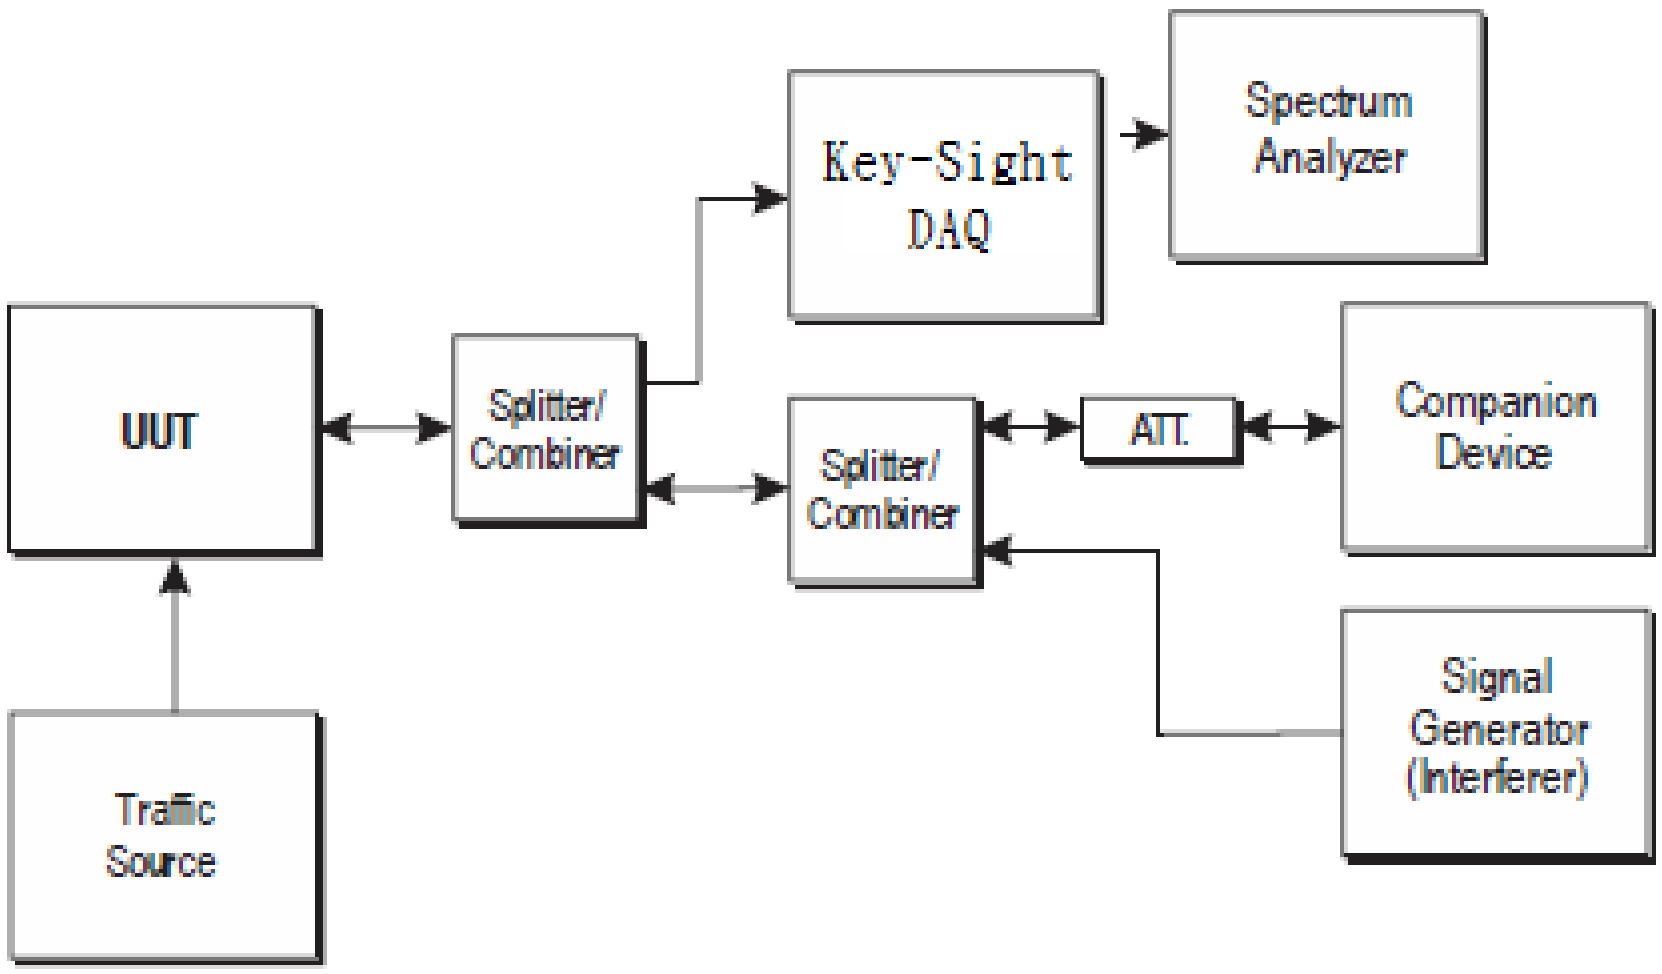

5.1.7 Support Unit used in test configuration and system

Item	Instrument	Manufacturer	Model No.	Characteristics
1.	WLAN AP	MOTOROLA	AP-7131N	Dual Band AP
2.	Notebook	Lenovo	E335	LAN

5.1.8 Test Results of Adaptivity Test

	Modulation	Nominal Bandwidth	Channel	Test Frequency	Test Result
WIFI 5GHz	802.11n HT20	20MHz	36	5180 MHz	PASS
	802.11n HT40	40MHz	38	5190 MHz	PASS

5.1.9 Test Plots of Adaptivity Test

Test results

TestMode	Antenna	Freq(MHz)	Priority Class	COT Num [n]	Max. COT [ms]	Limit [ms]	Min.Idle Time[ms]	Limit [ms]	Idle Period probability	Verdict
11n20SISO	Ant6	5180	2	10005	5.053	6.000	0.034	0.027	See the graph	PASS
11n40SISO	Ant6	5190	2	10006	4.461	6.000	0.036	0.027	See the graph	PASS

Test Graphs

11n20SISO_Ant6_5180

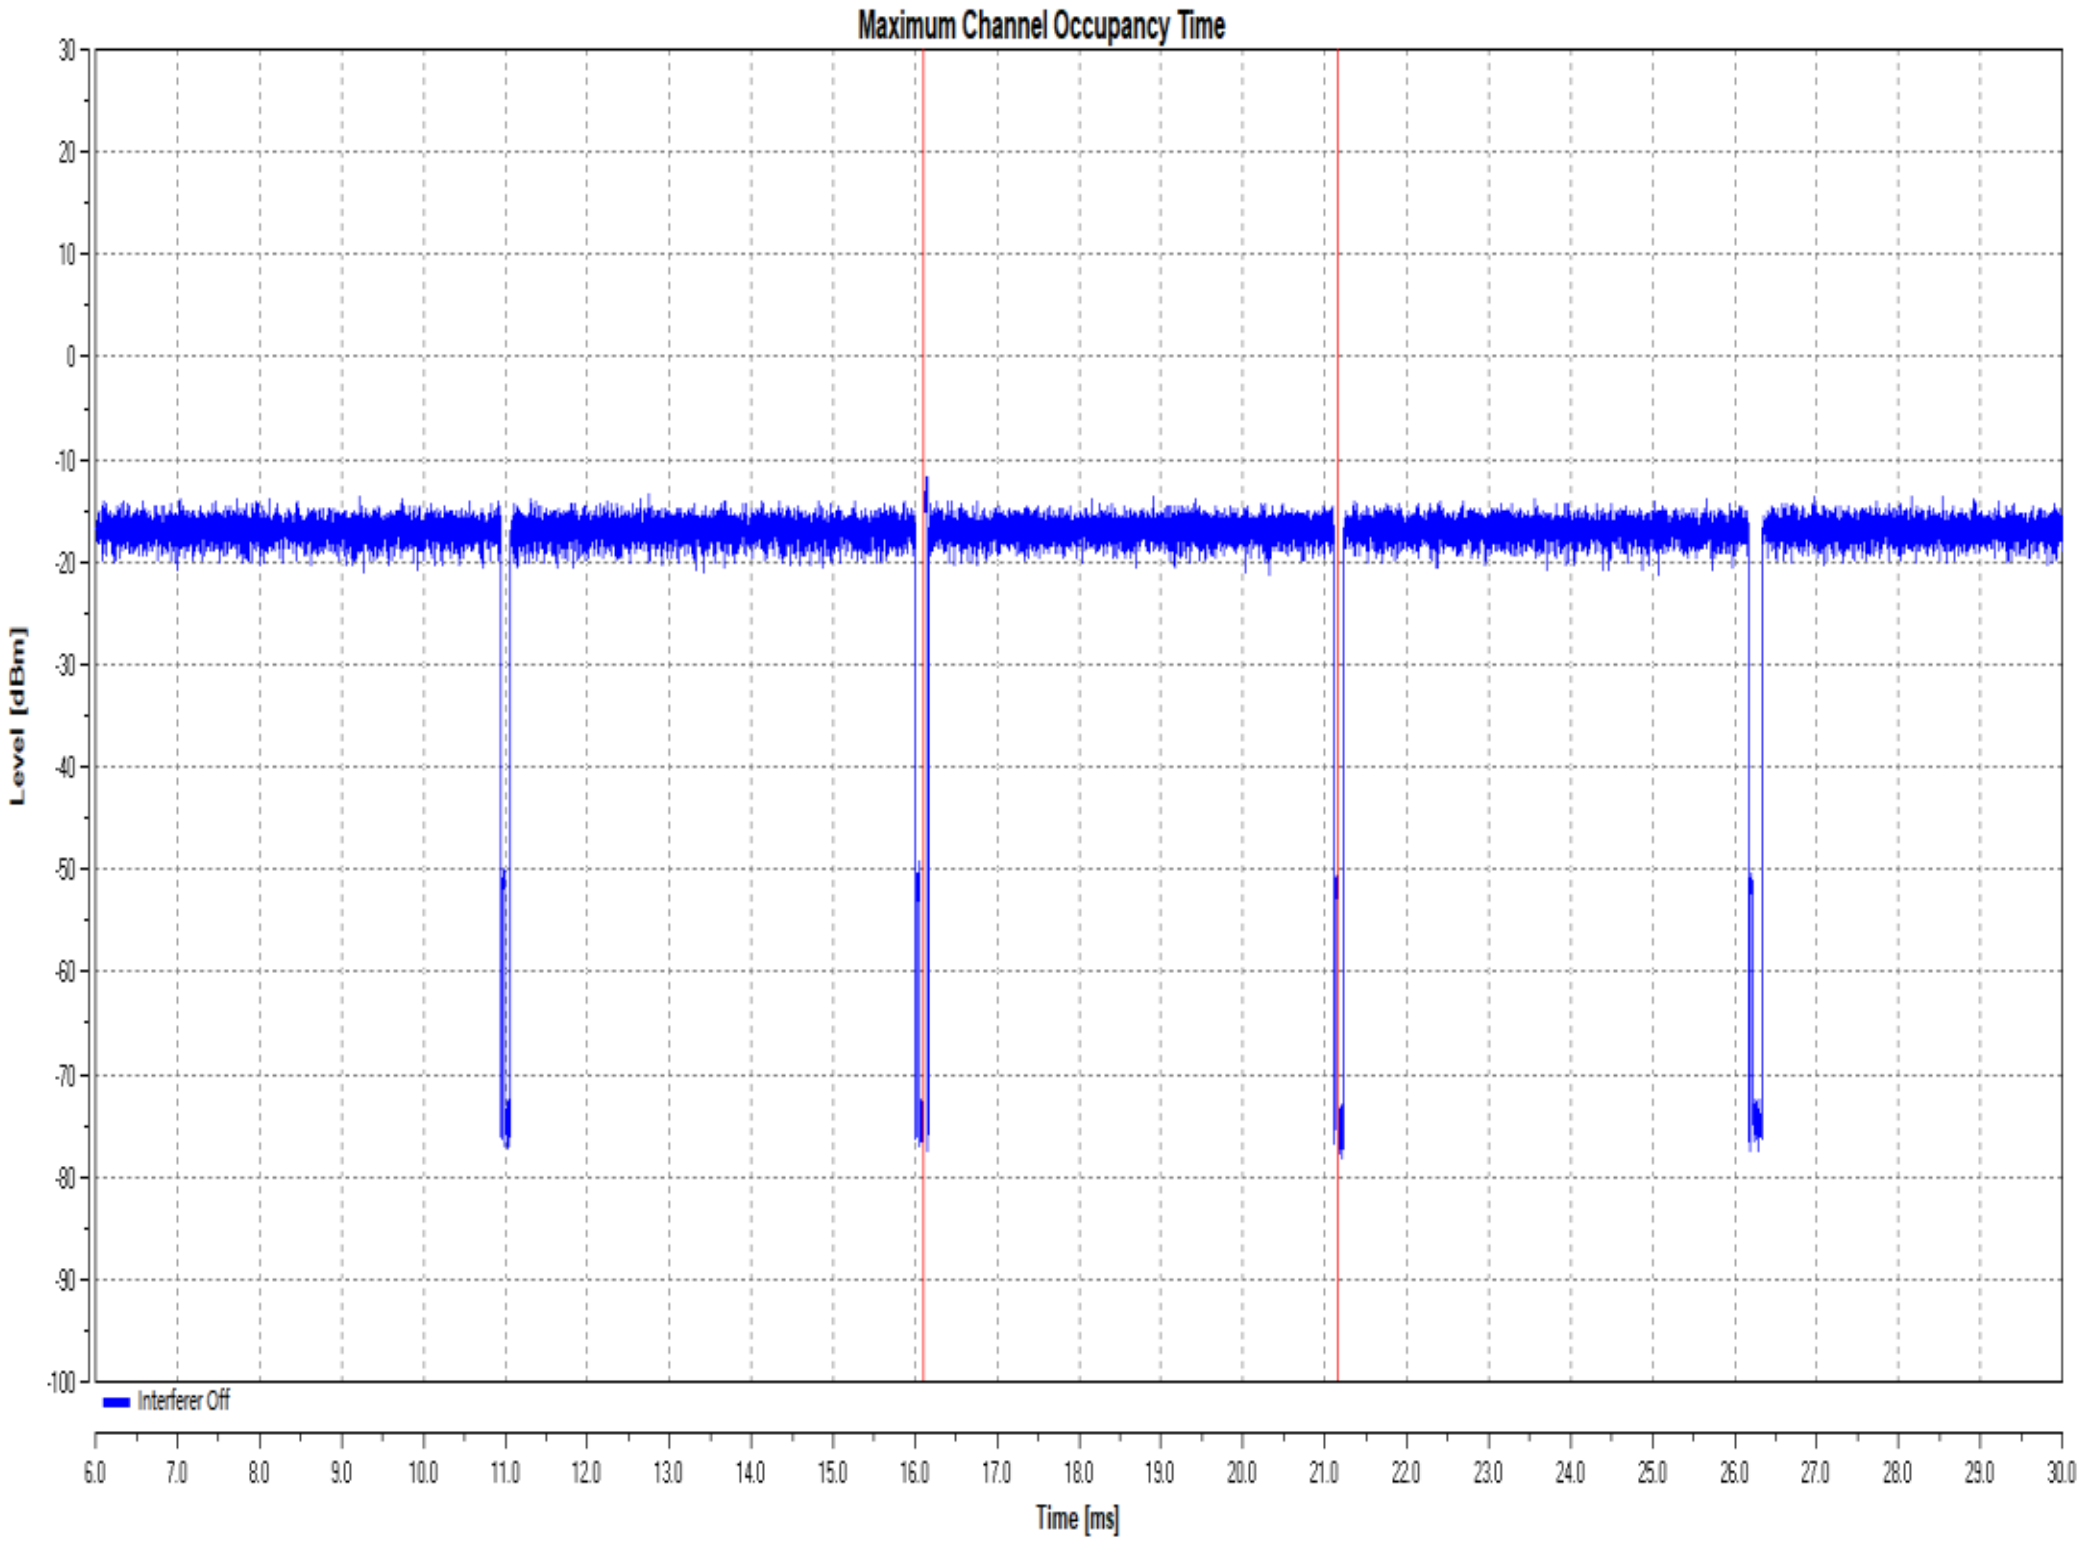

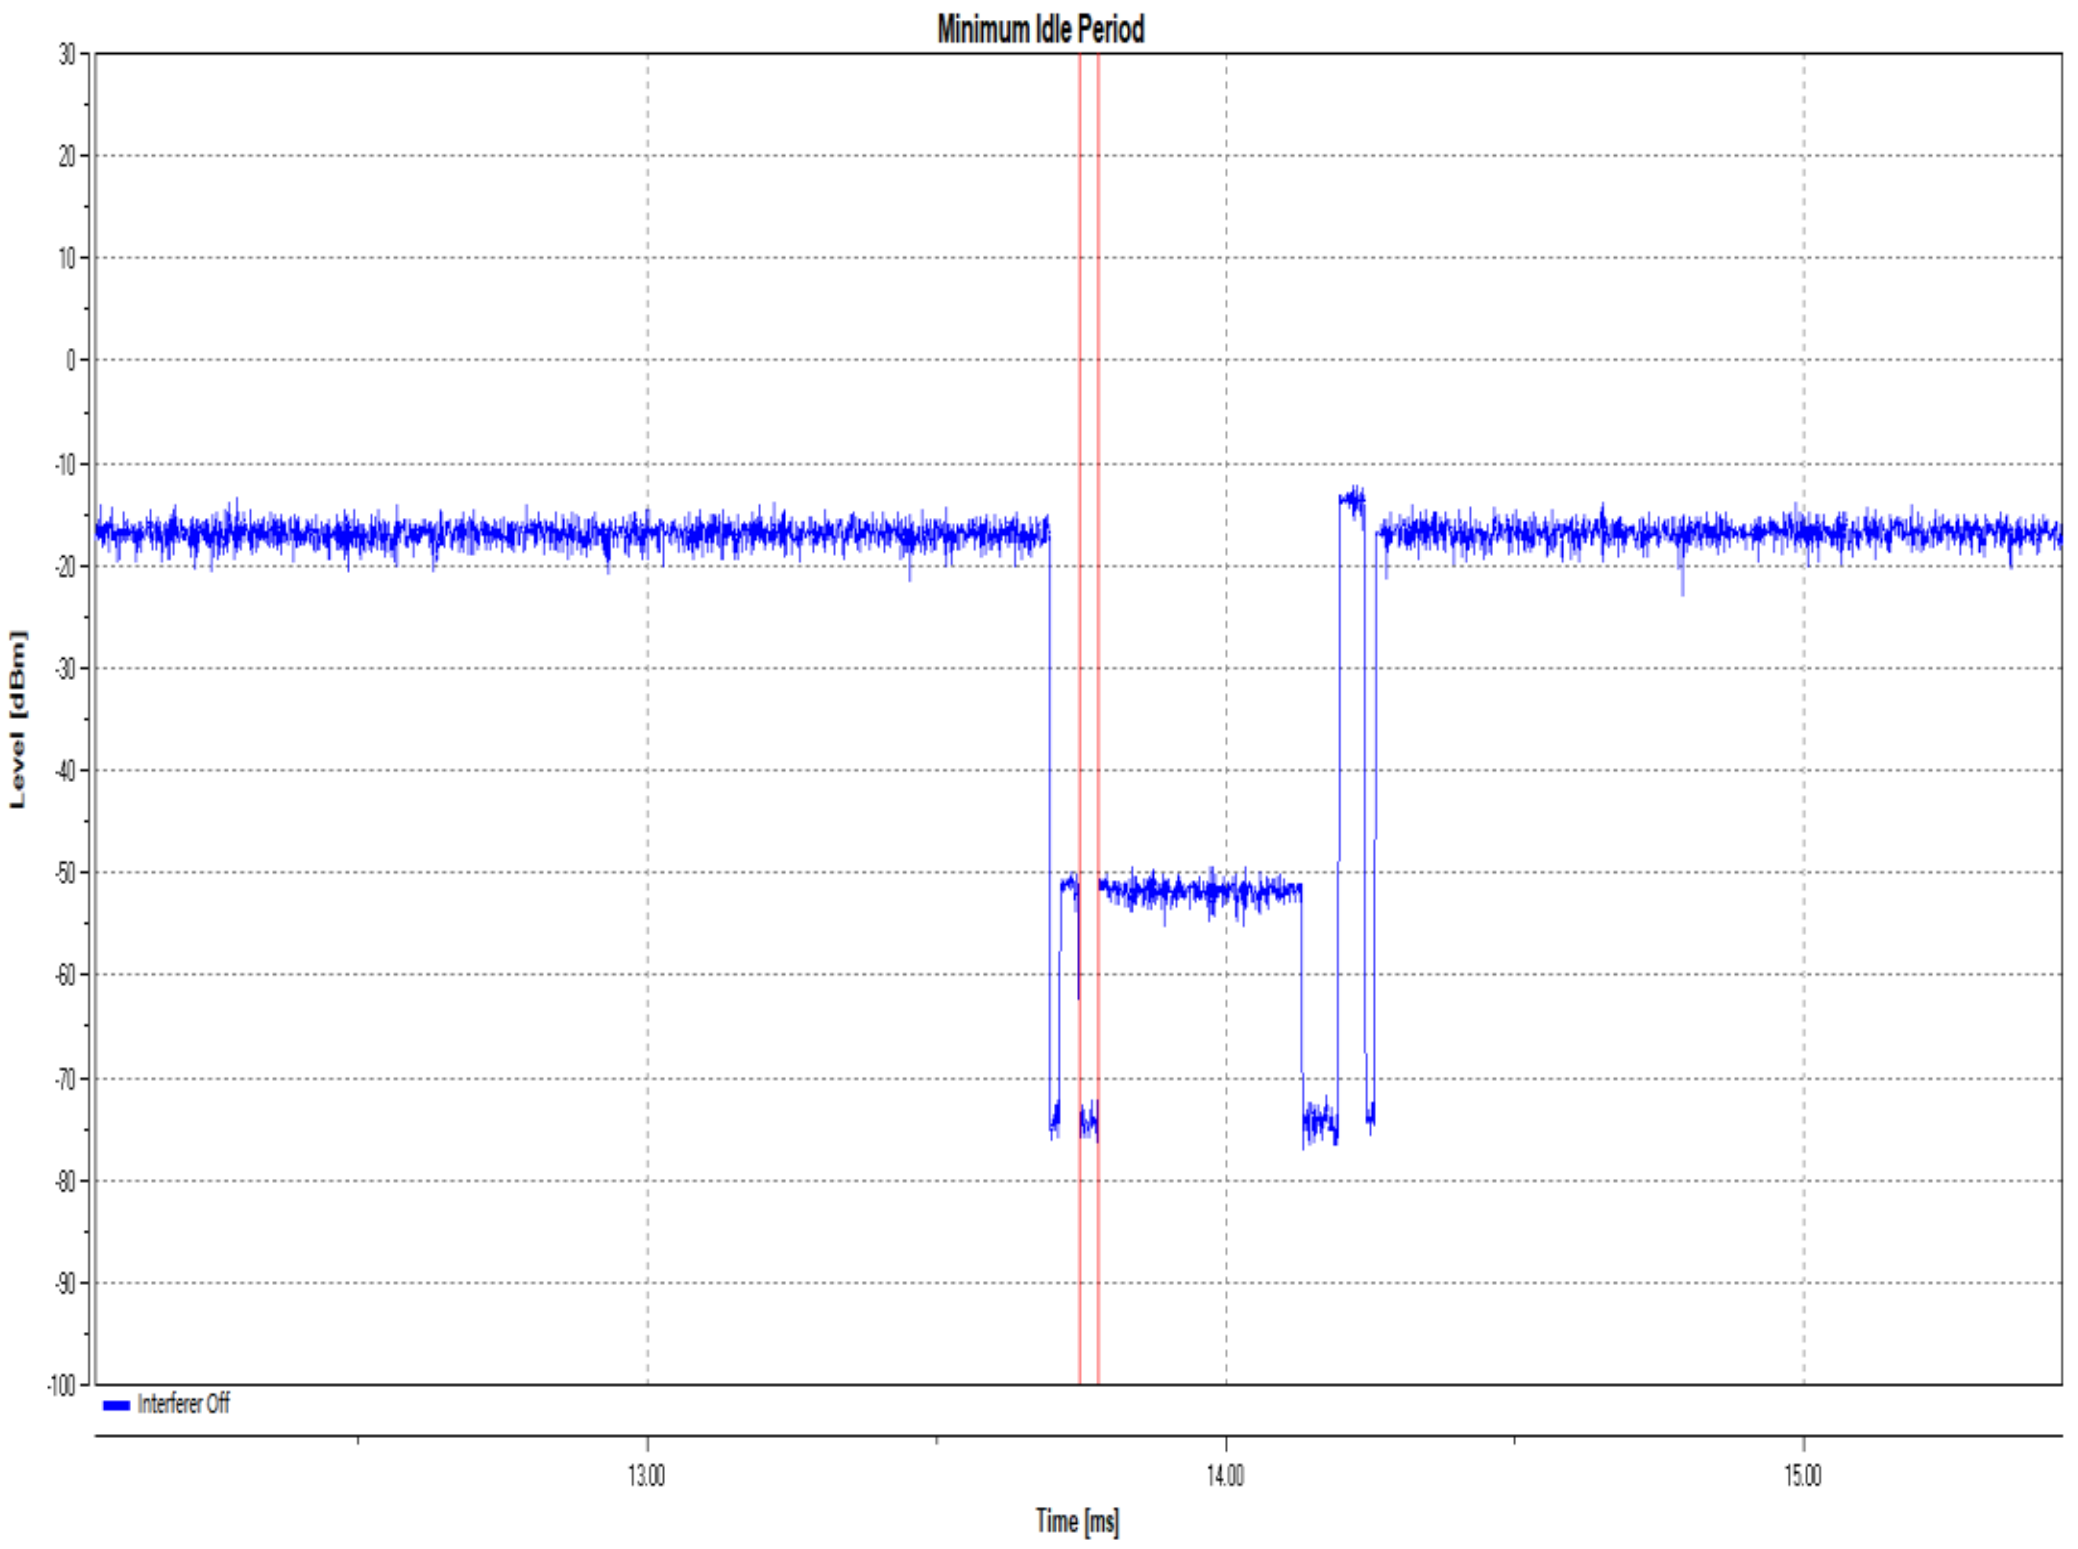

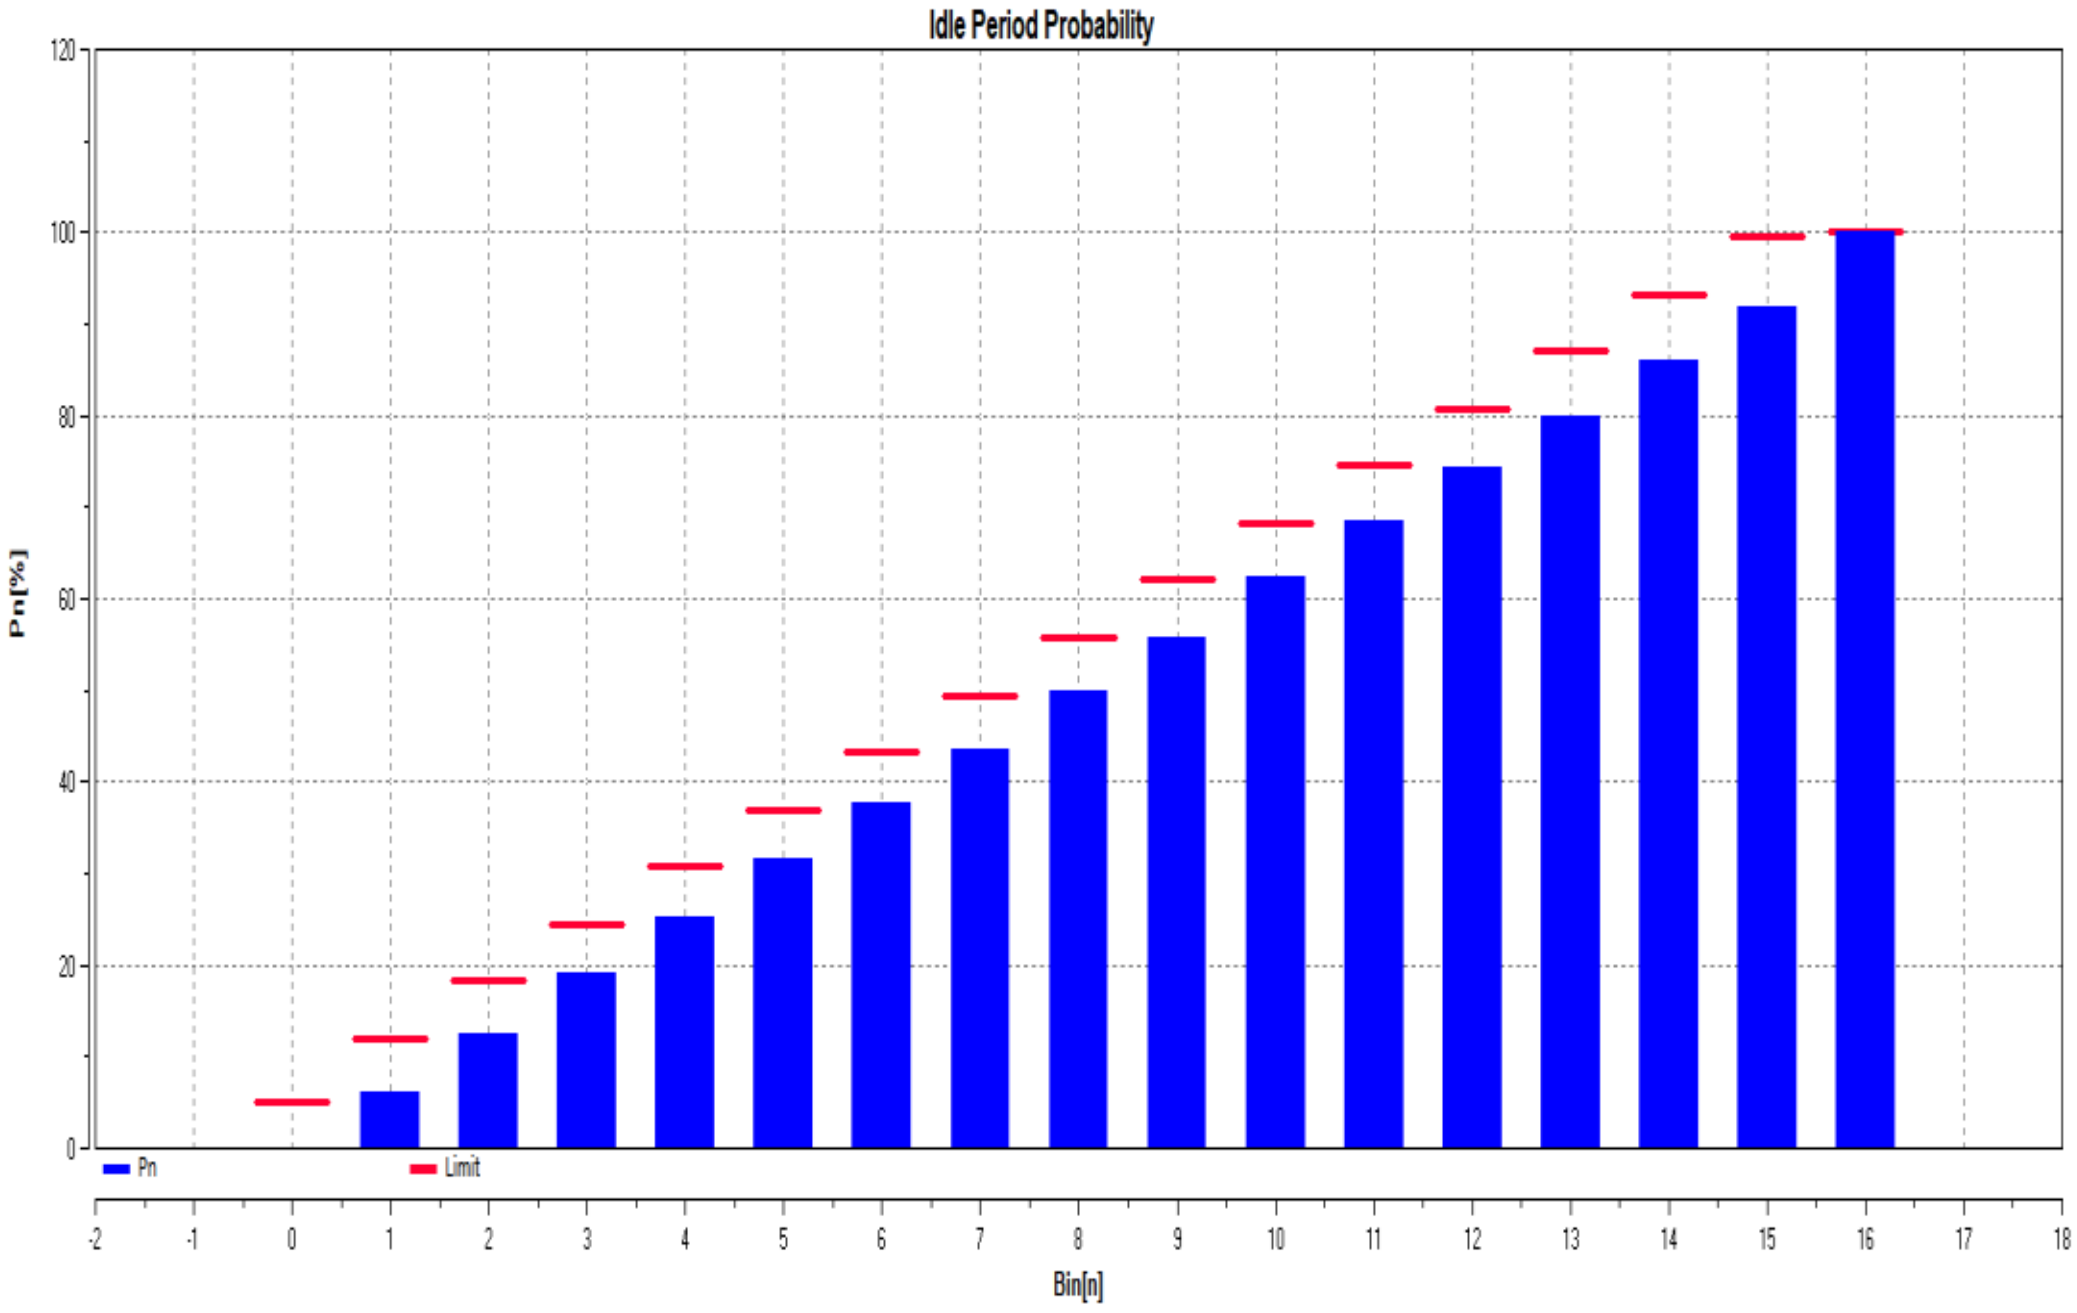

n	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
B[n]	1	620	620	675	610	629	613	588	647	585	642	618	578	579	609	565	826
P[n]	0.01	6.21	12.4	19.15	25.25	31.53	37.66	43.54	50	55.85	62.27	68.45	74.22	80.01	86.1	91.74	100
Limit	5	12	18.25	24.5	30.75	37	43.25	49.5	55.75	62	68.25	74.5	80.75	87	93.25	99.5	100

11n40SISO_Ant6_5190

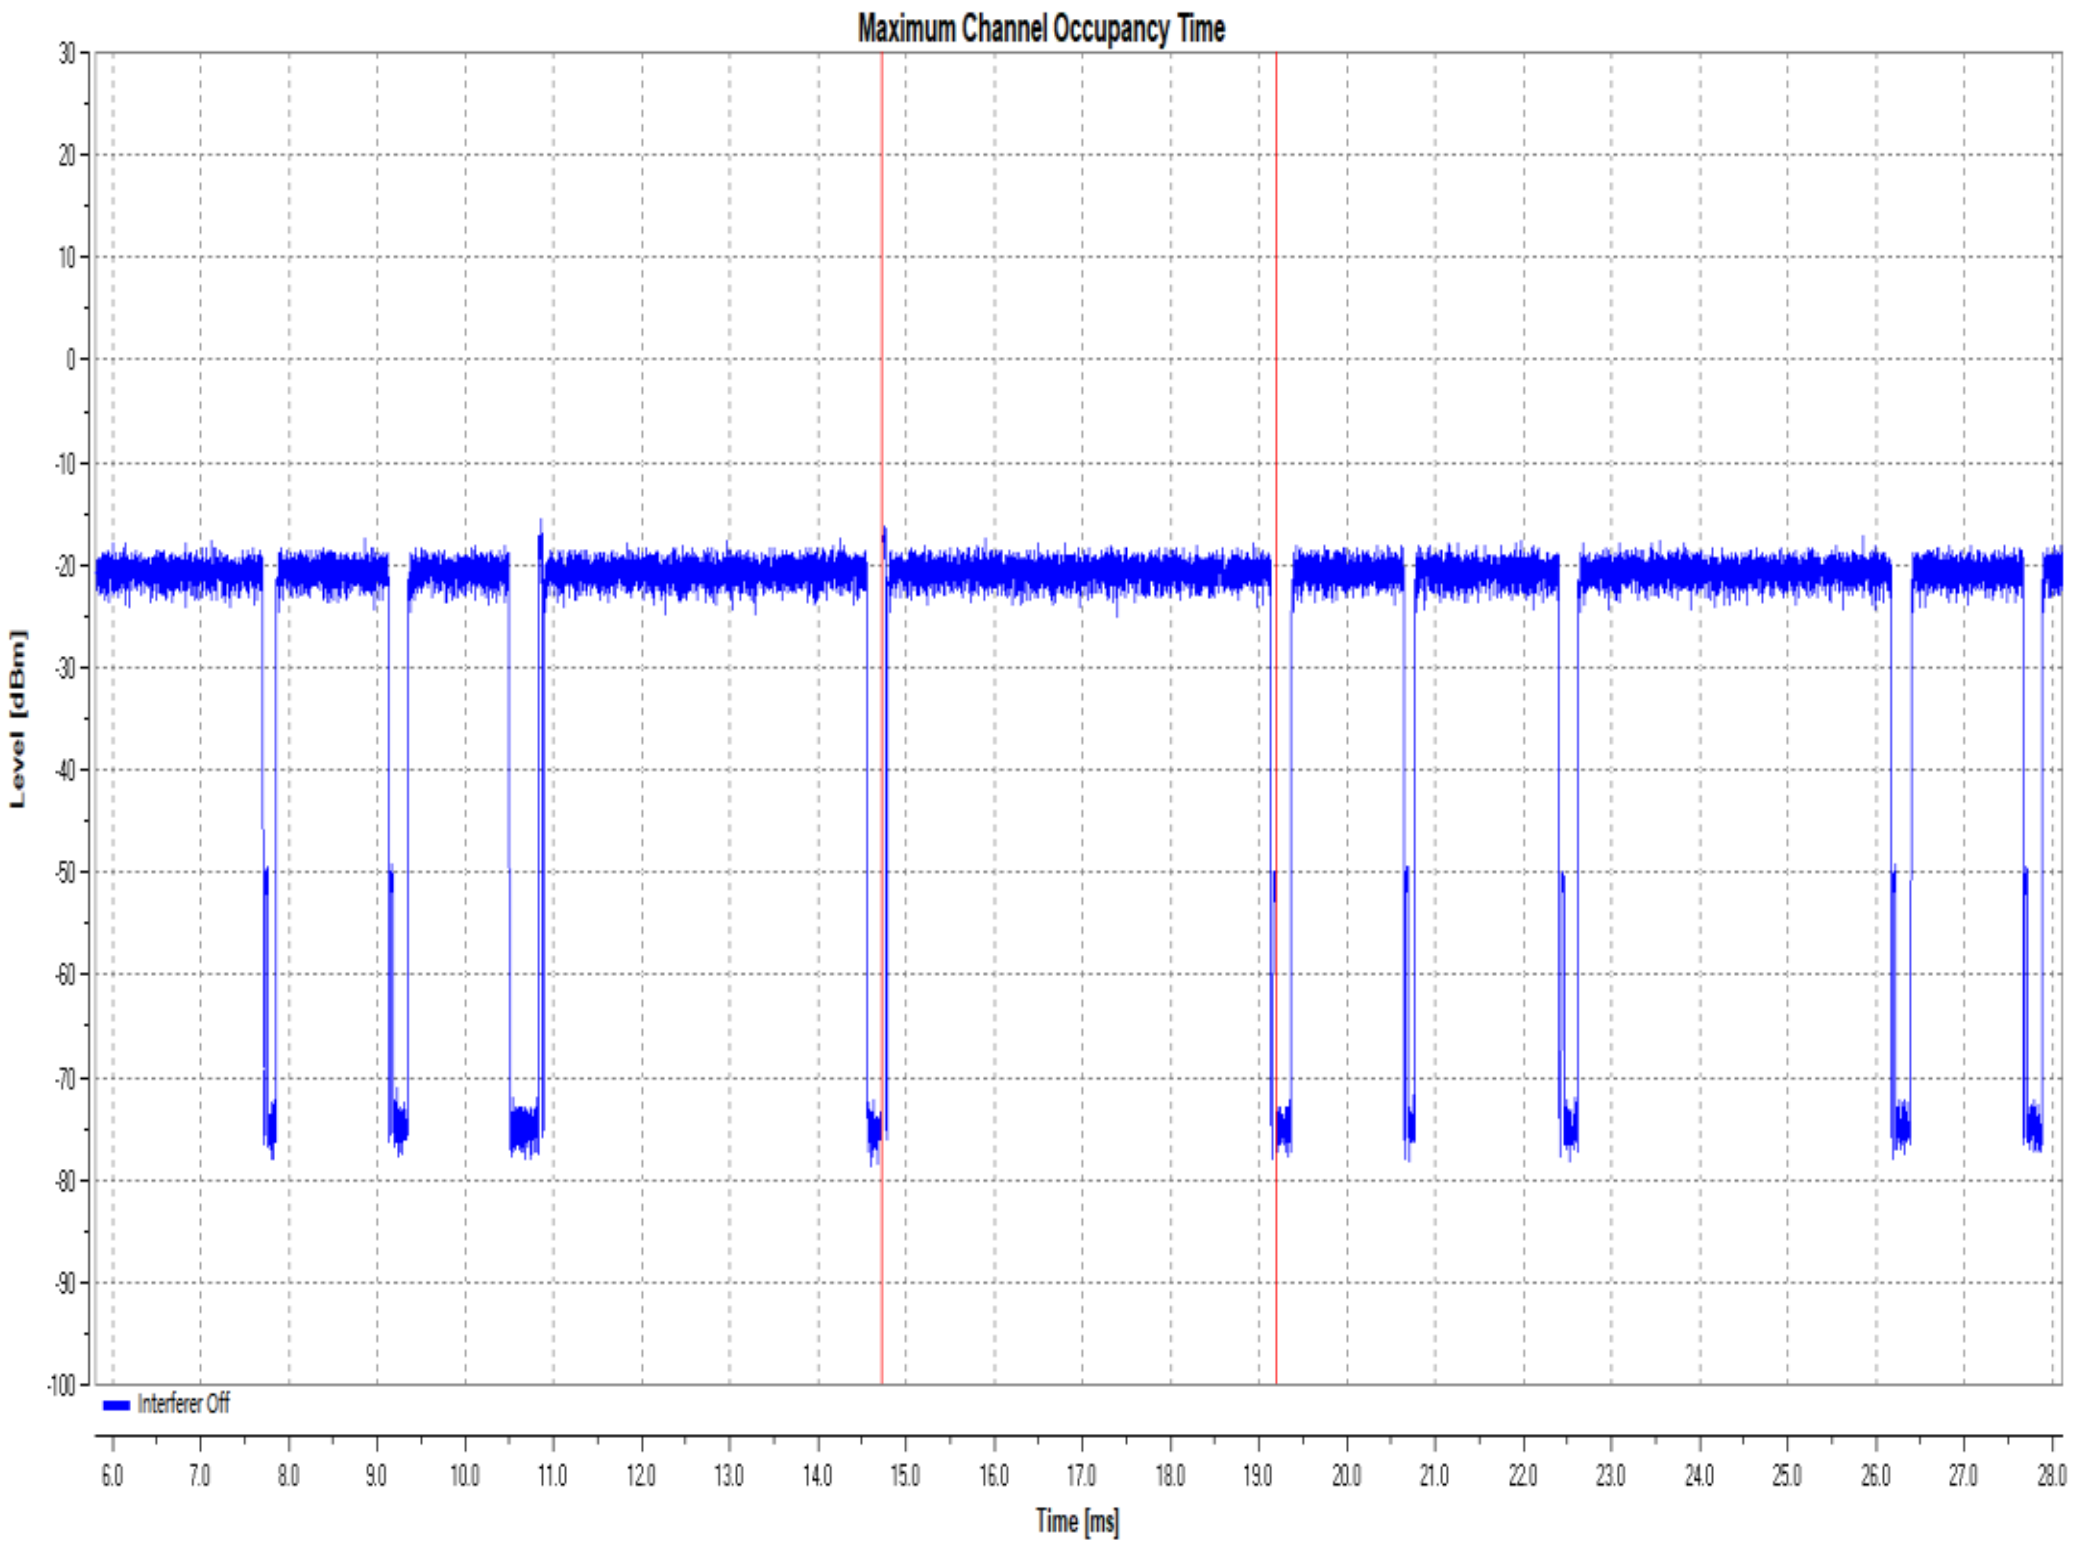

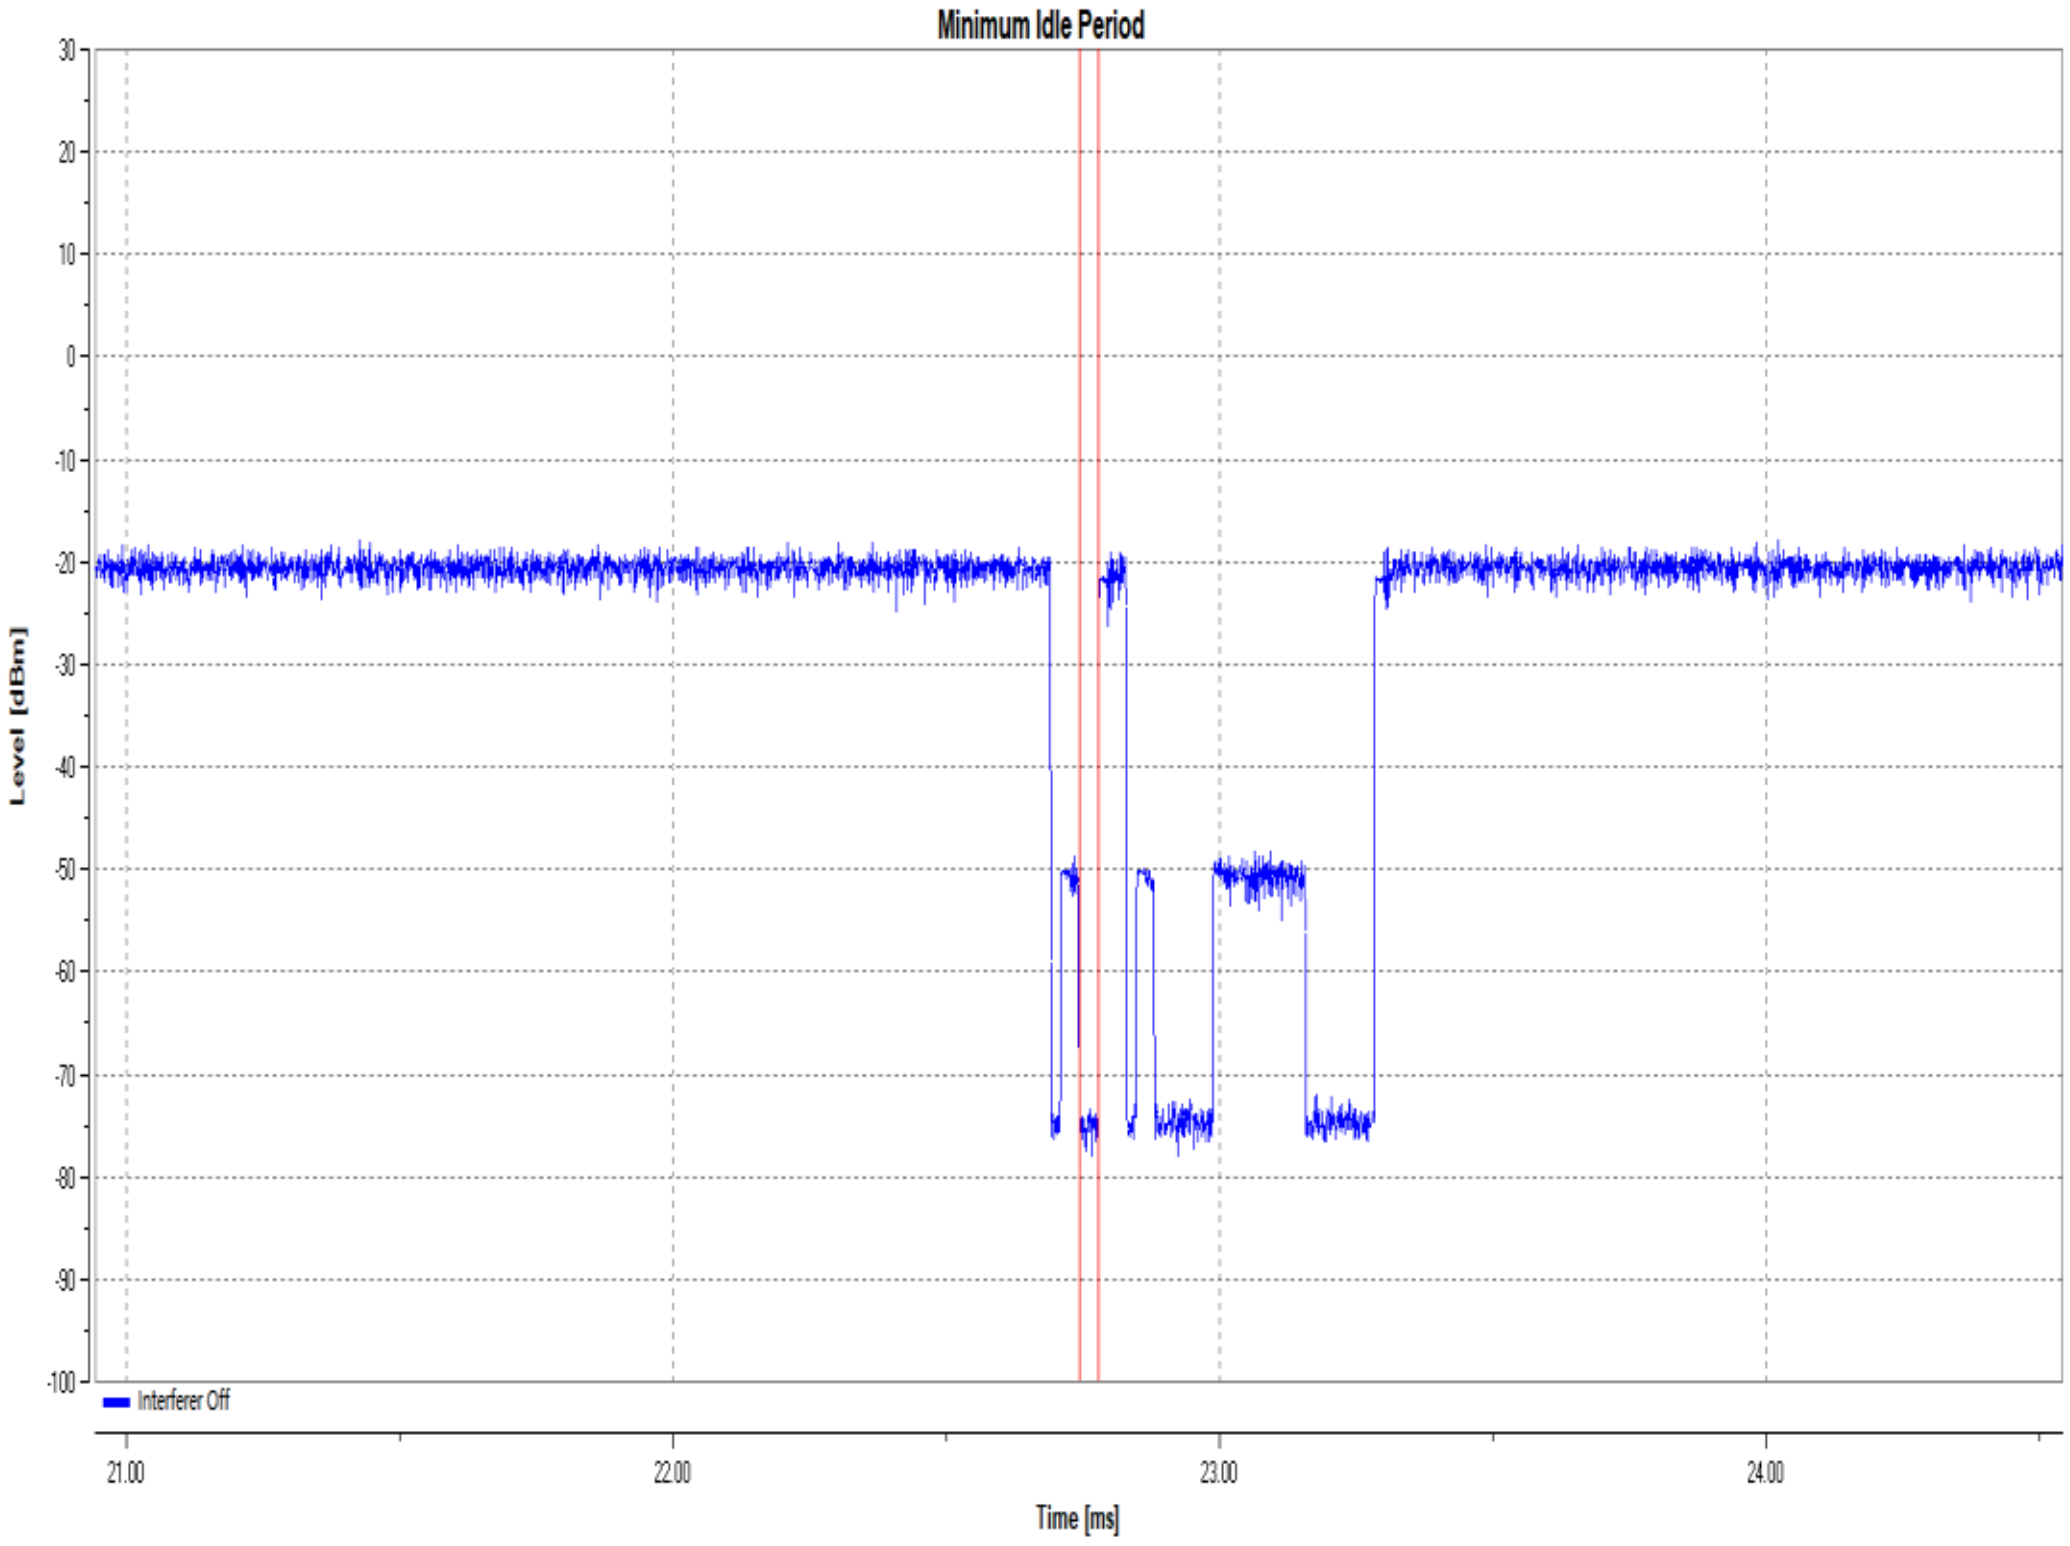

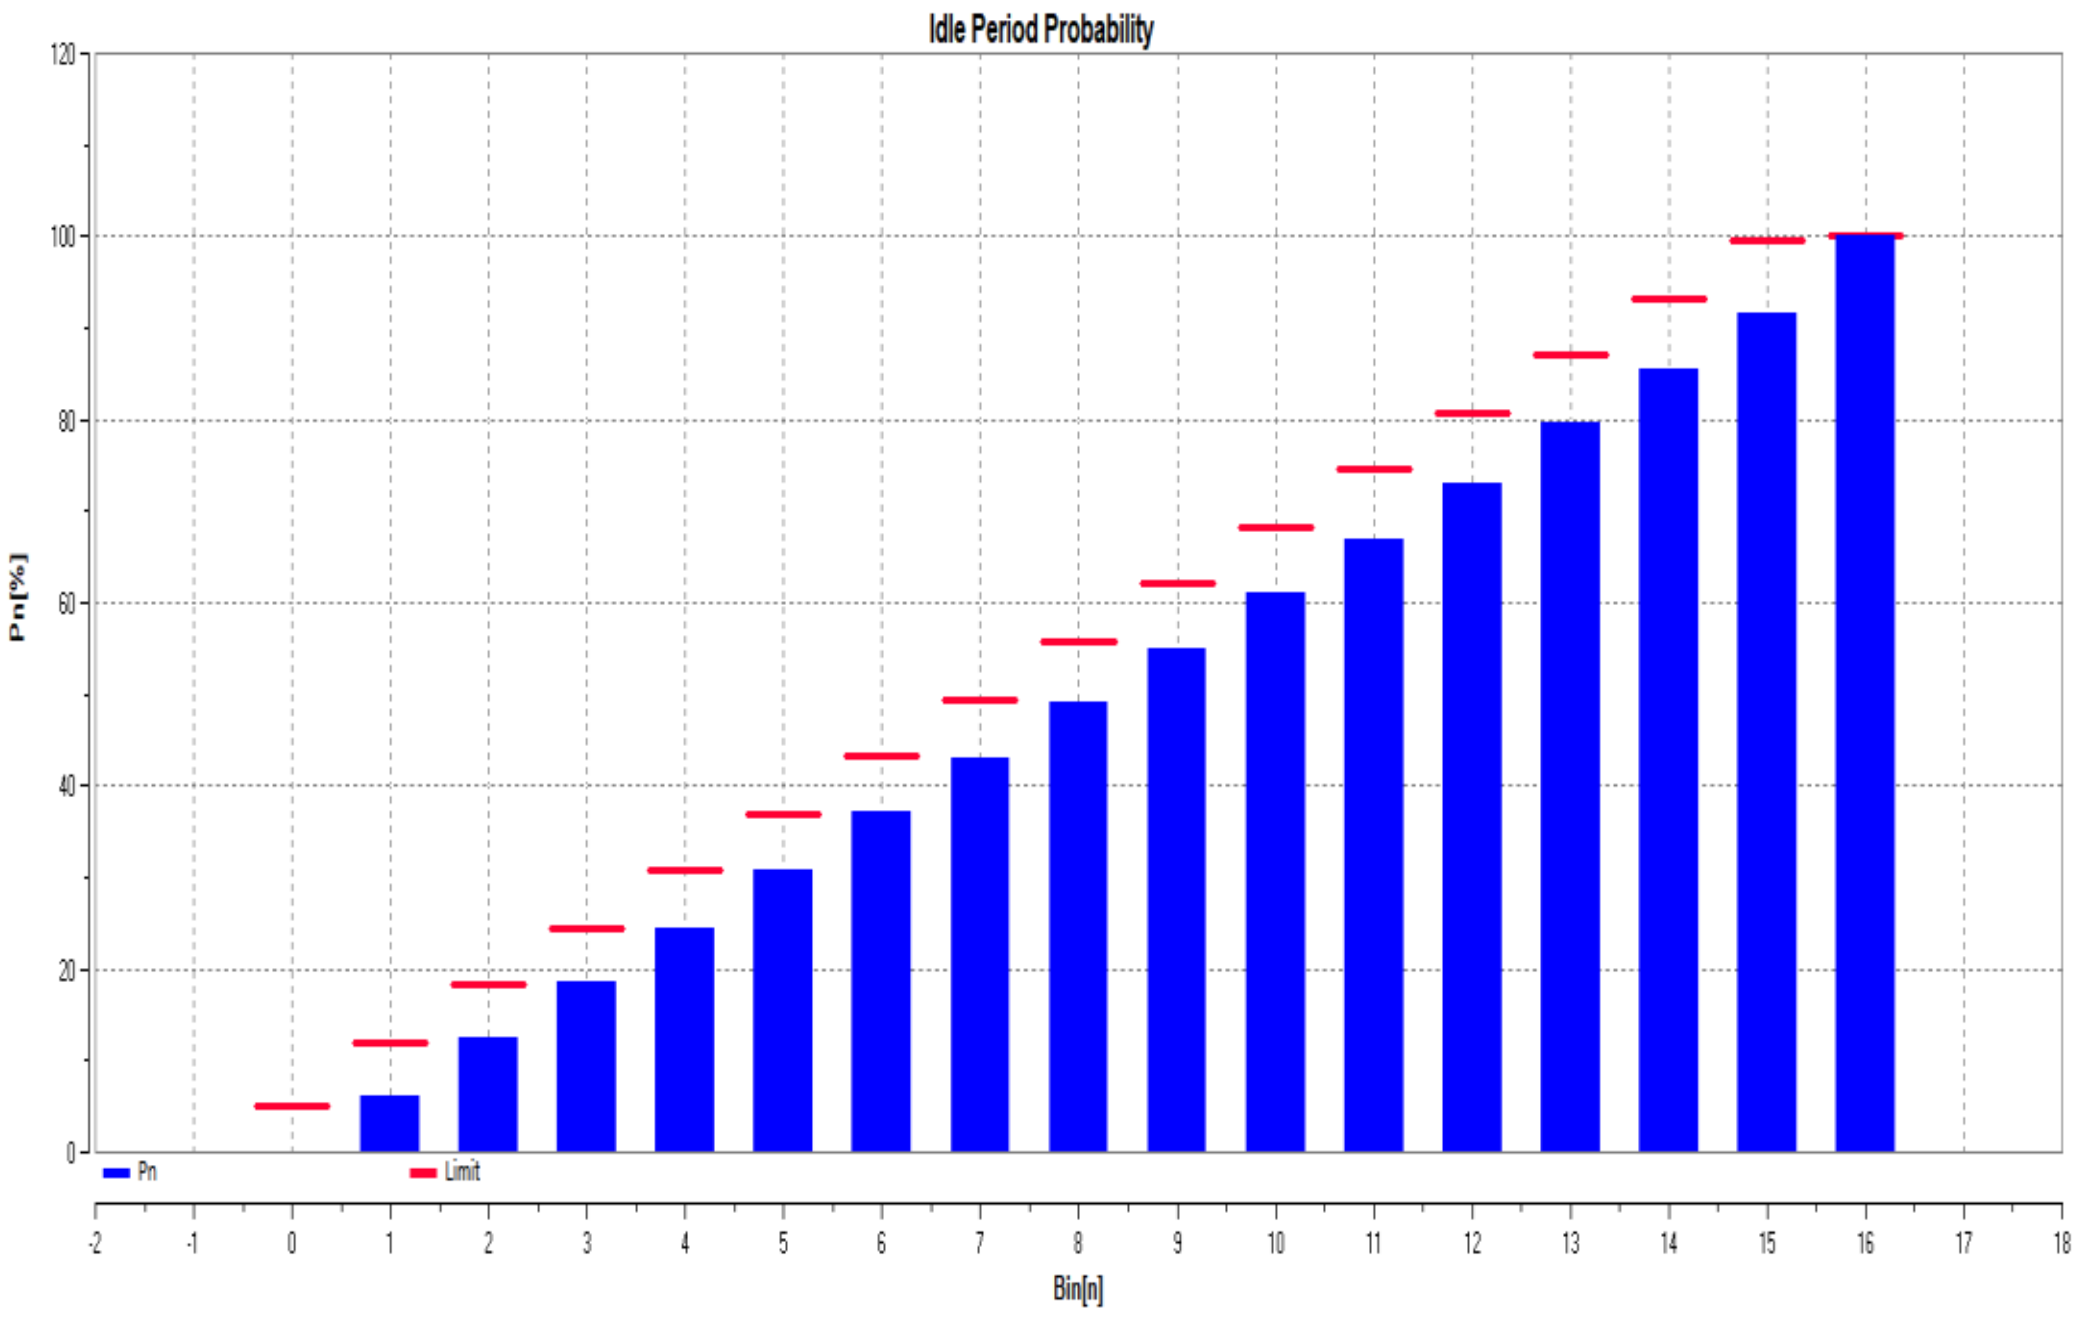

n	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
B[n]	2	599	635	618	577	656	630	596	599	585	607	587	612	654	590	629	830
P[n]	0.02	6.01	12.35	18.53	24.3	30.85	37.15	43.1	49.09	54.94	61	66.87	72.99	79.52	85.42	91.7	100
Limit	5	12	18.25	24.5	30.75	37	43.25	49.5	55.75	62	68.25	74.5	80.75	87	93.25	99.5	100

Hotspot Mode:
Test Result

TestMode	Antenna	Freq(MHz)	Priority Class	COT Num [n]	Max. COT [ms]	Limit [ms]	Min.Idle Time[ms]	Limit [ms]	Idle Period probability	Verdict
11n20SISO	Ant6	5180	2	10018	4.369	6.000	0.028	0.027	See the graph	PASS
11n40SISO	Ant6	5190	2	10021	2.215	6.000	0.028	0.027	See the graph	PASS

Test Graphs

11n20SISO_Ant6_5180

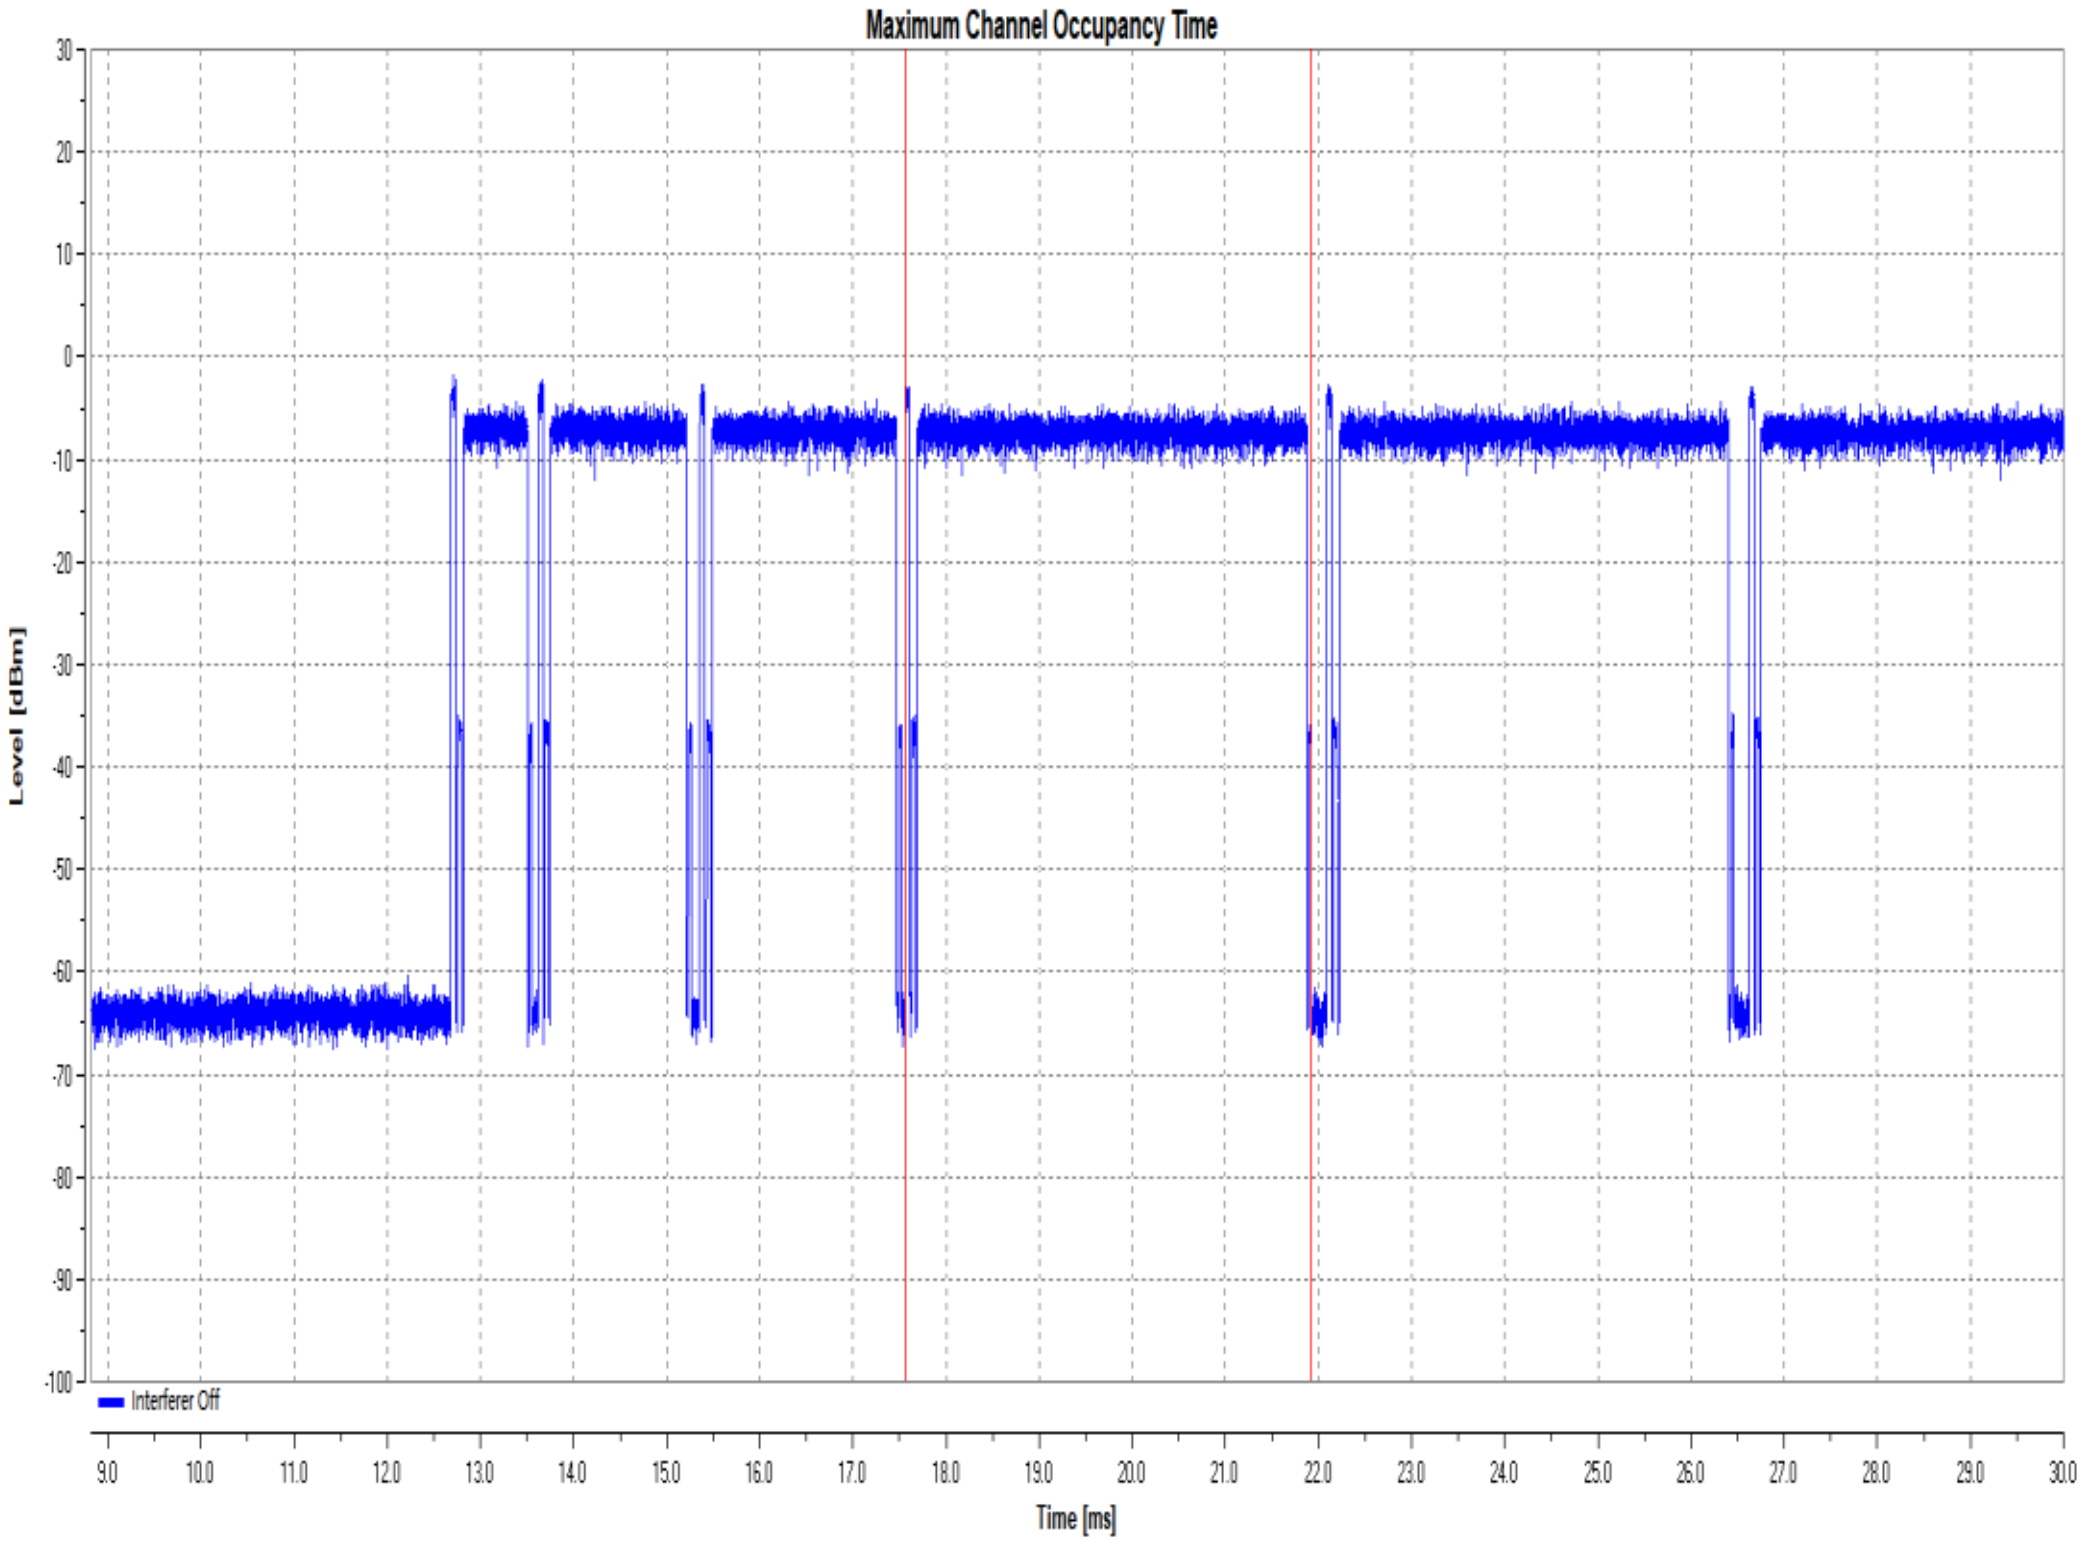

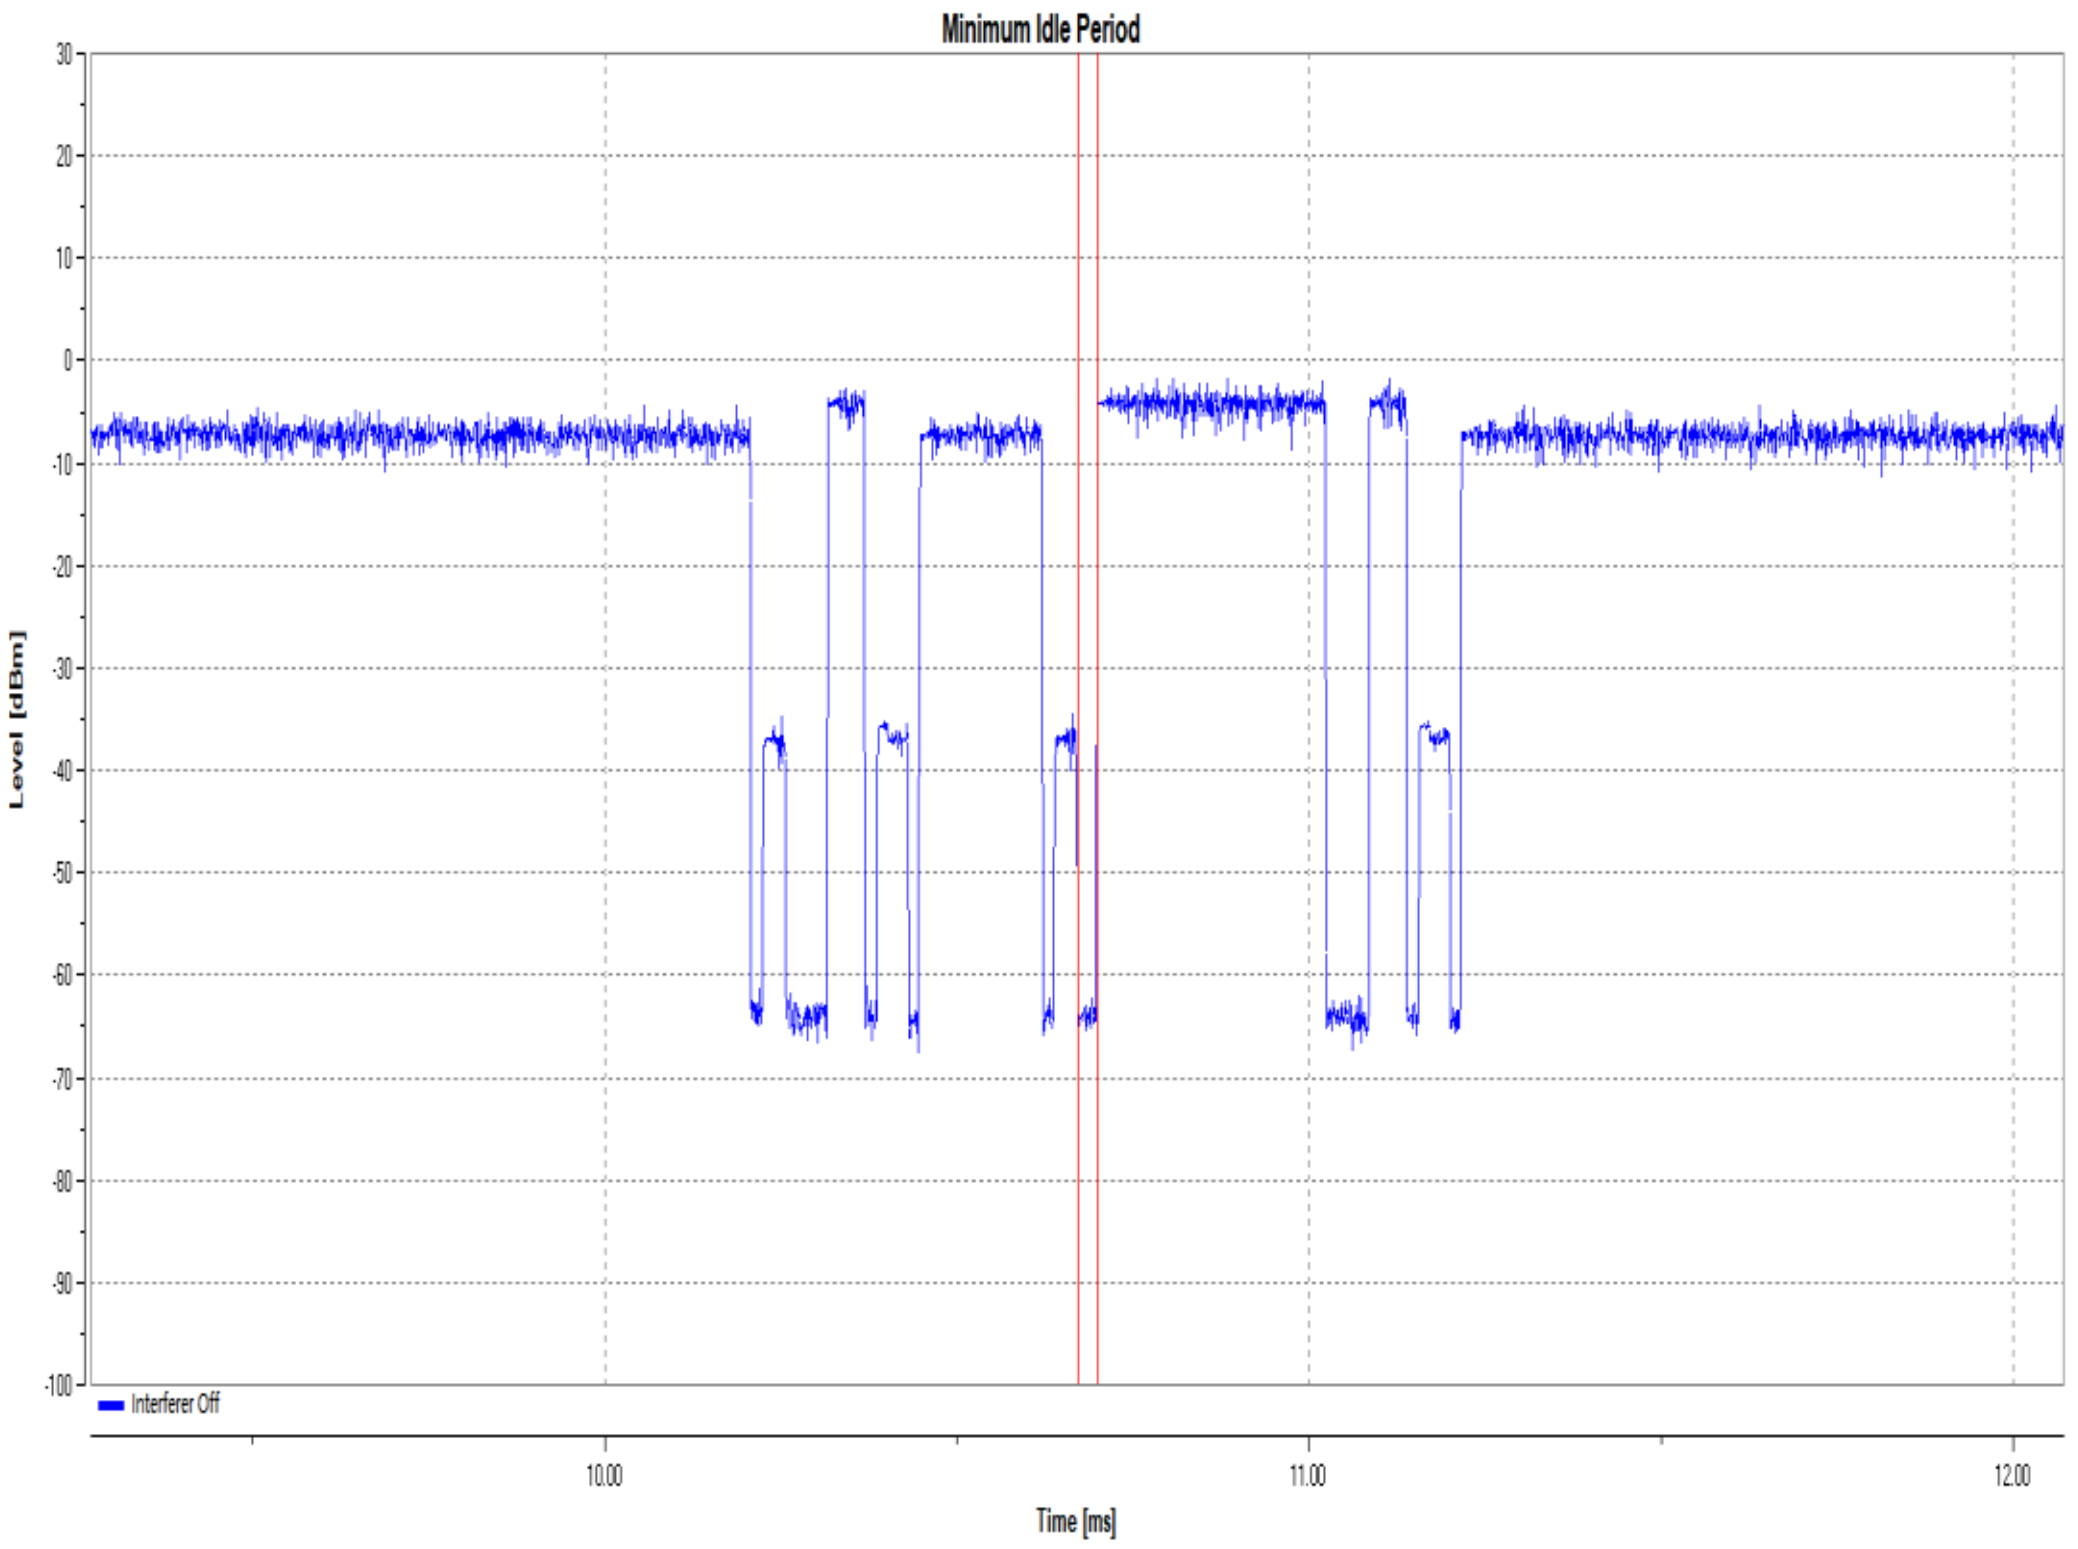

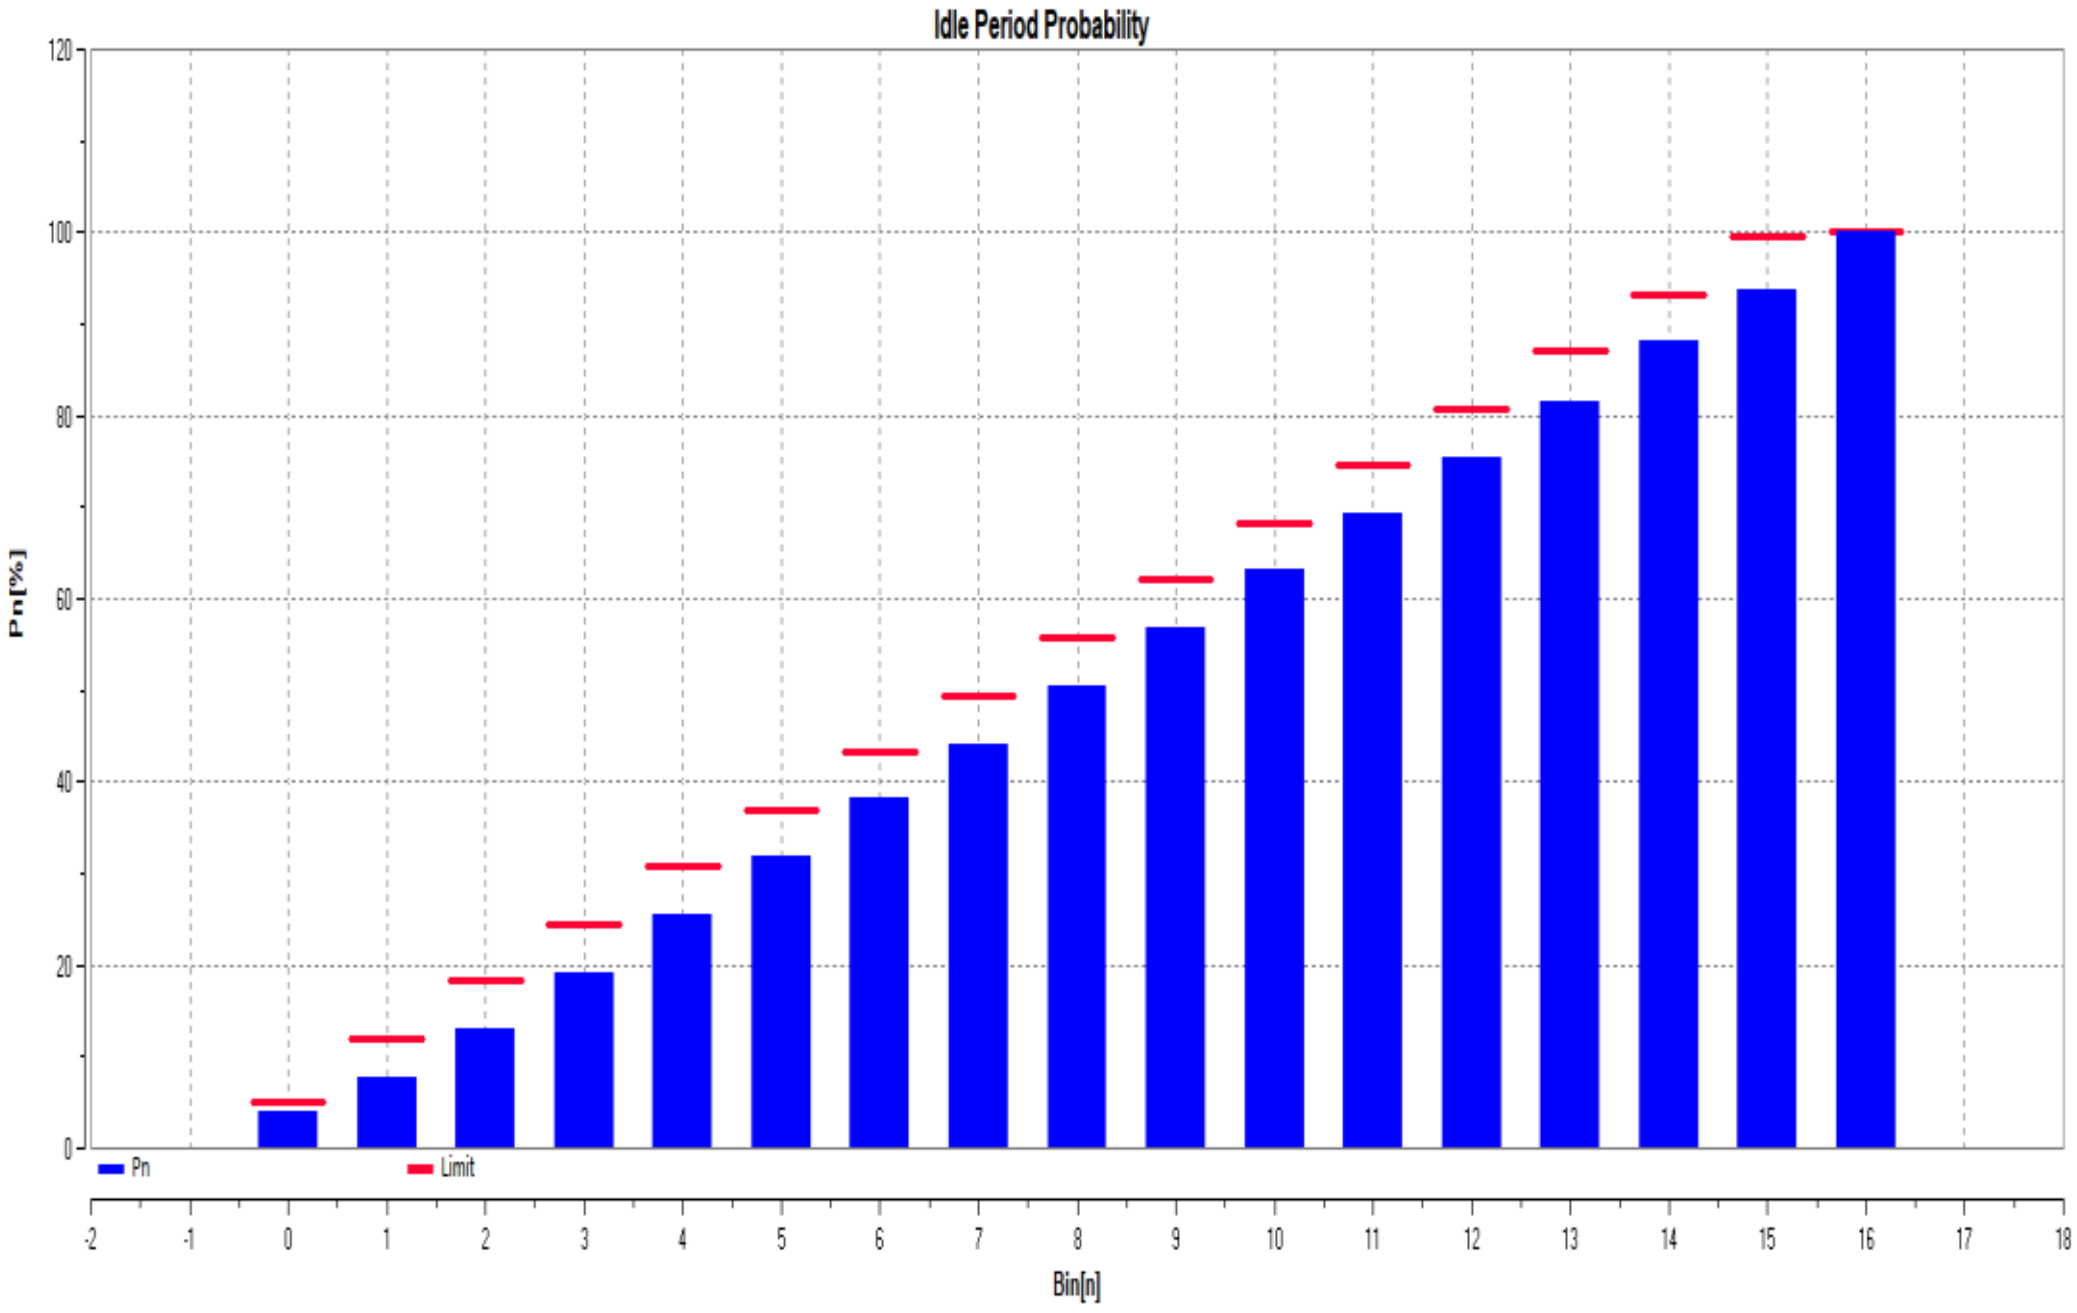

n	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
B[n]	386	375	548	601	651	630	633	603	629	626	648	616	613	613	651	567	627
P[n]	3.85	7.6	13.07	19.07	25.57	31.86	38.18	44.19	50.47	56.72	63.19	69.34	75.46	81.58	88.08	93.74	100
Limit	5	12	18.25	24.5	30.75	37	43.25	49.5	55.75	62	68.25	74.5	80.75	87	93.25	99.5	100

11n40SISO_Ant6_5190

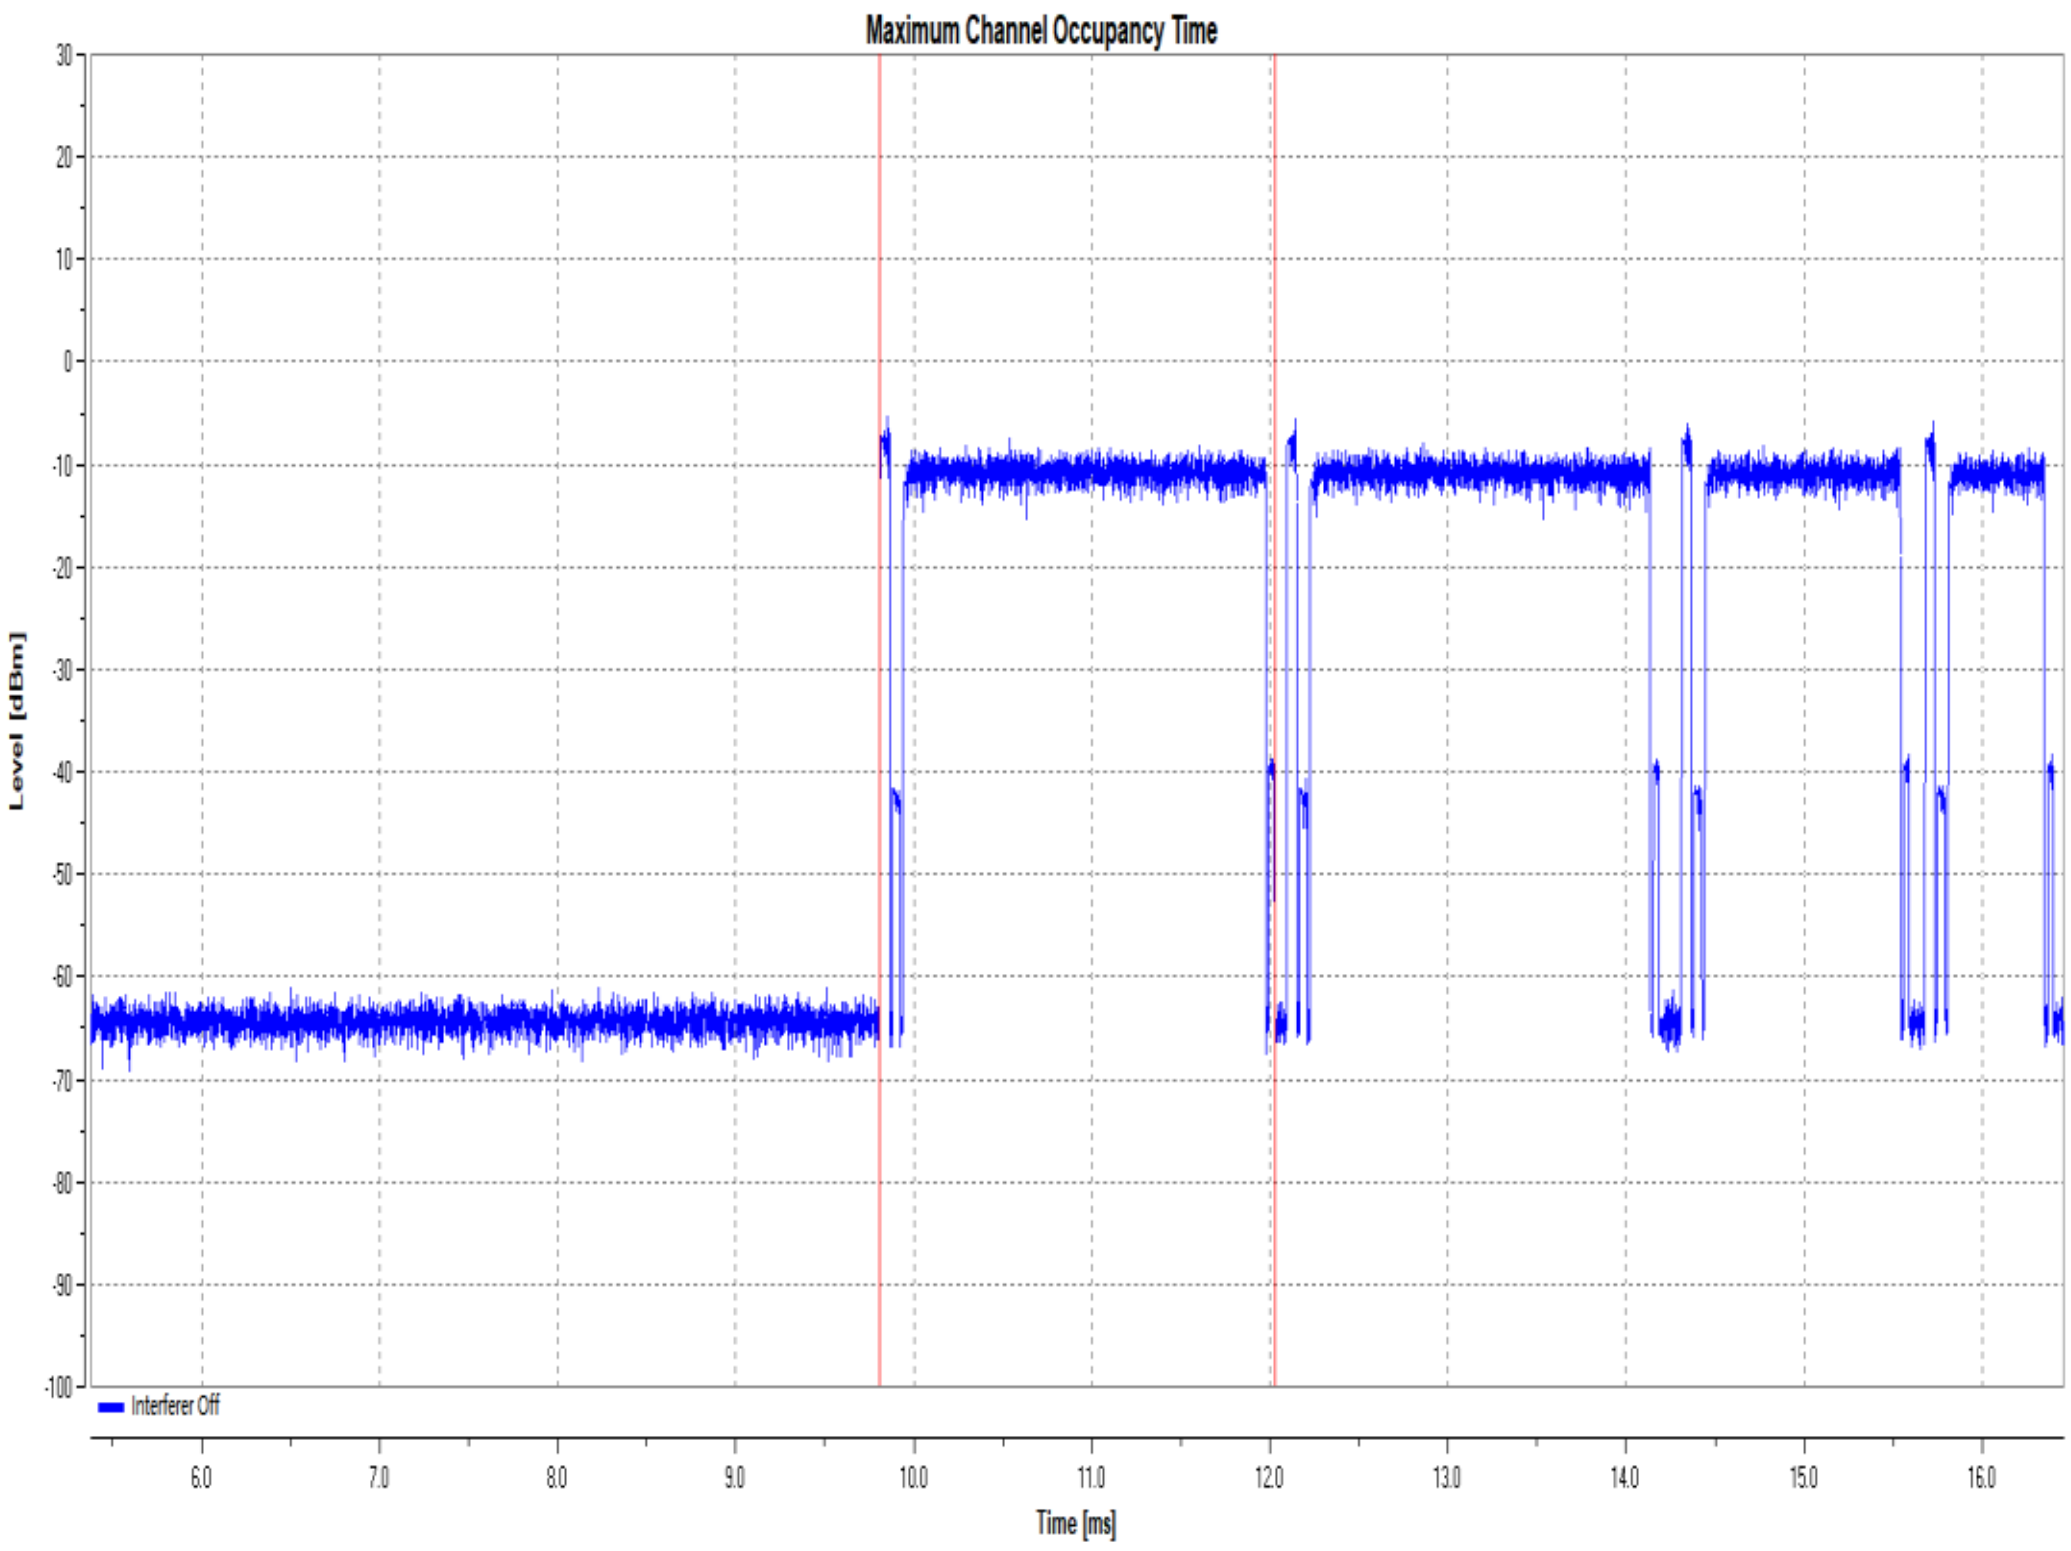

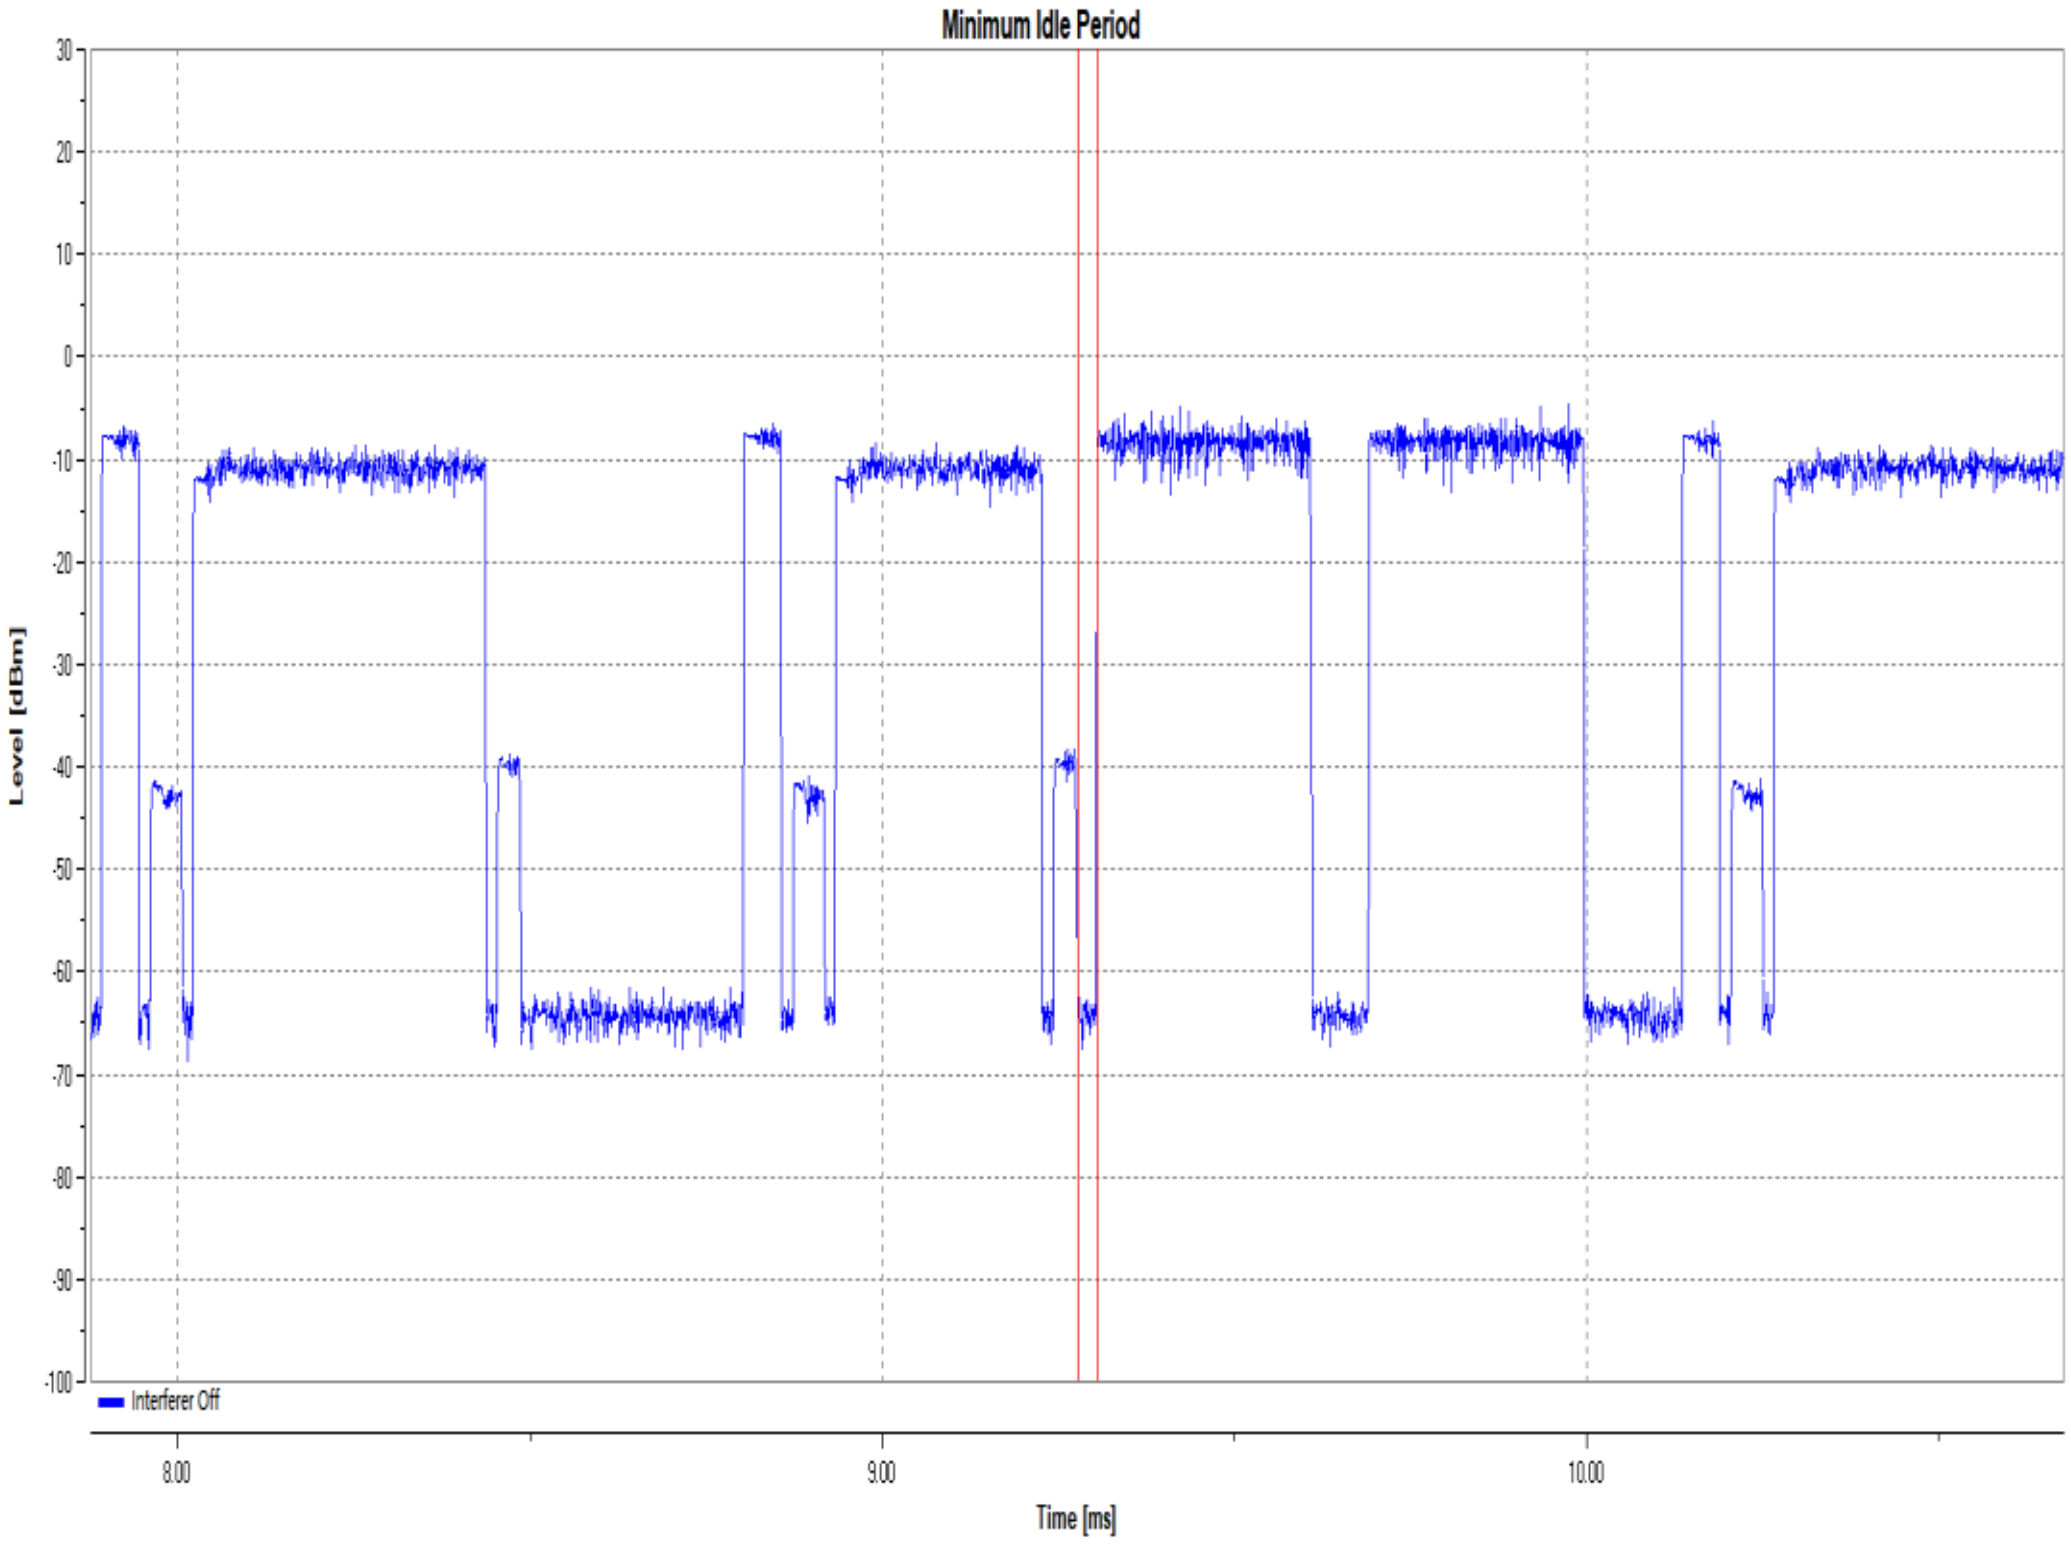

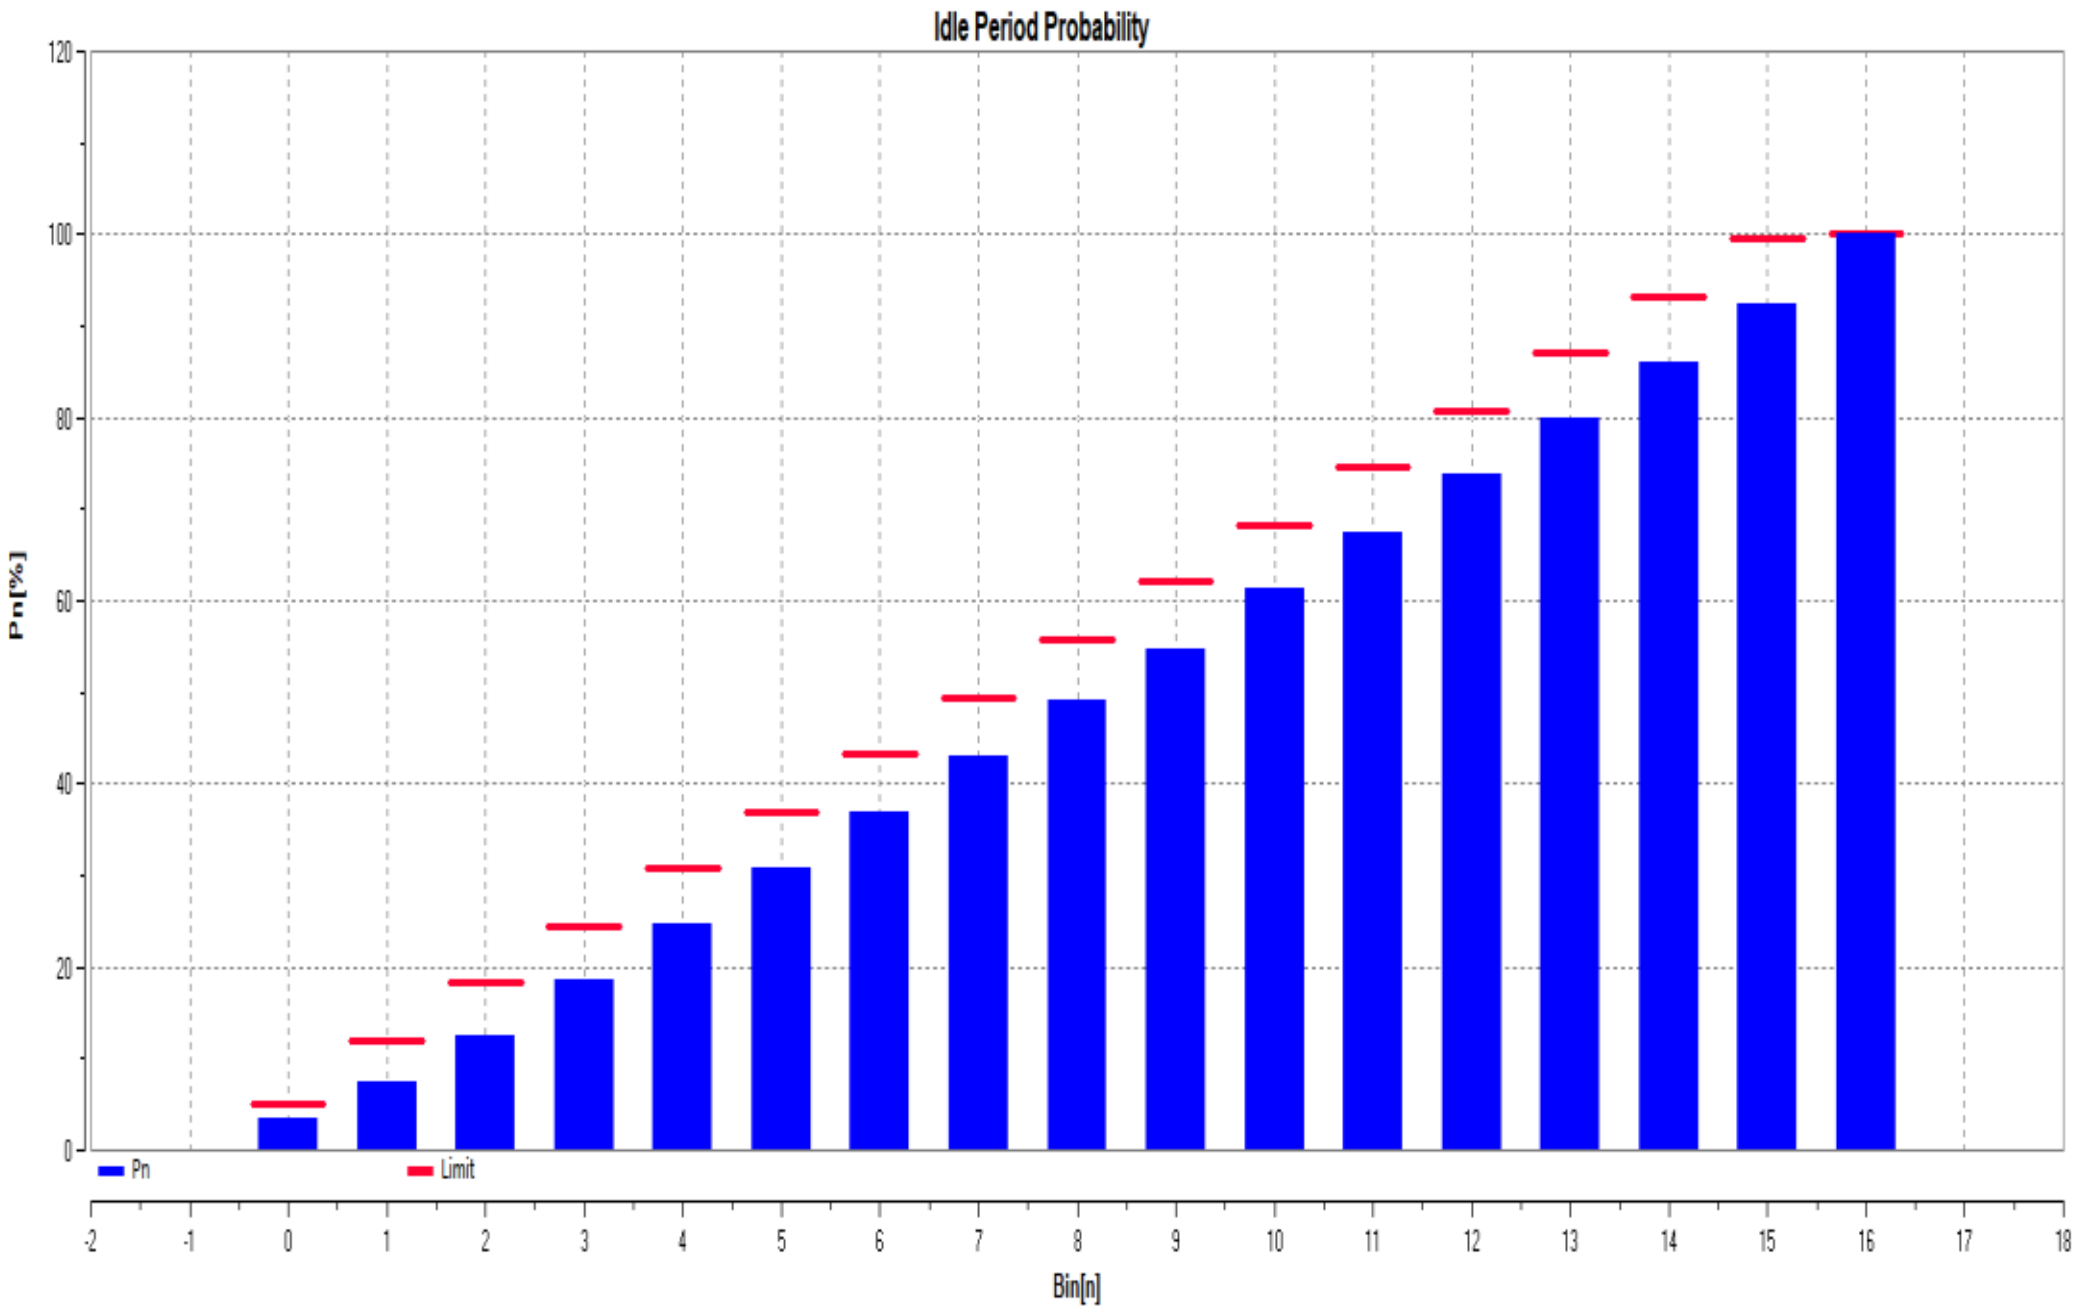

n	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
B[n]	352	386	513	608	604	613	620	621	609	559	665	617	642	597	626	639	750
P[n]	3.51	7.36	12.48	18.55	24.58	30.7	36.88	43.08	49.16	54.74	61.37	67.53	73.93	79.89	86.14	92.52	100
Limit	5	12	18.25	24.5	30.75	37	43.25	49.5	55.75	62	68.25	74.5	80.75	87	93.25	99.5	100

Test Detail of Adaptivity

802.11n HT20: AWGN	
UUT Payload (%)	96.03
CCA Time (us)	196.11
Transmission Time (ms)	10040.00
SCST TxOn / (TxOn + TxOff) (%)	0.00
Pulse Width within 50ms (us)	0.00

Adaptivity Test Plot

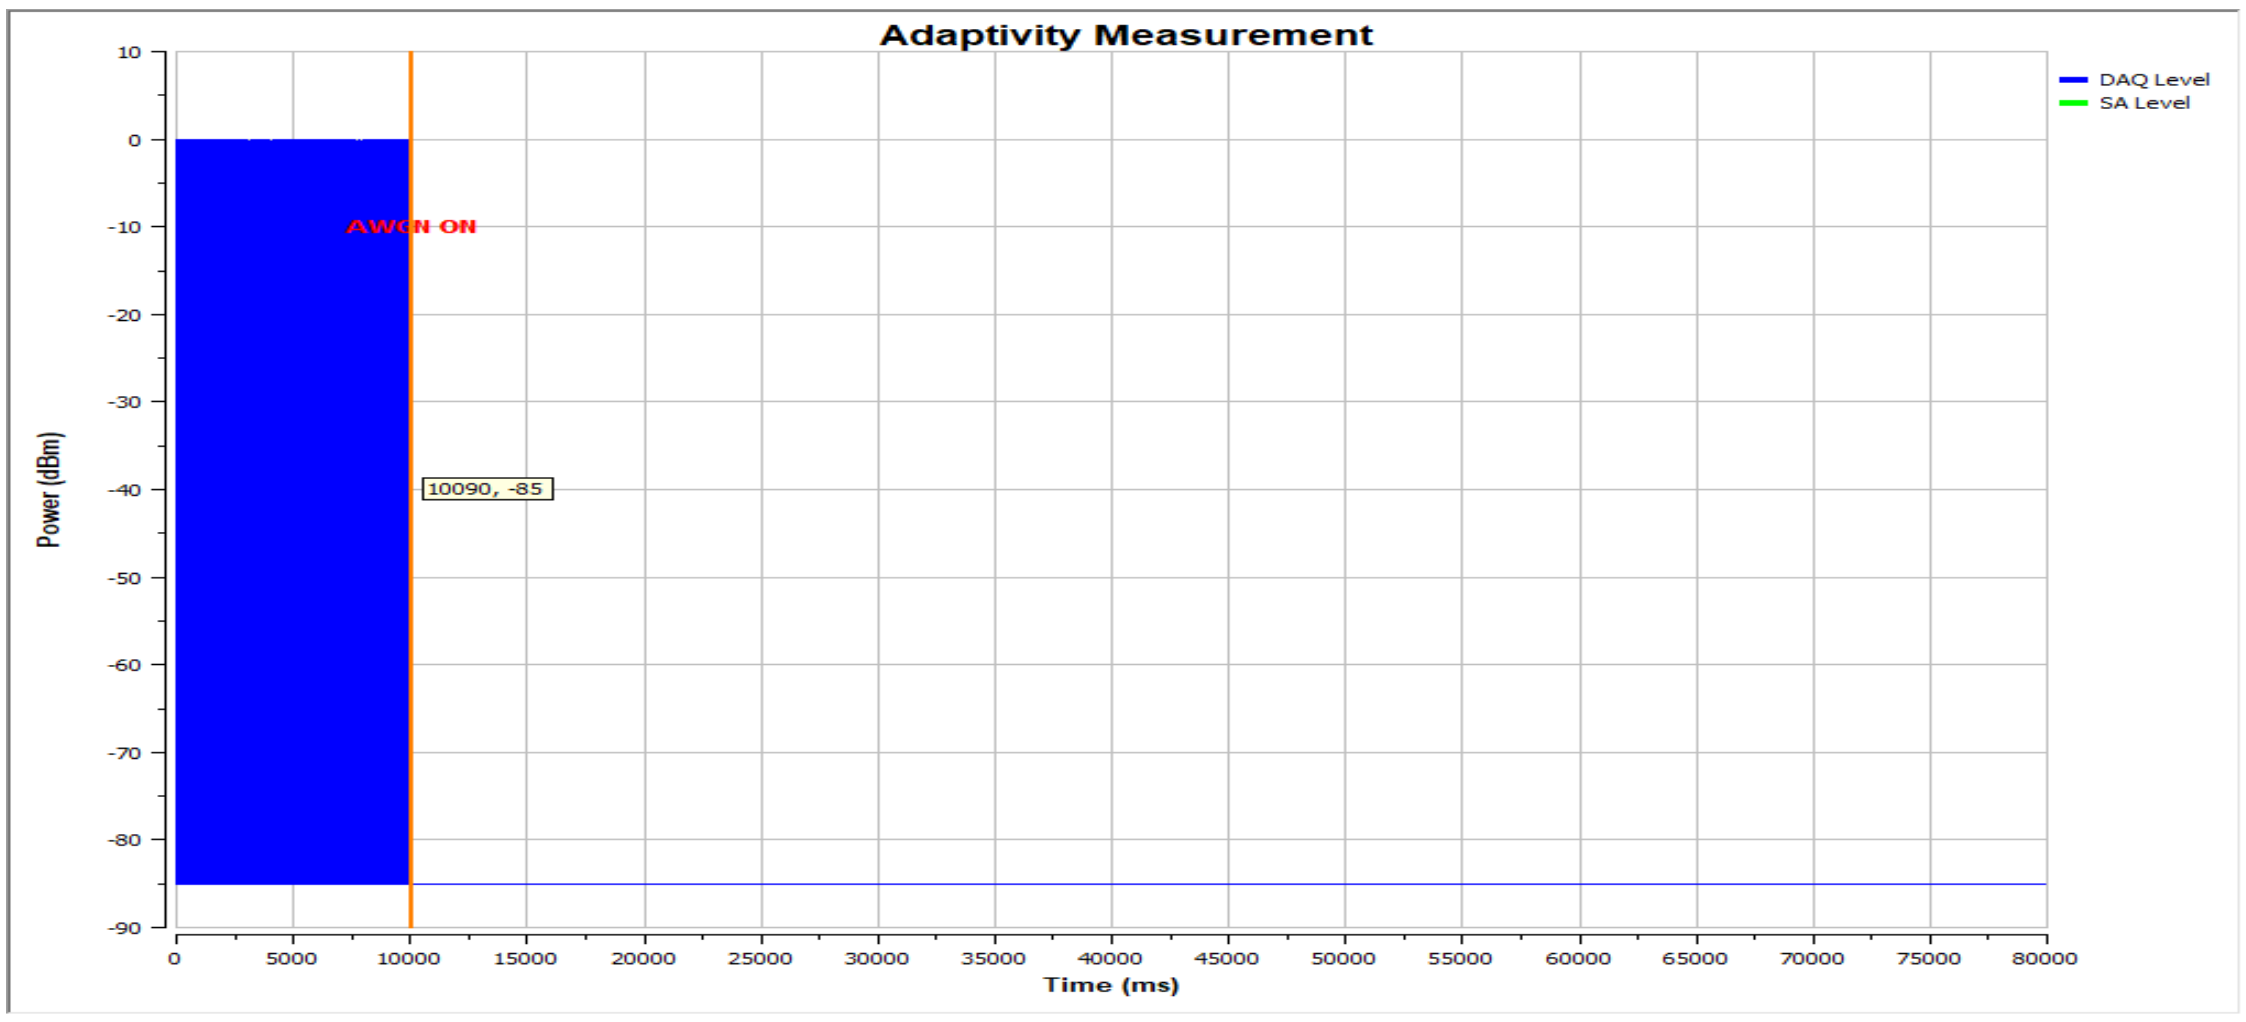

Short Control Signal Check

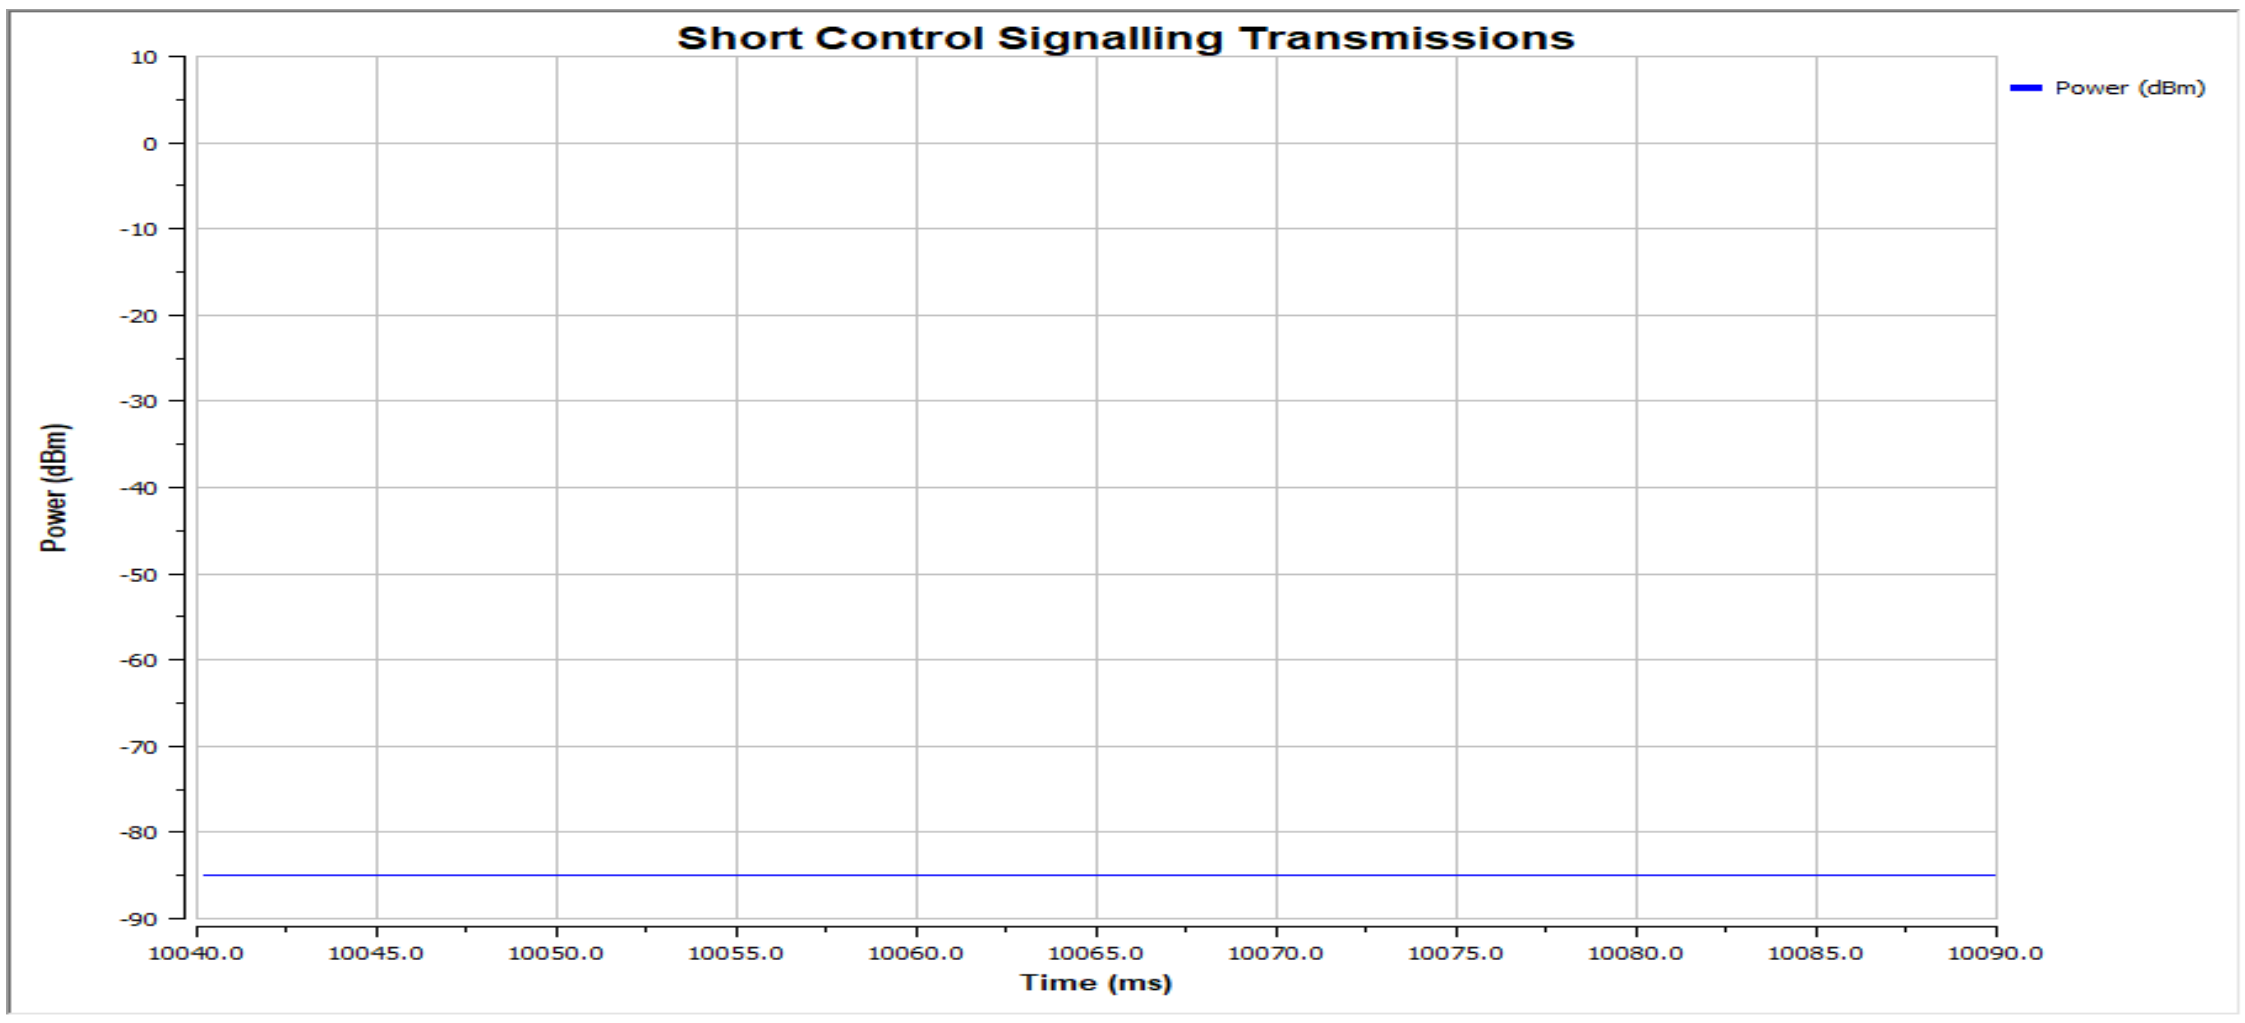

802.11n HT20: LTE	
UUT Payload (%)	96.90
CCA Time (us)	314.19
Transmission Time (ms)	10040.00
SCST TxOn / (TxOn + TxOff) (%)	0.20
Pulse Width within 50ms (us)	100.00

Adaptivity Test Plot

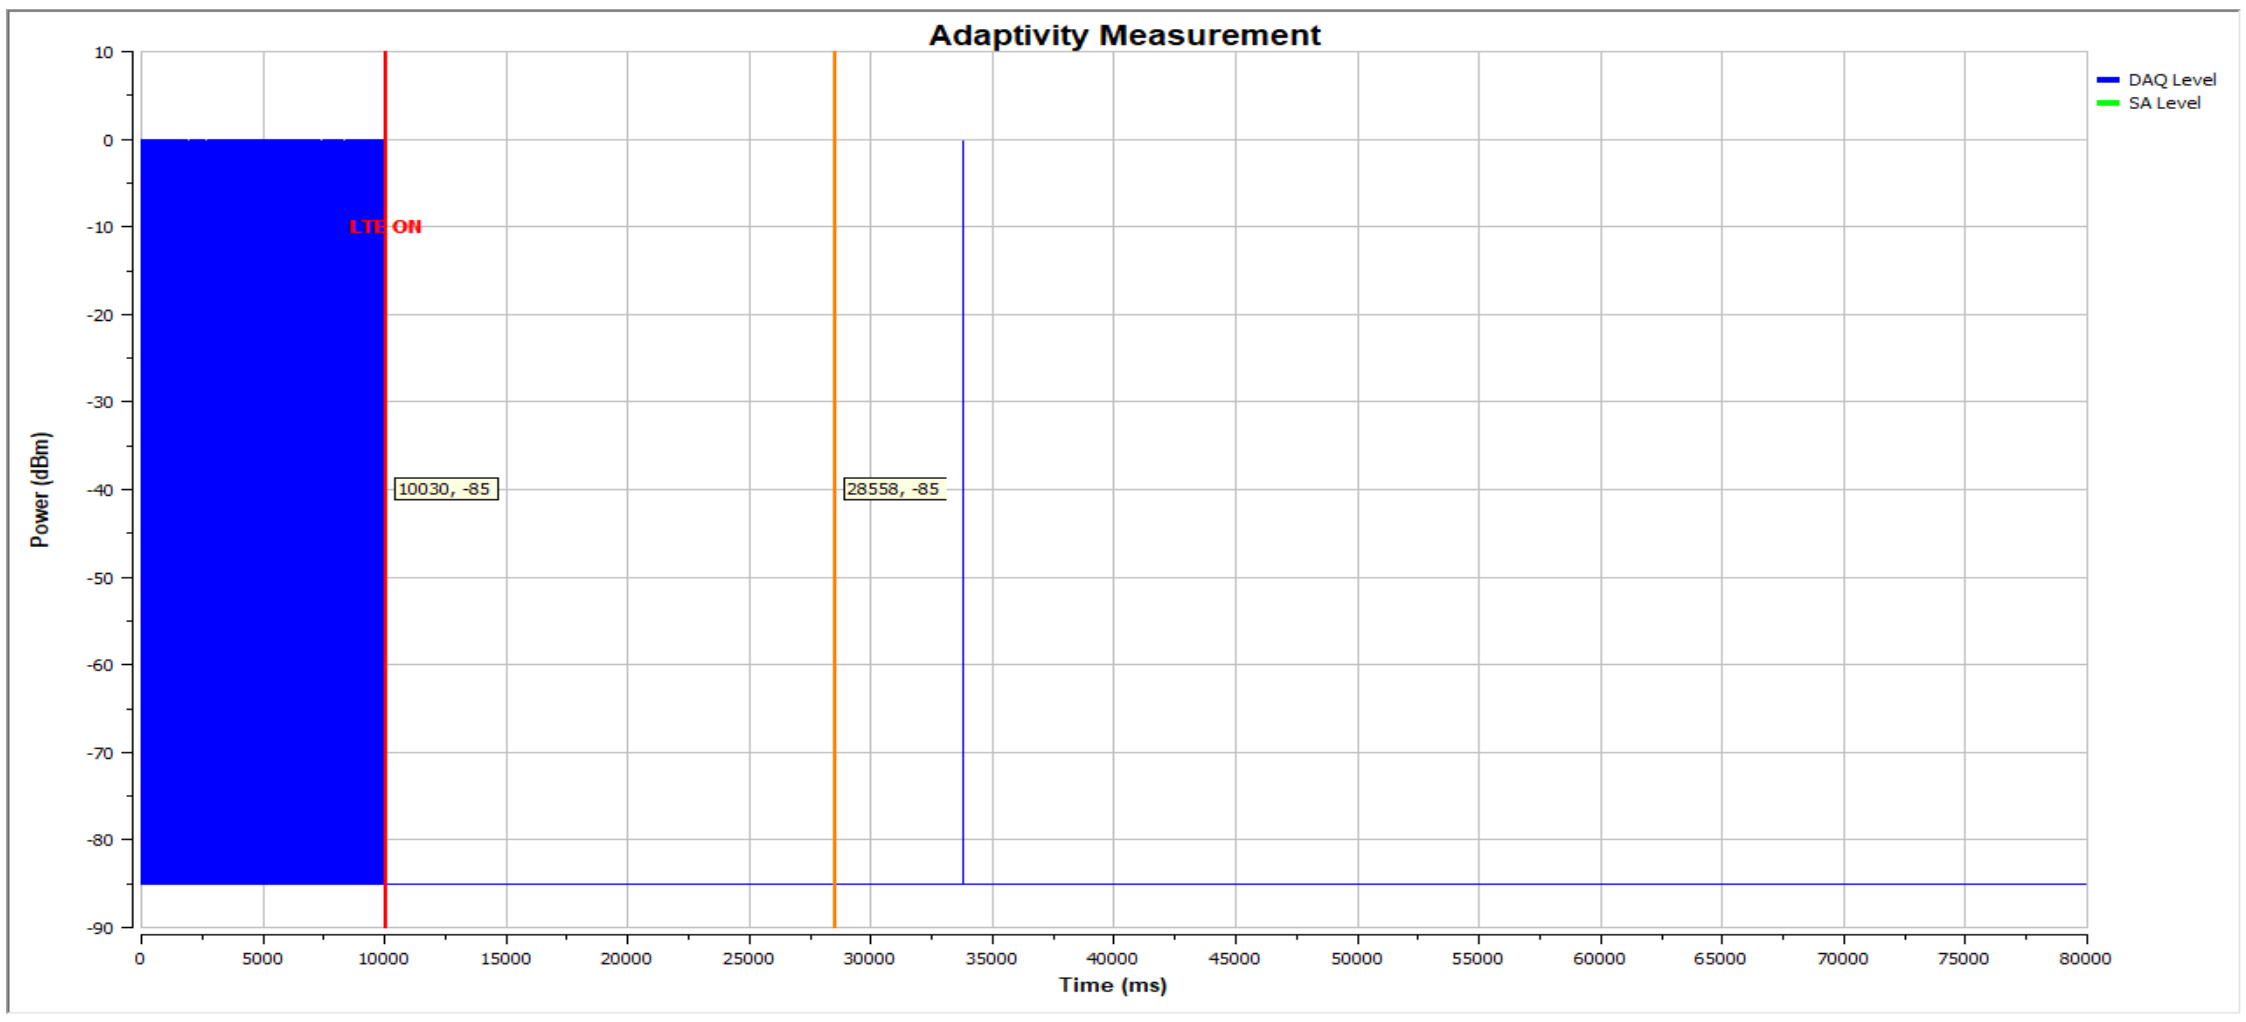

Short Control Signal Check

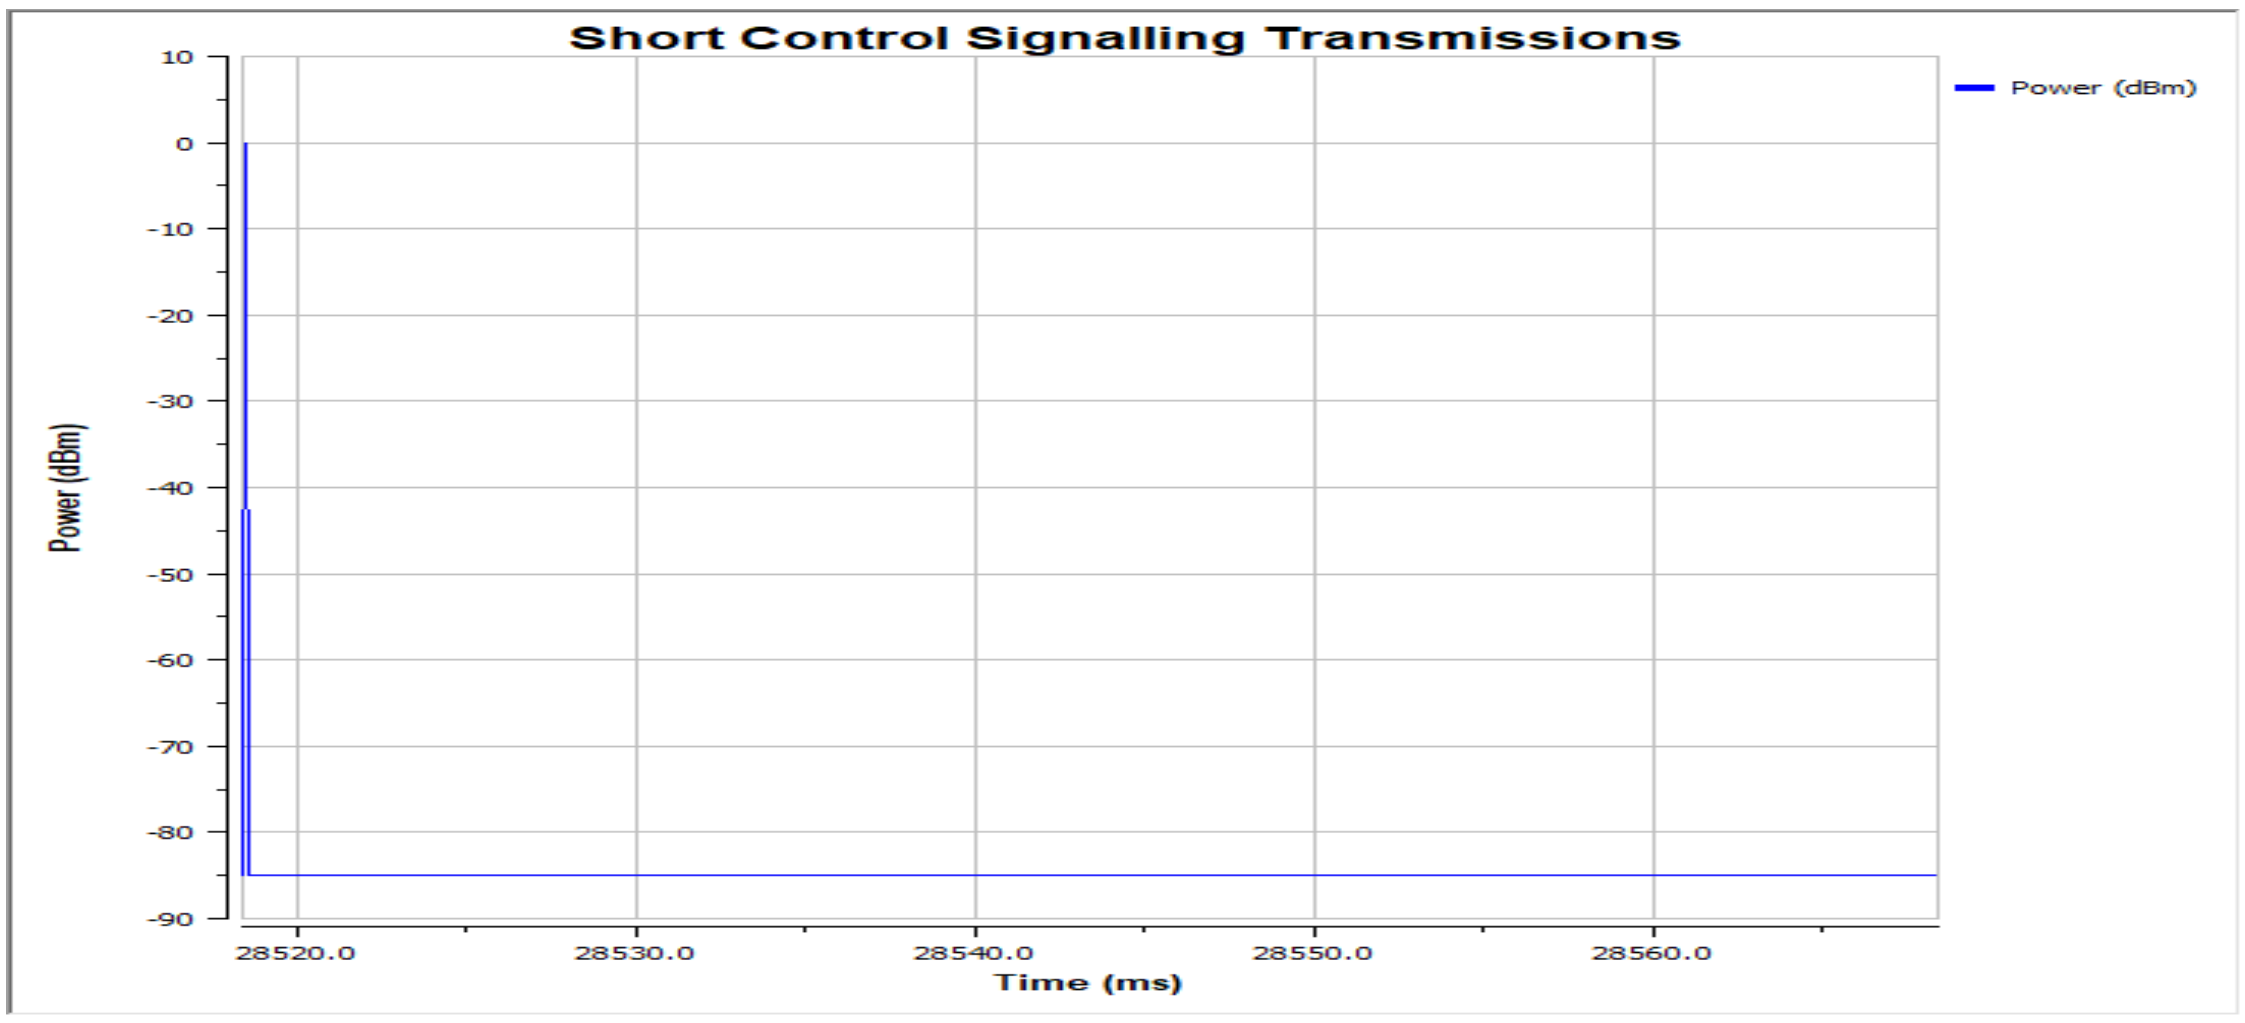

802.11n HT20: OFDM	
UUT Payload (%)	96.75
CCA Time (us)	133.21
Transmission Time (ms)	10040.00
SCST TxOn / (TxOn + TxOff) (%)	0.20
Pulse Width within 50ms (us)	101.00

Adaptivity Test Plot

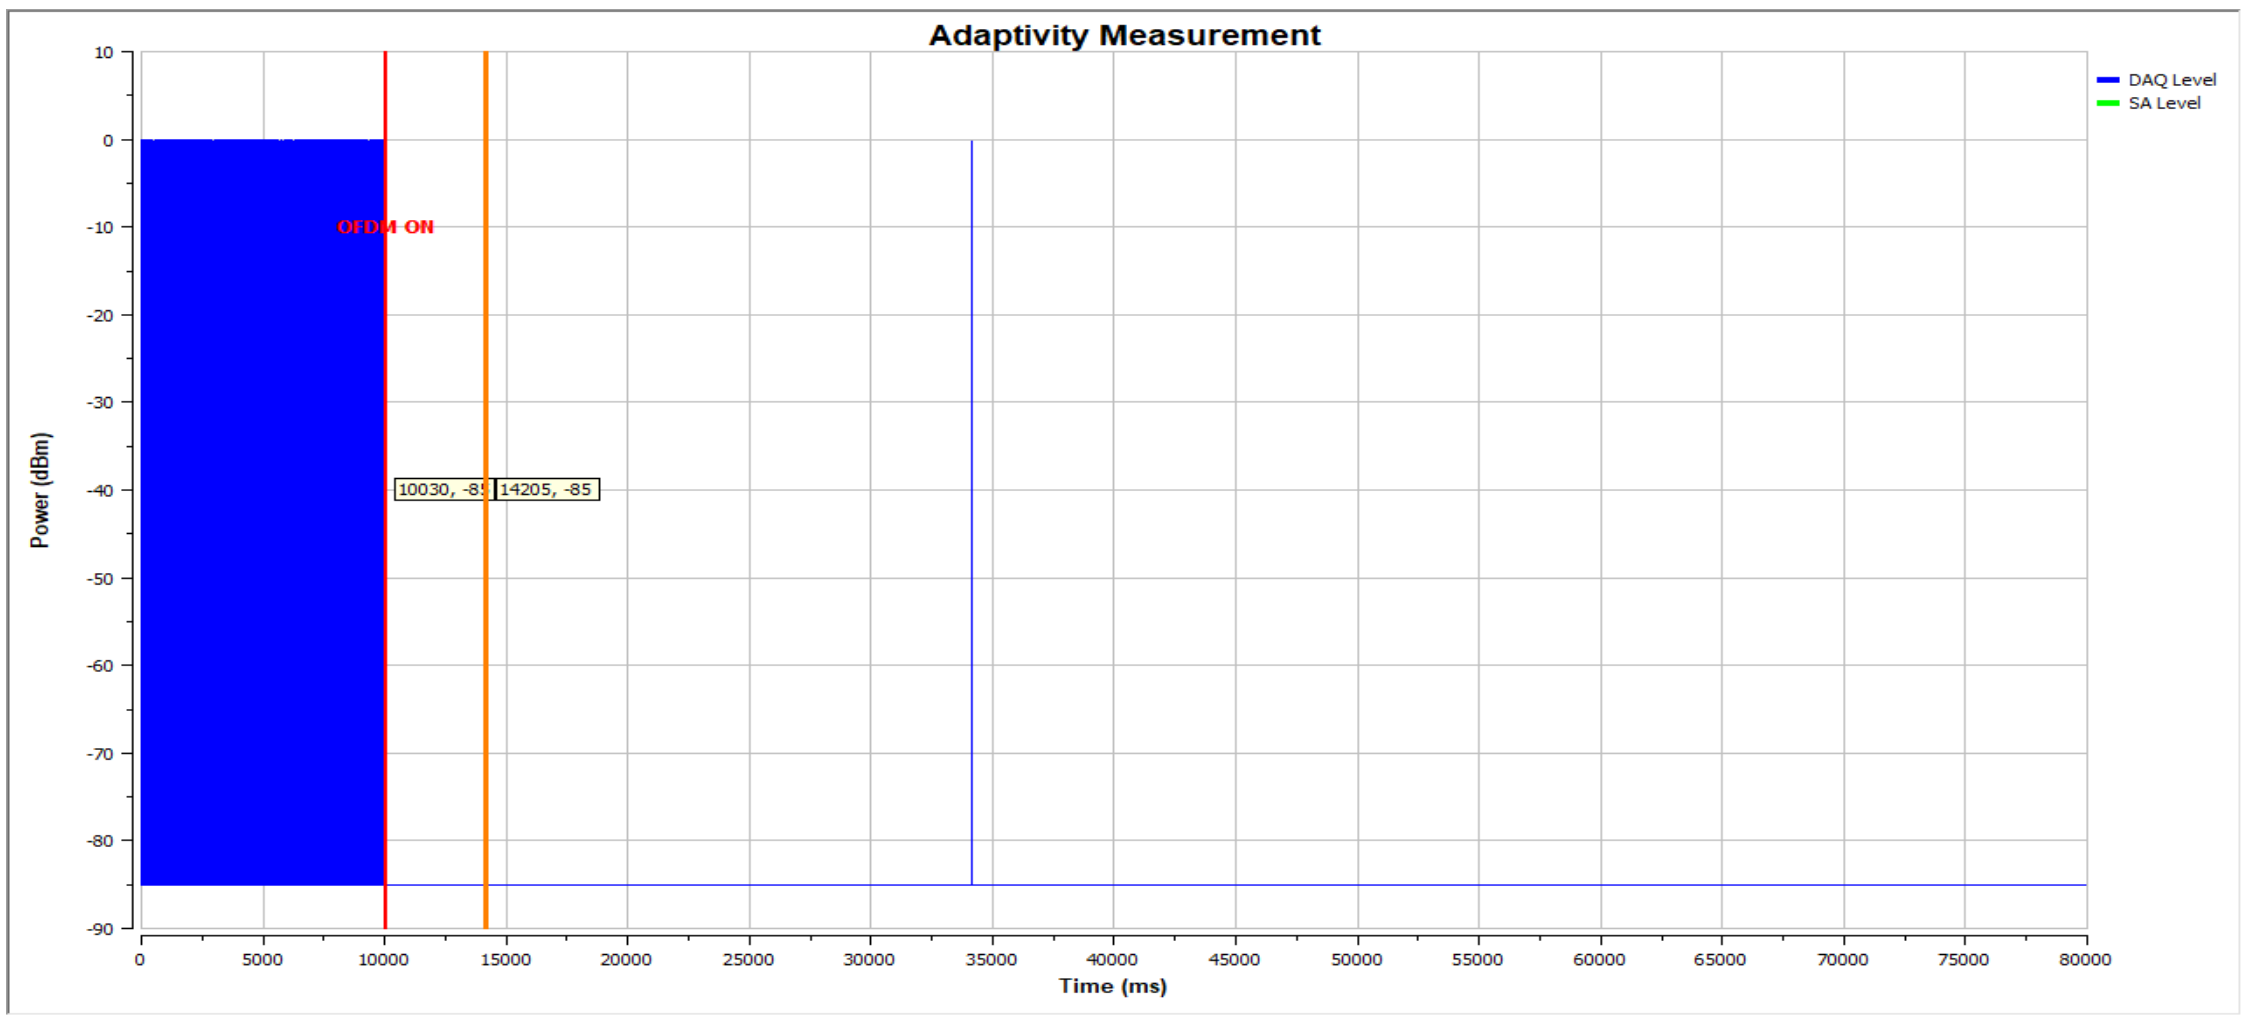

Short Control Signal Check

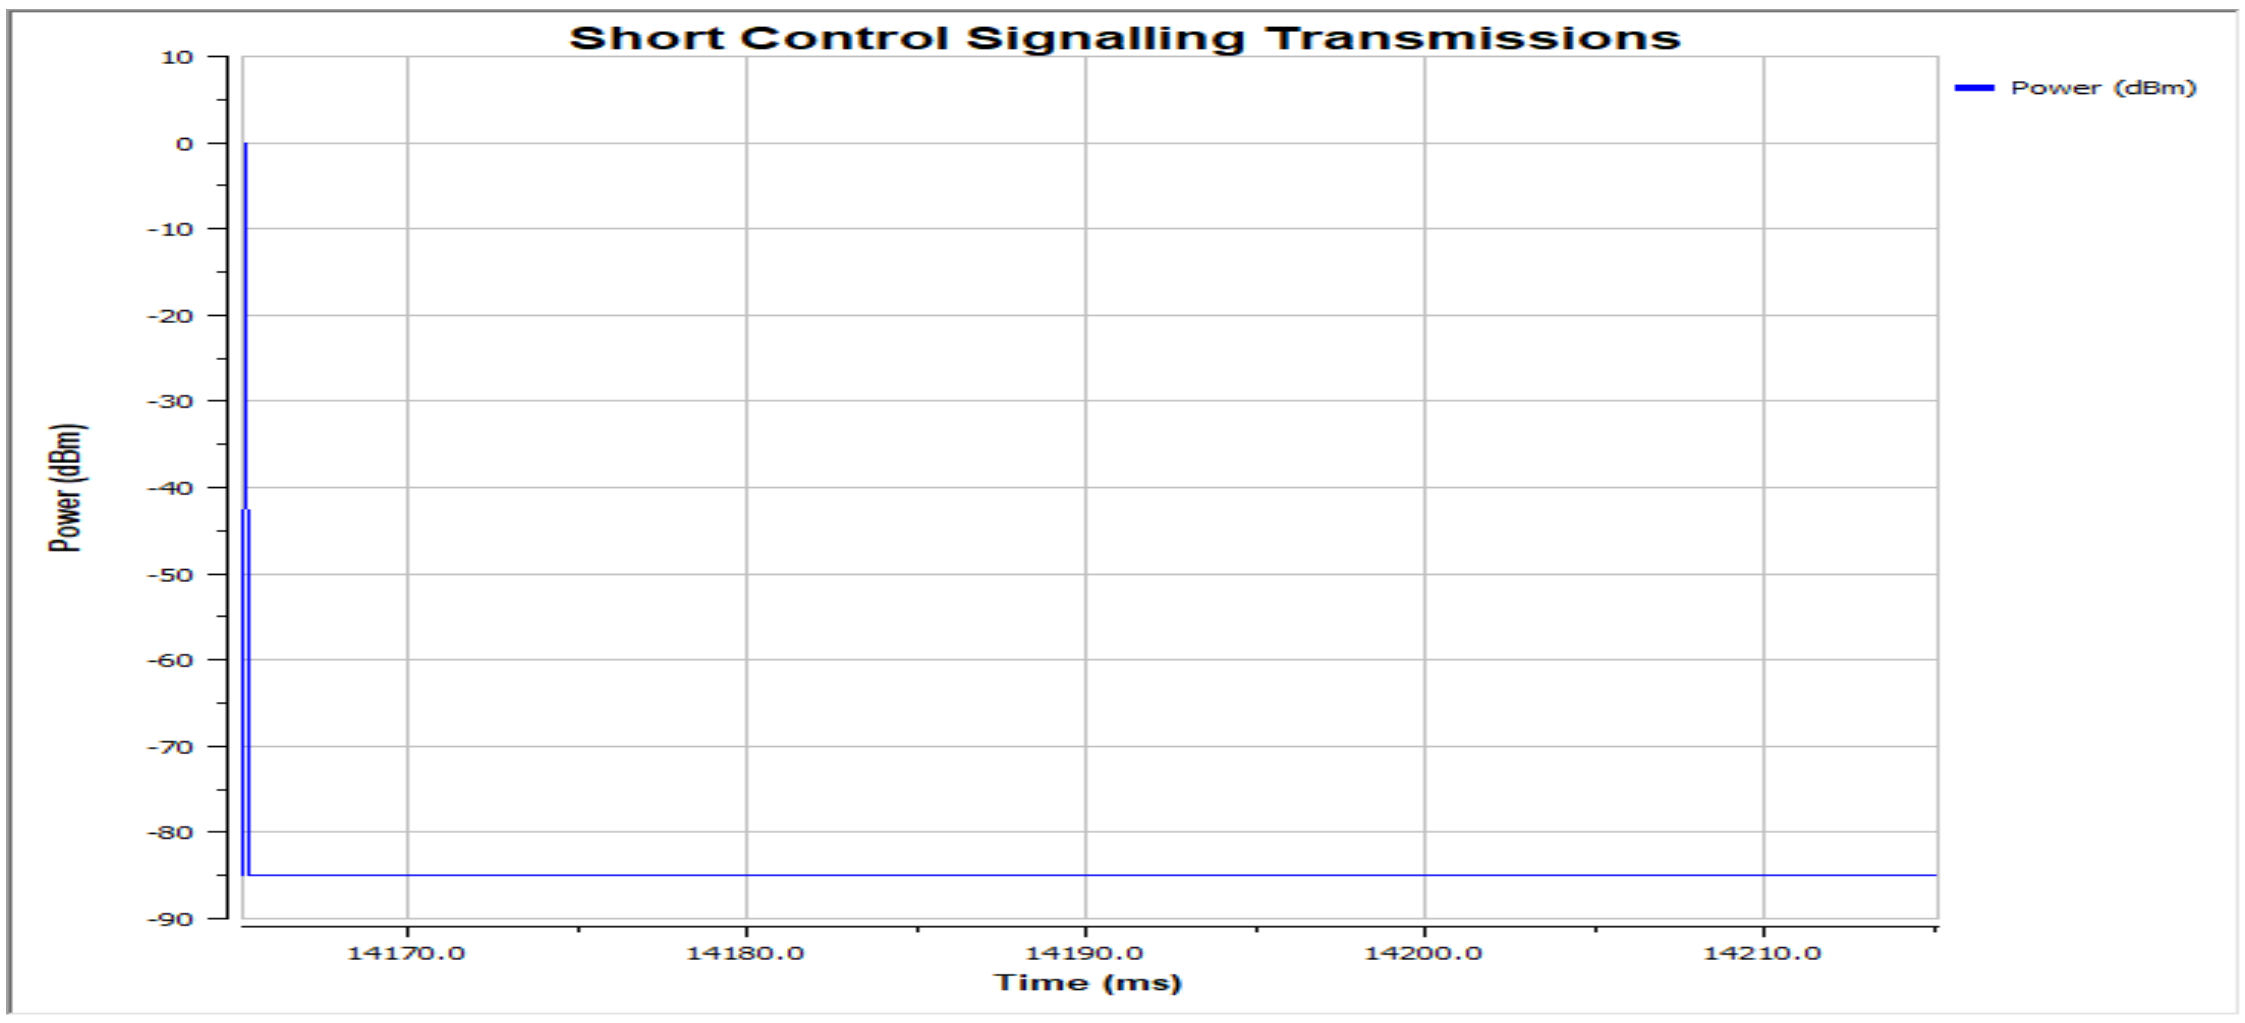

802.11n HT40: AWGN	
UUT Payload (%)	95.53
CCA Time (us)	578.70
Transmission Time (ms)	10040.00
SCST TxOn / (TxOn + TxOff) (%)	0.00
Pulse Width within 50ms (us)	0.00

Adaptivity Test Plot

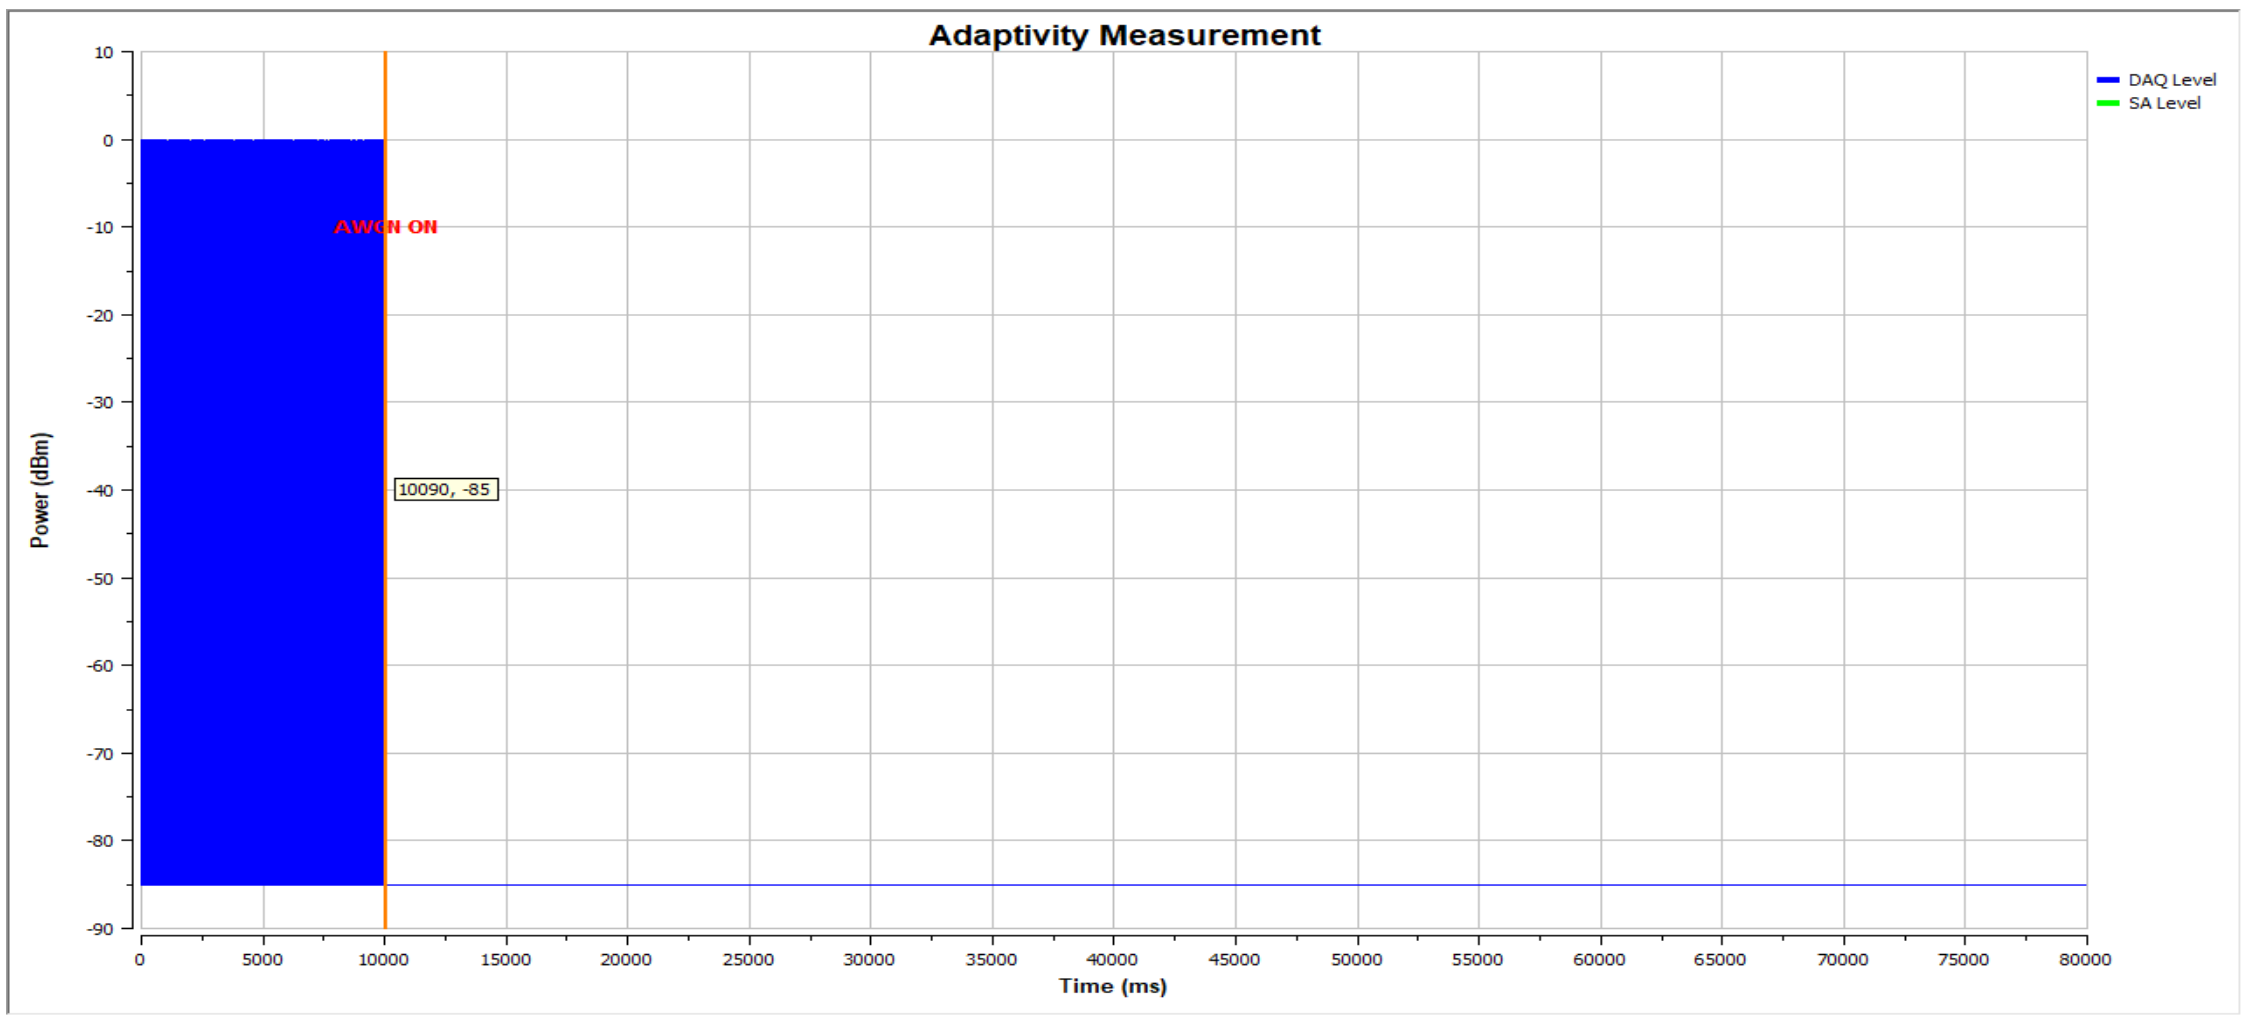

Short Control Signal Check

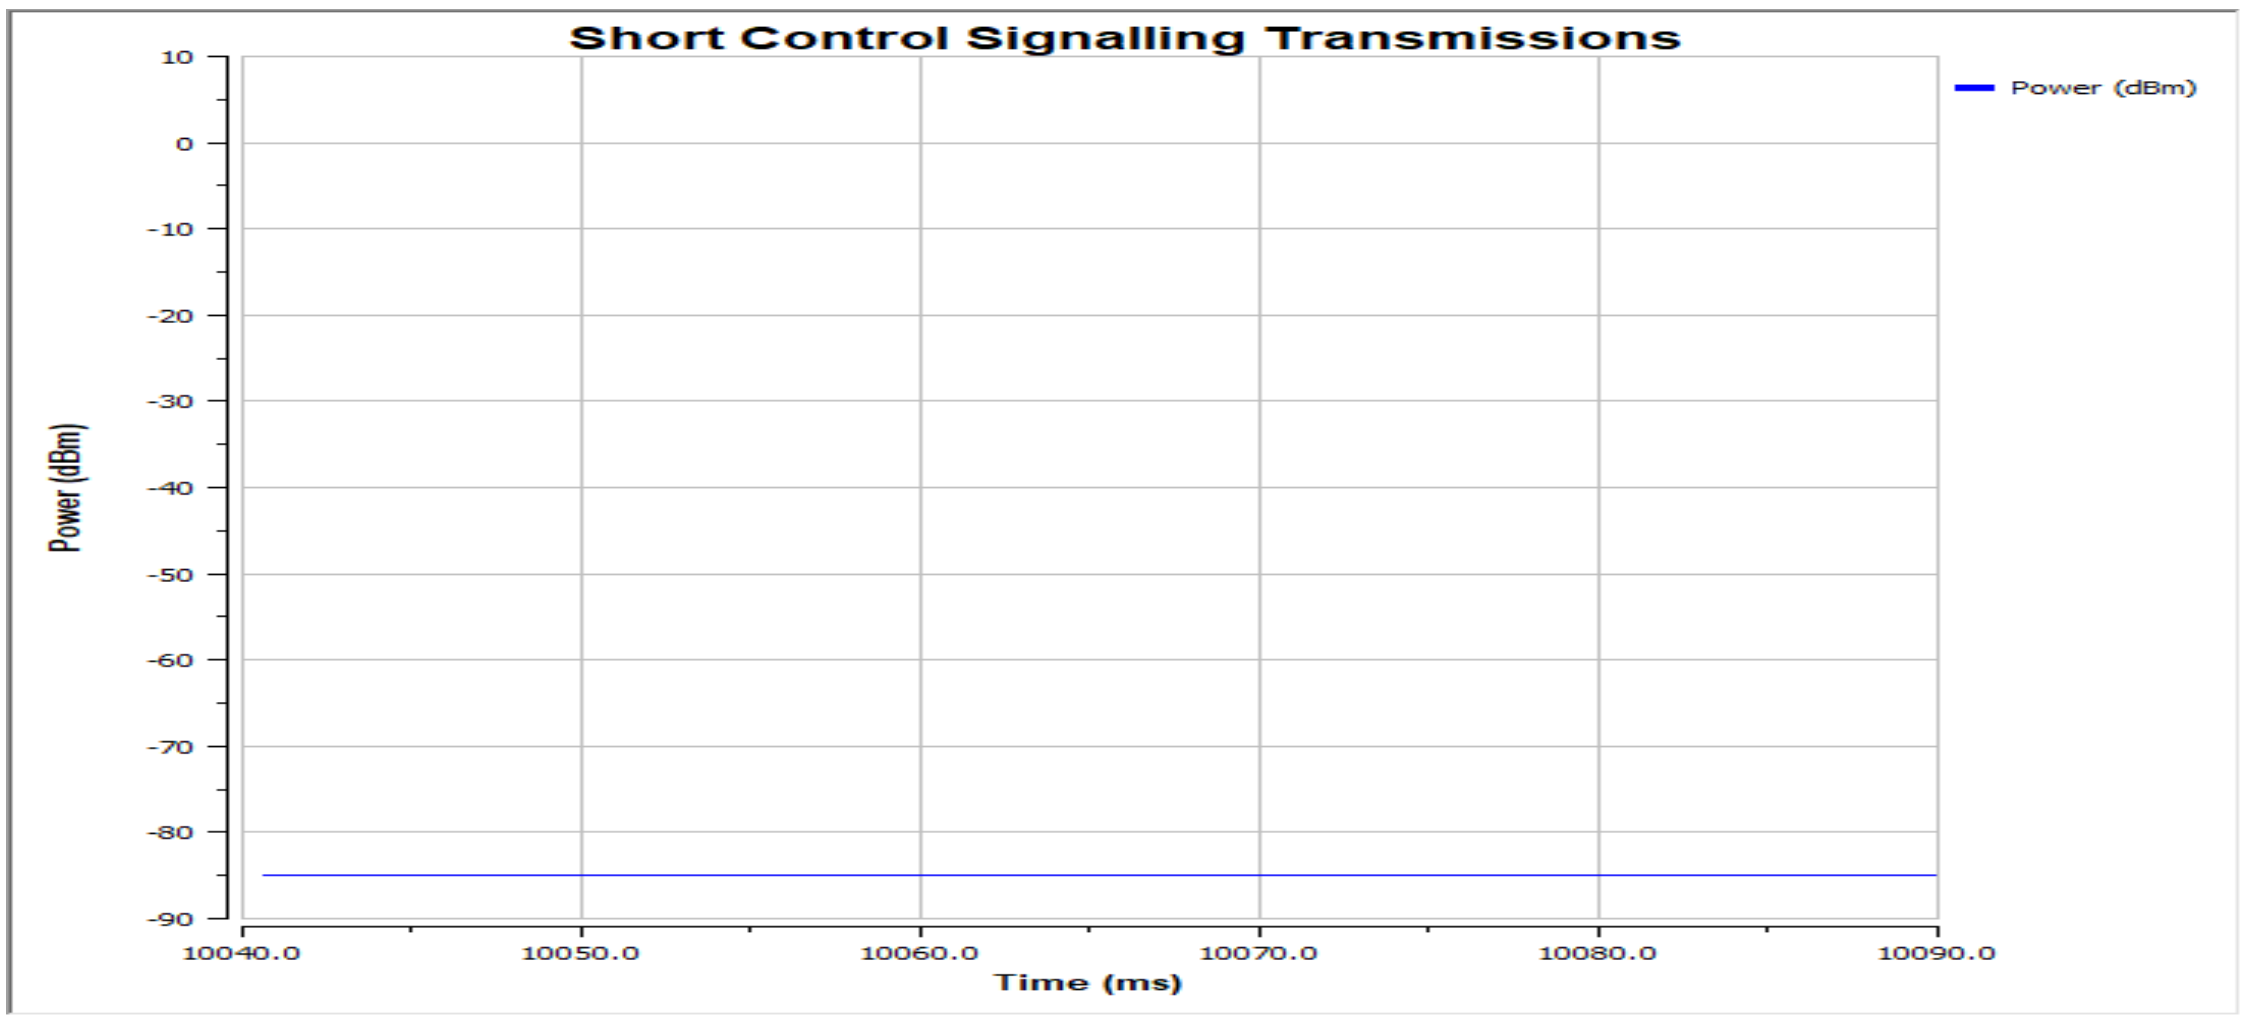

Test Detail of Adaptivity

Hotspot Mode:

802.11n HT20: AWGN	
UUT Payload (%)	95.92
CCA Time (us)	123.97
Transmission Time (ms)	10040.00
SCST TxOn / (TxOn + TxOff) (%)	0.80
Pulse Width within 50ms (us)	400.00

Adaptivity Test Plot

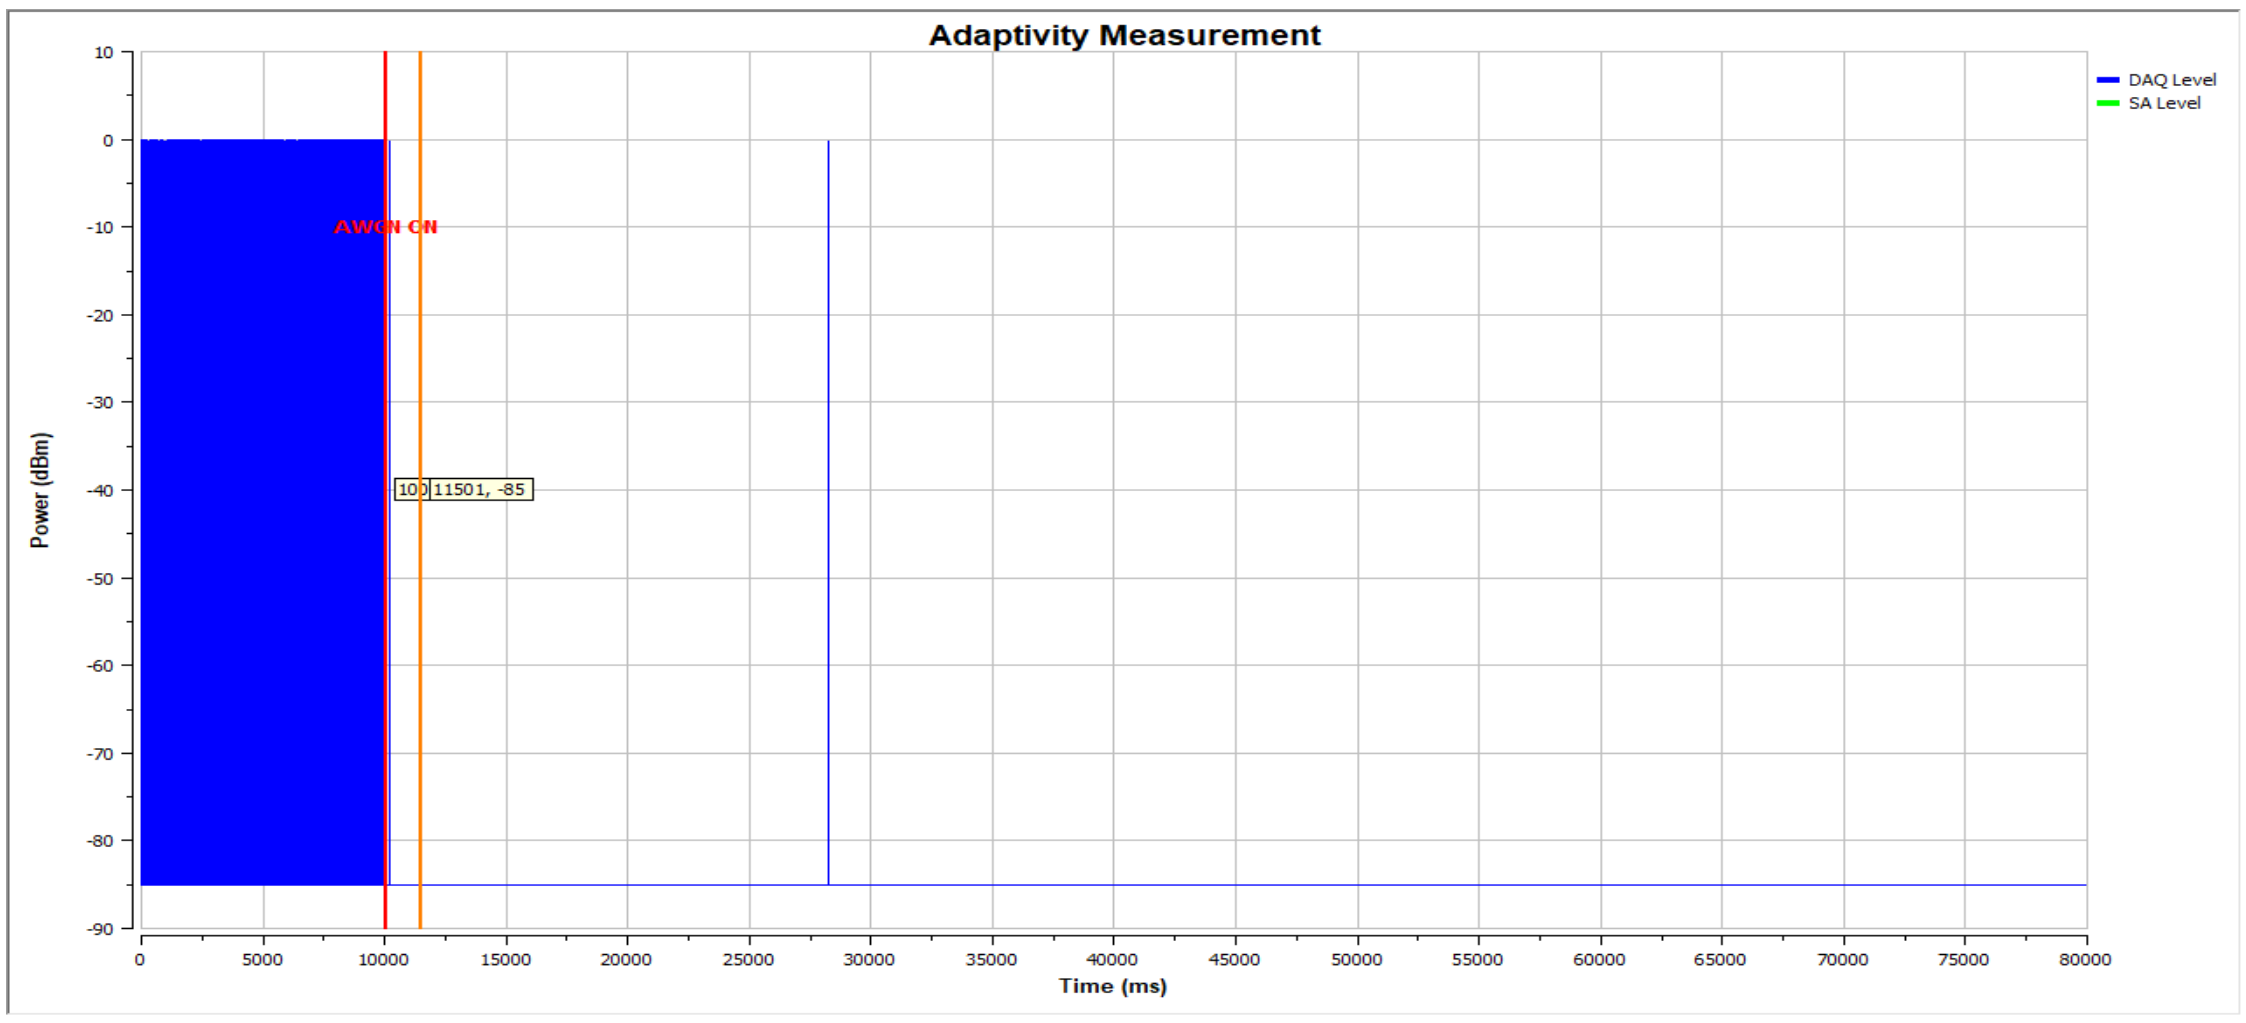

Short Control Signal Check

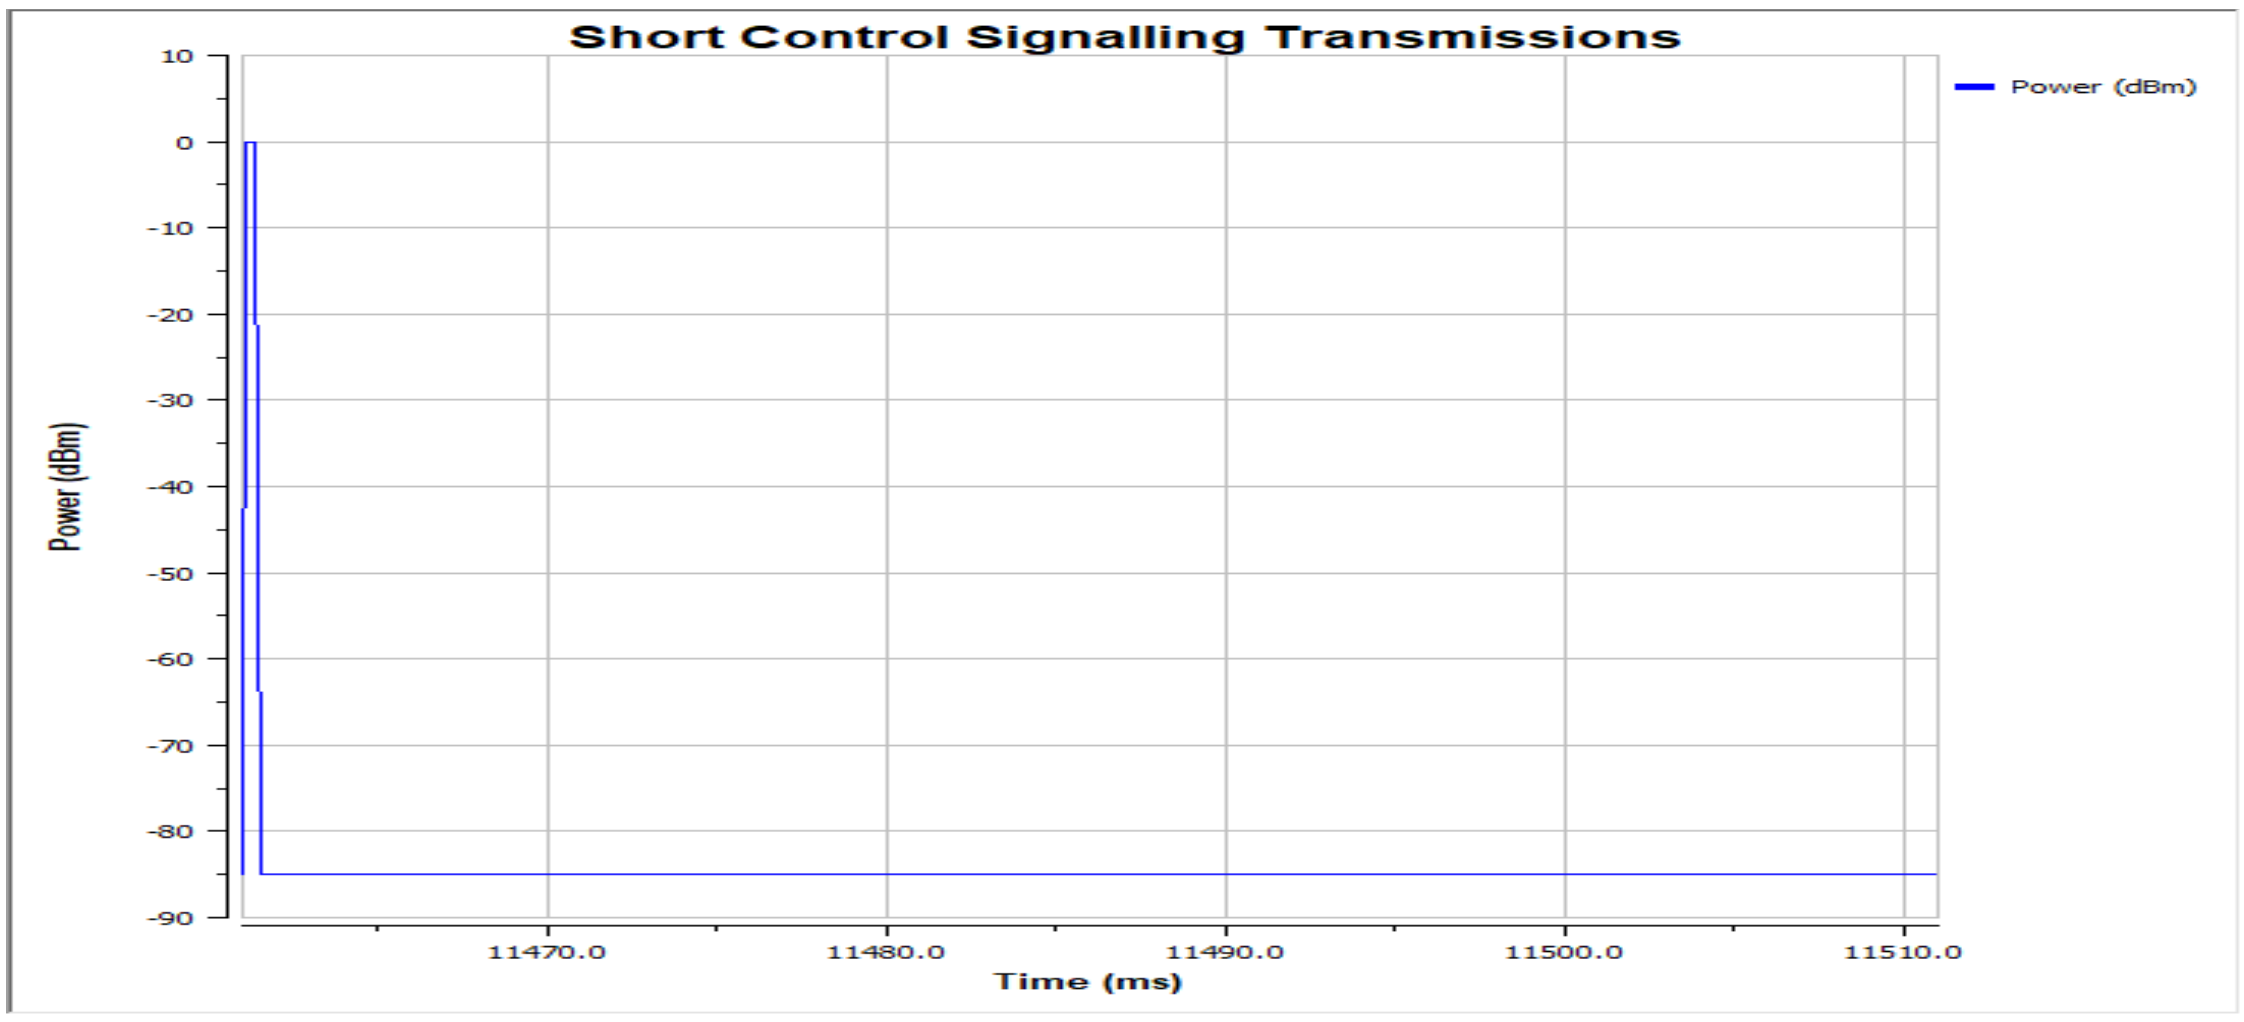

802.11n HT20: LTE	
UUT Payload (%)	97.25
CCA Time (us)	90.09
Transmission Time (ms)	10040.00
SCST TxOn / (TxOn + TxOff) (%)	0.60
Pulse Width within 50ms (us)	300.00

Adaptivity Test Plot

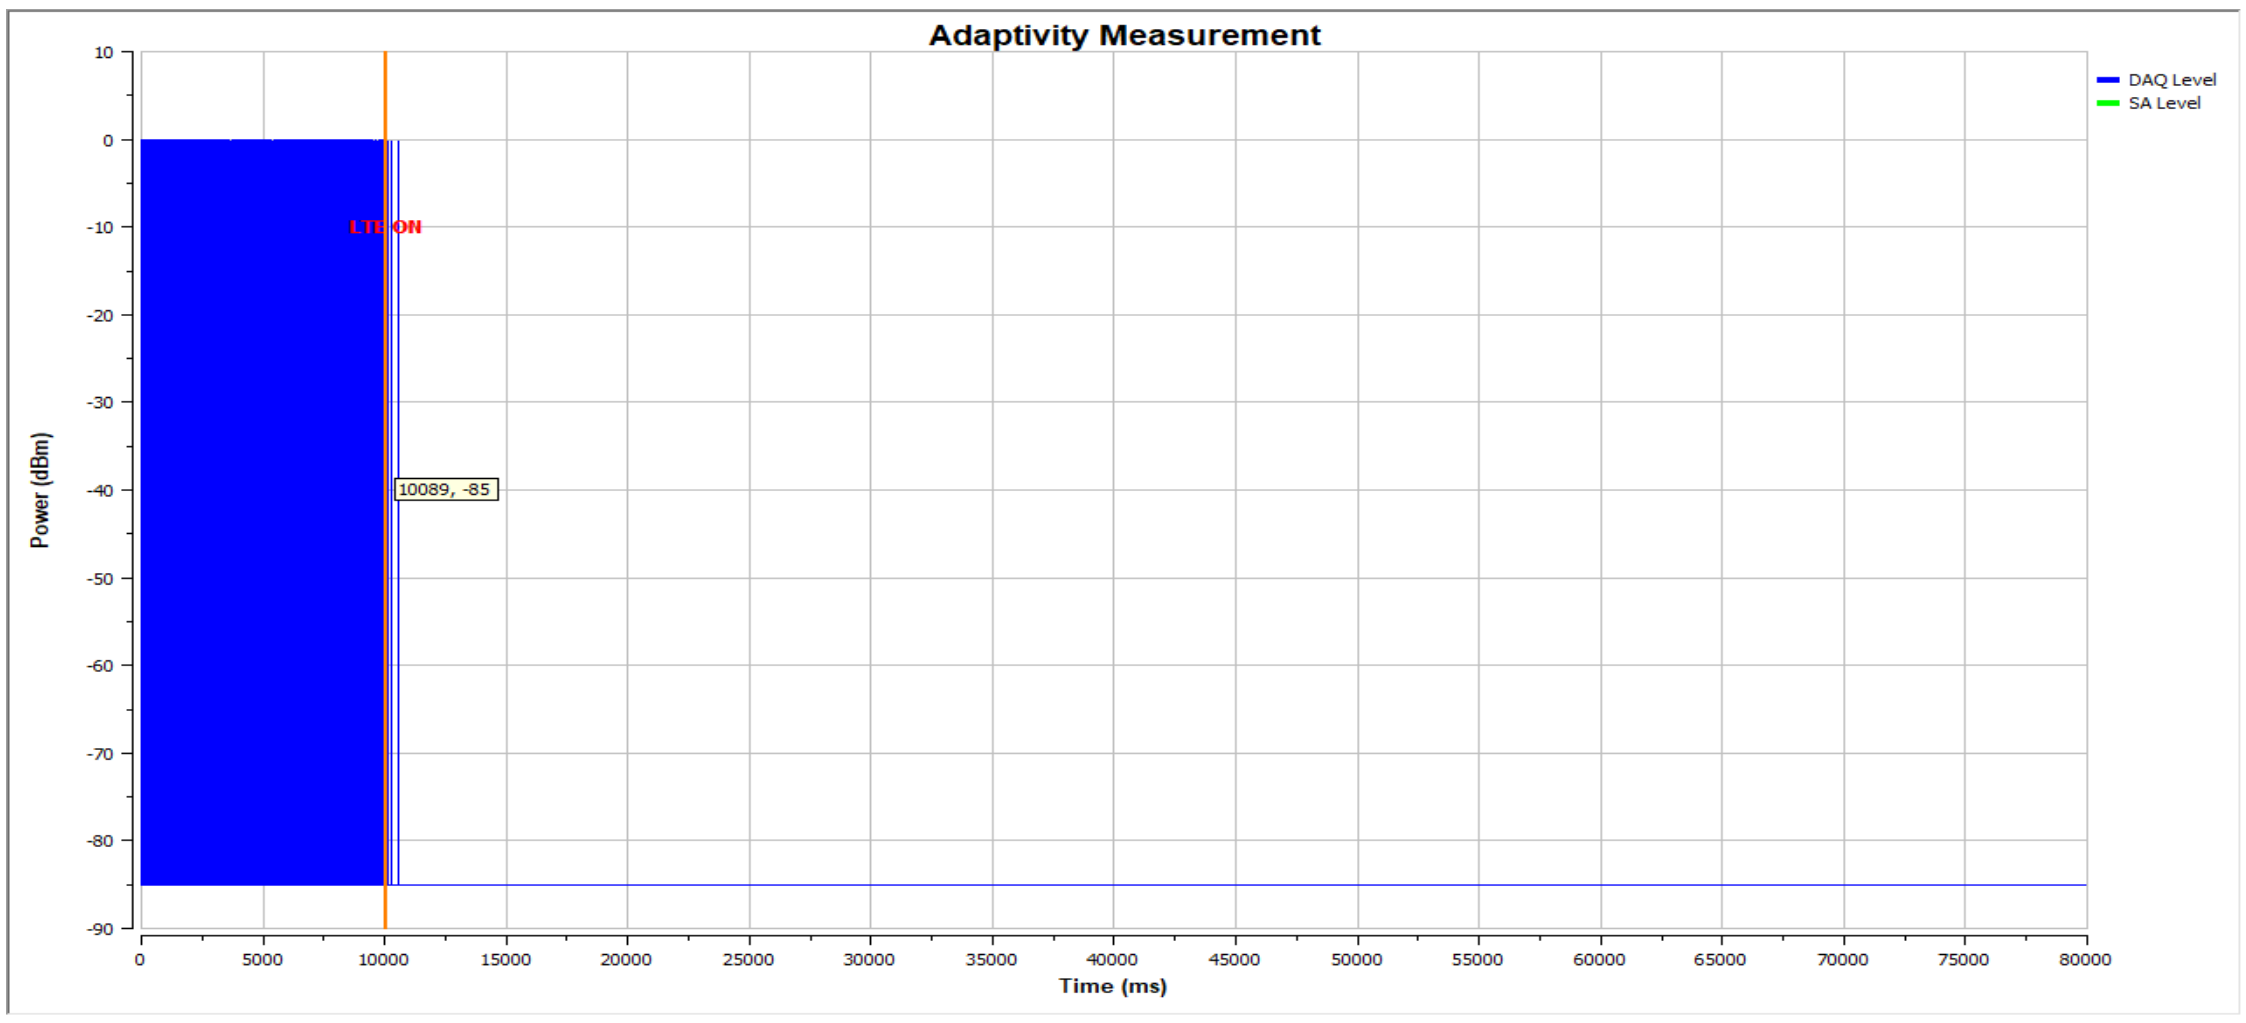

Short Control Signal Check

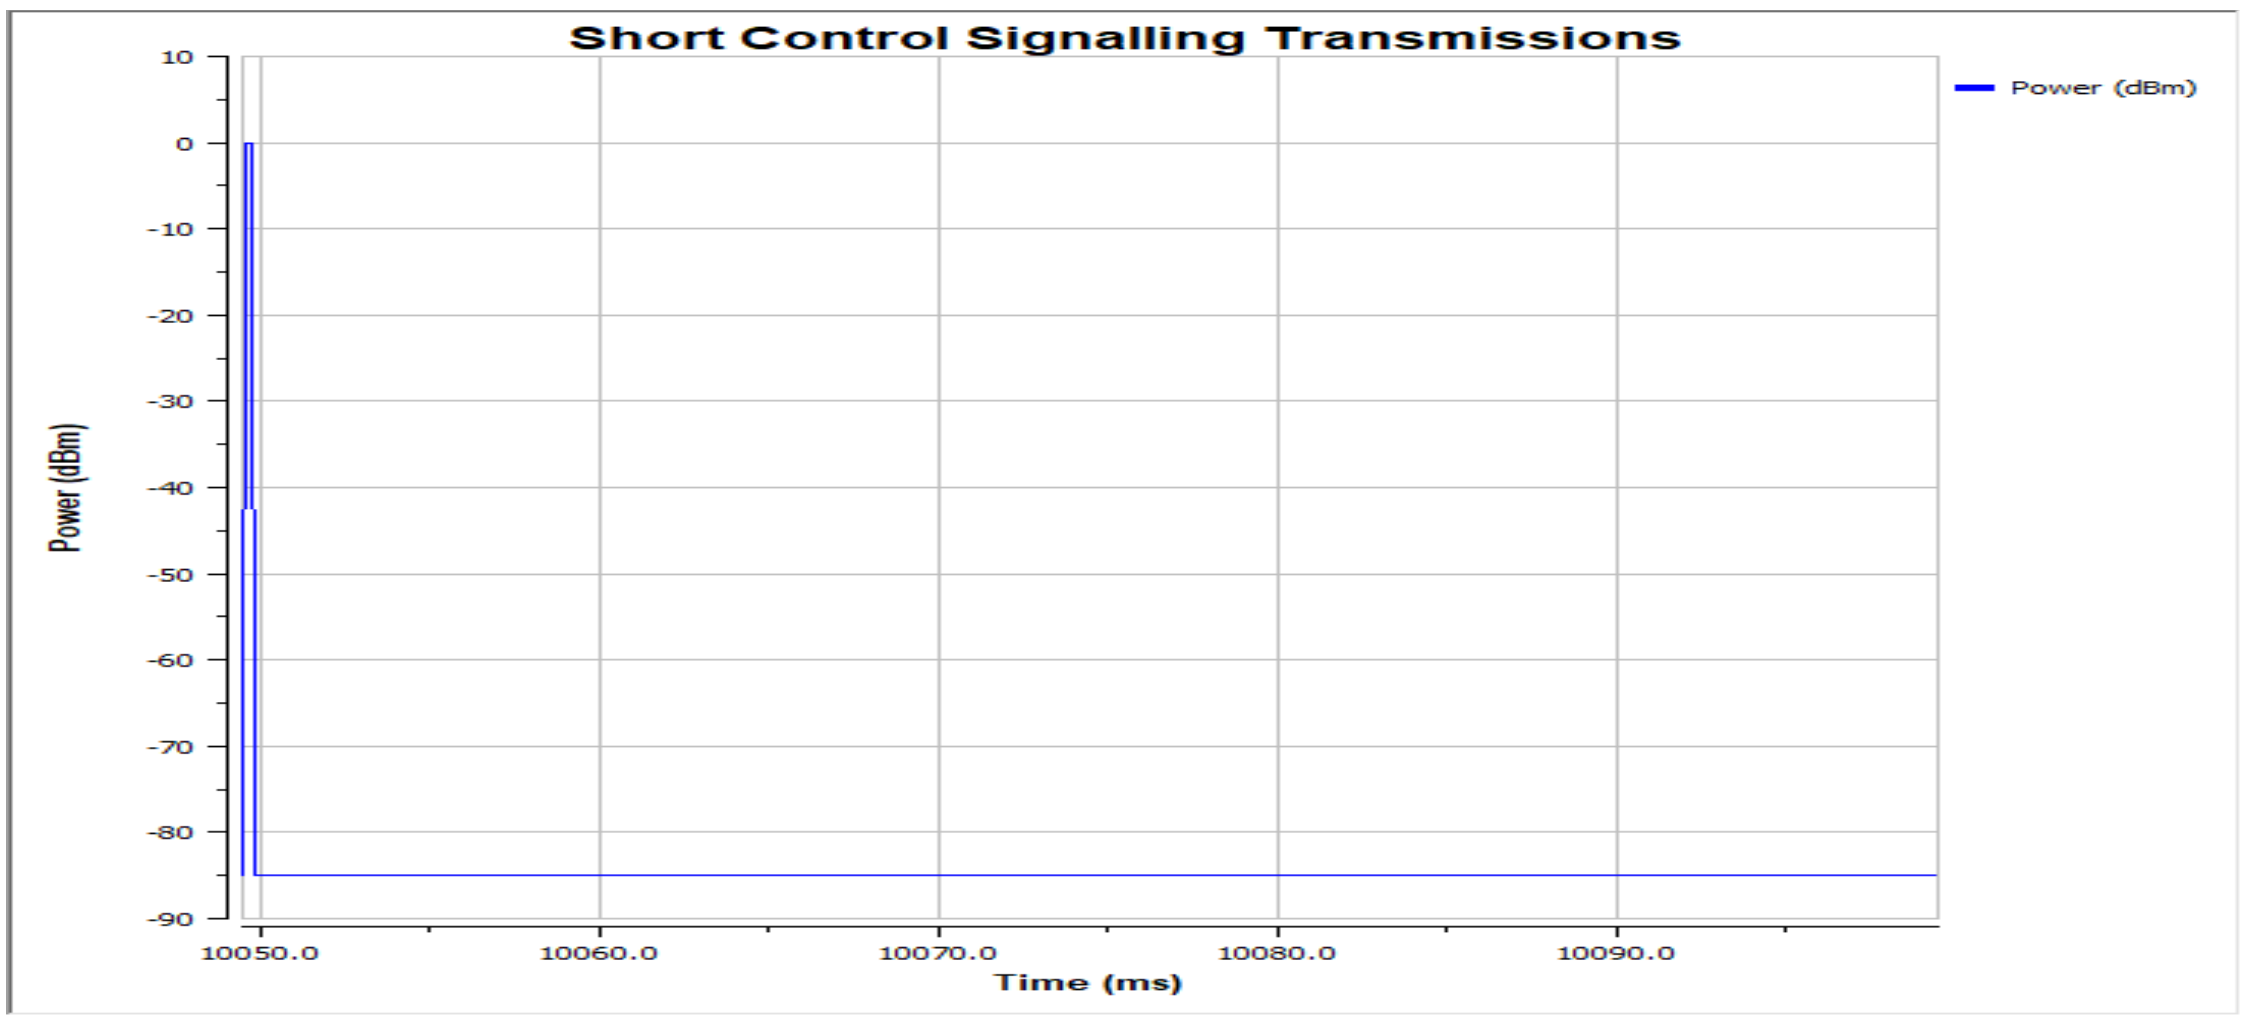

802.11n HT20: OFDM	
UUT Payload (%)	95.17
CCA Time (us)	123.95
Transmission Time (ms)	10040.00
SCST TxOn / (TxOn + TxOff) (%)	0.00
Pulse Width within 50ms (us)	0.00

Adaptivity Test Plot

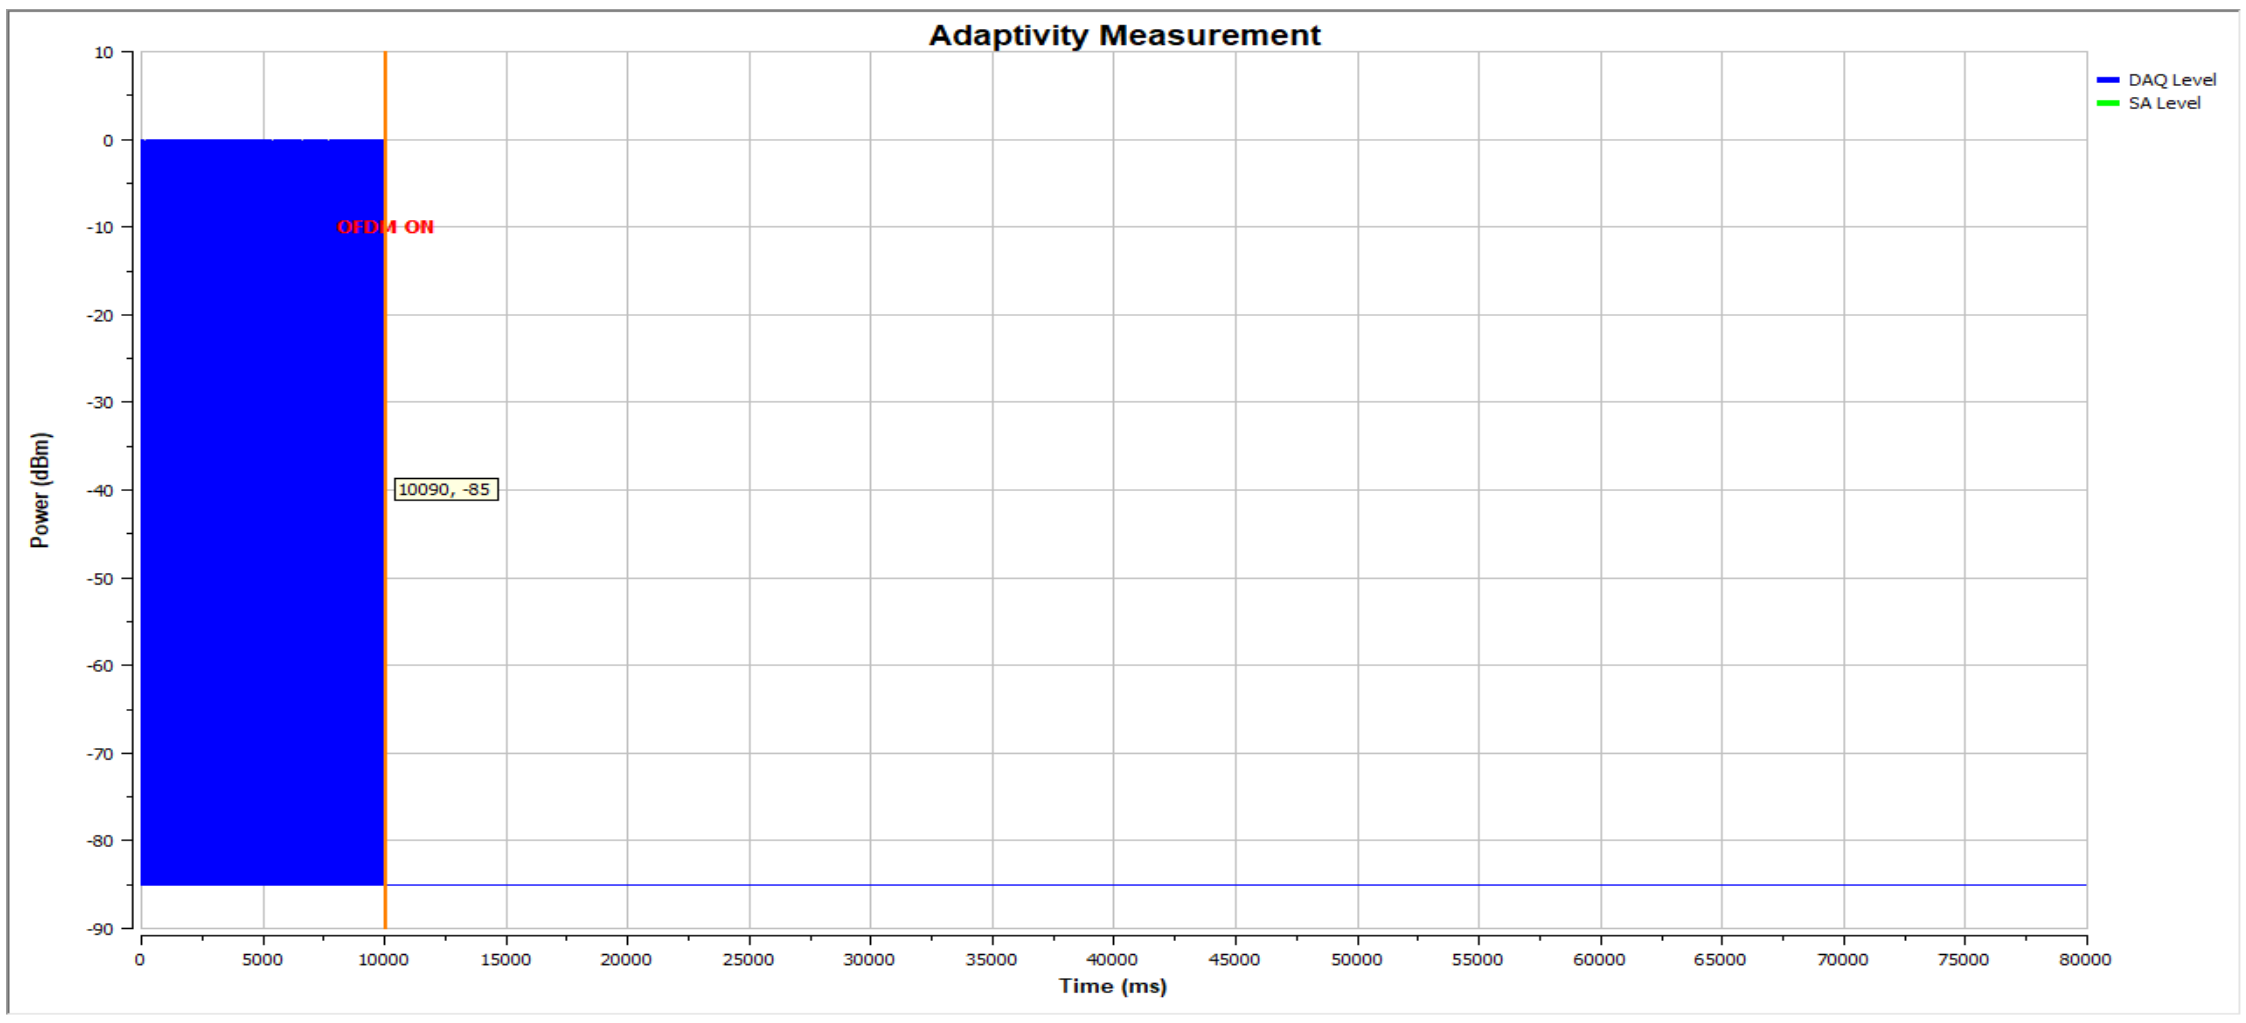

Short Control Signal Check

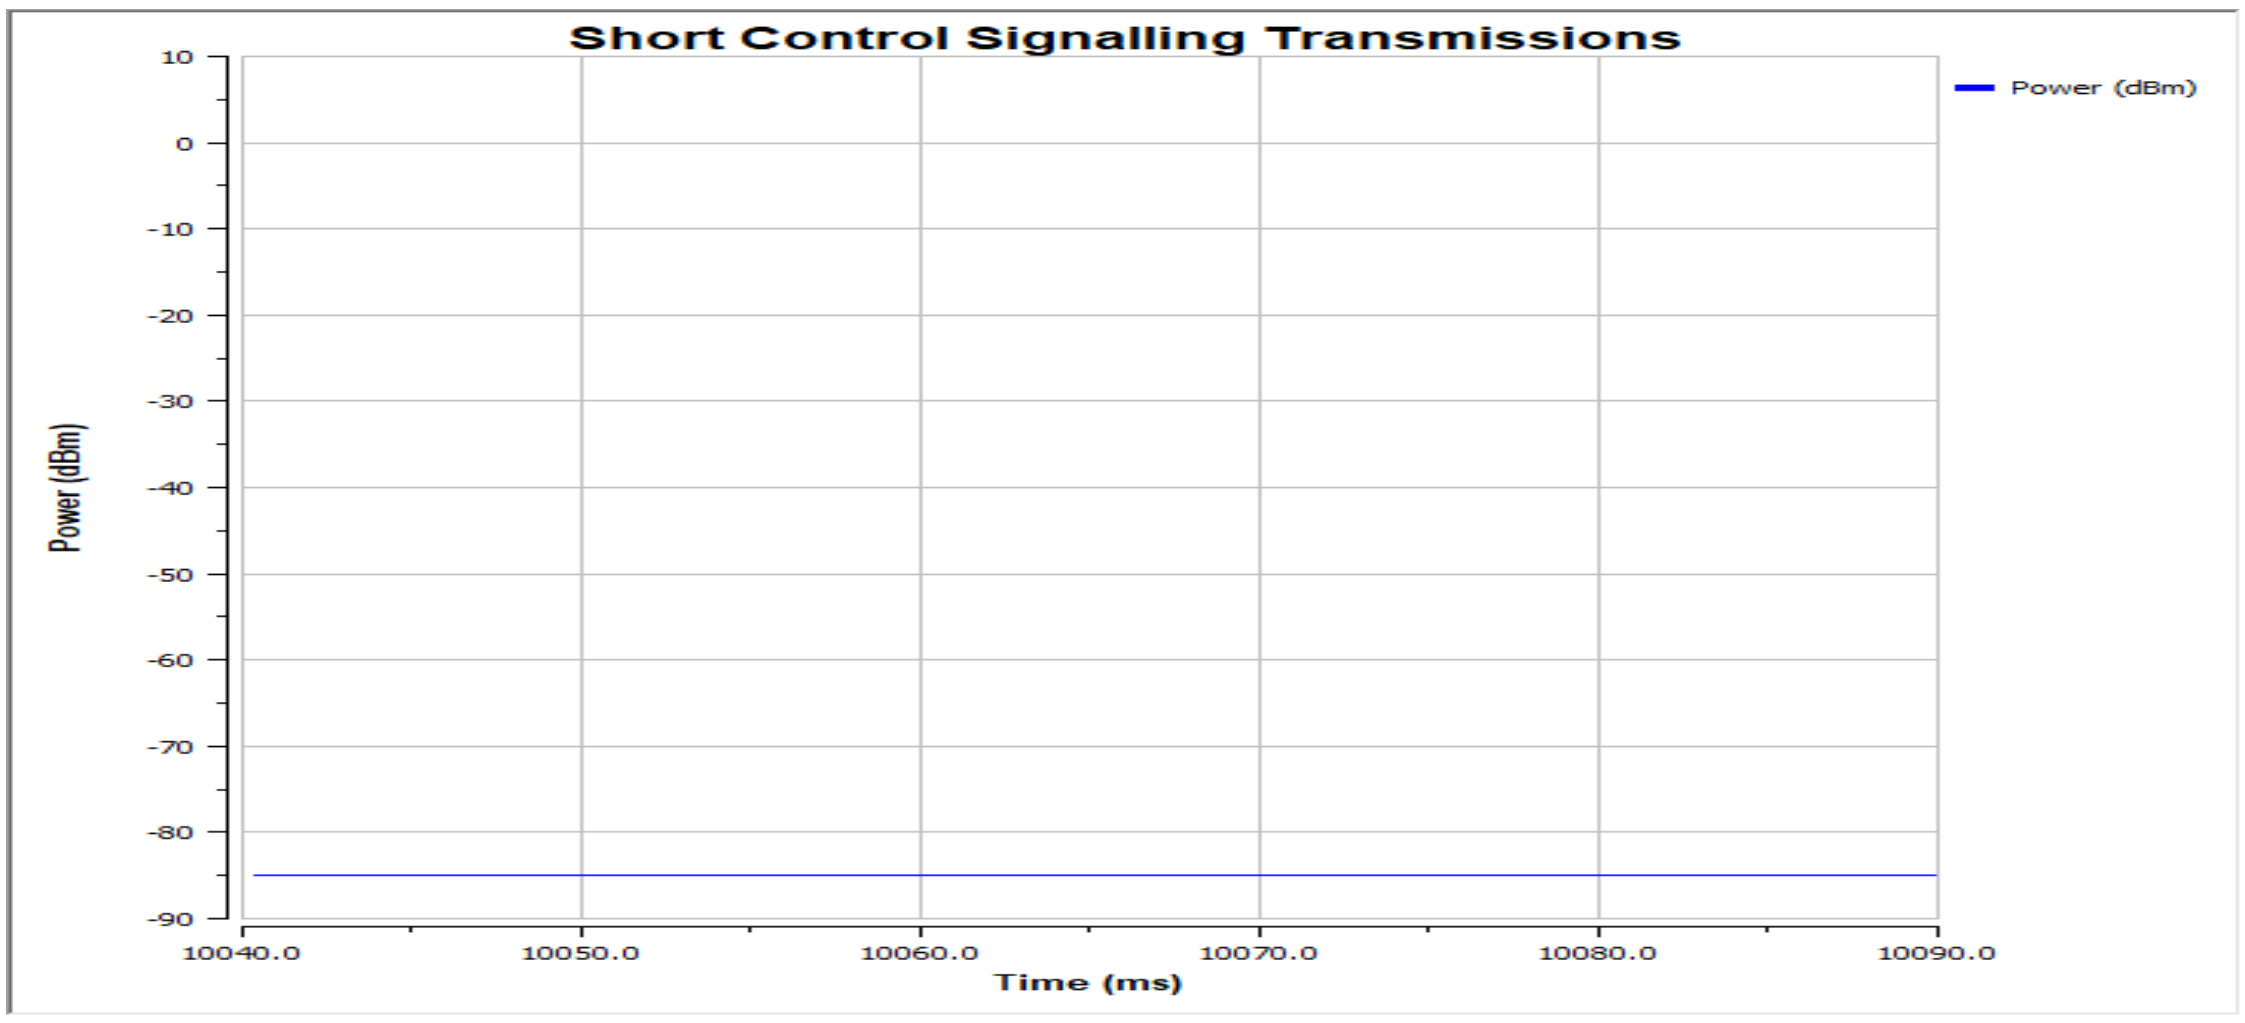

802.11n HT40: AWGN	
UUT Payload (%)	75.11
CCA Time (us)	1555.30
Transmission Time (ms)	10040.00
SCST TxOn / (TxOn + TxOff) (%)	0.00
Pulse Width within 50ms (us)	0.00

Adaptivity Test Plot

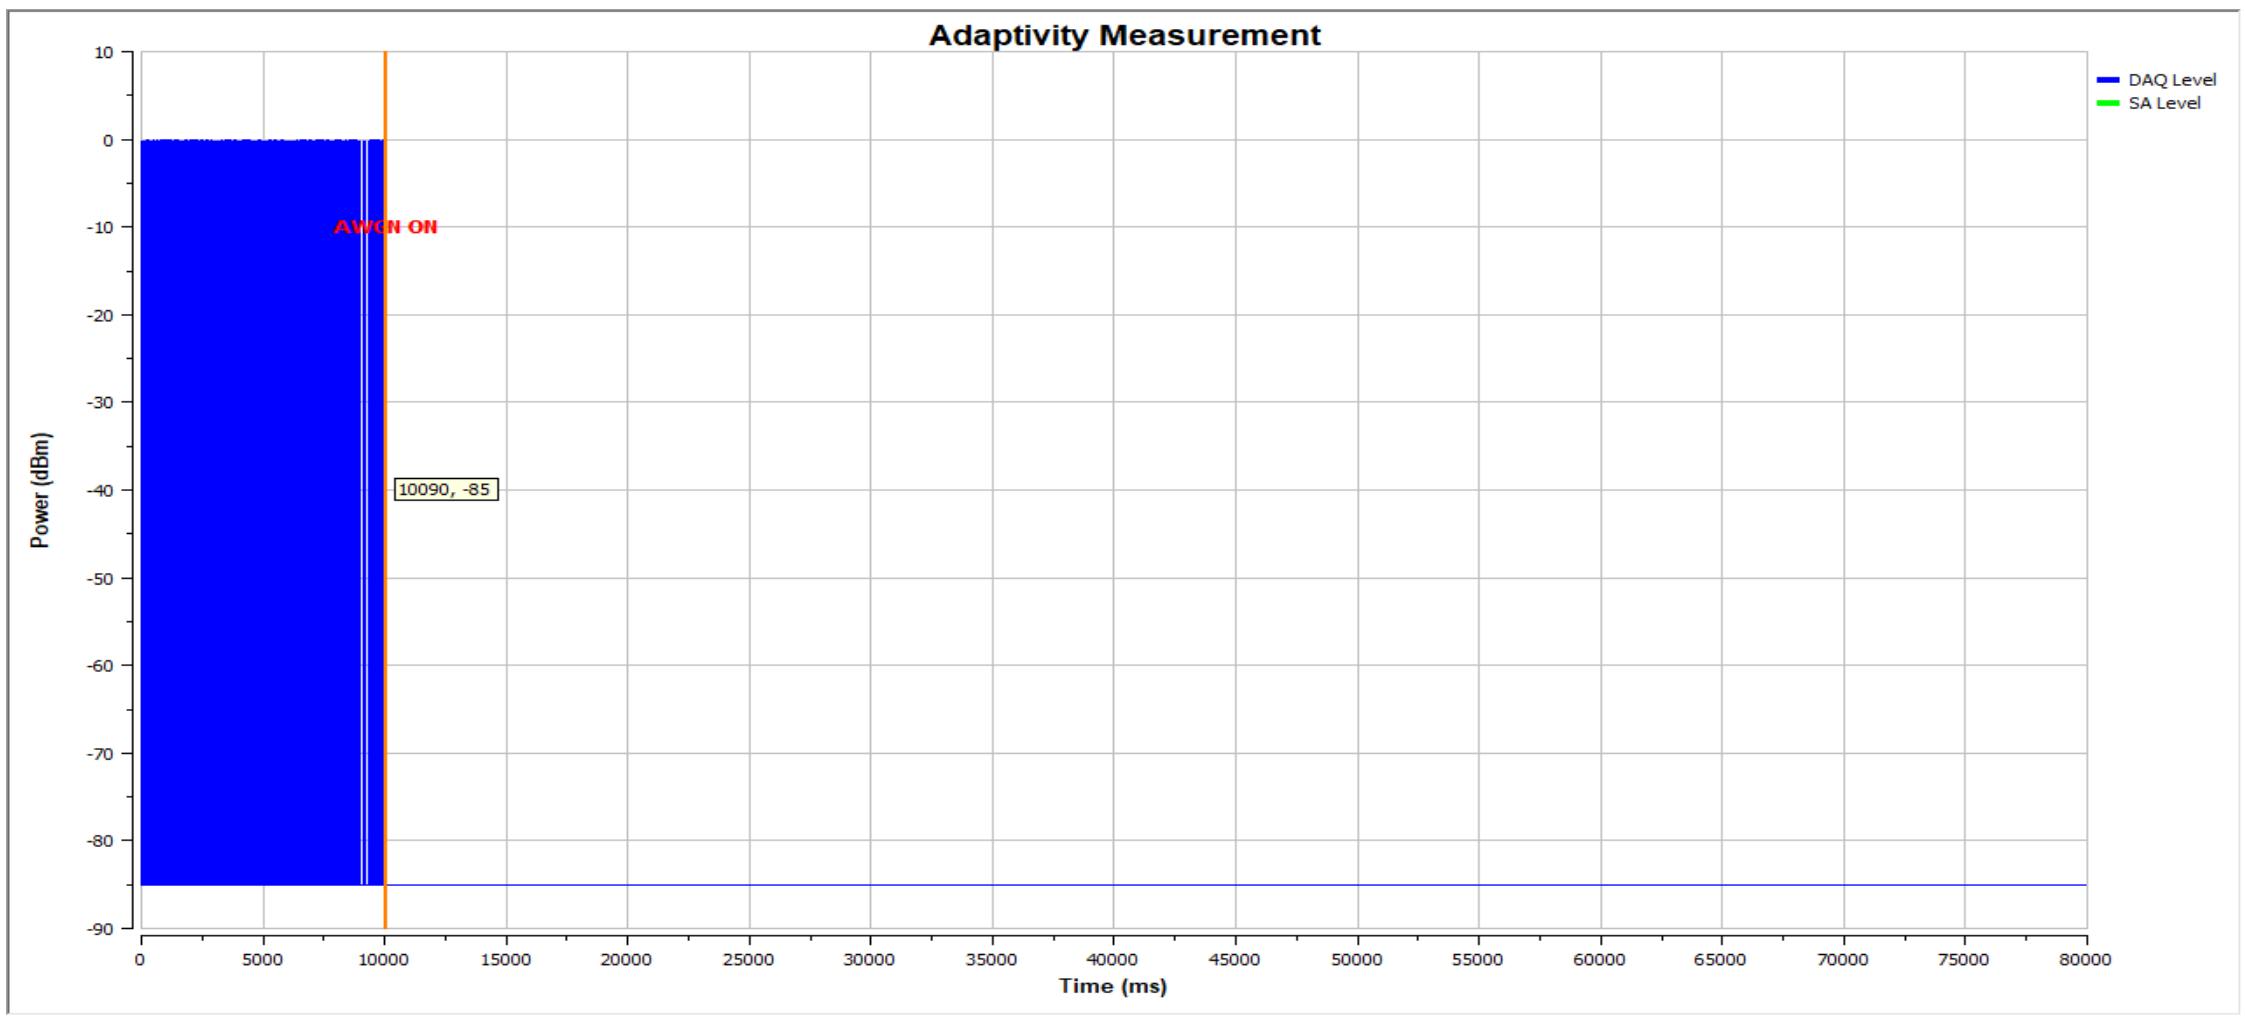

Short Control Signal Check

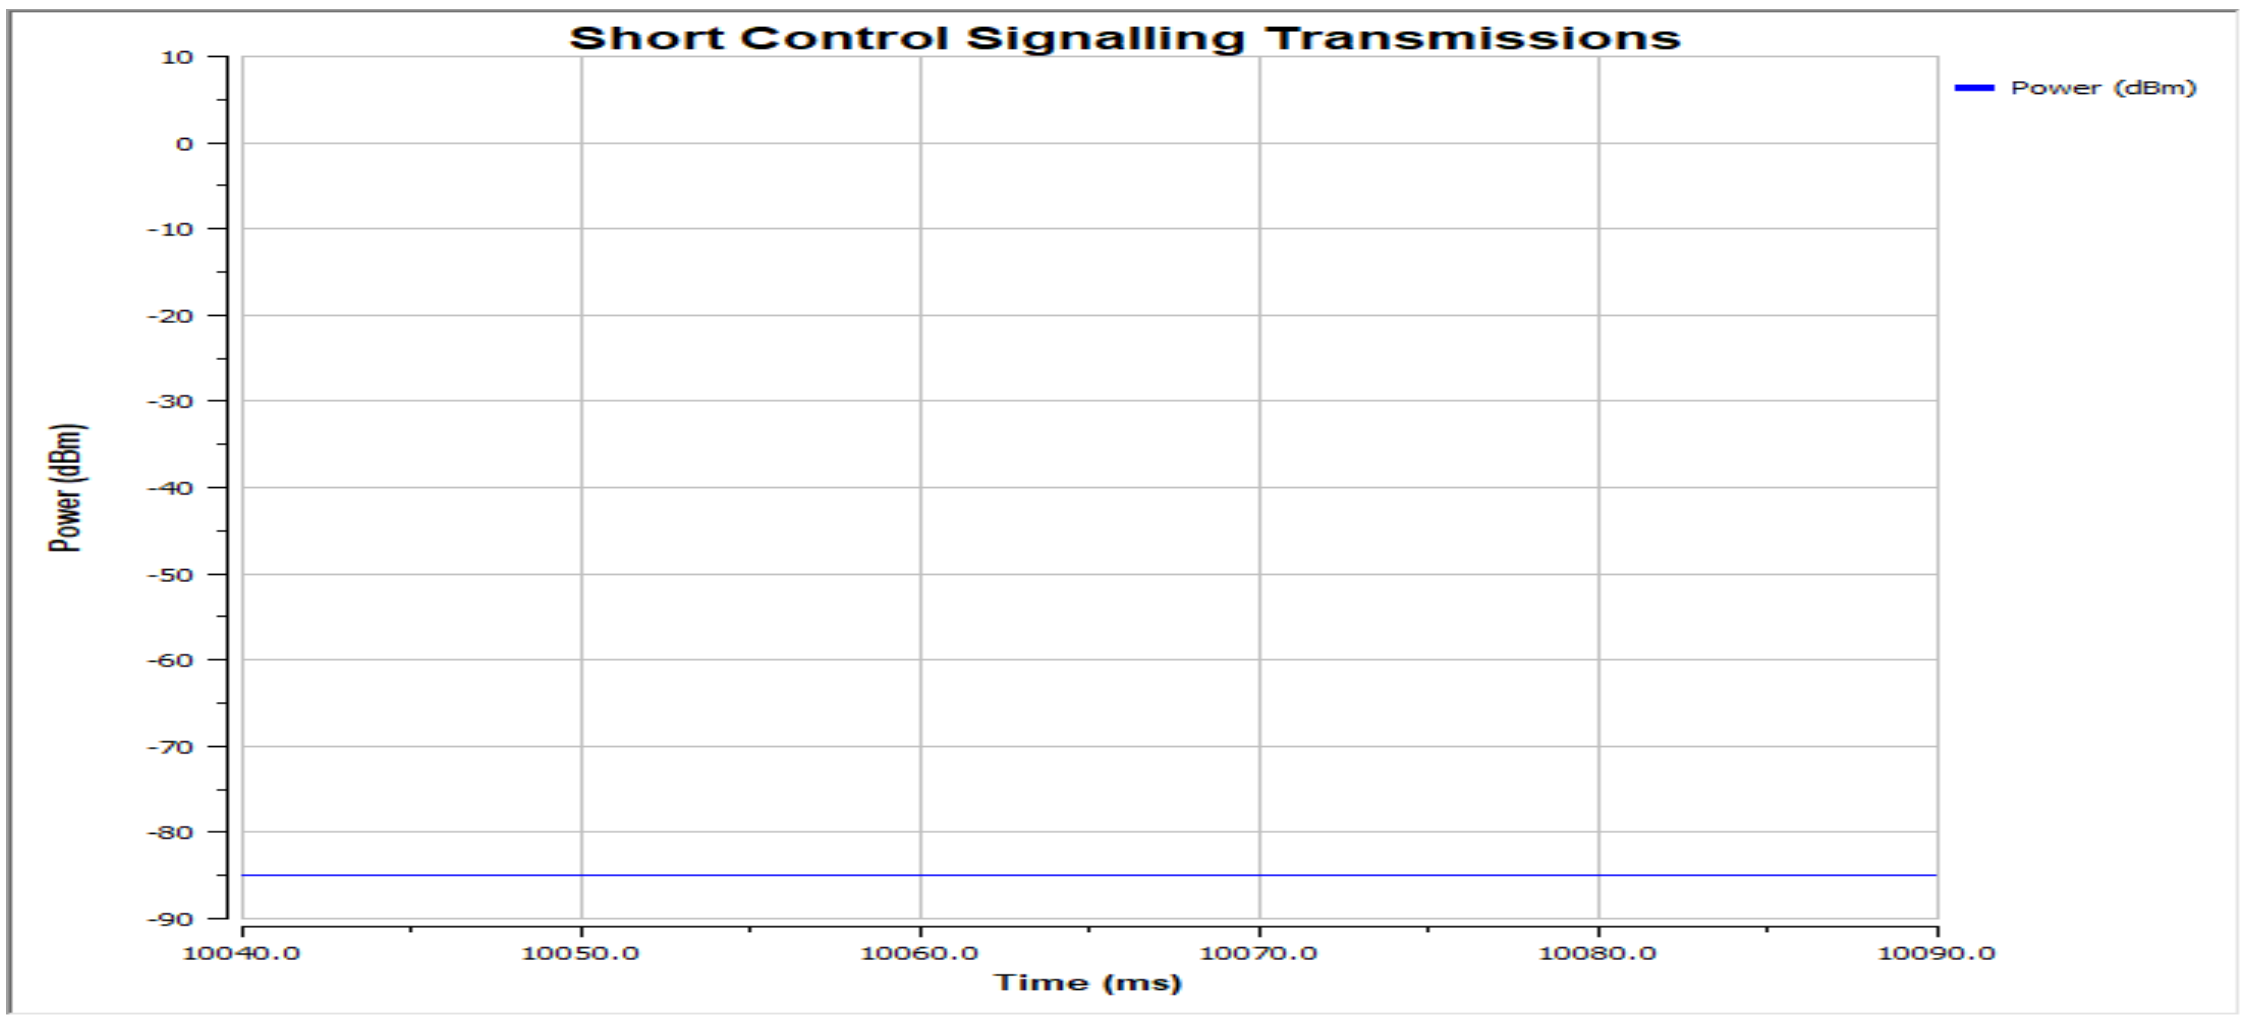

6. Country determination capability

6.1 Country determination

6.1.1 Definition and Requirement

Country determination capability is a feature of an RLAN device which enables the device to be configured automatically according to the regulatory requirements applicable at the location where the device operates.

This includes implementations where the country determination capability is present in the RLAN device itself or in external equipment associated with the device.

Requirements in clause B.2.2.11 shall apply to RLAN devices that are capable of applying an RF output power of greater than 25 mW EIRP in sub-band 4.

Before the RLAN device starts transmitting in sub-band 4 with an RF output power of greater than 25 mW EIRP, the RLAN device shall use the country determination capability to identify the country where it is located. The RLAN device shall not transmit in sub-band 4 with an RF output power of greater than 25 mW EIRP, if any of the following applies:

1) The RLAN device is in a country where regulatory requirements prohibit transmitting in sub-band 4 with an RF output power of greater than 25 mW EIRP.
2) The RLAN device cannot identify the country where the RLAN device is located.

The geographical location determined by the equipment shall not be accessible to the user.

6.1.2 Description

Not Required.

The measured RF output power in sub-band 4 is less than 25 mW EIRP and does not support Straddle Channel.

7. Photographs of Radiated Emission Test Configuration

Z Plane

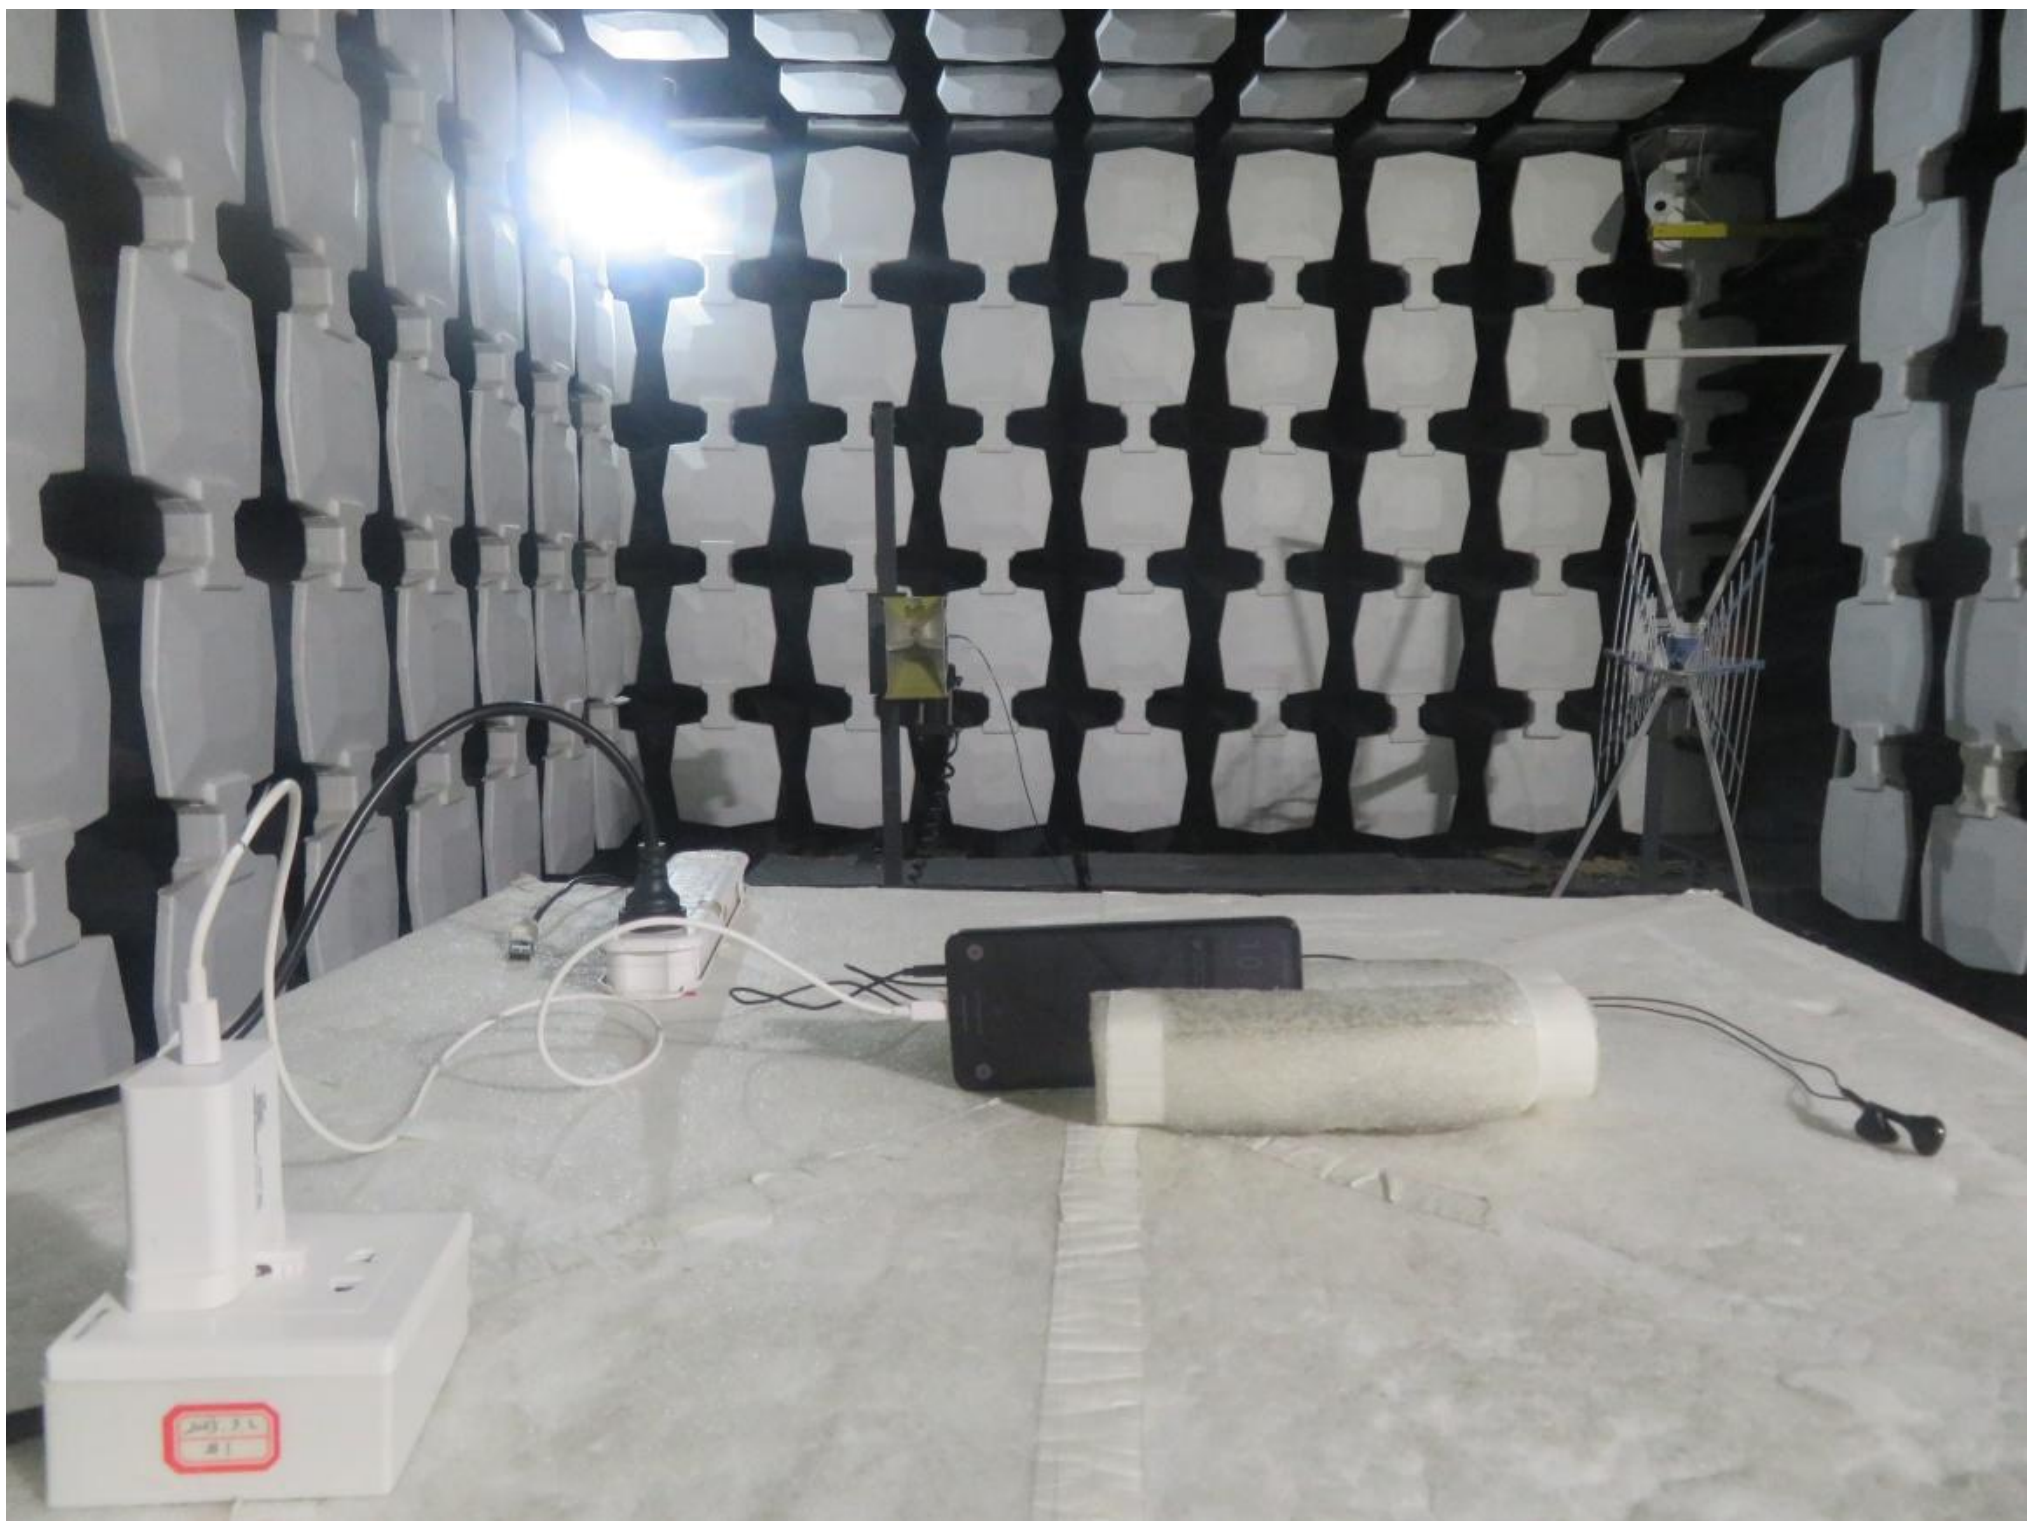

8. Photographs of DFS Test Configuration

Front View

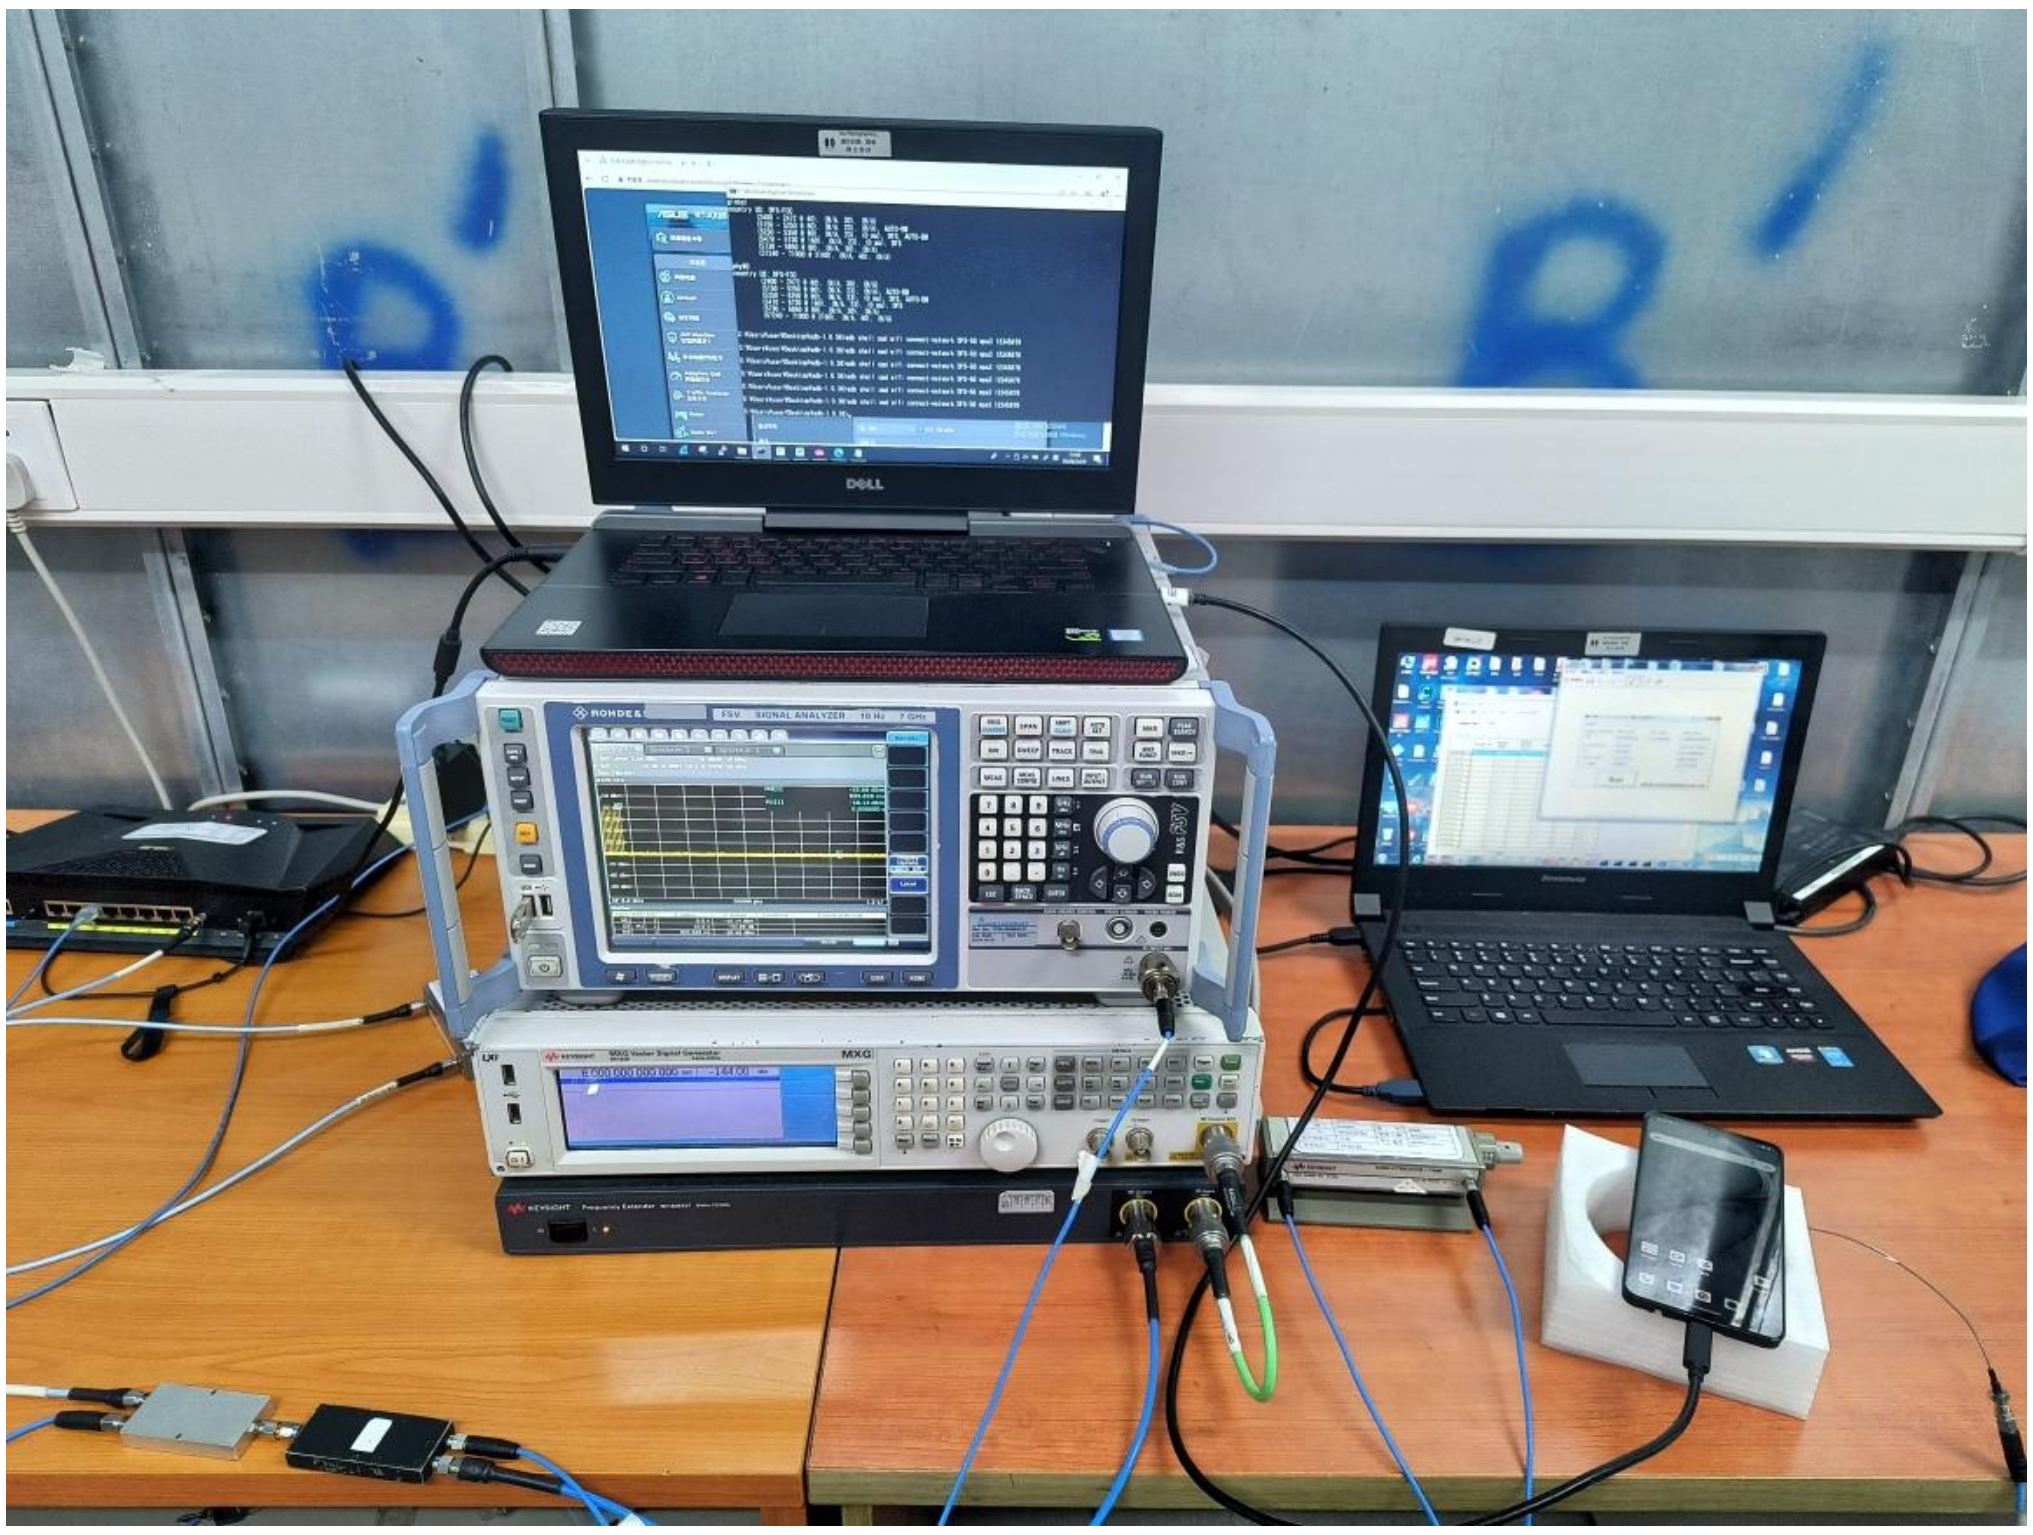

9. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal and spectrum analyzer	Rohde & Schwarz	FSV3044	101177	10Hz-44GHz	Jul. 03, 2025	Mar. 14, 2026	Jul. 02, 2026	Radiation (05CH02-KS)
Log-periodic antenna	R&S	HL562	100446	30MHz-3GHz	Jan. 21, 2026	Mar. 14, 2026	Jan. 20, 2027	Radiation (05CH02-KS)
Horn Antenna	R&S	HF906	100496	1GHz~18GHz	Jan. 11, 2026	Mar. 14, 2026	Jan. 10, 2027	Radiation (05CH02-KS)
SHF-EHF Horn	Com-Power	AH-840	101116	18GHz~40GHz	Oct. 21, 2025	Mar. 14, 2026	Oct. 20, 2026	Radiation (05CH02-KS)
Amplifier	Keysight	83017A	MY53270360	500MHz~26.5G Hz	Apr. 18, 2025	Mar. 14, 2026	Apr. 17, 2026	Radiation (05CH02-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2026	Mar. 14, 2026	Jan. 01, 2027	Radiation (05CH02-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 02, 2026	Mar. 14, 2026	Jan. 01, 2027	Radiation (05CH02-KS)
Amplifier	EM	EM01G18GA	060839	1GHz-18GHz	May 23, 2025	Mar. 14, 2026	May 22, 2026	Radiation (05CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Mar. 14, 2026	NCR	Radiation (05CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Mar. 14, 2026	NCR	Radiation (05CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Mar. 03, 2026	Jul. 06, 2026	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Dec. 25, 2025	Mar. 03, 2026	Dec. 24, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Dec. 25, 2025	Mar. 03, 2026	Dec. 24, 2026	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 02, 2025	Mar. 03, 2026	Jul. 01, 2026	Conducted (TH01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2026	Mar. 17, 2026	Jan. 01, 2027	Conducted (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Jan. 02, 2026	Mar. 17, 2026	Jan. 01, 2027	Conducted (DFS01-KS)
Vector Signal Generator	R&S	SMJ100A	101908	100kHz~6GHz	Dec. 24, 2025	Mar. 17, 2026	Dec. 23, 2026	Conducted (DFS01-KS)
MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 16, 2025	Mar. 17, 2026	Apr. 15, 2026	Conducted (DFS01-KS)
Base Station	R&S	CMW270	102513	Base Station	Apr. 16, 2025	Mar. 17, 2026	Apr. 15, 2026	Conducted (DFS01-KS)
Adaptivity test Box AD300	WORLD-PALL AS	AD300	TW5451223	N/A	NCR	Mar. 17, 2026	NCR	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7114-M	N/A	0.5GHz~18GHz	NCR	Mar. 17, 2026	NCRs	Conducted (DFS01-KS)

Note:

1. Test equipment calibration is traceable to the procedure of ISO17025.
2. NCR: No Calibration Required

10. Measurement Uncertainty

Test Item	Uncertainty
RF Frequency	1.0×10^{-6}
RF output power, conducted	±1.1 dB
Power density, conducted	±1.3 dB
Radiated spurious emissions (25M - 1GHz)	±2.8 dB
Radiated spurious emissions (1G - 18GHz)	±2.8 dB
Radiated spurious emissions (18G – 26.5GHz)	±2.8 dB
Conducted emissions	±1.3 dB
Temperature	±1.19 °C
Humidity	±1.3 %
Time	±0.01 %

----------- THE END -----------

Appendix A. Test Result of Conducted Test Items

Ambient Condition: 25 ℃, 45 %RH	
Test Date: 2026-3-3	Test Engineer: Yang

Carrier frequencies

Test Result

Test Condition	TestMode	Antenna	Freq(MHz)	Result[ppm]	Limit[ppm]	Verdict
NTNV	11A	Ant6	5180	-3.86100	±20	PASS
			5260	-3.80228	±20	PASS
			5500	-3.63636	±20	PASS
	11N20SISO	Ant6	5180	0.00000	±20	PASS
			5260	0.00000	±20	PASS
			5500	0.00000	±20	PASS
	11N40SISO	Ant6	5190	0.00000	±20	PASS
			5270	0.00000	±20	PASS
			5510	-7.25953	±20	PASS
	11AC80SISO	Ant6	5210	0.00000	±20	PASS
			5290	0.00000	±20	PASS
			5530	0.00000	±20	PASS
LTNV	11A	Ant6	5180	0.00000	±20	PASS
			5260	-3.80228	±20	PASS
			5500	0.00000	±20	PASS
	11N20SISO	Ant6	5180	0.00000	±20	PASS
			5260	-3.80228	±20	PASS
			5500	-3.63636	±20	PASS
	11N40SISO	Ant6	5190	7.70713	±20	PASS
			5270	-7.59013	±20	PASS
			5510	-7.25953	±20	PASS
	11AC80SISO	Ant6	5210	0.00000	±20	PASS
			5290	0.00000	±20	PASS
			5530	0.00000	±20	PASS
HTNV	11A	Ant6	5180	0.00000	±20	PASS
			5260	0.00000	±20	PASS
			5500	0.00000	±20	PASS
	11N20SISO	Ant6	5180	3.86100	±20	PASS
			5260	0.00000	±20	PASS
			5500	0.00000	±20	PASS
	11N40SISO	Ant6	5190	0.00000	±20	PASS
			5270	0.00000	±20	PASS
			5510	-7.25953	±20	PASS
	11AC80SISO	Ant6	5210	0.00000	±20	PASS
			5290	0.00000	±20	PASS
			5530	0.00000	±20	PASS

Power Spectral Density

Test Result

TestMode	Antenna	Freq(MHz)	Result [dBm/MHz]	DC Factor [dB]	PSD [dBm/MHz]	Gain [dBi]	EIRP PSD [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	Ant6	5180	1.42	0.22	1.64	3.00	4.64	10	PASS
		5240	1.56	0.22	1.78	3.00	4.78	10	PASS
		5260	1.72	0.22	1.94	3.00	4.94	7	PASS
		5320	1.74	0.22	1.96	3.00	4.96	7	PASS
		5500	0.92	0.22	1.14	4.00	5.14	7	PASS
		5700	2.49	0.22	2.71	4.00	6.71	7	PASS
11N20SISO	Ant6	5180	1.48	0.26	1.74	3.00	4.74	10	PASS
		5240	1.55	0.26	1.81	3.00	4.81	10	PASS
		5260	1.82	0.26	2.08	3.00	5.08	7	PASS
		5320	1.85	0.26	2.11	3.00	5.11	7	PASS
		5500	1.02	0.26	1.28	4.00	5.28	7	PASS
		5700	2.57	0.26	2.83	4.00	6.83	7	PASS
11N40SISO	Ant6	5190	-5.80	0.50	-5.30	3.00	-2.30	10	PASS
		5230	-5.27	0.50	-4.77	3.00	-1.77	10	PASS
		5270	-4.89	0.50	-4.39	3.00	-1.39	7	PASS
		5310	-4.54	0.50	-4.04	3.00	-1.04	7	PASS
		5510	-5.51	0.50	-5.01	4.00	-1.01	7	PASS
		5670	-4.24	0.50	-3.74	4.00	0.26	7	PASS
11AC80SISO	Ant6	5210	-9.48	1.09	-8.39	3.00	-5.39	10	PASS
		5290	-8.99	1.09	-7.90	3.00	-4.90	7	PASS
		5530	-10.18	1.09	-9.09	4.00	-5.09	7	PASS

Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB[MHz]	Limit[MHz]	Verdict
11A	Ant6	5180	16.424	20	PASS
		5260	16.424	16 to 20	PASS
		5500	16.424	16 to 20	PASS
11N20SISO	Ant6	5180	17.582	20	PASS
		5260	17.582	16 to 20	PASS
		5500	17.582	16 to 20	PASS
11N40SISO	Ant6	5190	36.124	40	PASS
		5270	36.204	32 to 40	PASS
		5510	36.204	32 to 40	PASS
11AC80SISO	Ant6	5210	75.604	64 to 80	PASS
		5290	75.604	64 to 80	PASS
		5530	75.604	64 to 80	PASS

Test Graphs

11A_Ant6_5180

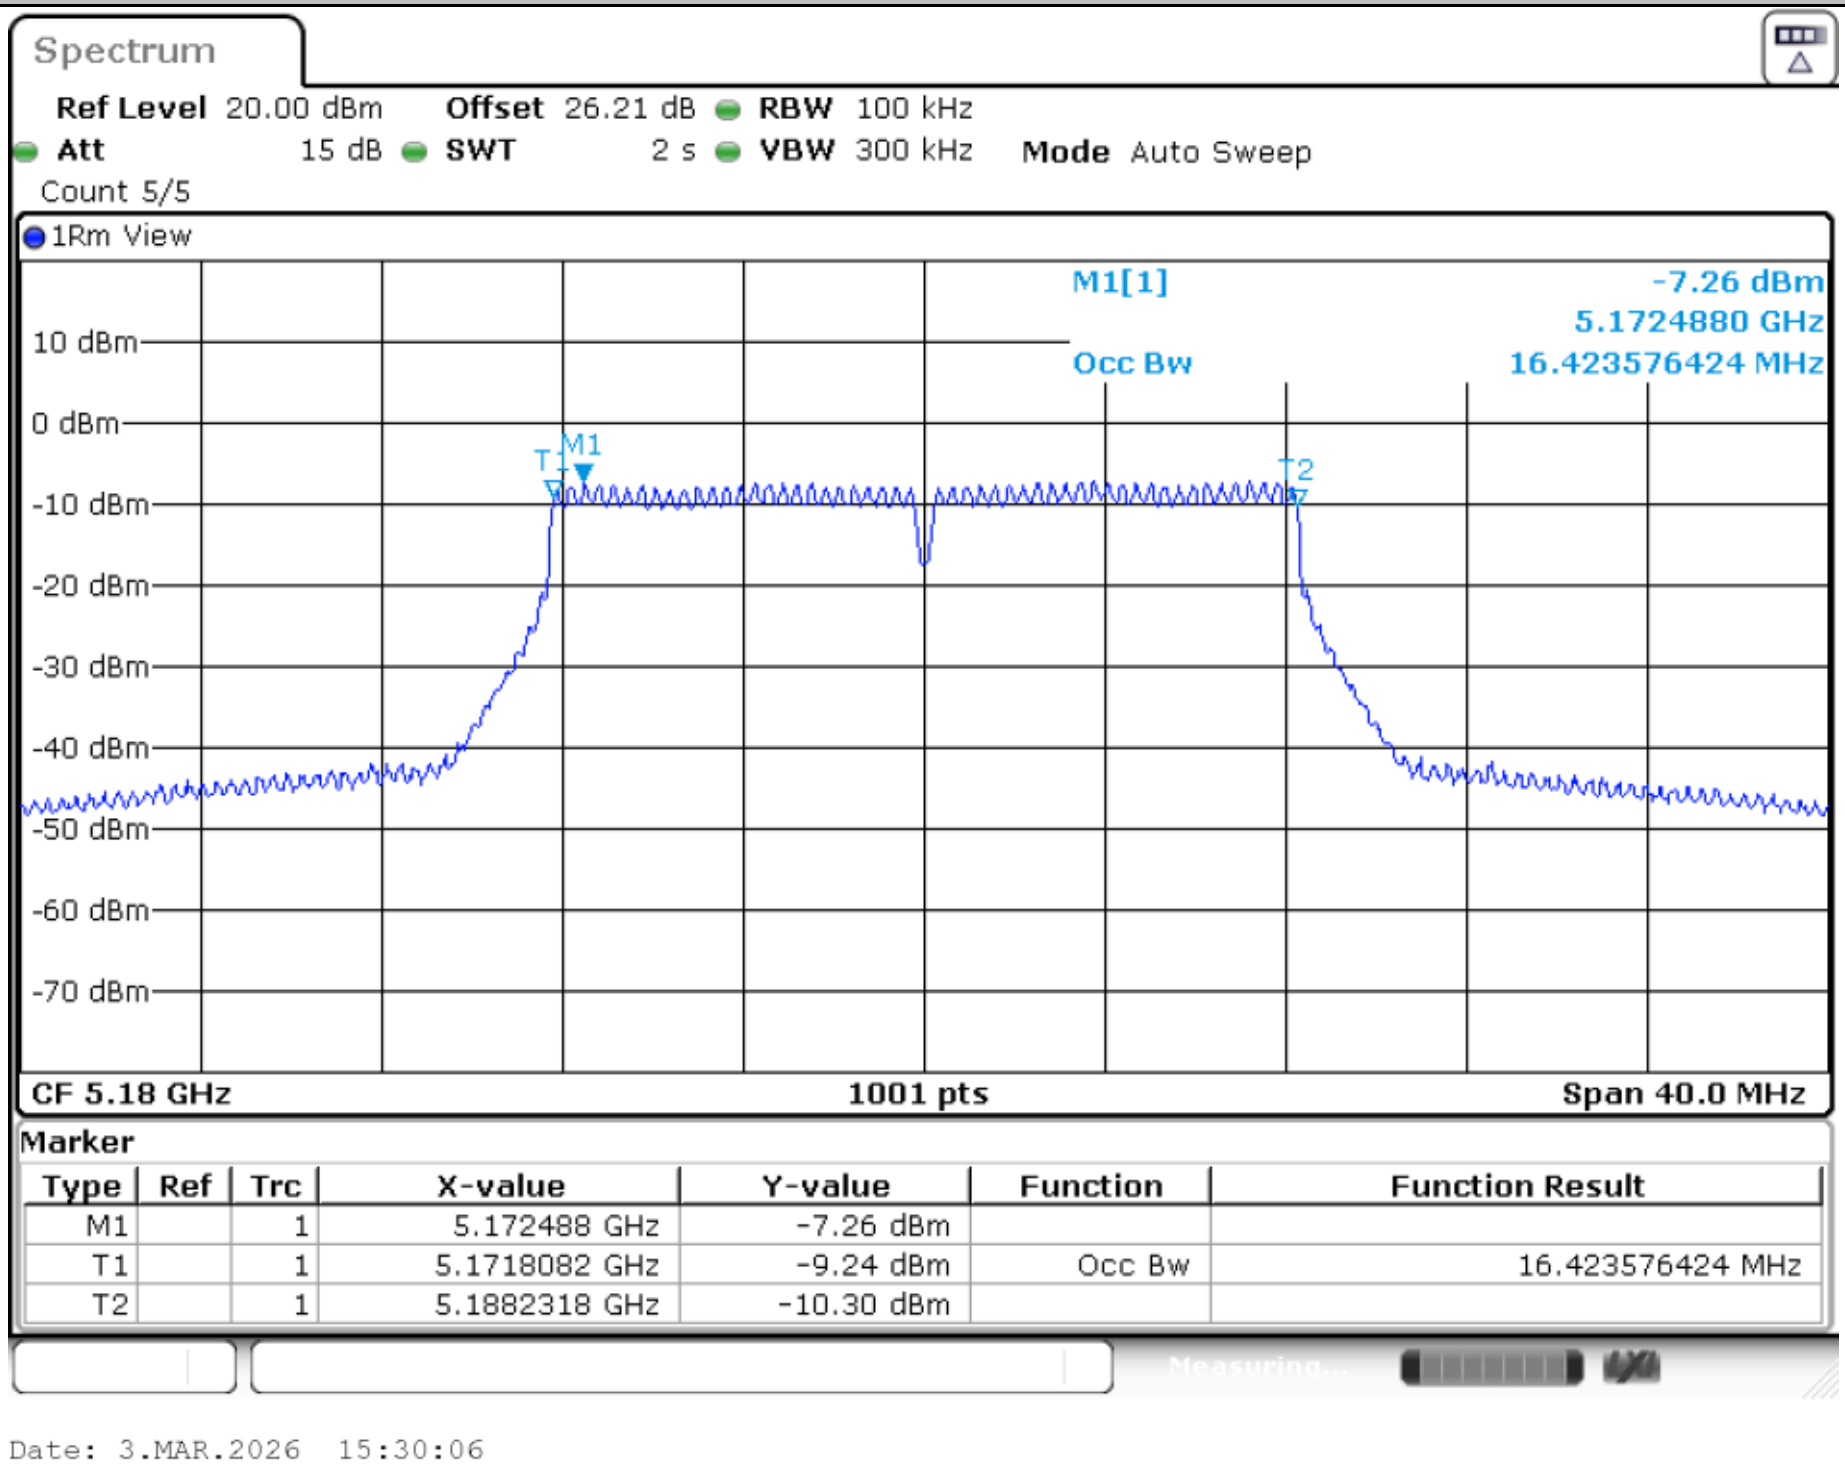

11A_Ant6_5260

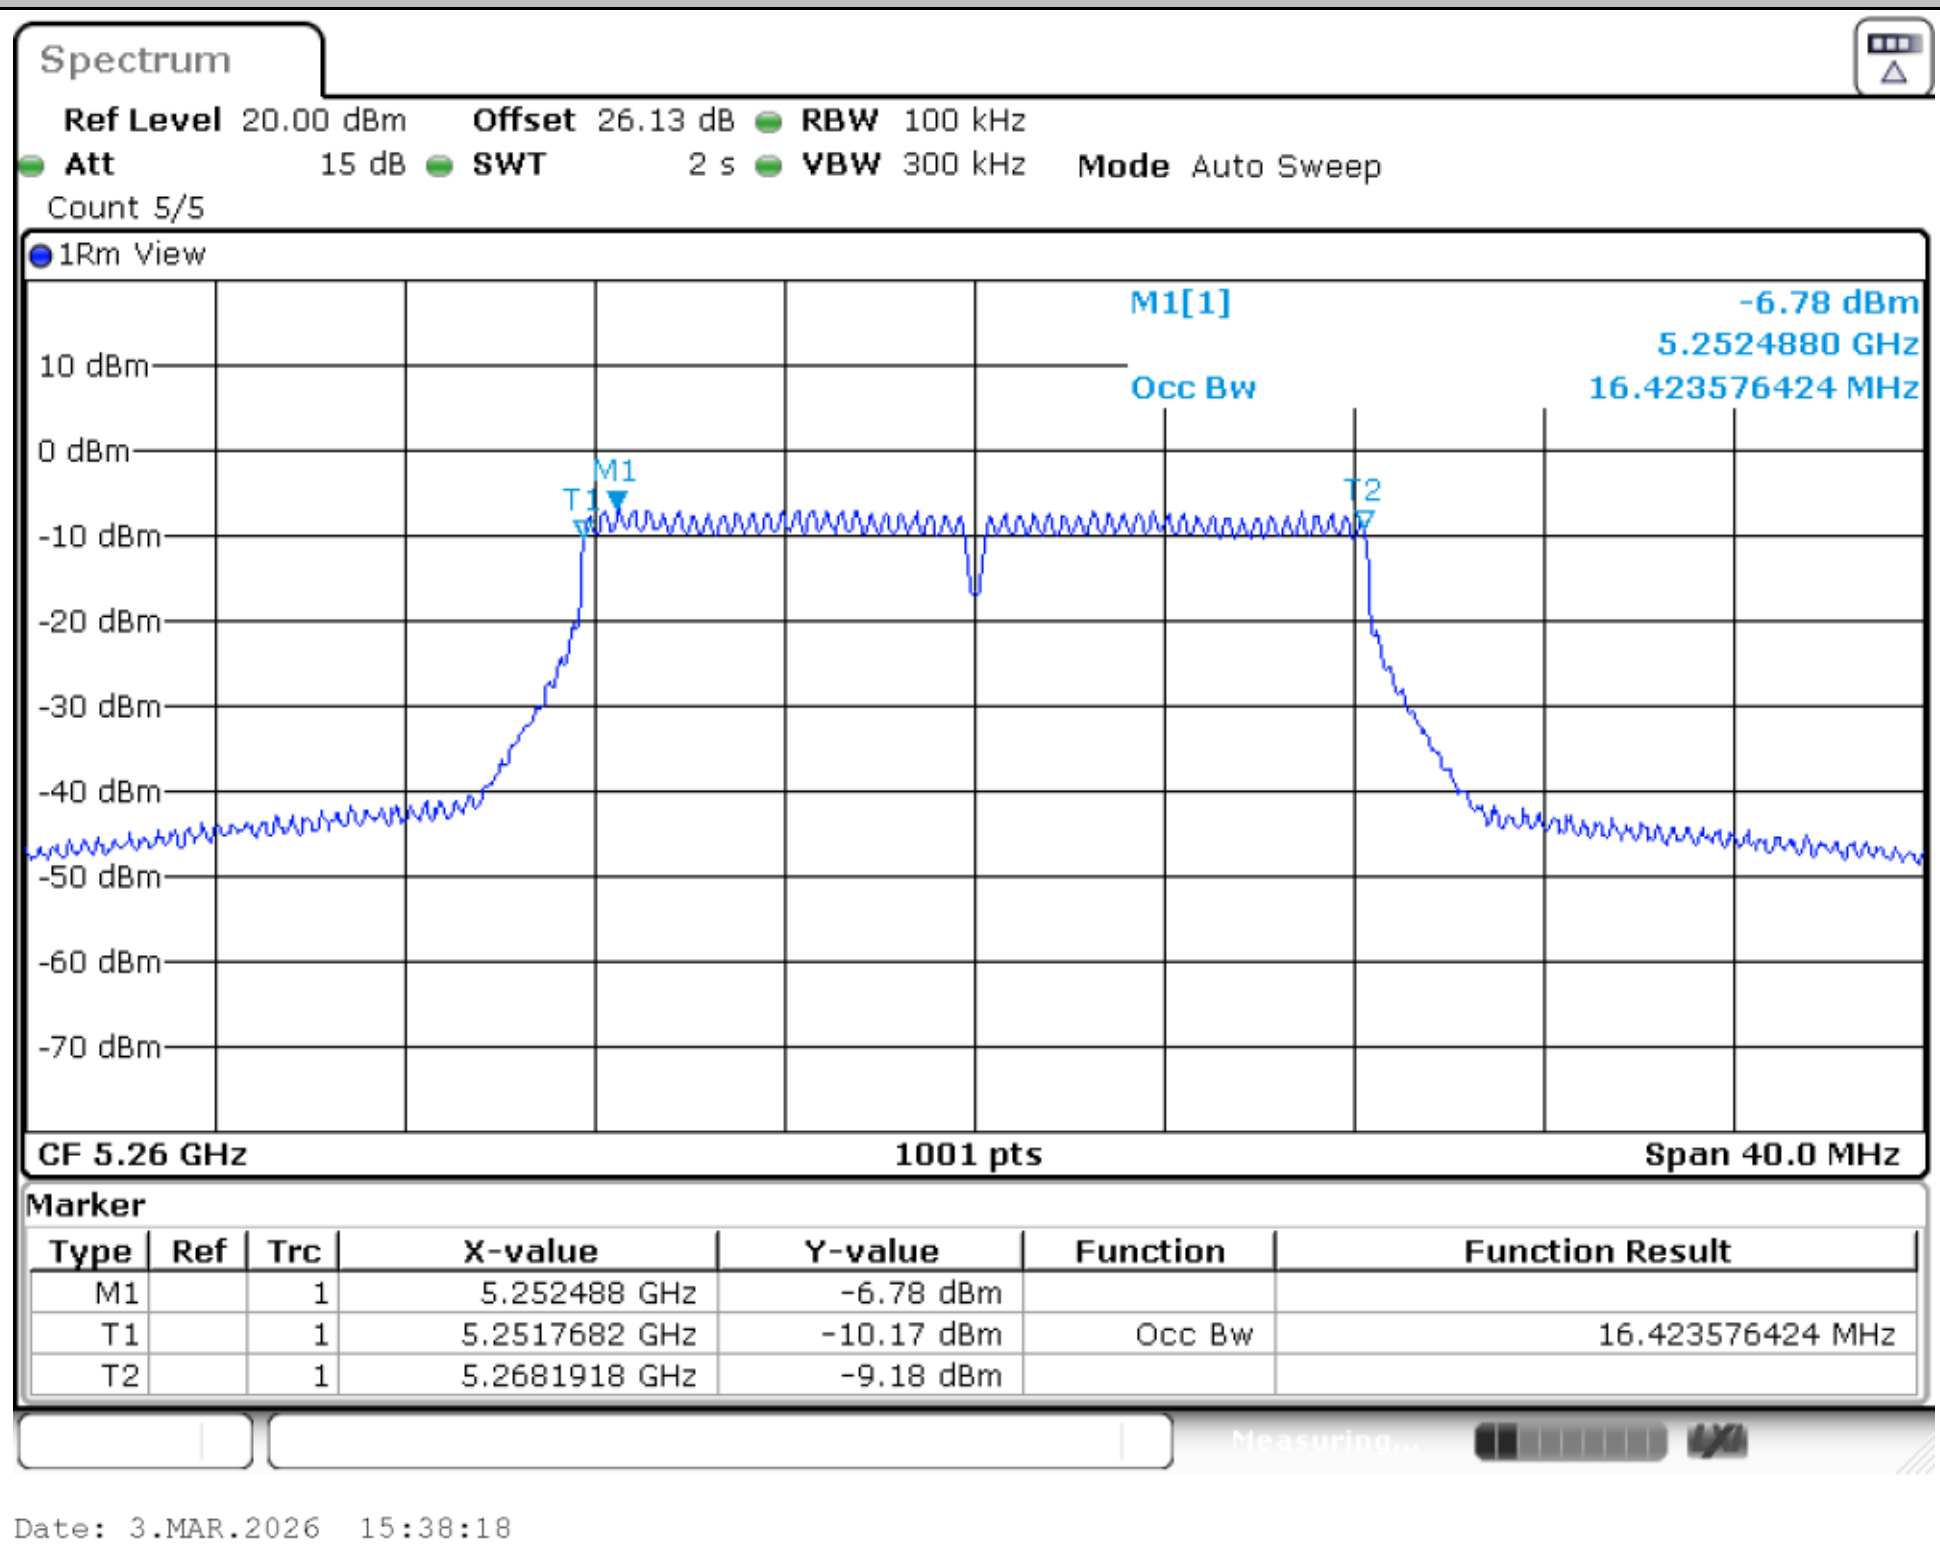

11A_Ant6_5500

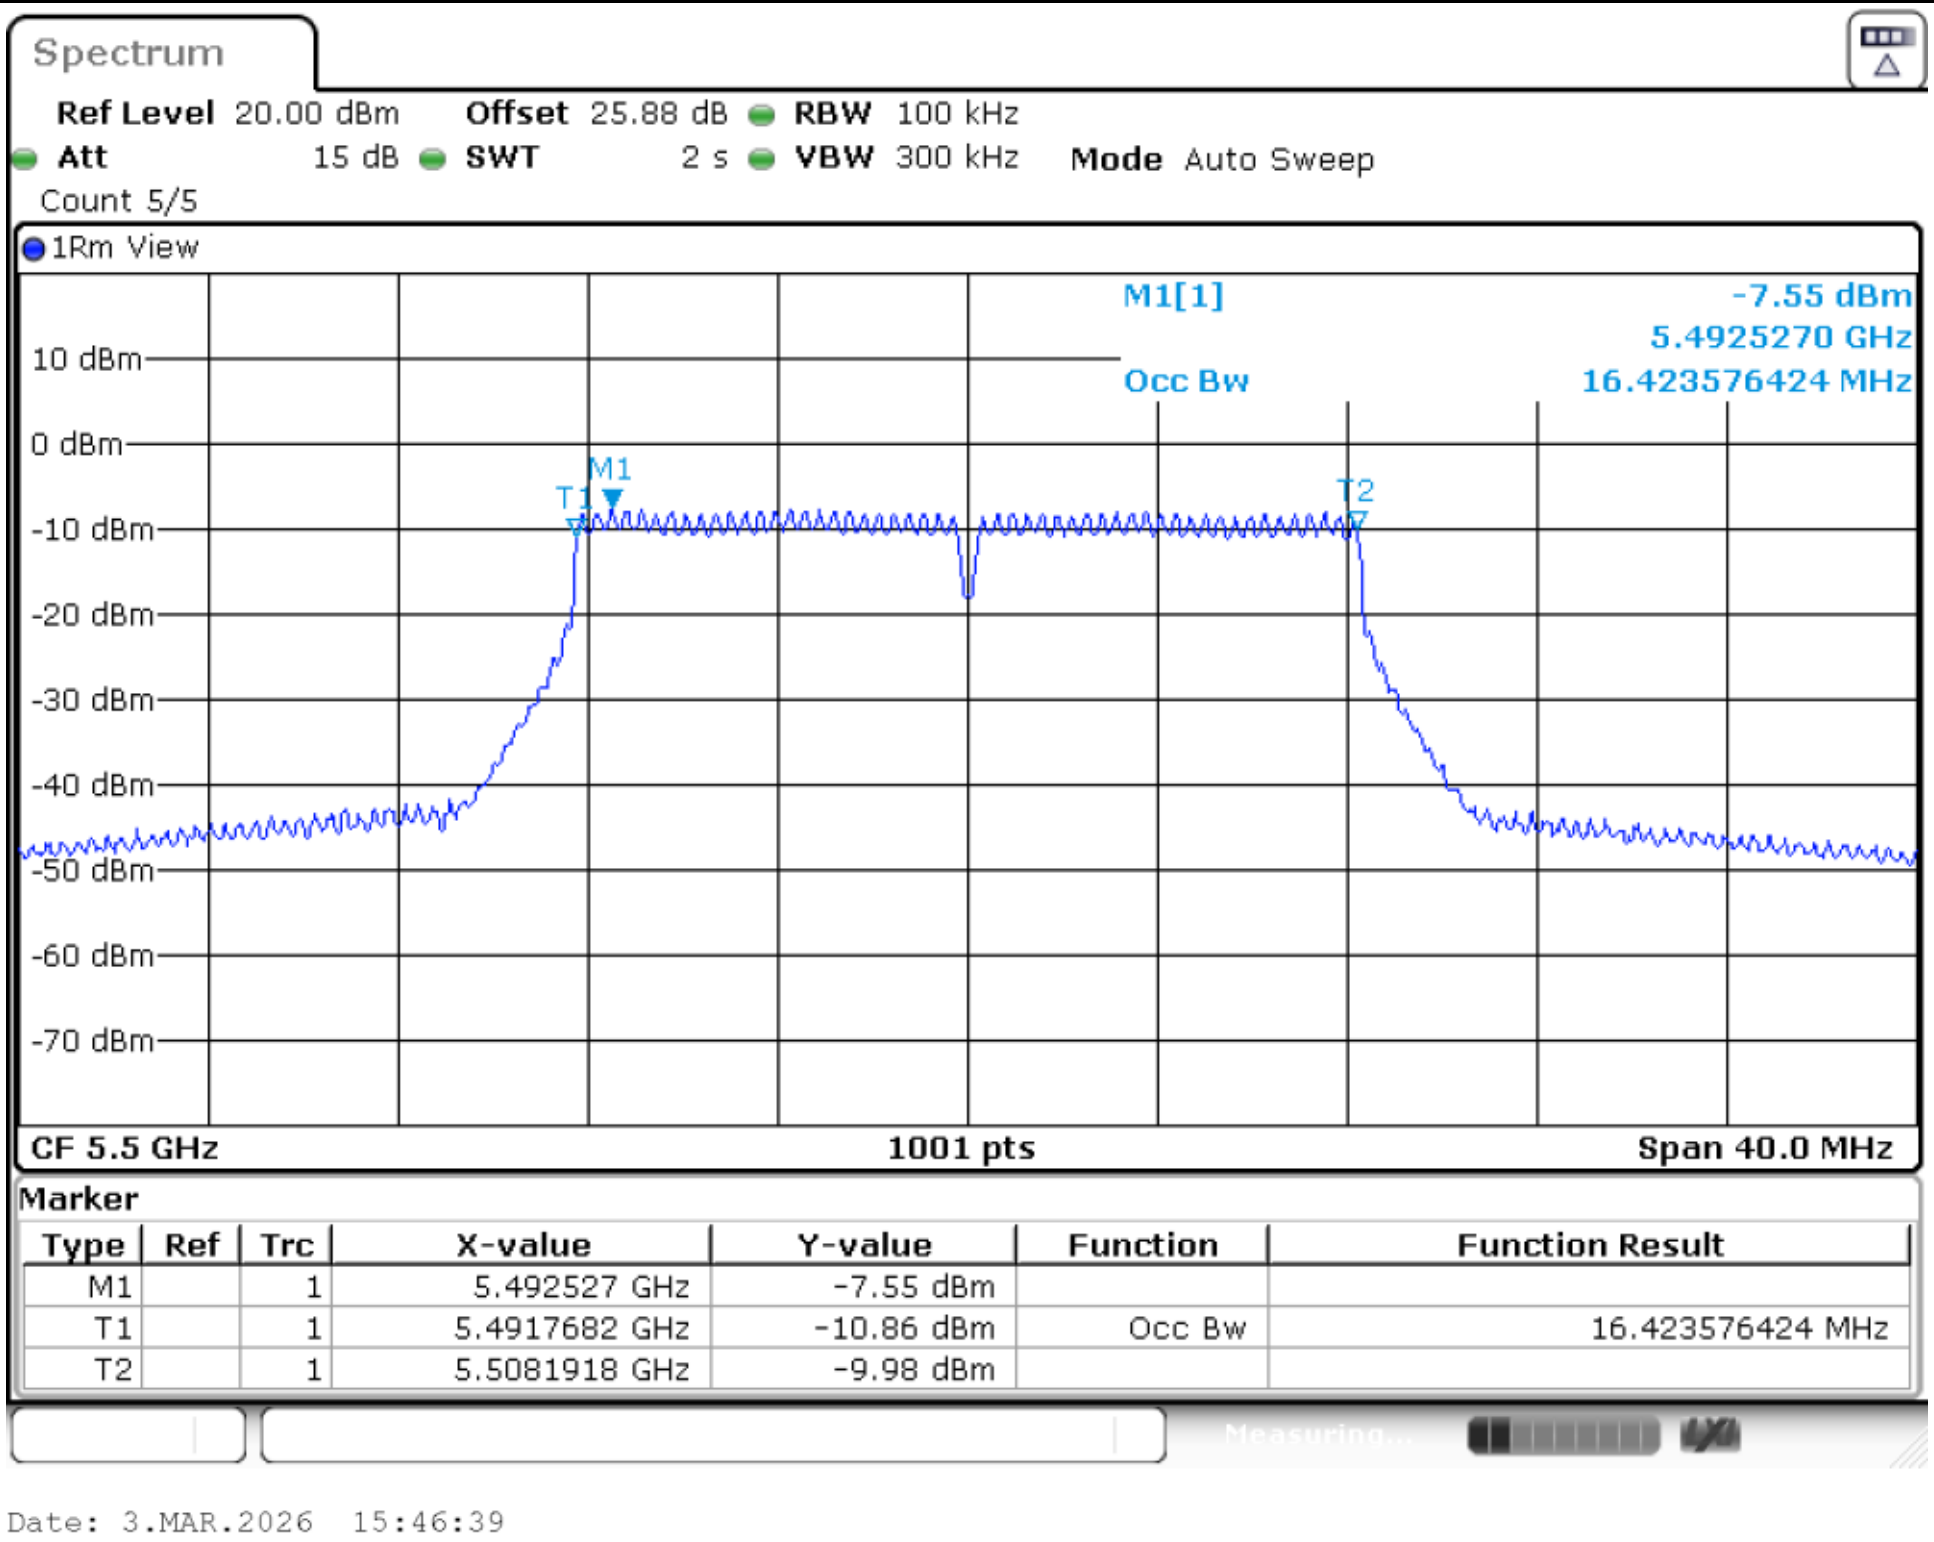

11N20SISO_Ant6_5180

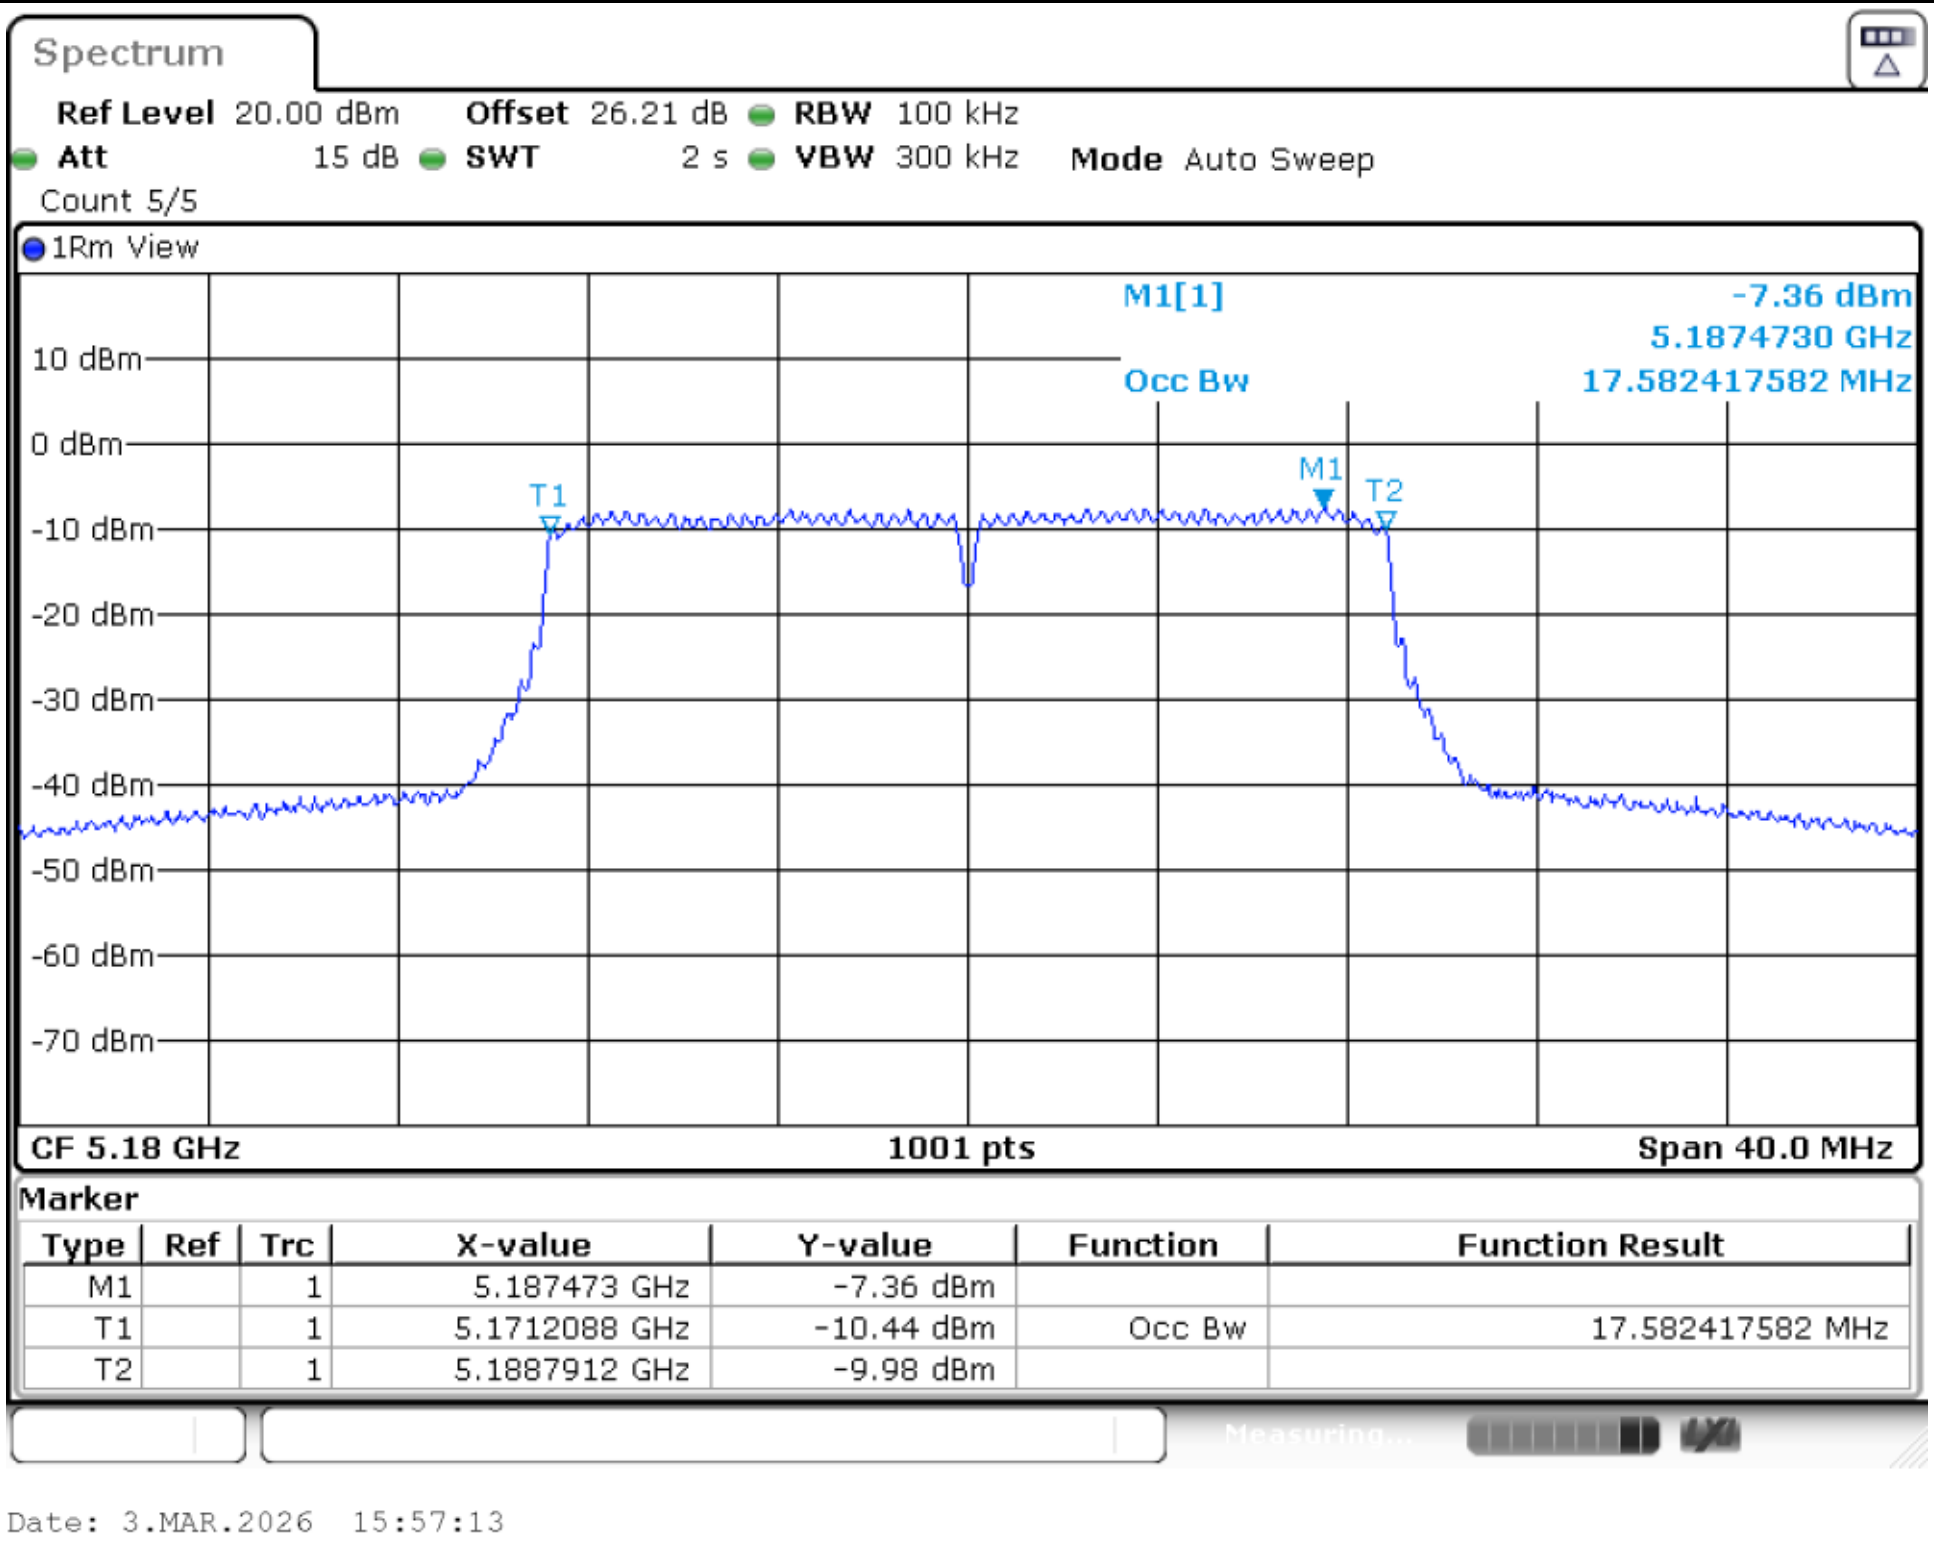

11N20SISO_Ant6_5260

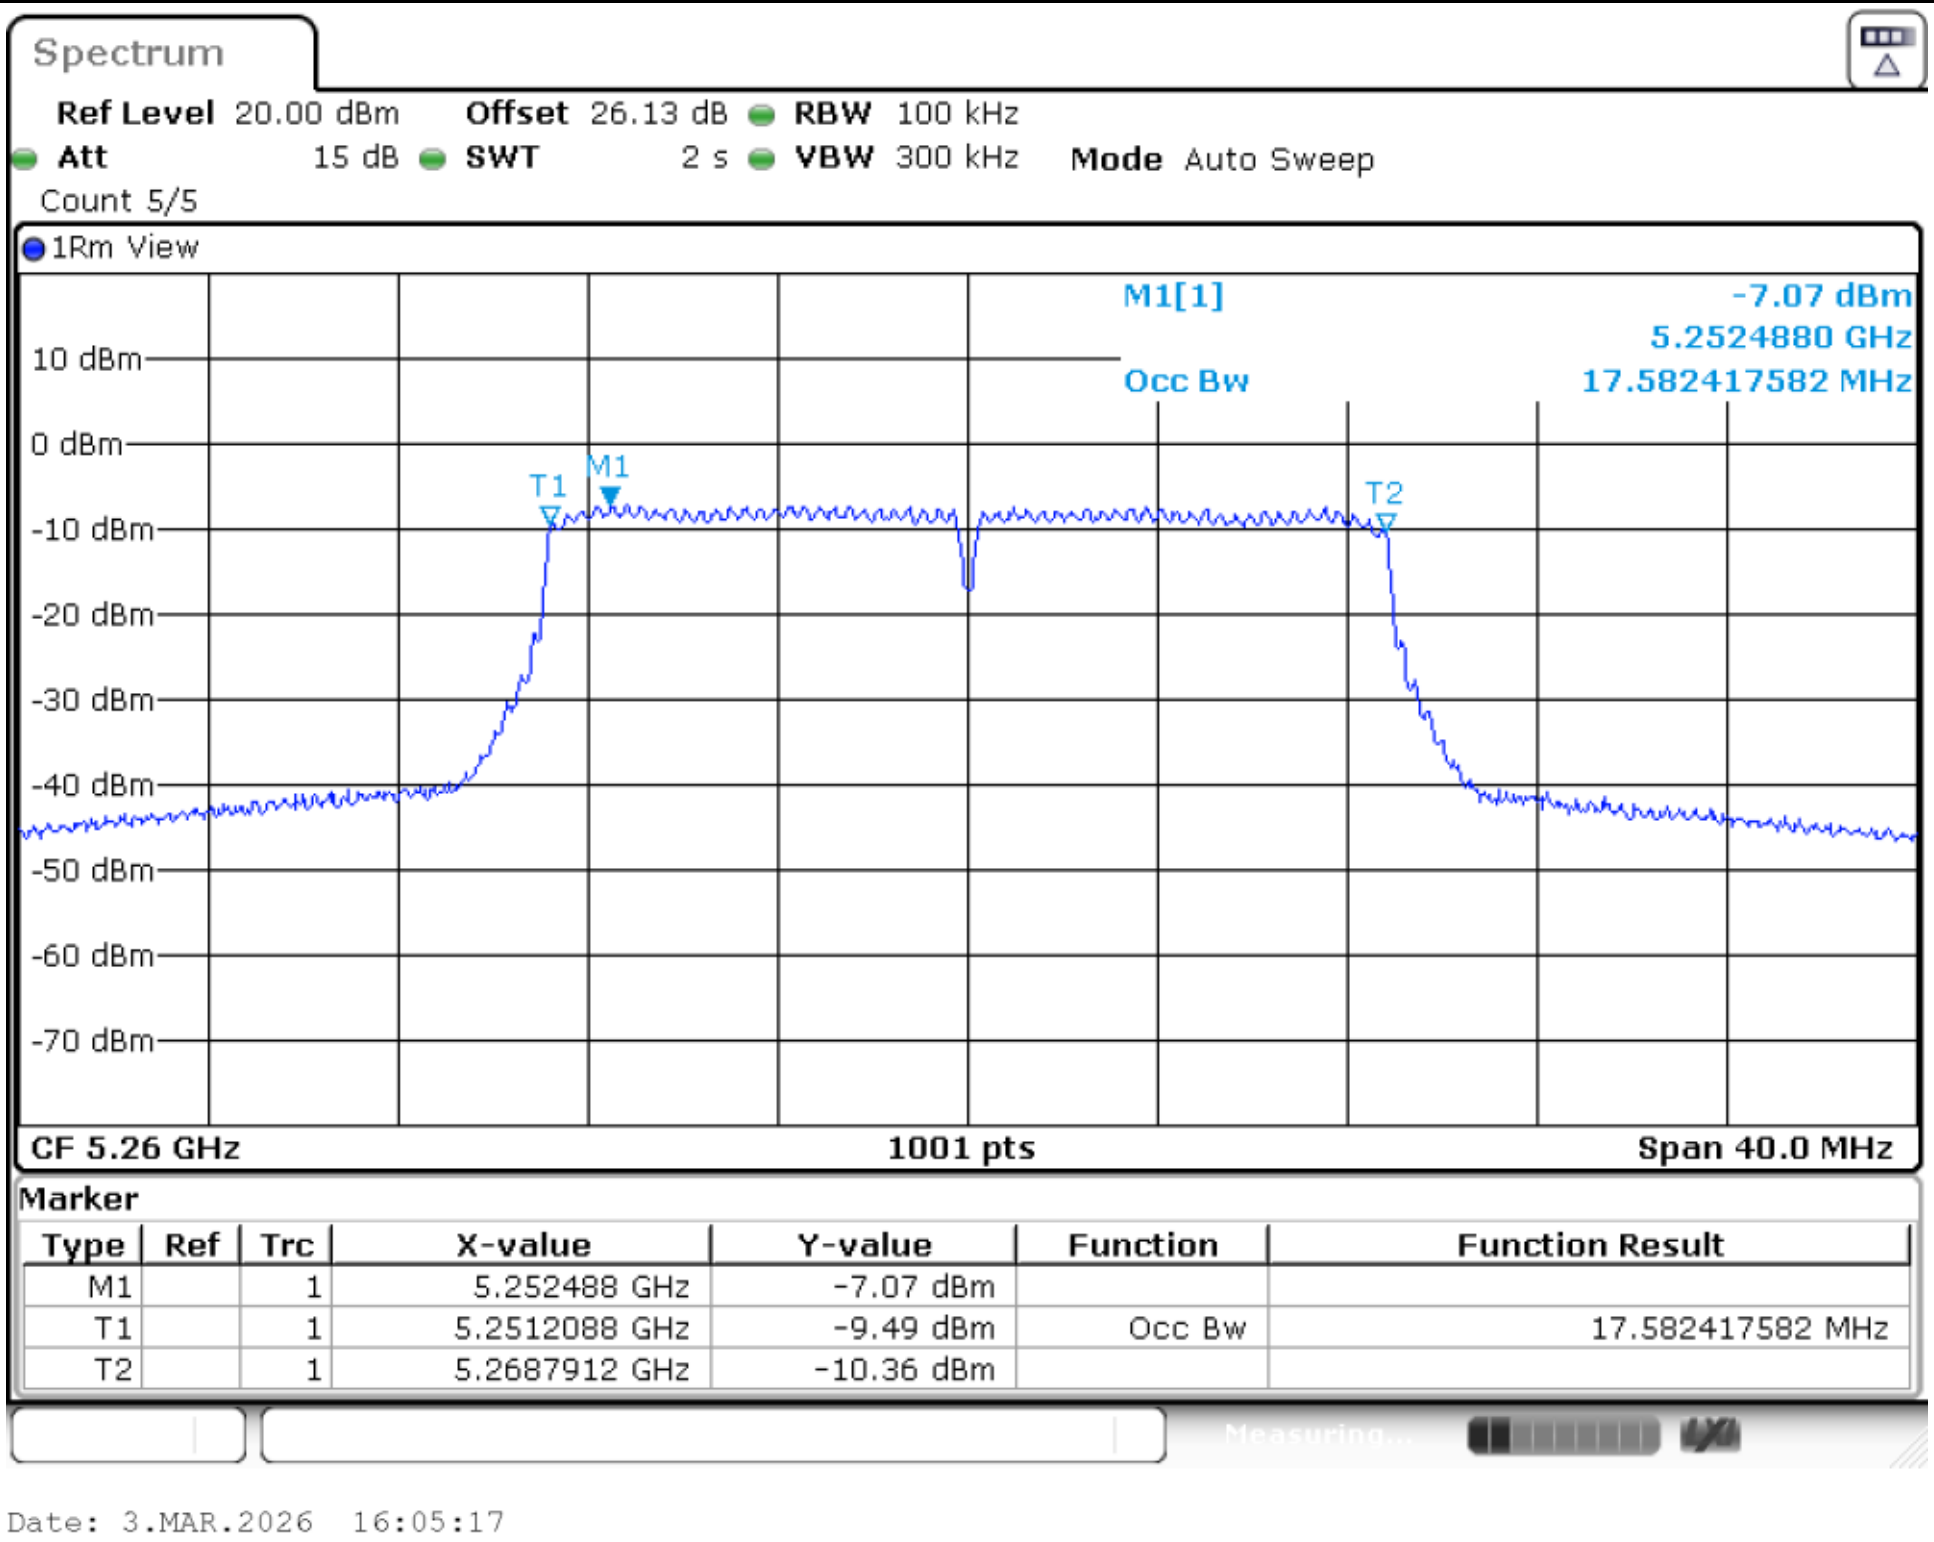

11N20SISO_Ant6_5500

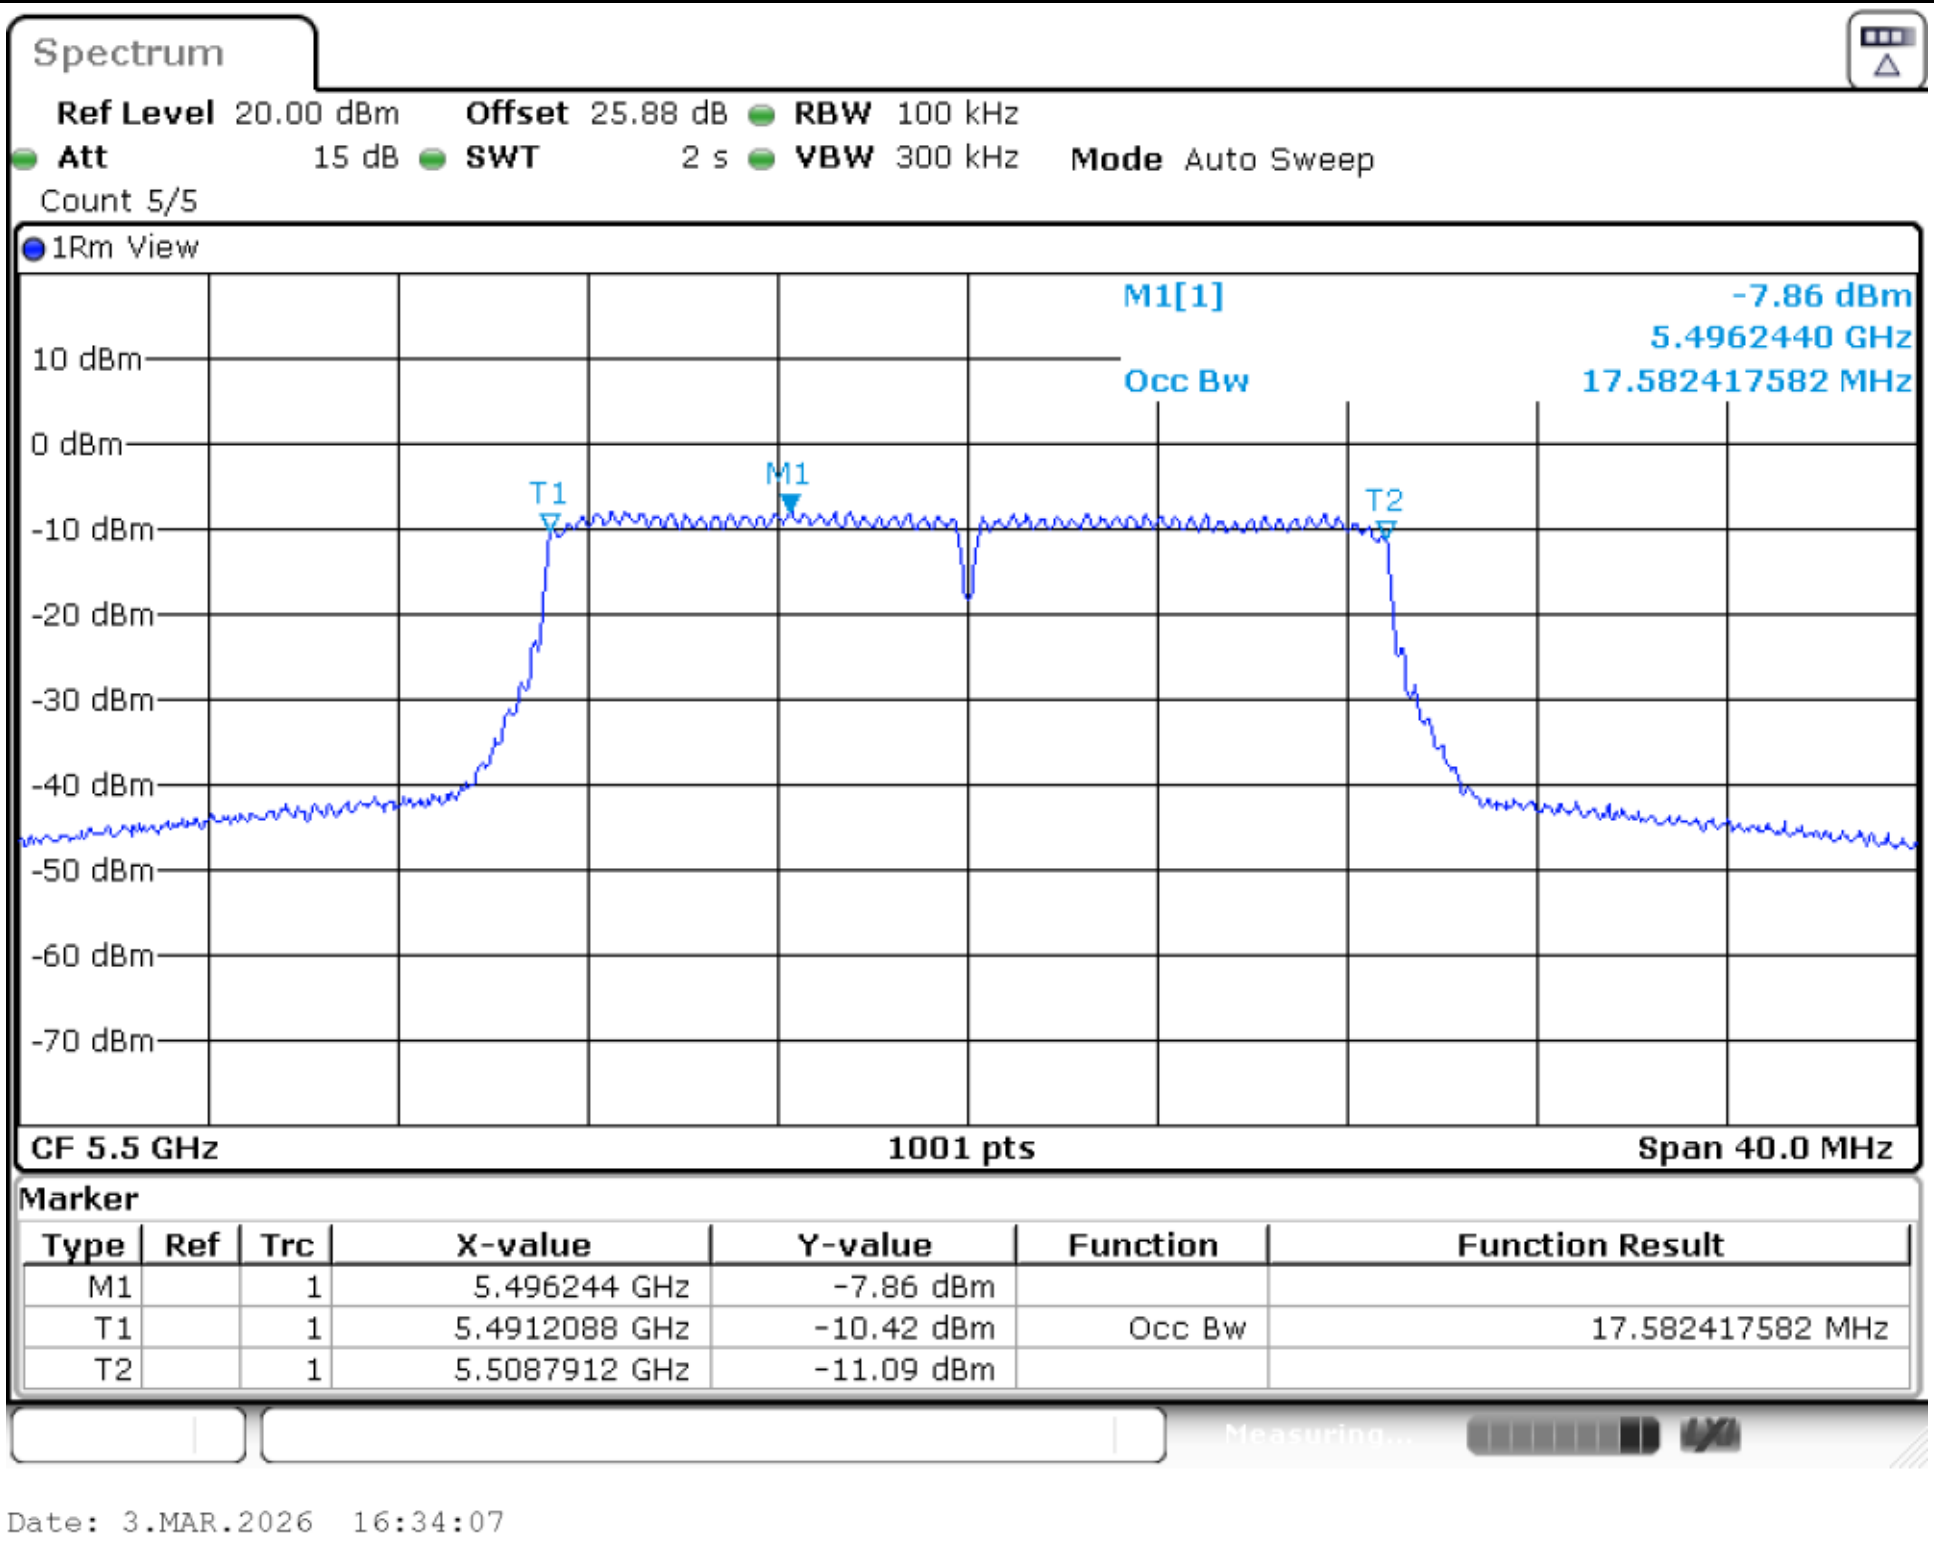

11N40SISO_Ant6_5190

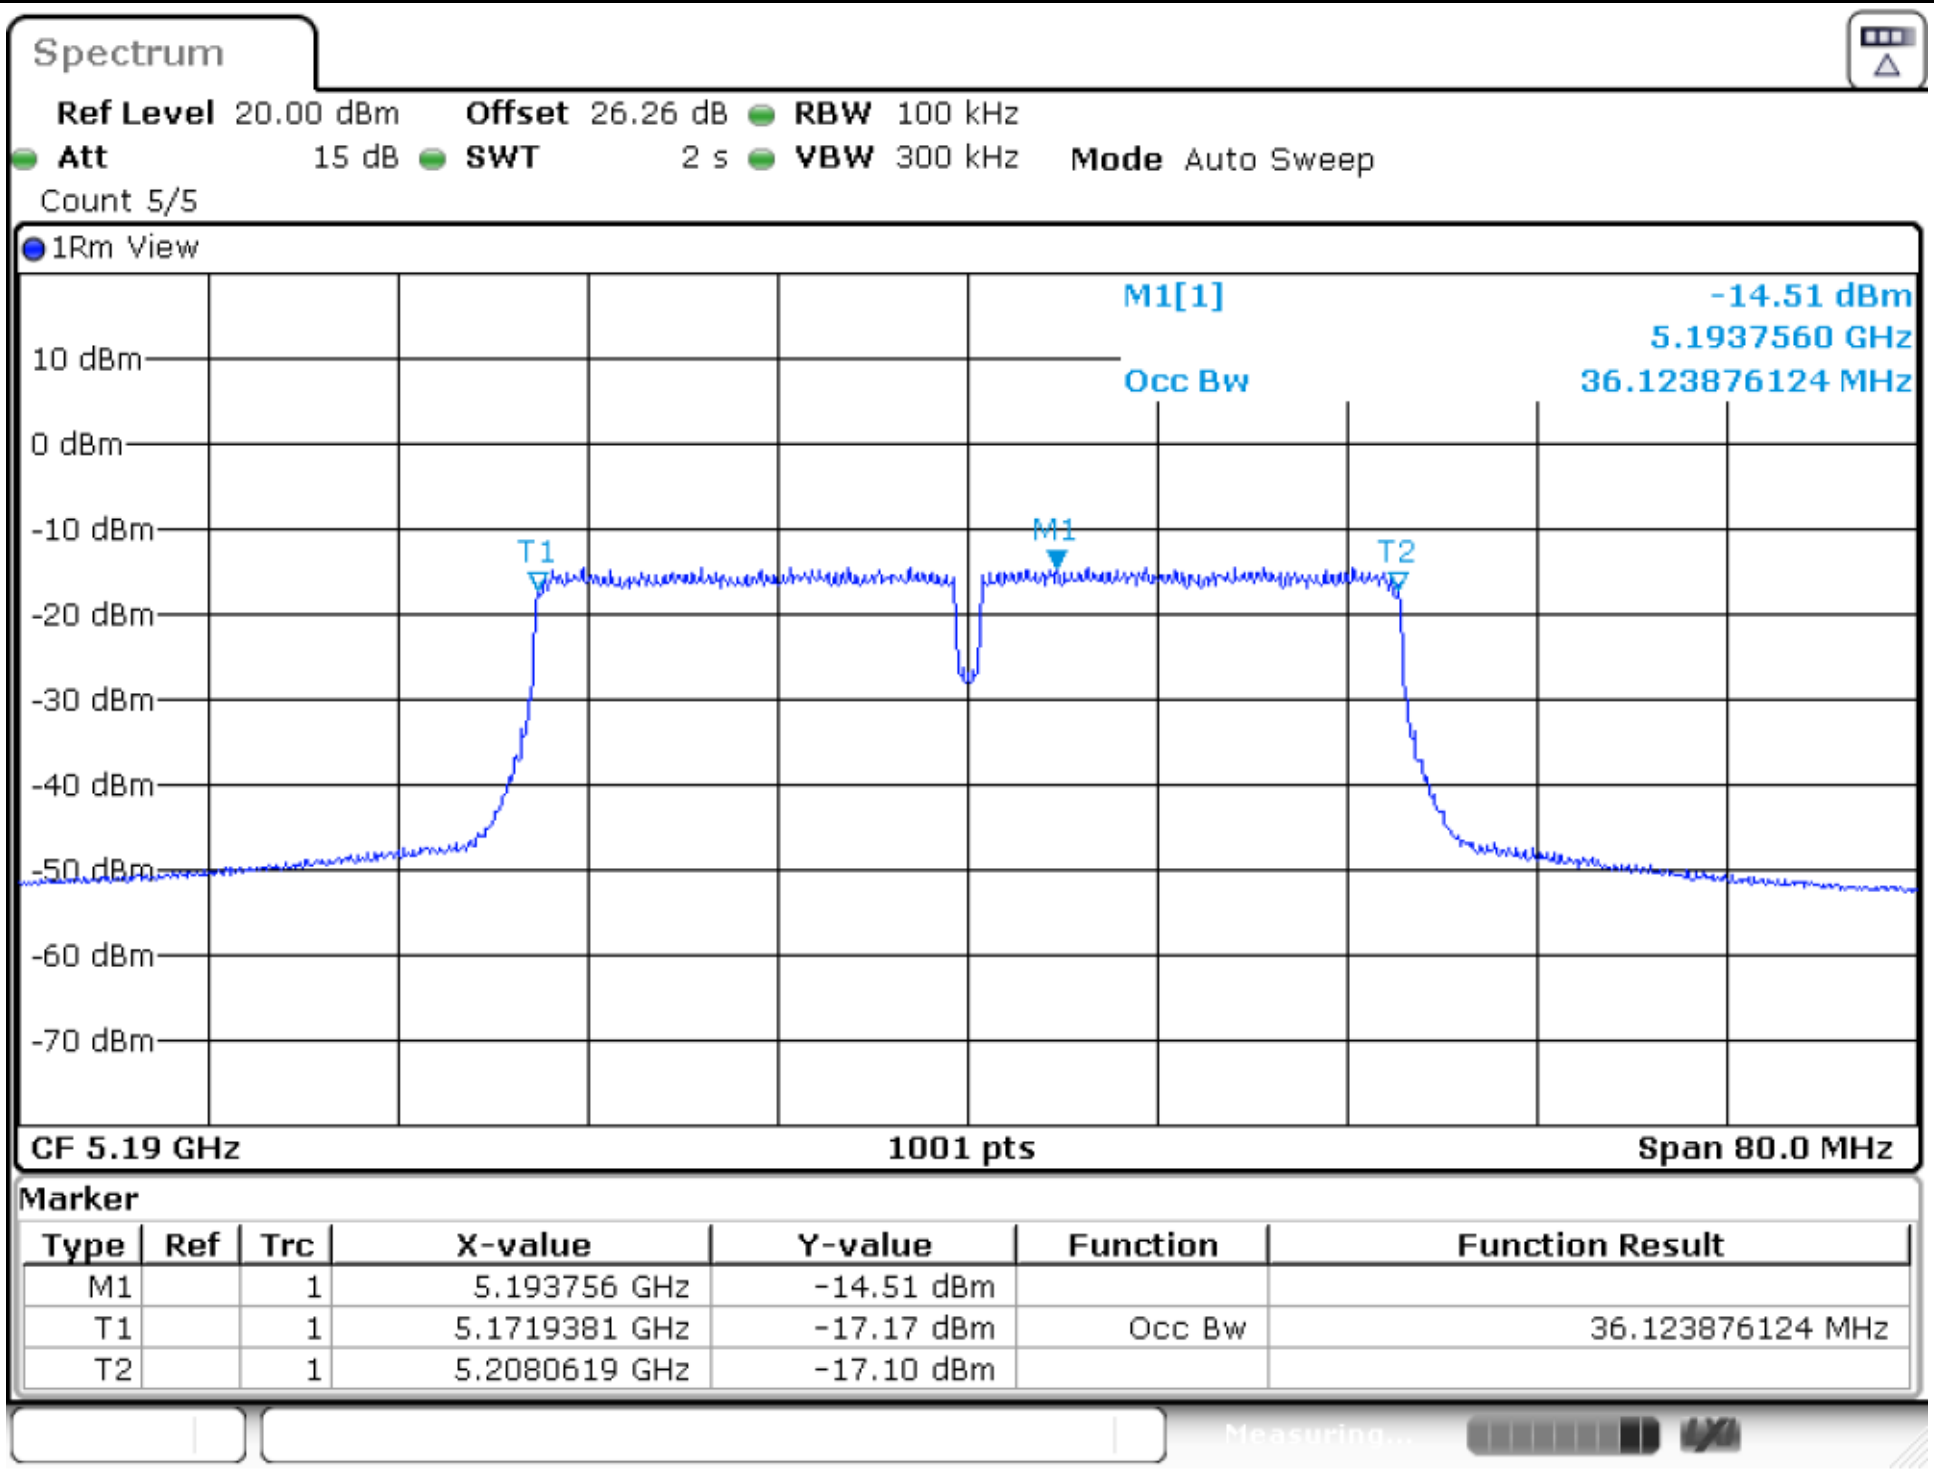

Date: 3.MAR.2026 16:42:58

11N40SISO_Ant6_5270

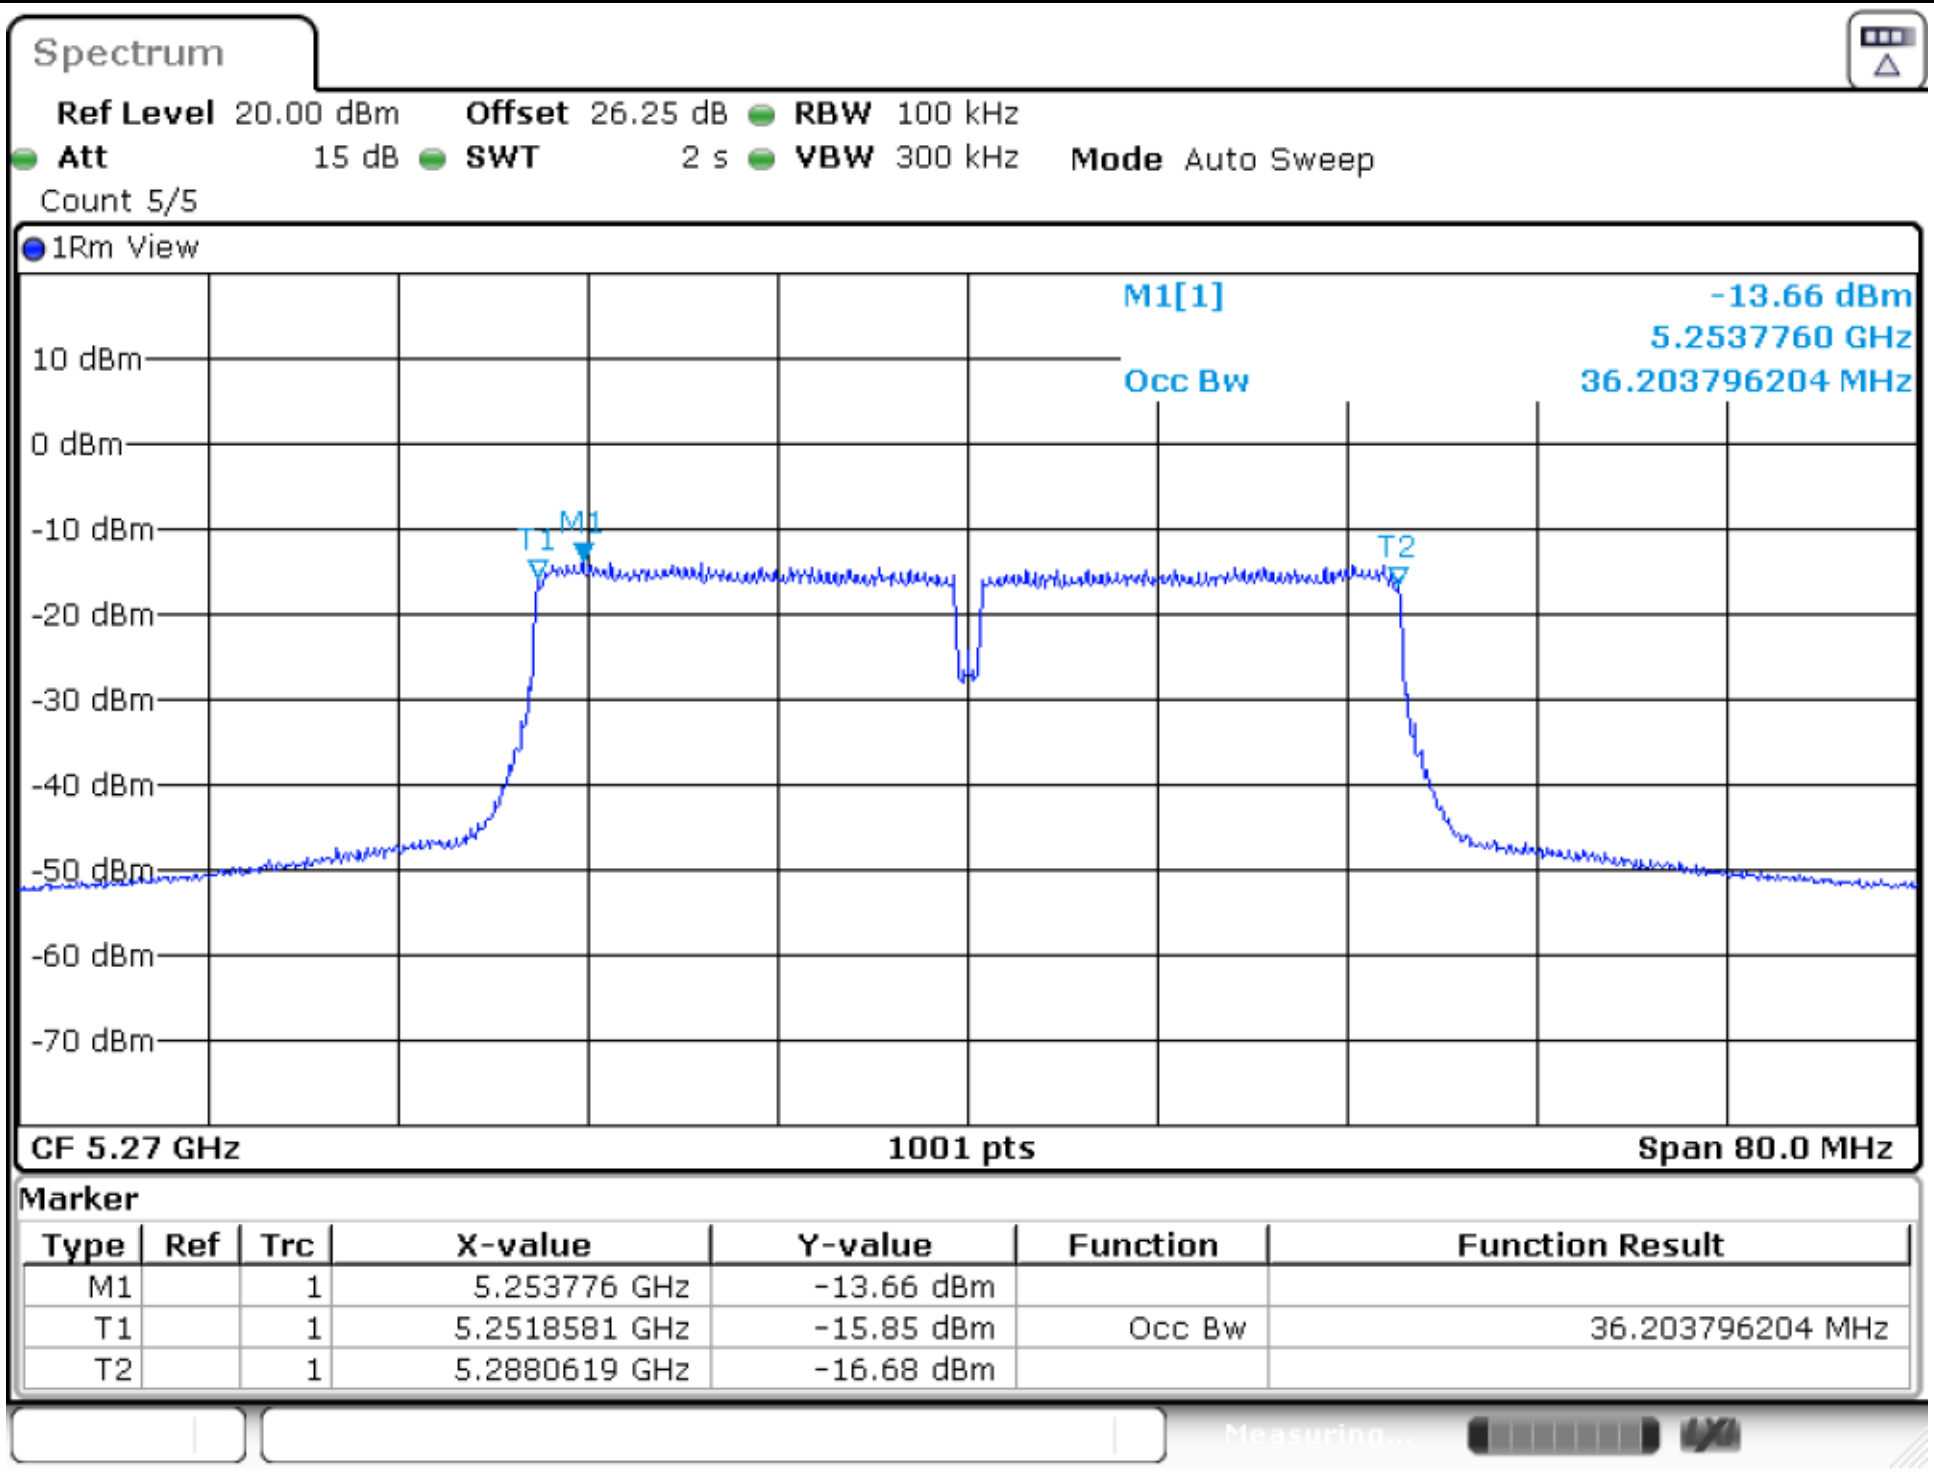

Date: 3.MAR.2026 17:38:56

11N40SISO_Ant6_5510

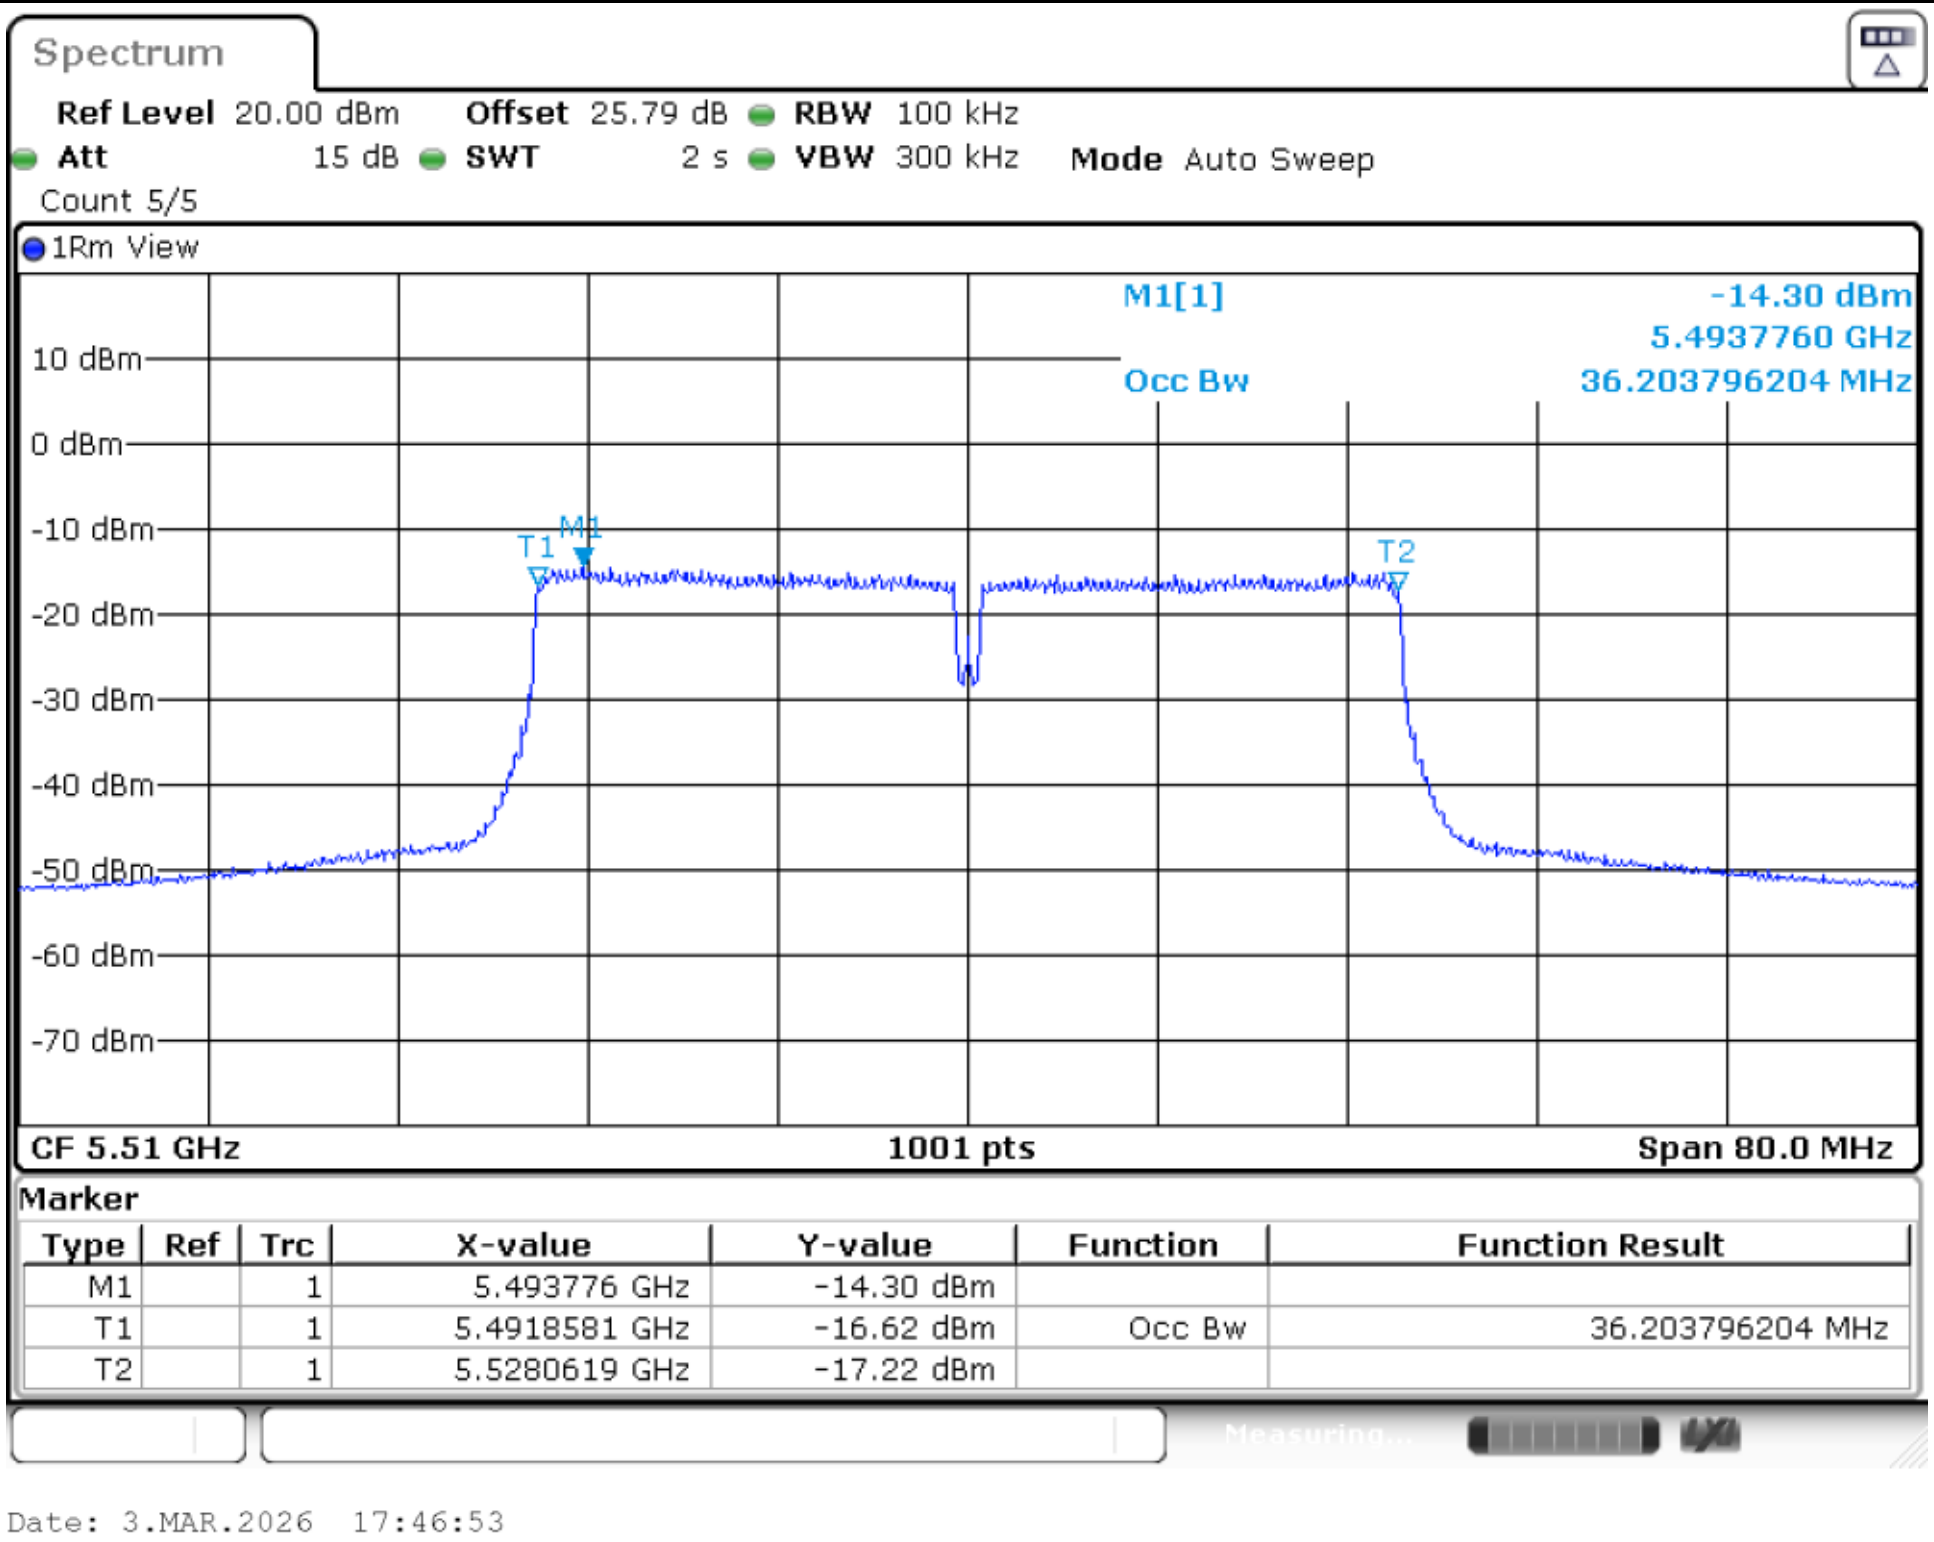

11AC80SISO_Ant6_5210

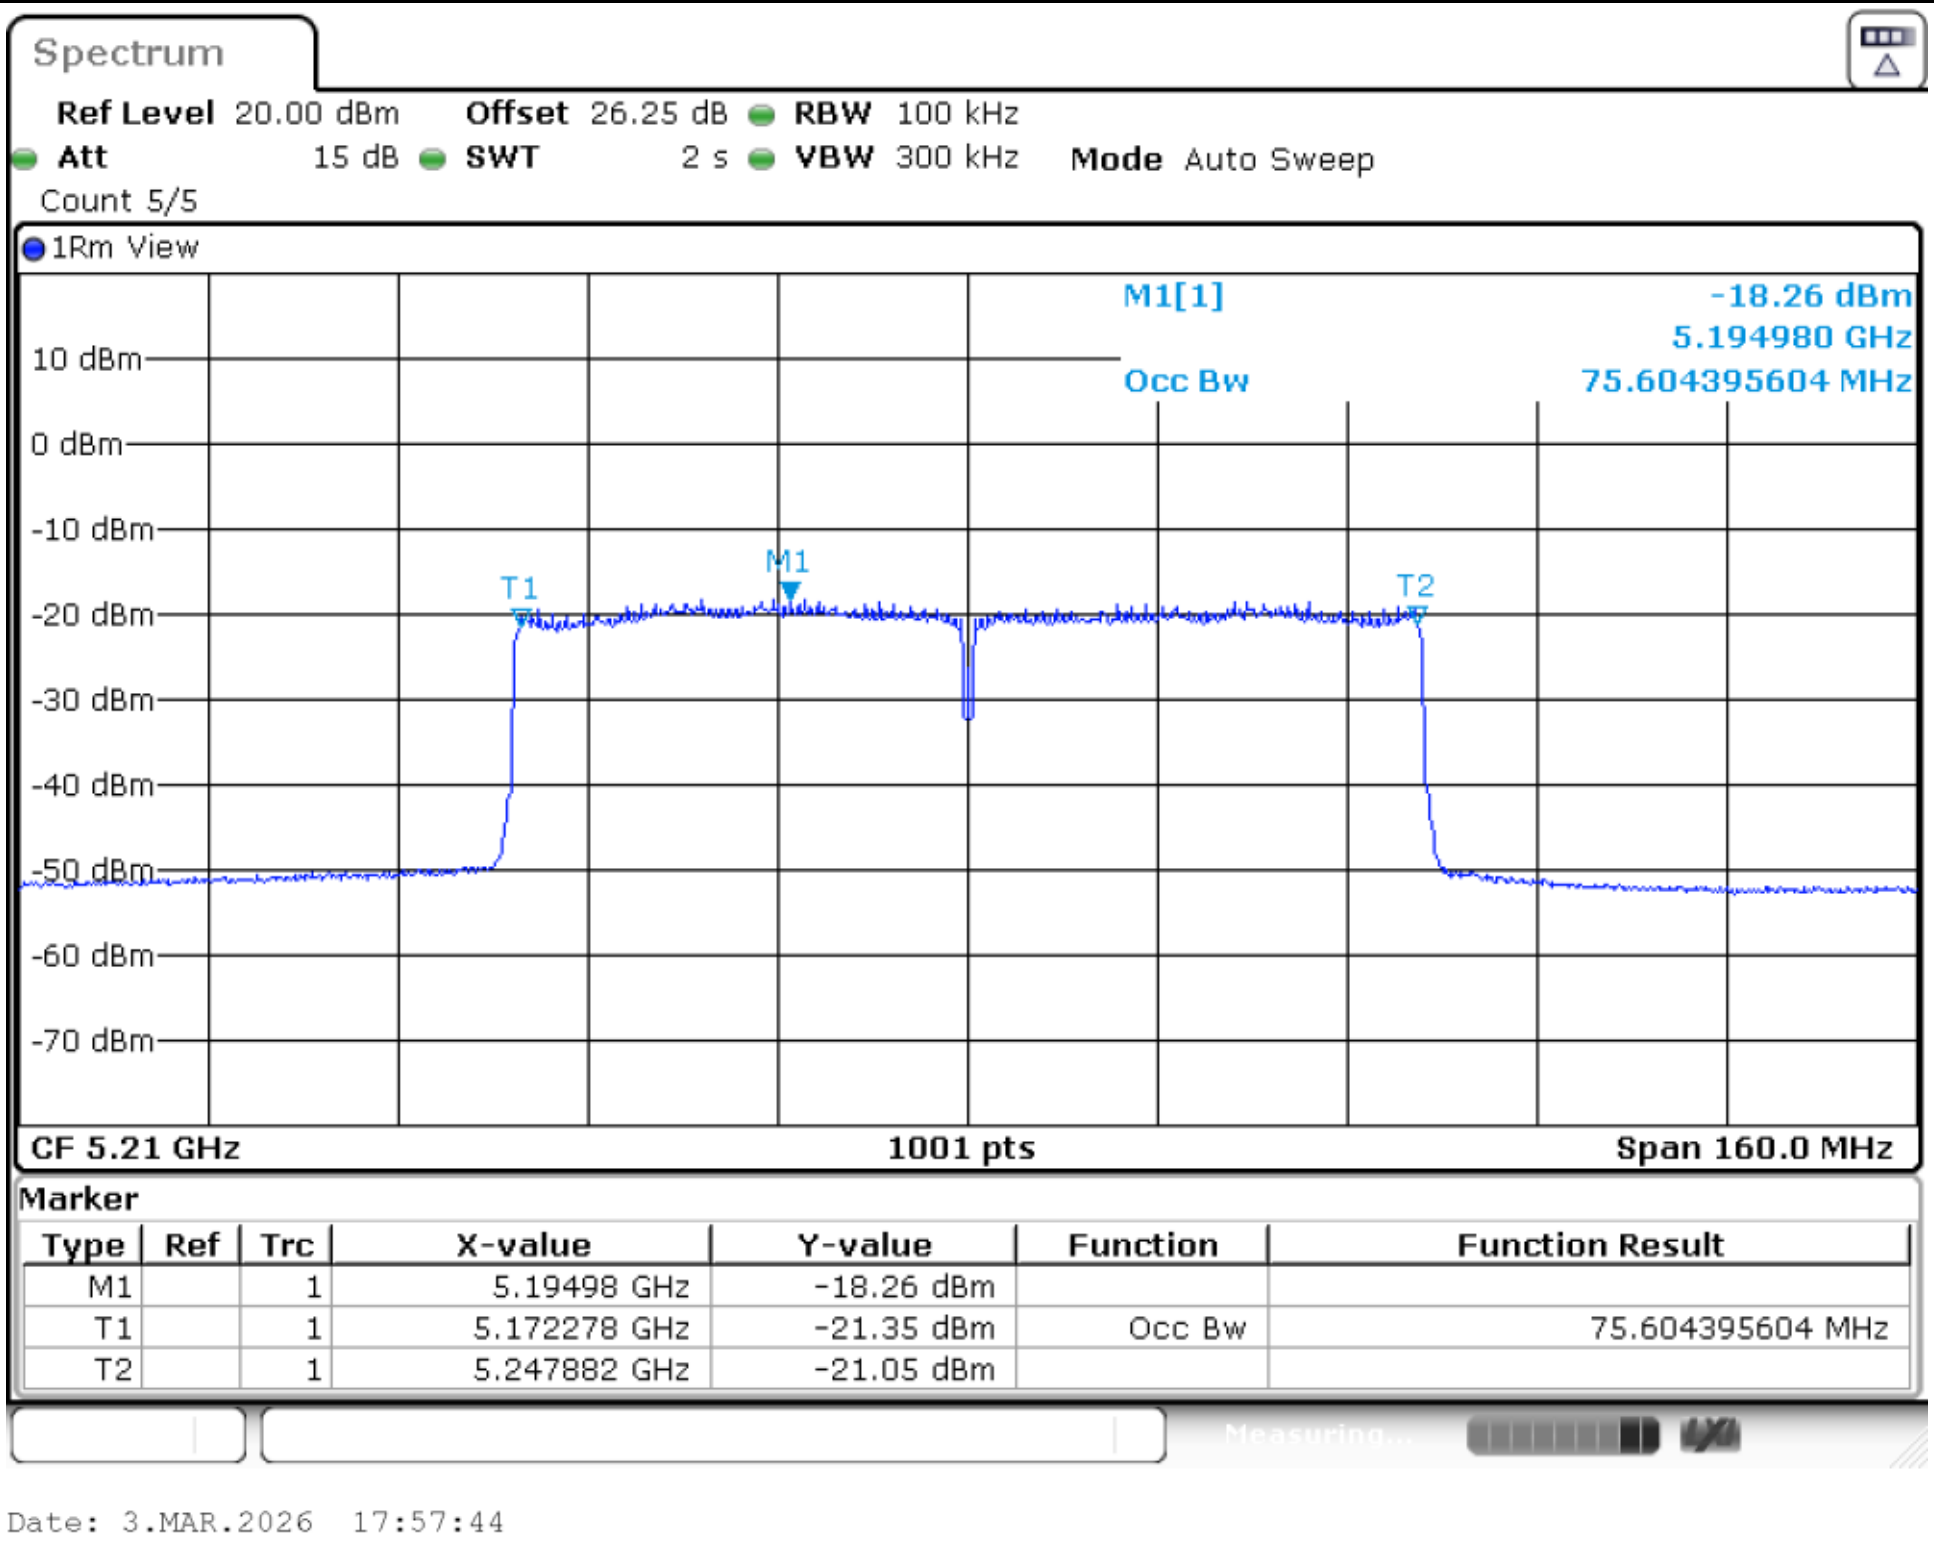

11AC80SISO_Ant6_5290

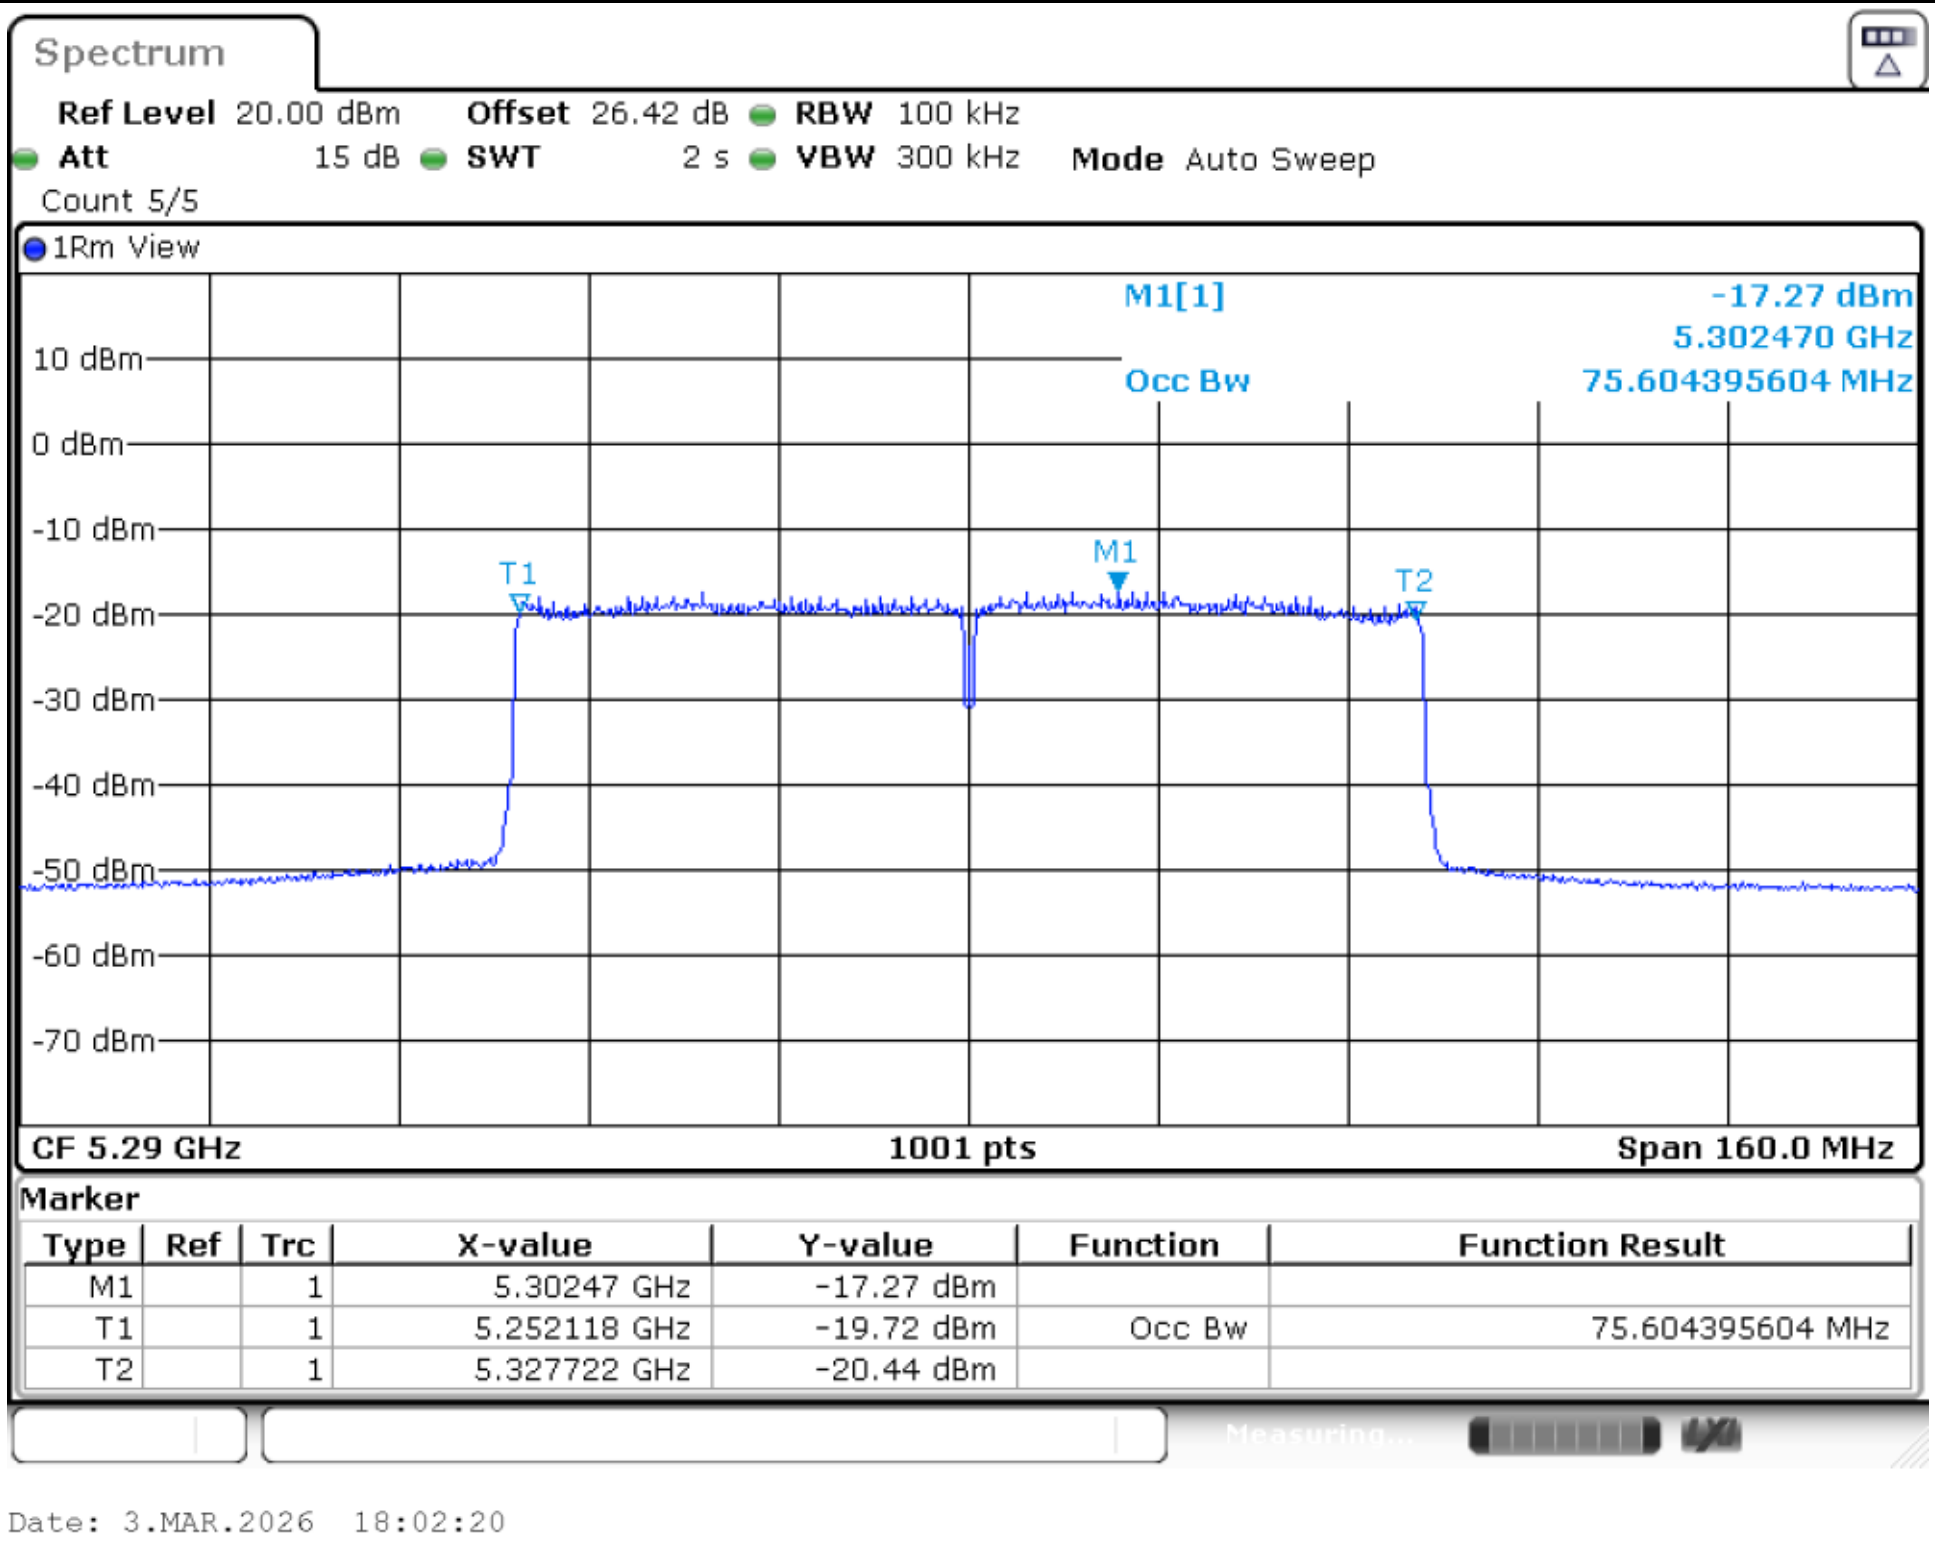

11AC80SISO_Ant6_5530

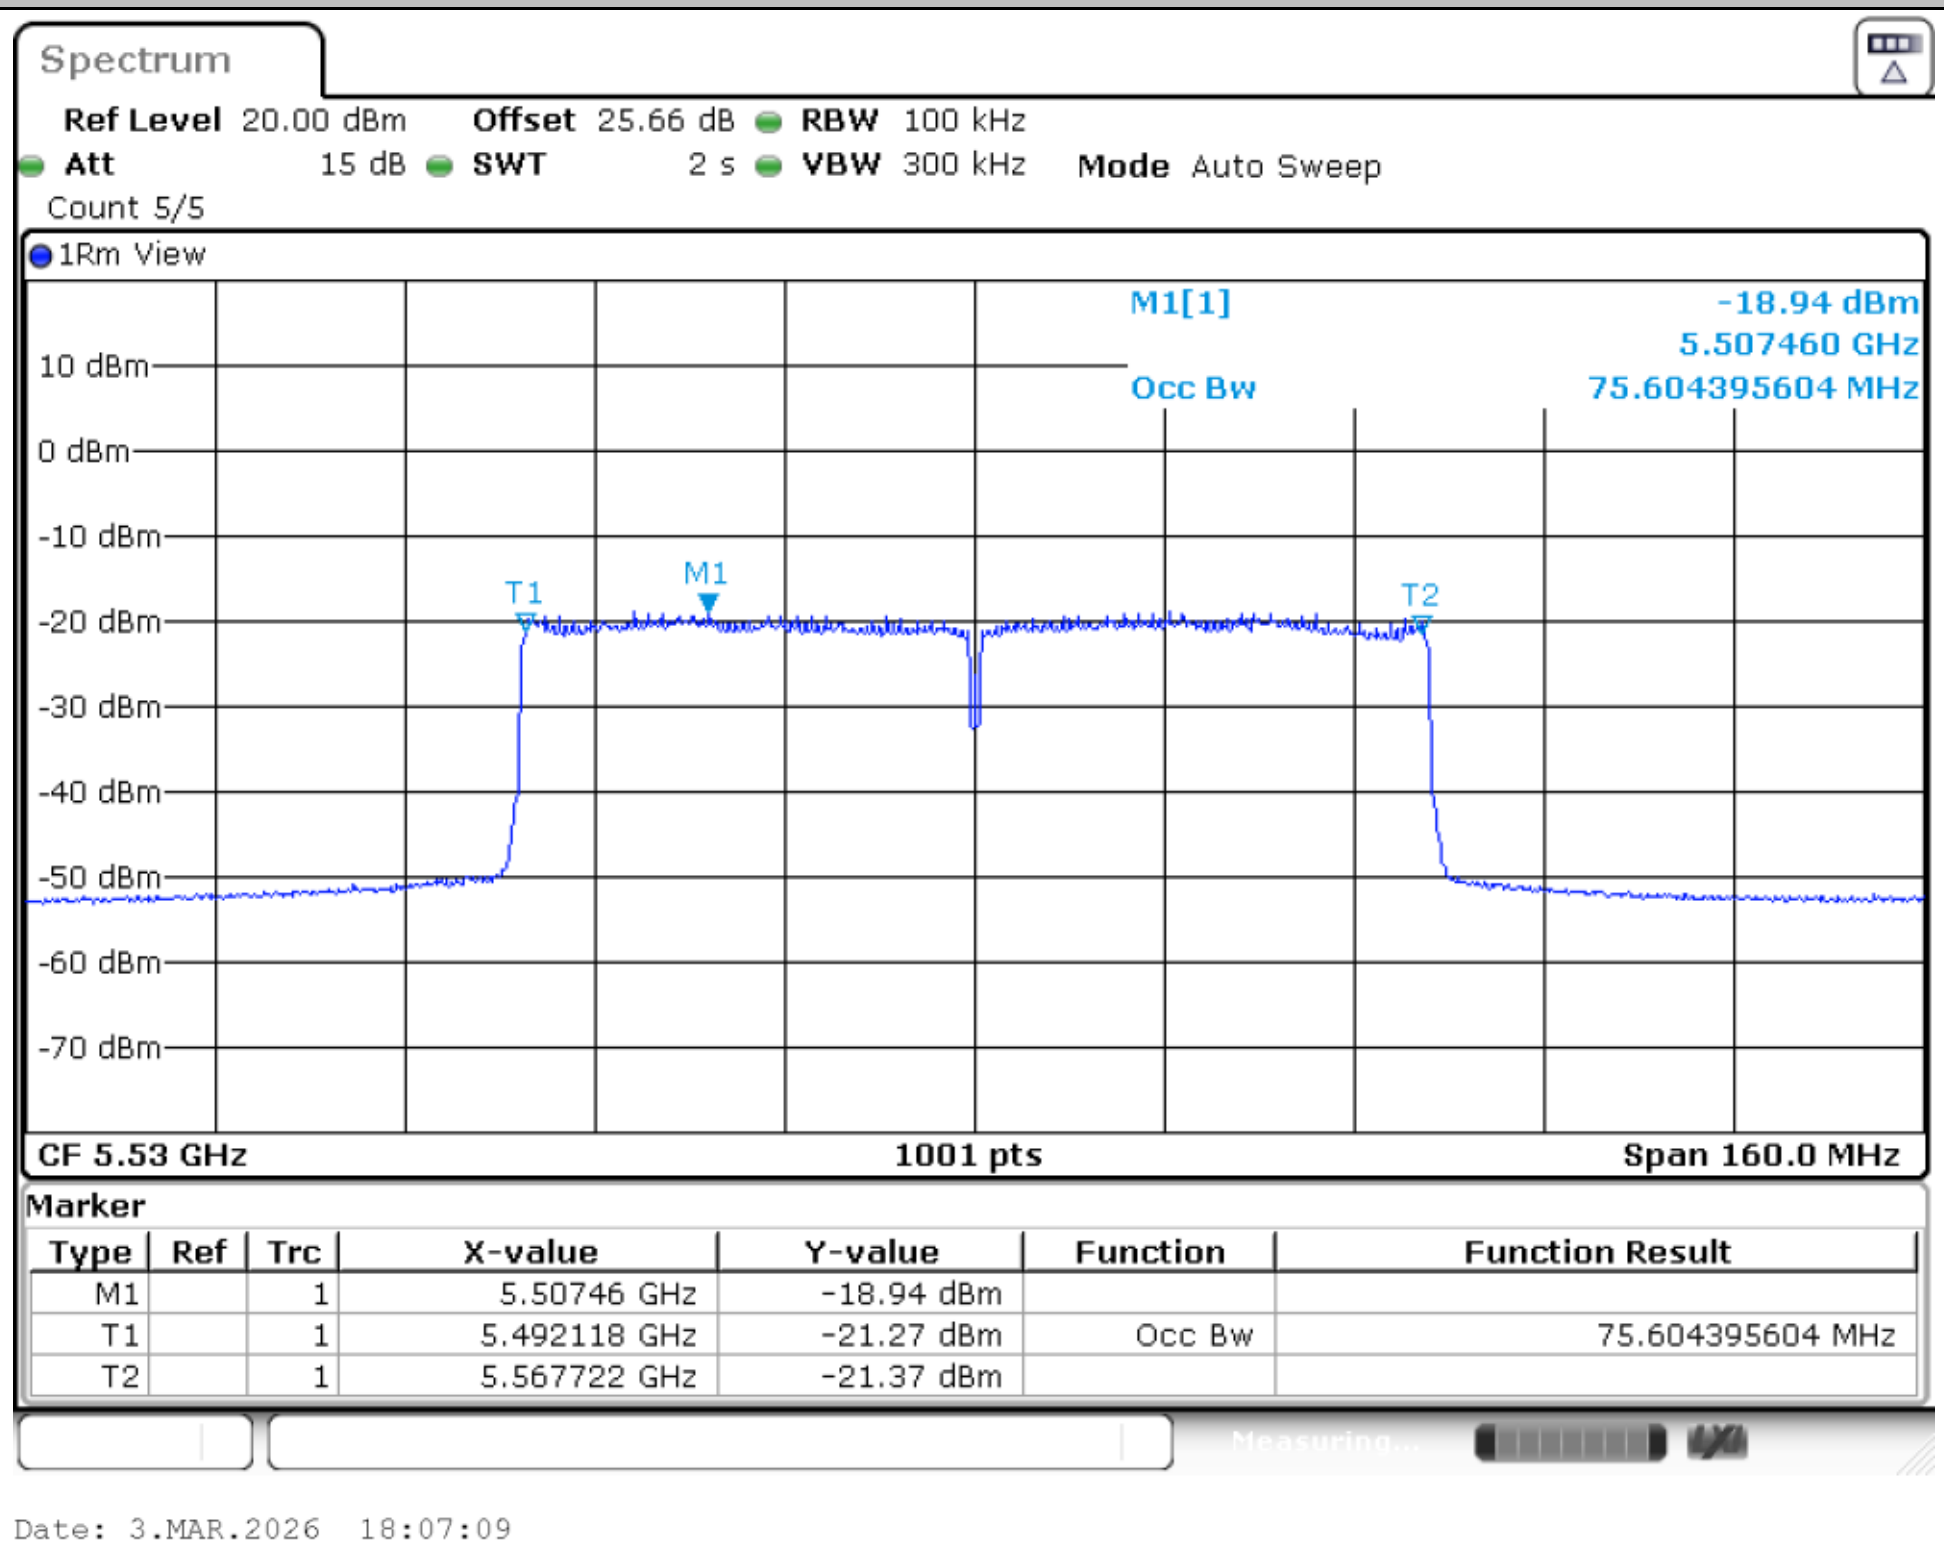

Transmitter unwanted emissions within the 5 GHz RLAN bands

Test Result

TestMode	Antenna	Freq(MHz)	Result [dBm]	Limit[dBm]	Verdict
11A	Ant6	5180	See test graph	See test graph	PASS
		5240	See test graph	See test graph	PASS
		5260	See test graph	See test graph	PASS
		5320	See test graph	See test graph	PASS
		5500	See test graph	See test graph	PASS
		5700	See test graph	See test graph	PASS
11N20SISO	Ant6	5180	See test graph	See test graph	PASS
		5240	See test graph	See test graph	PASS
		5260	See test graph	See test graph	PASS
		5320	See test graph	See test graph	PASS
		5500	See test graph	See test graph	PASS
		5700	See test graph	See test graph	PASS
11N40SISO	Ant6	5190	See test graph	See test graph	PASS
		5230	See test graph	See test graph	PASS
		5270	See test graph	See test graph	PASS
		5310	See test graph	See test graph	PASS
		5510	See test graph	See test graph	PASS
		5670	See test graph	See test graph	PASS
11AC80SISO	Ant6	5210	See test graph	See test graph	PASS
		5290	See test graph	See test graph	PASS
		5530	See test graph	See test graph	PASS

Test Graphs

11A_Ant6_5180

Spectrum

Ref Level 16.21 dBm Offset 26.21 dB Mode Auto Sweep
Count 1/1

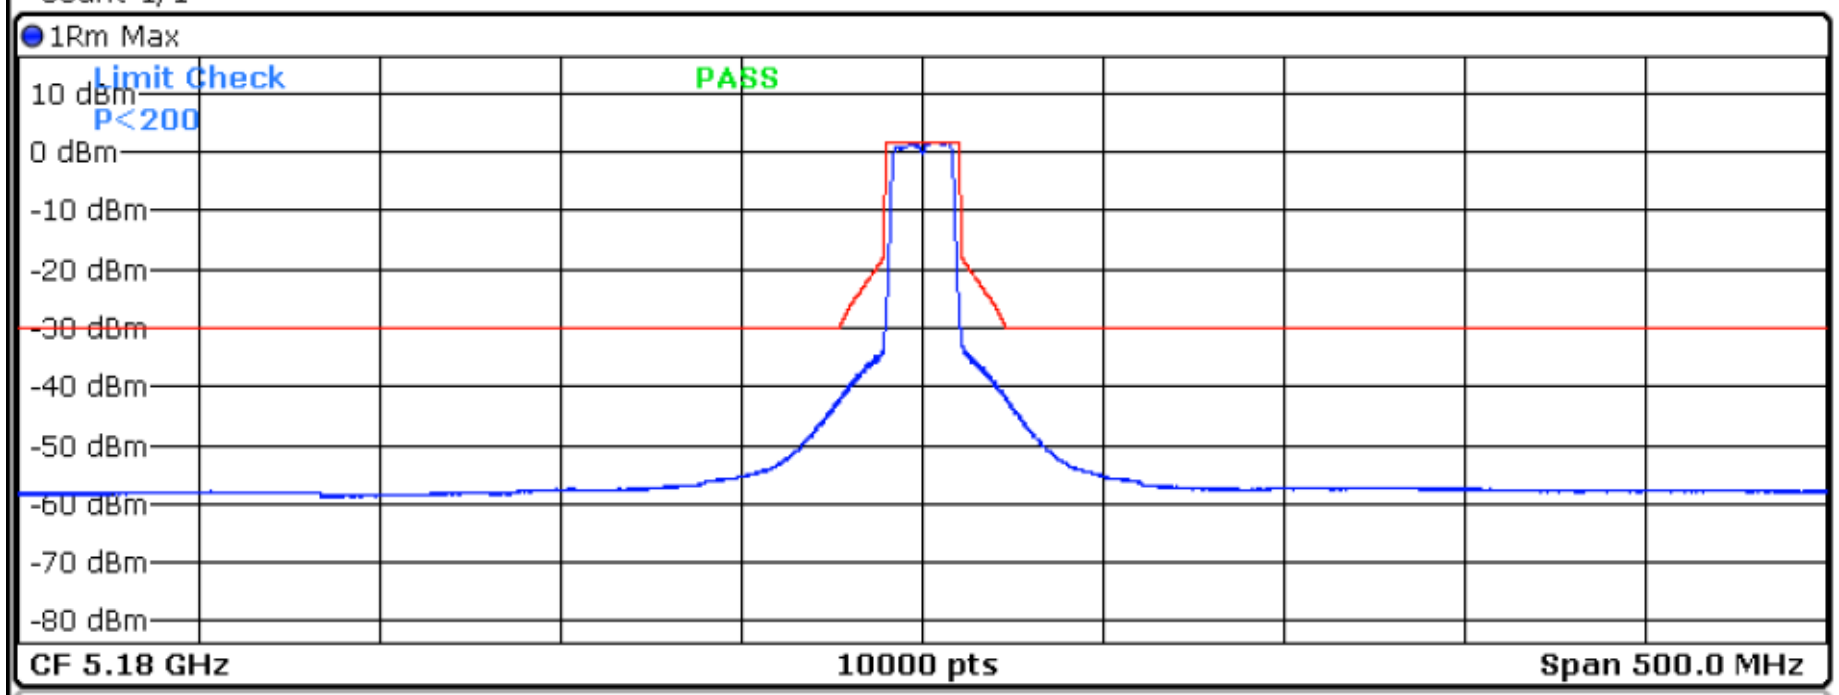

Spectrum Emission Mask Standard: None
Peak Power 1.74 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-250.000 MHz	-216.000 MHz	1.000 MHz	4.96387 GHz	-58.09 dBm	-59.83 dB	-28.09 dB
-216.000 MHz	-180.000 MHz	1.000 MHz	4.98343 GHz	-57.88 dBm	-59.62 dB	-27.88 dB
-180.000 MHz	-30.000 MHz	1.000 MHz	5.14978 GHz	-47.69 dBm	-49.43 dB	-17.69 dB
-30.000 MHz	-20.000 MHz	1.000 MHz	5.15718 GHz	-41.86 dBm	-43.60 dB	-12.21 dB
-20.000 MHz	-11.000 MHz	1.000 MHz	5.16028 GHz	-39.29 dBm	-41.03 dB	-13.27 dB
-11.000 MHz	-10.000 MHz	1.000 MHz	5.16903 GHz	-34.18 dBm	-35.93 dB	-16.43 dB
10.000 MHz	11.000 MHz	1.000 MHz	5.19098 GHz	-33.26 dBm	-35.00 dB	-15.50 dB
11.000 MHz	20.000 MHz	1.000 MHz	5.19982 GHz	-39.17 dBm	-40.91 dB	-13.07 dB
20.000 MHz	30.000 MHz	1.000 MHz	5.20328 GHz	-41.89 dBm	-43.63 dB	-11.89 dB
30.000 MHz	180.000 MHz	1.000 MHz	5.21003 GHz	-47.78 dBm	-49.52 dB	-17.78 dB

Measuring...

Date: 3.MAR.2026 15:31:19

11A_Ant6_5240

Spectrum

Ref Level 16.32 dBm Offset 26.32 dB Mode Auto Sweep
Count 1/1

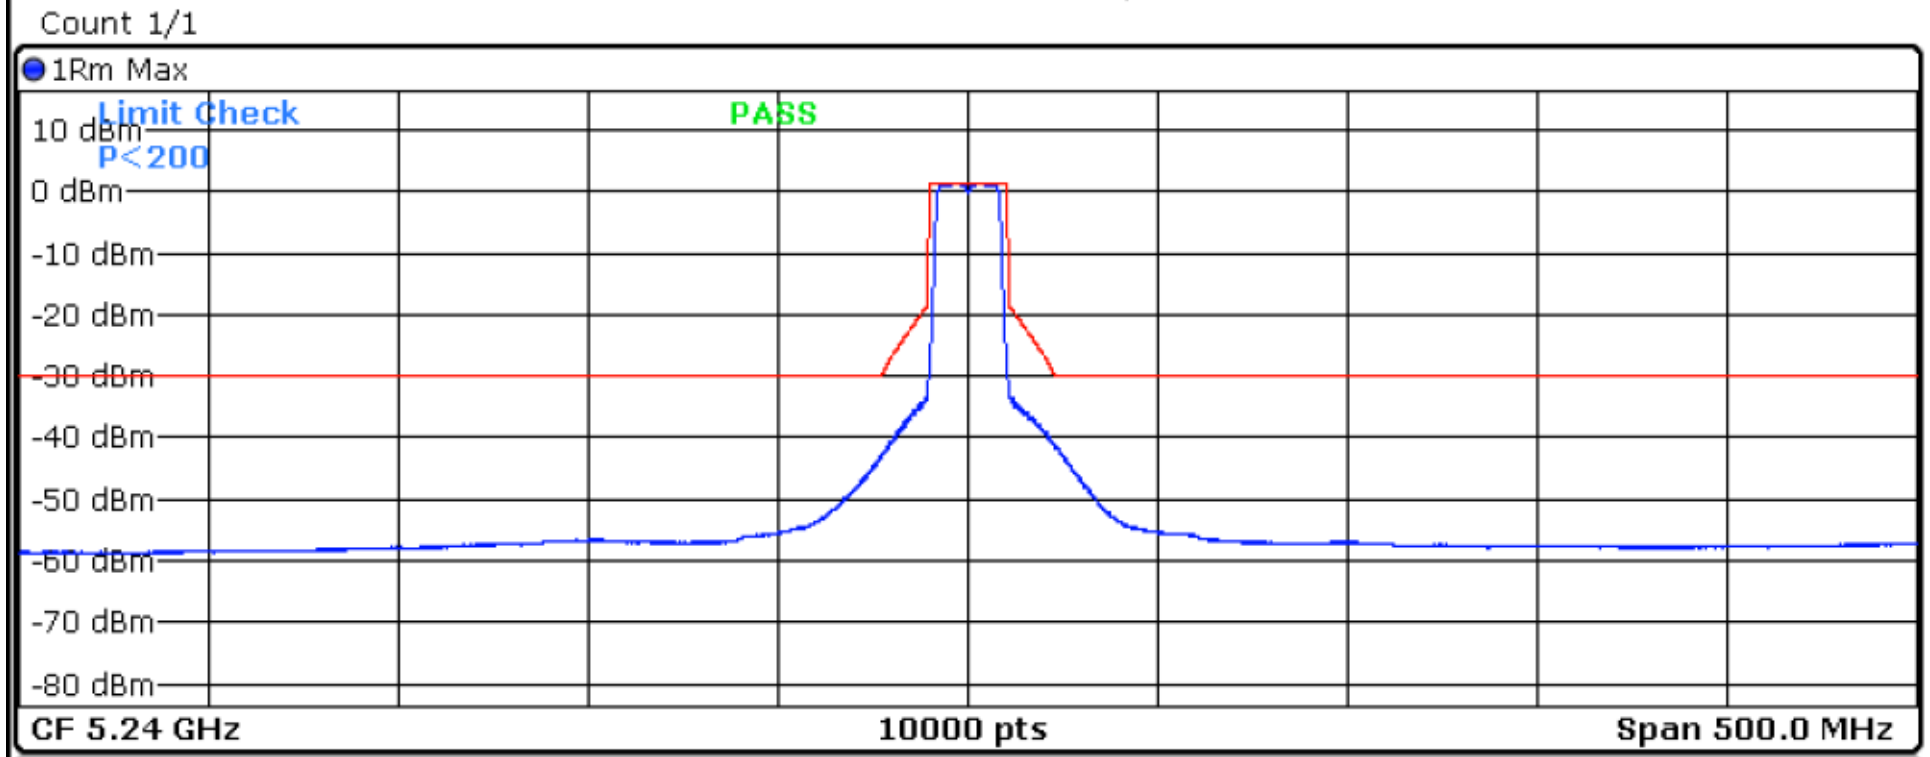

Spectrum Emission Mask Standard: None
Peak Power 1.37 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-250.000 MHz	-216.000 MHz	1.000 MHz	4.99113 GHz	-58.52 dBm	-59.89 dB	-28.52 dB
-216.000 MHz	-180.000 MHz	1.000 MHz	5.05832 GHz	-58.26 dBm	-59.63 dB	-28.26 dB
-180.000 MHz	-30.000 MHz	1.000 MHz	5.20982 GHz	-48.37 dBm	-49.74 dB	-18.37 dB
-30.000 MHz	-20.000 MHz	1.000 MHz	5.21713 GHz	-42.77 dBm	-44.15 dB	-12.77 dB
-20.000 MHz	-11.000 MHz	1.000 MHz	5.22053 GHz	-39.63 dBm	-41.00 dB	-13.47 dB
-11.000 MHz	-10.000 MHz	1.000 MHz	5.22903 GHz	-33.21 dBm	-34.59 dB	-15.09 dB
10.000 MHz	11.000 MHz	1.000 MHz	5.25098 GHz	-33.34 dBm	-34.71 dB	-15.21 dB
11.000 MHz	20.000 MHz	1.000 MHz	5.25923 GHz	-38.20 dBm	-39.57 dB	-12.26 dB
20.000 MHz	30.000 MHz	1.000 MHz	5.26262 GHz	-40.83 dBm	-42.20 dB	-11.05 dB
30.000 MHz	180.000 MHz	1.000 MHz	5.27003 GHz	-47.19 dBm	-48.57 dB	-17.19 dB

Measuring...

Date: 3.MAR.2026 15:34:43

11A_Ant6_5260

Spectrum

Ref Level 16.13 dBm **Offset** 26.13 dB **Mode** Auto Sweep
Count 1/1

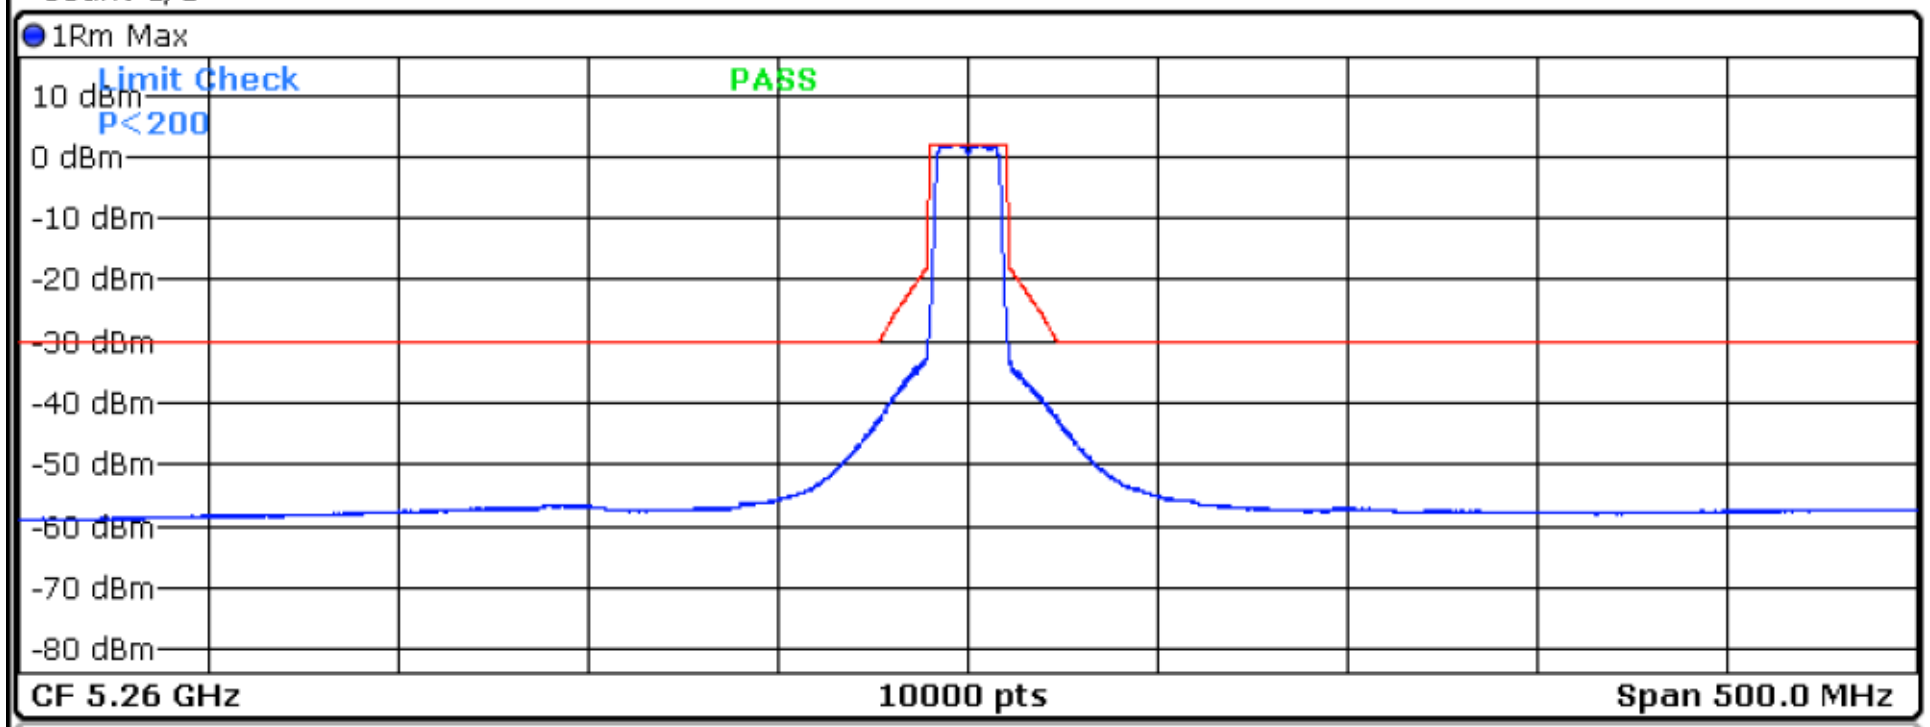

Spectrum Emission Mask **Standard: None**
Peak Power 1.87 dBm **RBW** 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-250.000 MHz	-216.000 MHz	1.000 MHz	5.04398 GHz	-58.63 dBm	-60.49 dB	-28.63 dB
-216.000 MHz	-180.000 MHz	1.000 MHz	5.07873 GHz	-58.18 dBm	-60.05 dB	-28.18 dB
-180.000 MHz	-30.000 MHz	1.000 MHz	5.22998 GHz	-47.78 dBm	-49.65 dB	-17.78 dB
-30.000 MHz	-20.000 MHz	1.000 MHz	5.23678 GHz	-42.38 dBm	-44.25 dB	-12.38 dB
-20.000 MHz	-11.000 MHz	1.000 MHz	5.24073 GHz	-38.29 dBm	-40.16 dB	-12.80 dB
-11.000 MHz	-10.000 MHz	1.000 MHz	5.24903 GHz	-32.99 dBm	-34.86 dB	-15.36 dB
10.000 MHz	11.000 MHz	1.000 MHz	5.27098 GHz	-33.45 dBm	-35.32 dB	-15.82 dB
11.000 MHz	20.000 MHz	1.000 MHz	5.27968 GHz	-39.42 dBm	-41.29 dB	-13.58 dB
20.000 MHz	30.000 MHz	1.000 MHz	5.28313 GHz	-42.06 dBm	-43.93 dB	-12.18 dB
30.000 MHz	180.000 MHz	1.000 MHz	5.29012 GHz	-47.67 dBm	-49.53 dB	-17.67 dB

Date: 3.MAR.2026 15:39:31

11A_Ant6_5320

Spectrum

Ref Level 16.32 dBm **Offset** 26.32 dB **Mode** Auto Sweep
Count 1/1

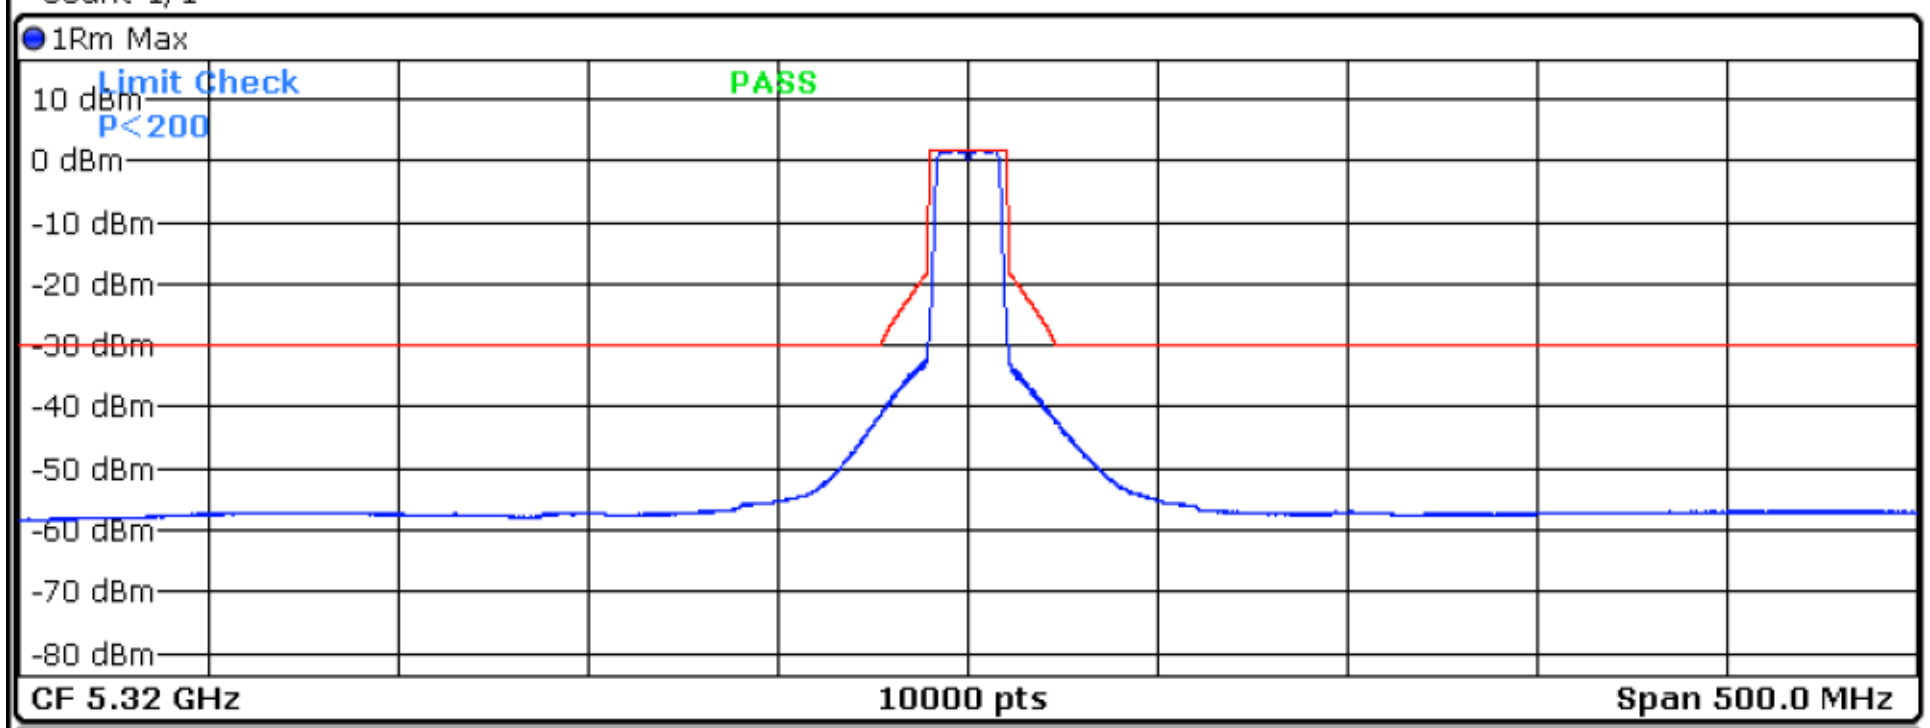

Spectrum Emission Mask **Standard: None**
Peak Power 1.75 dBm **RBW** 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-250.000 MHz	-216.000 MHz	1.000 MHz	5.10393 GHz	-57.73 dBm	-59.48 dB	-27.73 dB
-216.000 MHz	-180.000 MHz	1.000 MHz	5.13818 GHz	-57.14 dBm	-58.88 dB	-27.14 dB
-180.000 MHz	-30.000 MHz	1.000 MHz	5.28982 GHz	-47.15 dBm	-48.90 dB	-17.15 dB
-30.000 MHz	-20.000 MHz	1.000 MHz	5.29707 GHz	-41.06 dBm	-42.80 dB	-11.29 dB
-20.000 MHz	-11.000 MHz	1.000 MHz	5.30007 GHz	-38.29 dBm	-40.03 dB	-12.10 dB
-11.000 MHz	-10.000 MHz	1.000 MHz	5.30903 GHz	-32.43 dBm	-34.18 dB	-14.68 dB
10.000 MHz	11.000 MHz	1.000 MHz	5.33098 GHz	-32.65 dBm	-34.40 dB	-14.90 dB
11.000 MHz	20.000 MHz	1.000 MHz	5.33932 GHz	-38.91 dBm	-40.65 dB	-13.25 dB
20.000 MHz	30.000 MHz	1.000 MHz	5.34312 GHz	-42.17 dBm	-43.92 dB	-12.17 dB
30.000 MHz	180.000 MHz	1.000 MHz	5.35008 GHz	-47.25 dBm	-48.99 dB	-17.25 dB

Date: 3.MAR.2026 15:42:59

11A_Ant6_5500

Spectrum

Ref Level 15.88 dBm Offset 25.88 dB Mode Auto Sweep
Count 1/1

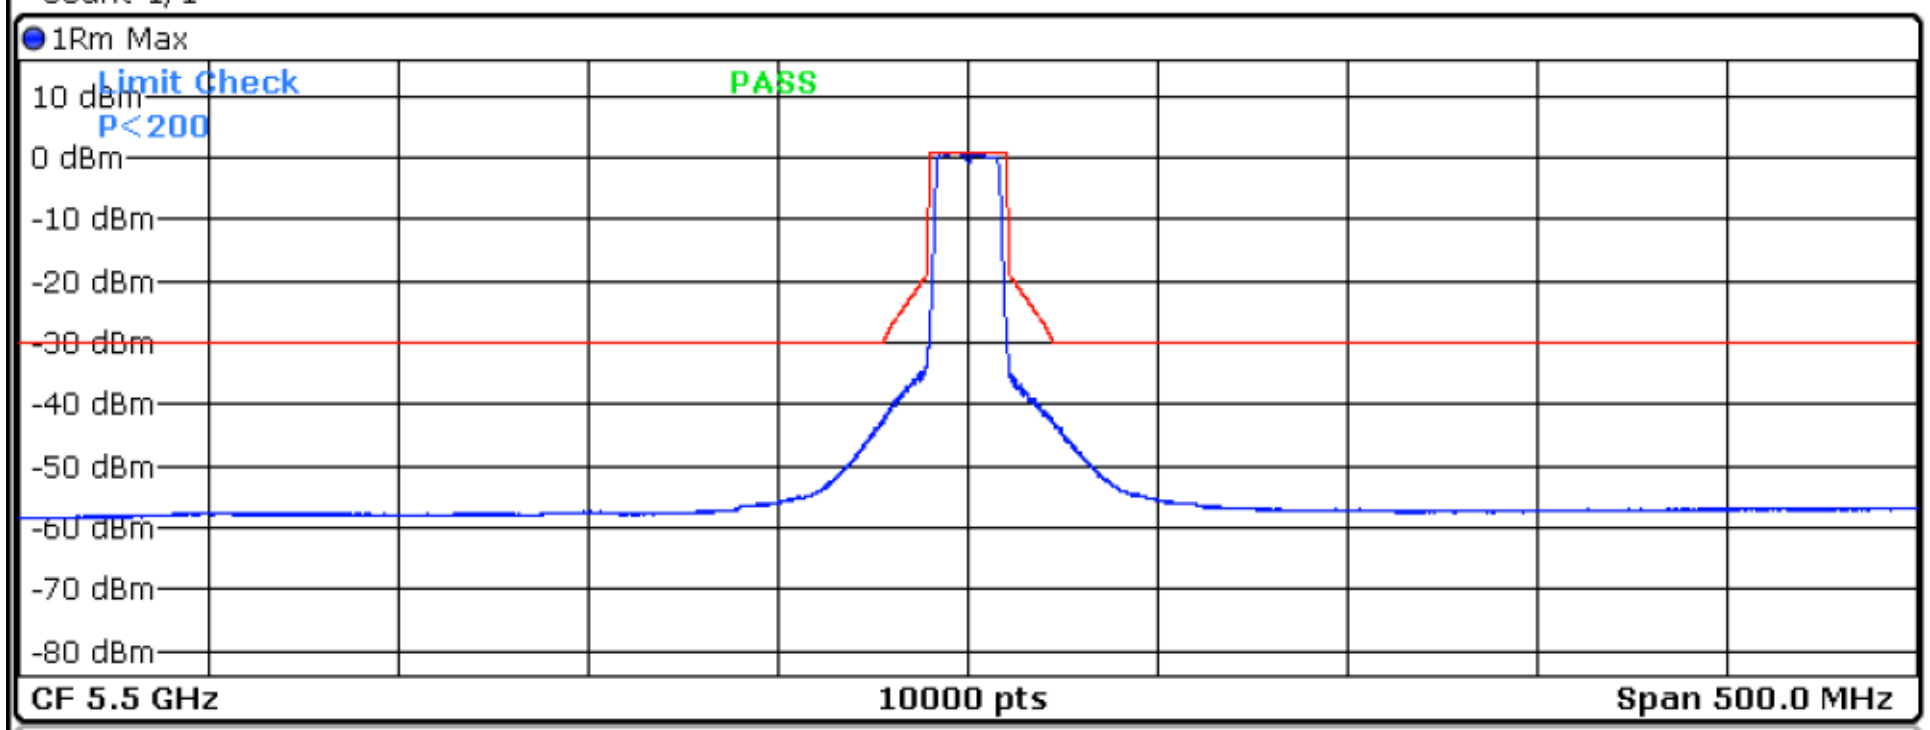

Spectrum Emission Mask Standard: None
Peak Power 1.00 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-250.000 MHz	-216.000 MHz	1.000 MHz	5.28388 GHz	-58.00 dBm	-59.00 dB	-28.00 dB
-216.000 MHz	-180.000 MHz	1.000 MHz	5.30088 GHz	-57.59 dBm	-58.59 dB	-27.59 dB
-180.000 MHz	-30.000 MHz	1.000 MHz	5.46998 GHz	-48.74 dBm	-49.74 dB	-18.74 dB
-30.000 MHz	-20.000 MHz	1.000 MHz	5.47798 GHz	-41.89 dBm	-42.89 dB	-12.46 dB
-20.000 MHz	-11.000 MHz	1.000 MHz	5.48083 GHz	-39.32 dBm	-40.32 dB	-13.06 dB
-11.000 MHz	-10.000 MHz	1.000 MHz	5.48903 GHz	-33.89 dBm	-34.89 dB	-15.39 dB
10.000 MHz	11.000 MHz	1.000 MHz	5.51098 GHz	-35.12 dBm	-36.12 dB	-16.62 dB
11.000 MHz	20.000 MHz	1.000 MHz	5.51923 GHz	-40.32 dBm	-41.32 dB	-14.01 dB
20.000 MHz	30.000 MHz	1.000 MHz	5.52228 GHz	-42.61 dBm	-43.61 dB	-12.88 dB
30.000 MHz	180.000 MHz	1.000 MHz	5.53003 GHz	-48.35 dBm	-49.35 dB	-18.35 dB

Date: 3.MAR.2026 15:47:52

11A_Ant6_5700

Spectrum

Ref Level 15.53 dBm Offset 25.53 dB Mode Auto Sweep
Count 1/1

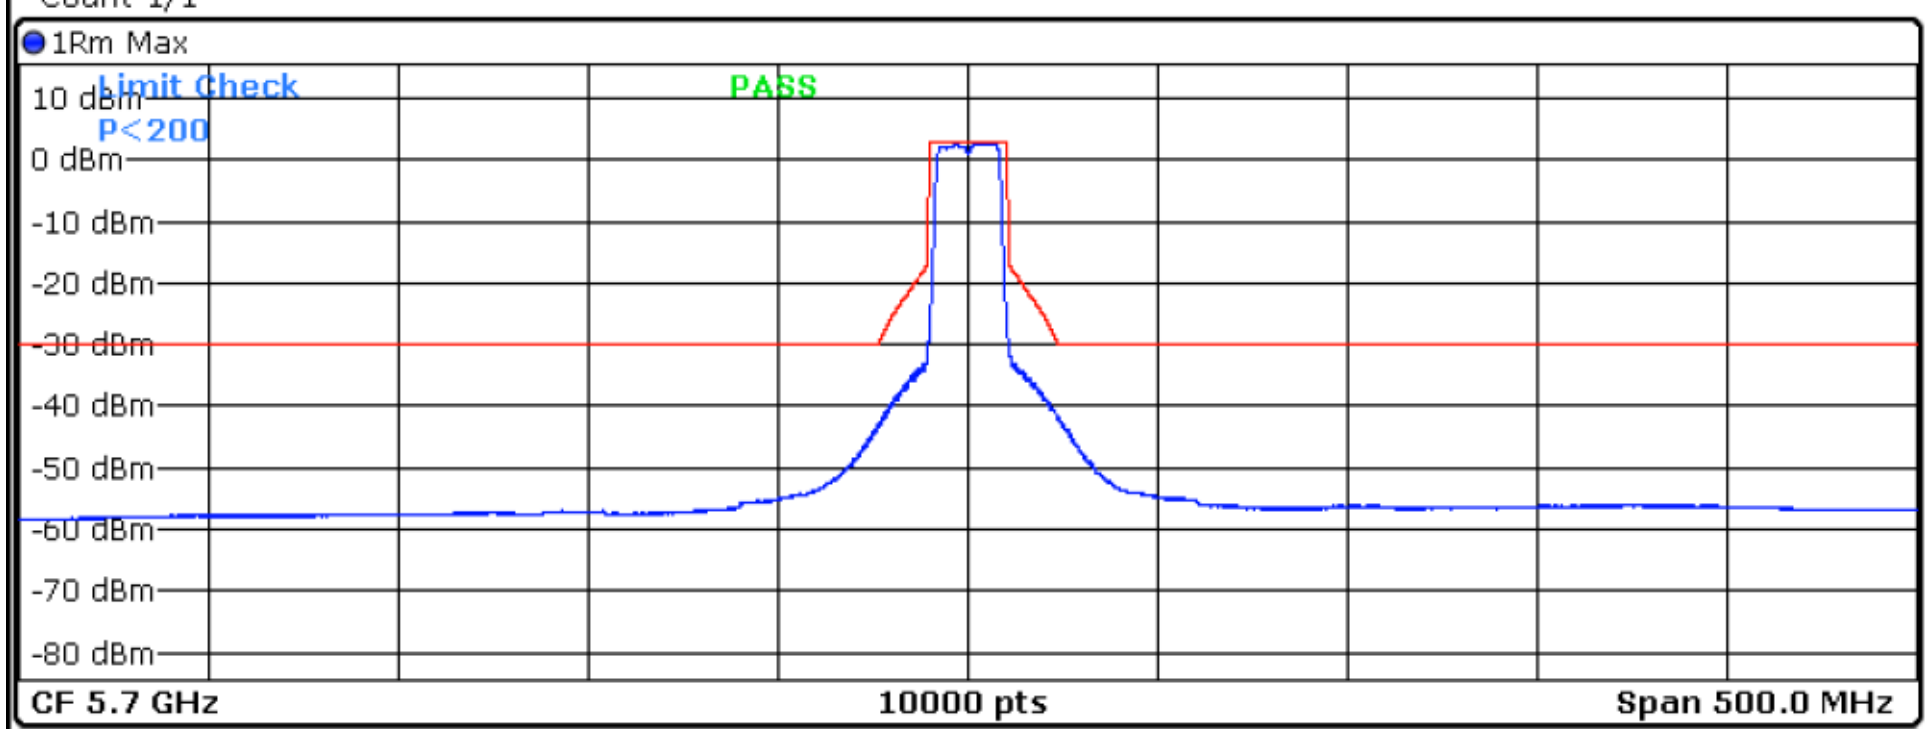

Spectrum Emission Mask Standard: None
Peak Power 2.72 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-250.000 MHz	-216.000 MHz	1.000 MHz	5.48398 GHz	-57.94 dBm	-60.65 dB	-27.94 dB
-216.000 MHz	-180.000 MHz	1.000 MHz	5.49582 GHz	-57.63 dBm	-60.34 dB	-27.63 dB
-180.000 MHz	-30.000 MHz	1.000 MHz	5.66983 GHz	-48.67 dBm	-51.38 dB	-18.67 dB
-30.000 MHz	-20.000 MHz	1.000 MHz	5.67623 GHz	-42.92 dBm	-45.64 dB	-13.11 dB
-20.000 MHz	-11.000 MHz	1.000 MHz	5.68018 GHz	-38.98 dBm	-41.70 dB	-13.86 dB
-11.000 MHz	-10.000 MHz	1.000 MHz	5.68903 GHz	-32.88 dBm	-35.60 dB	-16.10 dB
10.000 MHz	11.000 MHz	1.000 MHz	5.71098 GHz	-31.82 dBm	-34.53 dB	-15.03 dB
11.000 MHz	20.000 MHz	1.000 MHz	5.71957 GHz	-37.88 dBm	-40.60 dB	-12.97 dB
20.000 MHz	30.000 MHz	1.000 MHz	5.72373 GHz	-41.46 dBm	-44.17 dB	-11.70 dB
30.000 MHz	180.000 MHz	1.000 MHz	5.73008 GHz	-47.65 dBm	-50.36 dB	-17.65 dB

Date: 3.MAR.2026 15:51:28

11N20SISO_Ant6_5180

Spectrum

Ref Level 16.21 dBm **Offset** 26.21 dB **Mode** Auto Sweep

Count 1/1

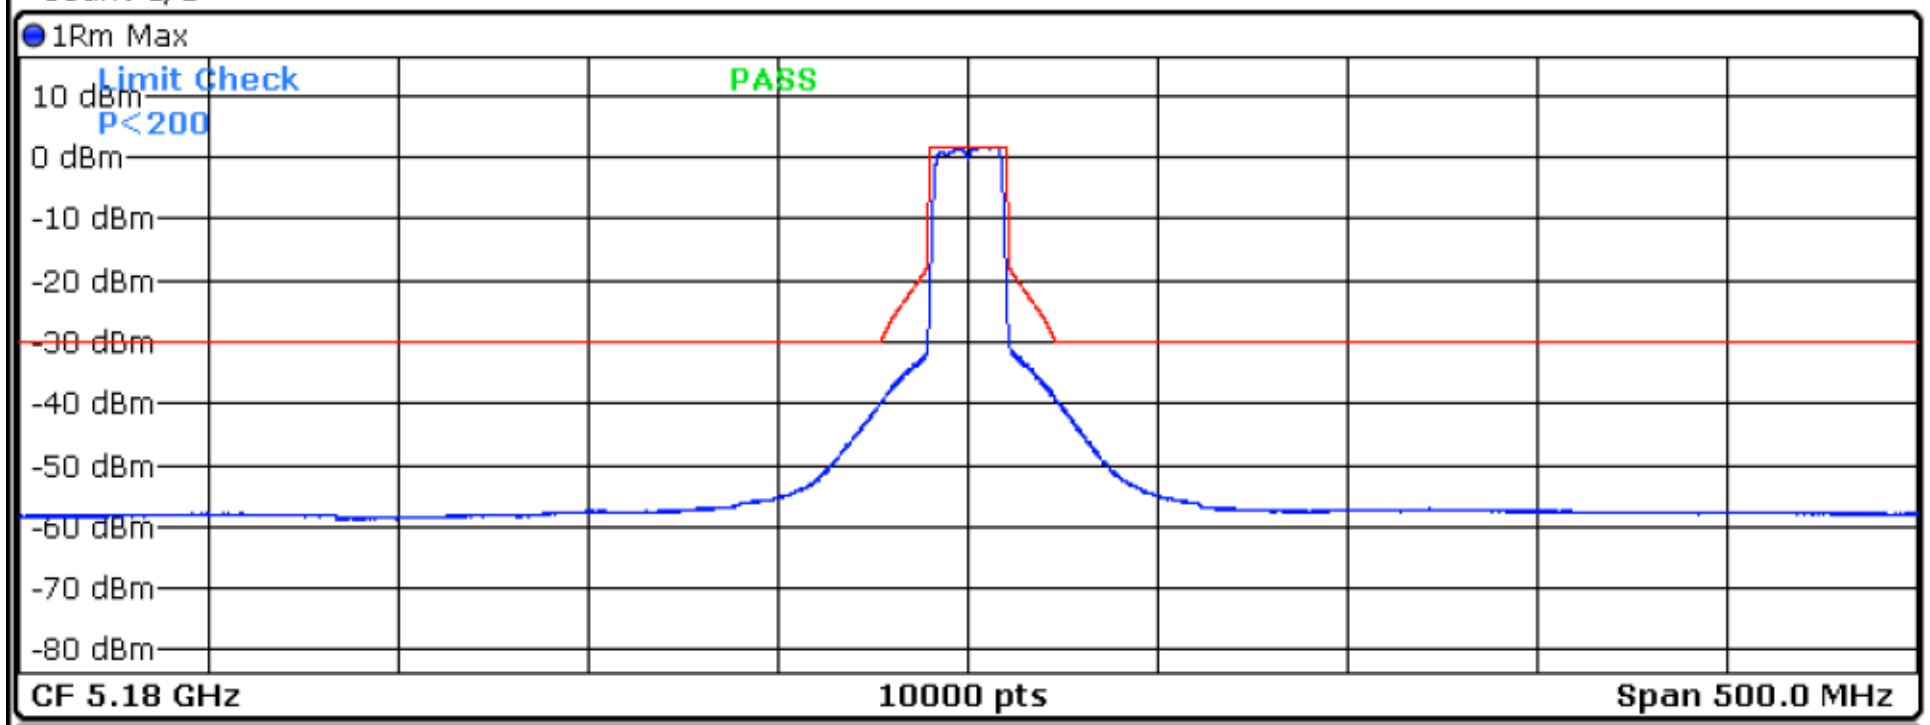

Spectrum Emission Mask **Standard:** None

Peak Power 1.76 dBm **RBW** 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-250.000 MHz	-216.000 MHz	1.000 MHz	4.96357 GHz	-58.09 dBm	-59.85 dB	-28.09 dB
-216.000 MHz	-180.000 MHz	1.000 MHz	4.97543 GHz	-57.86 dBm	-59.63 dB	-27.86 dB
-180.000 MHz	-30.000 MHz	1.000 MHz	5.14987 GHz	-45.40 dBm	-47.16 dB	-15.40 dB
-30.000 MHz	-20.000 MHz	1.000 MHz	5.15693 GHz	-39.72 dBm	-41.48 dB	-9.80 dB
-20.000 MHz	-11.000 MHz	1.000 MHz	5.16003 GHz	-37.17 dBm	-38.94 dB	-10.96 dB
-11.000 MHz	-10.000 MHz	1.000 MHz	5.16903 GHz	-31.32 dBm	-33.08 dB	-13.58 dB
10.000 MHz	11.000 MHz	1.000 MHz	5.19098 GHz	-30.72 dBm	-32.49 dB	-12.99 dB
11.000 MHz	20.000 MHz	1.000 MHz	5.19988 GHz	-36.74 dBm	-38.51 dB	-10.62 dB
20.000 MHz	30.000 MHz	1.000 MHz	5.20282 GHz	-38.90 dBm	-40.67 dB	-9.28 dB
30.000 MHz	180.000 MHz	1.000 MHz	5.21003 GHz	-44.82 dBm	-46.59 dB	-14.82 dB

Date: 3.MAR.2026 15:58:26

11N20SISO_Ant6_5240

Spectrum

Ref Level 16.32 dBm **Offset** 26.32 dB **Mode** Auto Sweep

Count 1/1

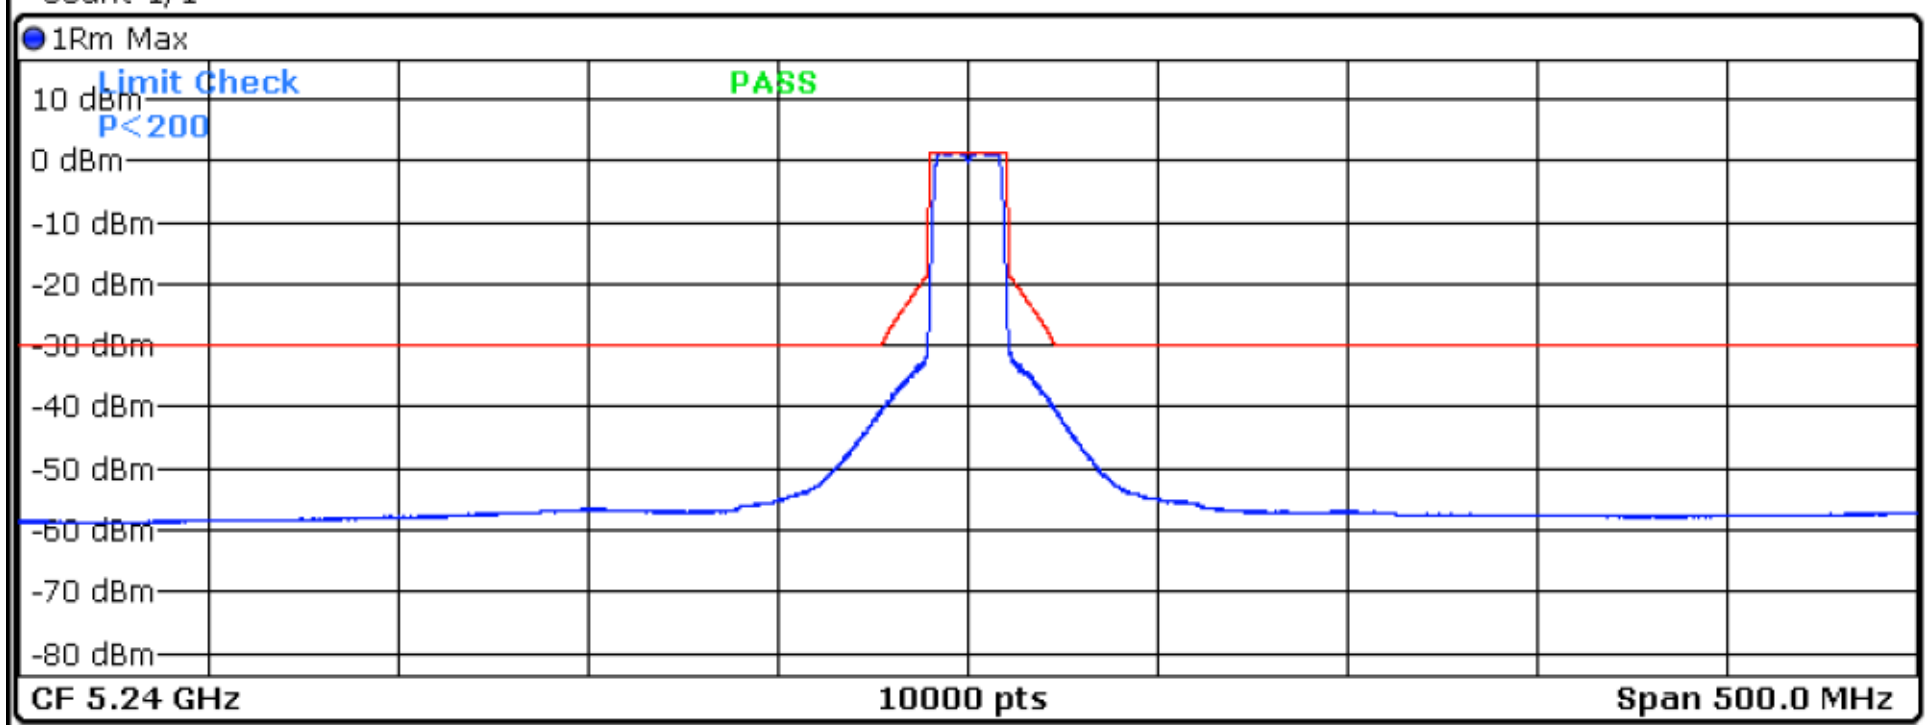

Spectrum Emission Mask **Standard:** None

Peak Power 1.33 dBm **RBW** 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-250.000 MHz	-216.000 MHz	1.000 MHz	4.99688 GHz	-58.54 dBm	-59.87 dB	-28.54 dB
-216.000 MHz	-180.000 MHz	1.000 MHz	5.04432 GHz	-58.23 dBm	-59.56 dB	-28.23 dB
-180.000 MHz	-30.000 MHz	1.000 MHz	5.20968 GHz	-46.41 dBm	-47.75 dB	-16.41 dB
-30.000 MHz	-20.000 MHz	1.000 MHz	5.21713 GHz	-40.36 dBm	-41.69 dB	-10.36 dB
-20.000 MHz	-11.000 MHz	1.000 MHz	5.22003 GHz	-37.81 dBm	-39.14 dB	-11.16 dB
-11.000 MHz	-10.000 MHz	1.000 MHz	5.22903 GHz	-31.58 dBm	-32.91 dB	-13.41 dB
10.000 MHz	11.000 MHz	1.000 MHz	5.25098 GHz	-31.04 dBm	-32.38 dB	-12.88 dB
11.000 MHz	20.000 MHz	1.000 MHz	5.25983 GHz	-37.50 dBm	-38.83 dB	-10.99 dB
20.000 MHz	30.000 MHz	1.000 MHz	5.26253 GHz	-39.70 dBm	-41.04 dB	-10.01 dB
30.000 MHz	180.000 MHz	1.000 MHz	5.27008 GHz	-46.73 dBm	-48.06 dB	-16.73 dB

Date: 3.MAR.2026 16:01:54

11N20SISO_Ant6_5260

Spectrum

Ref Level 16.13 dBm Offset 26.13 dB Mode Auto Sweep
Count 1/1

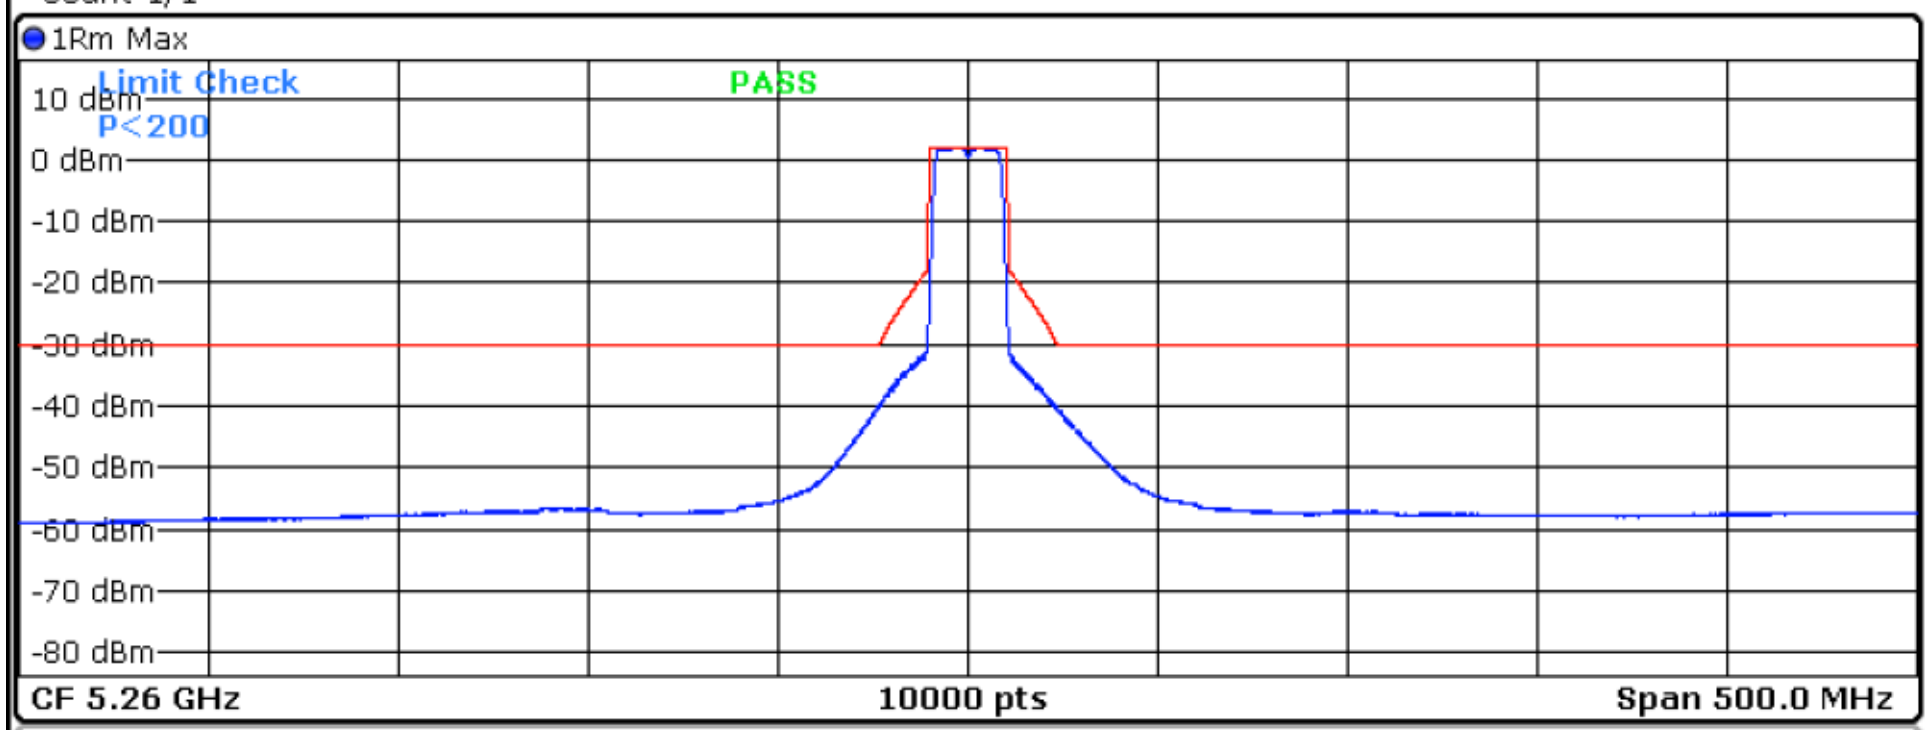

Spectrum Emission Mask Standard: None
Peak Power 1.96 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-250.000 MHz	-216.000 MHz	1.000 MHz	5.04368 GHz	-58.61 dBm	-60.57 dB	-28.61 dB
-216.000 MHz	-180.000 MHz	1.000 MHz	5.07923 GHz	-58.19 dBm	-60.15 dB	-28.19 dB
-180.000 MHz	-30.000 MHz	1.000 MHz	5.22987 GHz	-45.68 dBm	-47.64 dB	-15.68 dB
-30.000 MHz	-20.000 MHz	1.000 MHz	5.23667 GHz	-39.62 dBm	-41.58 dB	-9.62 dB
-20.000 MHz	-11.000 MHz	1.000 MHz	5.24087 GHz	-36.06 dBm	-38.02 dB	-10.80 dB
-11.000 MHz	-10.000 MHz	1.000 MHz	5.24903 GHz	-30.29 dBm	-32.25 dB	-12.75 dB
10.000 MHz	11.000 MHz	1.000 MHz	5.27098 GHz	-31.05 dBm	-33.02 dB	-13.52 dB
11.000 MHz	20.000 MHz	1.000 MHz	5.27937 GHz	-37.13 dBm	-39.09 dB	-11.65 dB
20.000 MHz	30.000 MHz	1.000 MHz	5.28328 GHz	-40.17 dBm	-42.14 dB	-10.21 dB
30.000 MHz	180.000 MHz	1.000 MHz	5.29012 GHz	-44.96 dBm	-46.92 dB	-14.96 dB

Date: 3.MAR.2026 16:06:30

11N20SISO_Ant6_5320

Spectrum

Ref Level 16.32 dBm Offset 26.32 dB Mode Auto Sweep
Count 1/1

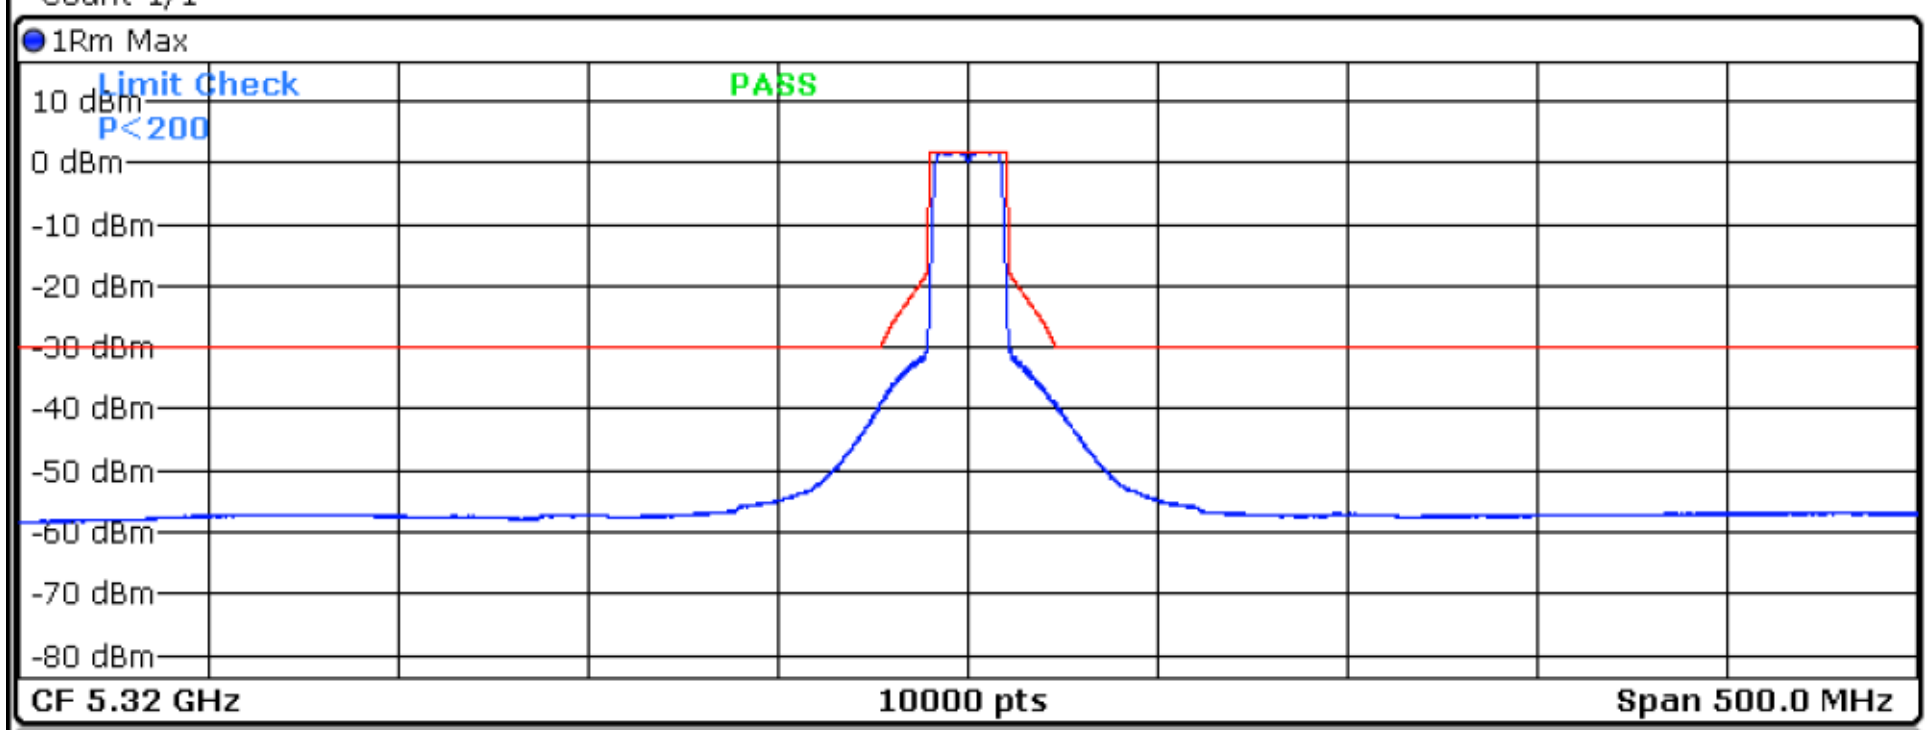

Spectrum Emission Mask Standard: None
Peak Power 1.87 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-250.000 MHz	-216.000 MHz	1.000 MHz	5.10393 GHz	-57.73 dBm	-59.61 dB	-27.73 dB
-216.000 MHz	-180.000 MHz	1.000 MHz	5.13868 GHz	-57.12 dBm	-58.99 dB	-27.12 dB
-180.000 MHz	-30.000 MHz	1.000 MHz	5.28998 GHz	-45.73 dBm	-47.60 dB	-15.73 dB
-30.000 MHz	-20.000 MHz	1.000 MHz	5.29707 GHz	-38.76 dBm	-40.64 dB	-9.13 dB
-20.000 MHz	-11.000 MHz	1.000 MHz	5.30018 GHz	-35.83 dBm	-37.71 dB	-9.86 dB
-11.000 MHz	-10.000 MHz	1.000 MHz	5.30903 GHz	-30.46 dBm	-32.33 dB	-12.83 dB
10.000 MHz	11.000 MHz	1.000 MHz	5.33098 GHz	-30.84 dBm	-32.72 dB	-13.22 dB
11.000 MHz	20.000 MHz	1.000 MHz	5.33998 GHz	-36.68 dBm	-38.55 dB	-10.57 dB
20.000 MHz	30.000 MHz	1.000 MHz	5.34323 GHz	-39.21 dBm	-41.08 dB	-9.21 dB
30.000 MHz	180.000 MHz	1.000 MHz	5.35003 GHz	-45.14 dBm	-47.01 dB	-15.14 dB

Date: 3.MAR.2026 16:09:41

11N20SISO_Ant6_5500

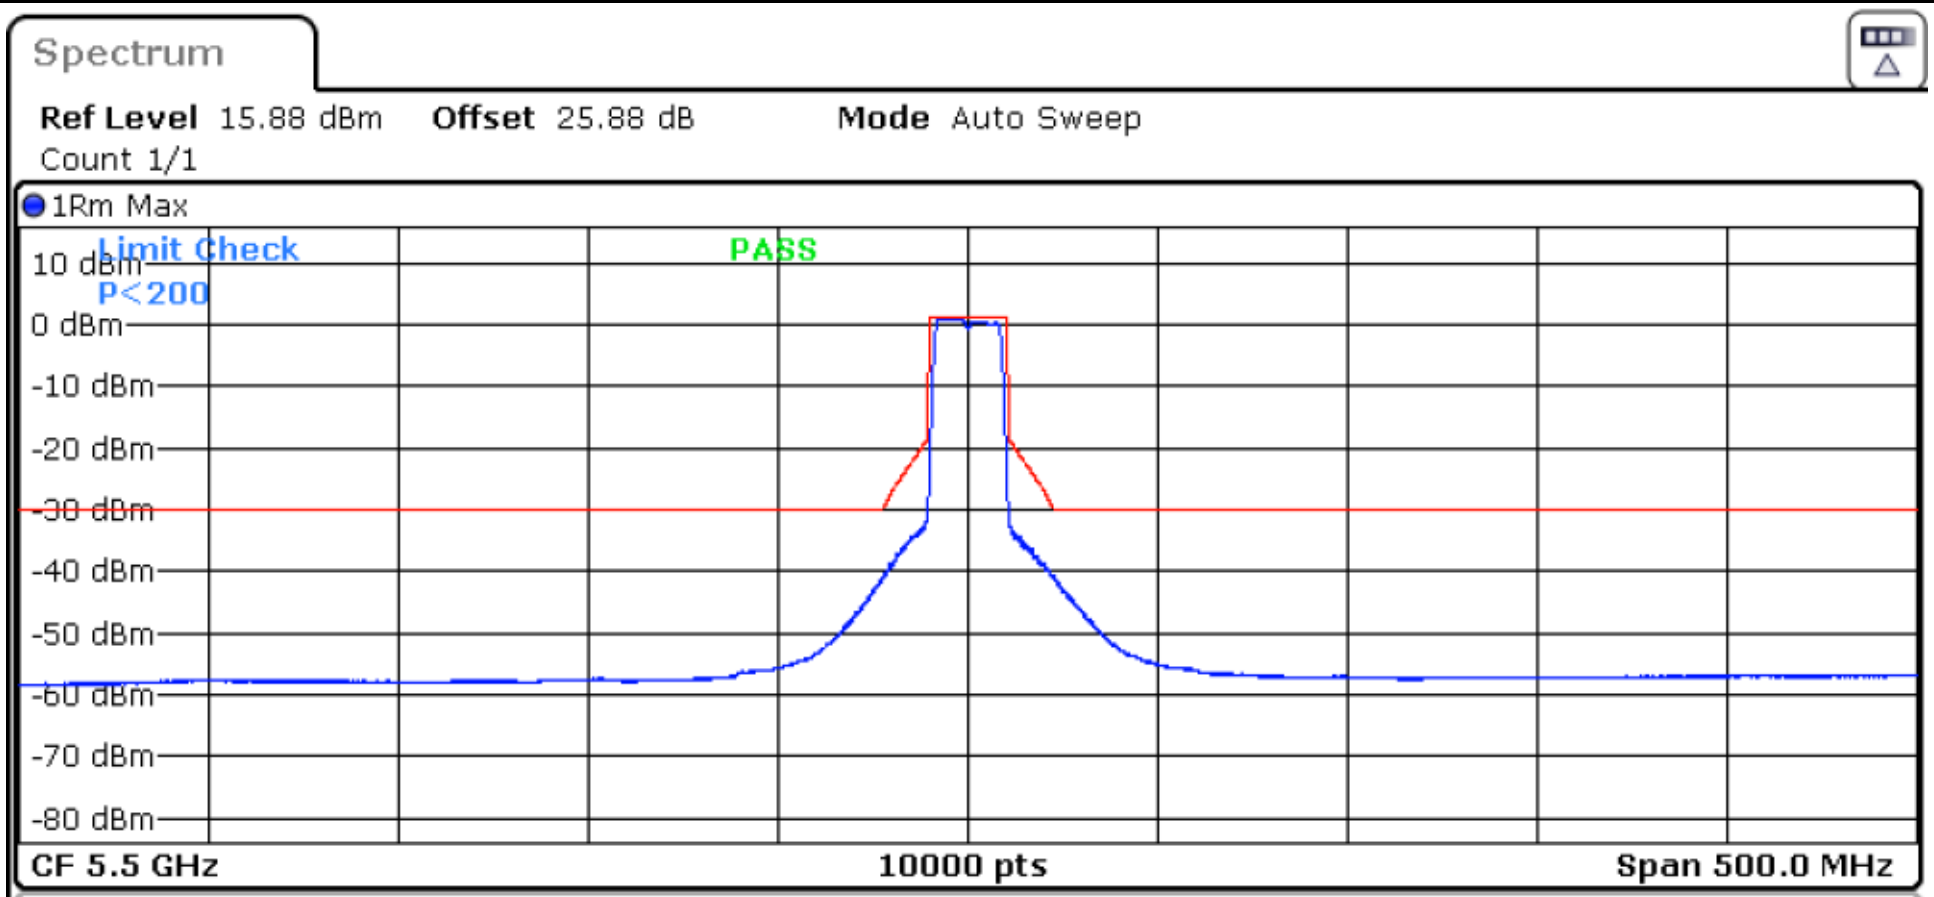

Spectrum Emission Mask Standard: None

Peak Power 1.17 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-250.000 MHz	-216.000 MHz	1.000 MHz	5.28338 GHz	-58.02 dBm	-59.19 dB	-28.02 dB
-216.000 MHz	-180.000 MHz	1.000 MHz	5.29978 GHz	-57.55 dBm	-58.72 dB	-27.55 dB
-180.000 MHz	-30.000 MHz	1.000 MHz	5.46998 GHz	-47.35 dBm	-48.52 dB	-17.35 dB
-30.000 MHz	-20.000 MHz	1.000 MHz	5.47743 GHz	-40.90 dBm	-42.07 dB	-10.98 dB
-20.000 MHz	-11.000 MHz	1.000 MHz	5.48093 GHz	-37.18 dBm	-38.35 dB	-11.17 dB
-11.000 MHz	-10.000 MHz	1.000 MHz	5.48903 GHz	-31.63 dBm	-32.80 dB	-13.30 dB
10.000 MHz	11.000 MHz	1.000 MHz	5.51098 GHz	-32.43 dBm	-33.60 dB	-14.10 dB
11.000 MHz	20.000 MHz	1.000 MHz	5.51998 GHz	-38.85 dBm	-40.02 dB	-12.04 dB
20.000 MHz	30.000 MHz	1.000 MHz	5.52253 GHz	-40.83 dBm	-42.00 dB	-10.97 dB
30.000 MHz	180.000 MHz	1.000 MHz	5.53003 GHz	-46.47 dBm	-47.64 dB	-16.47 dB

Date: 3.MAR.2026 16:35:20

11N20SISO_Ant6_5700

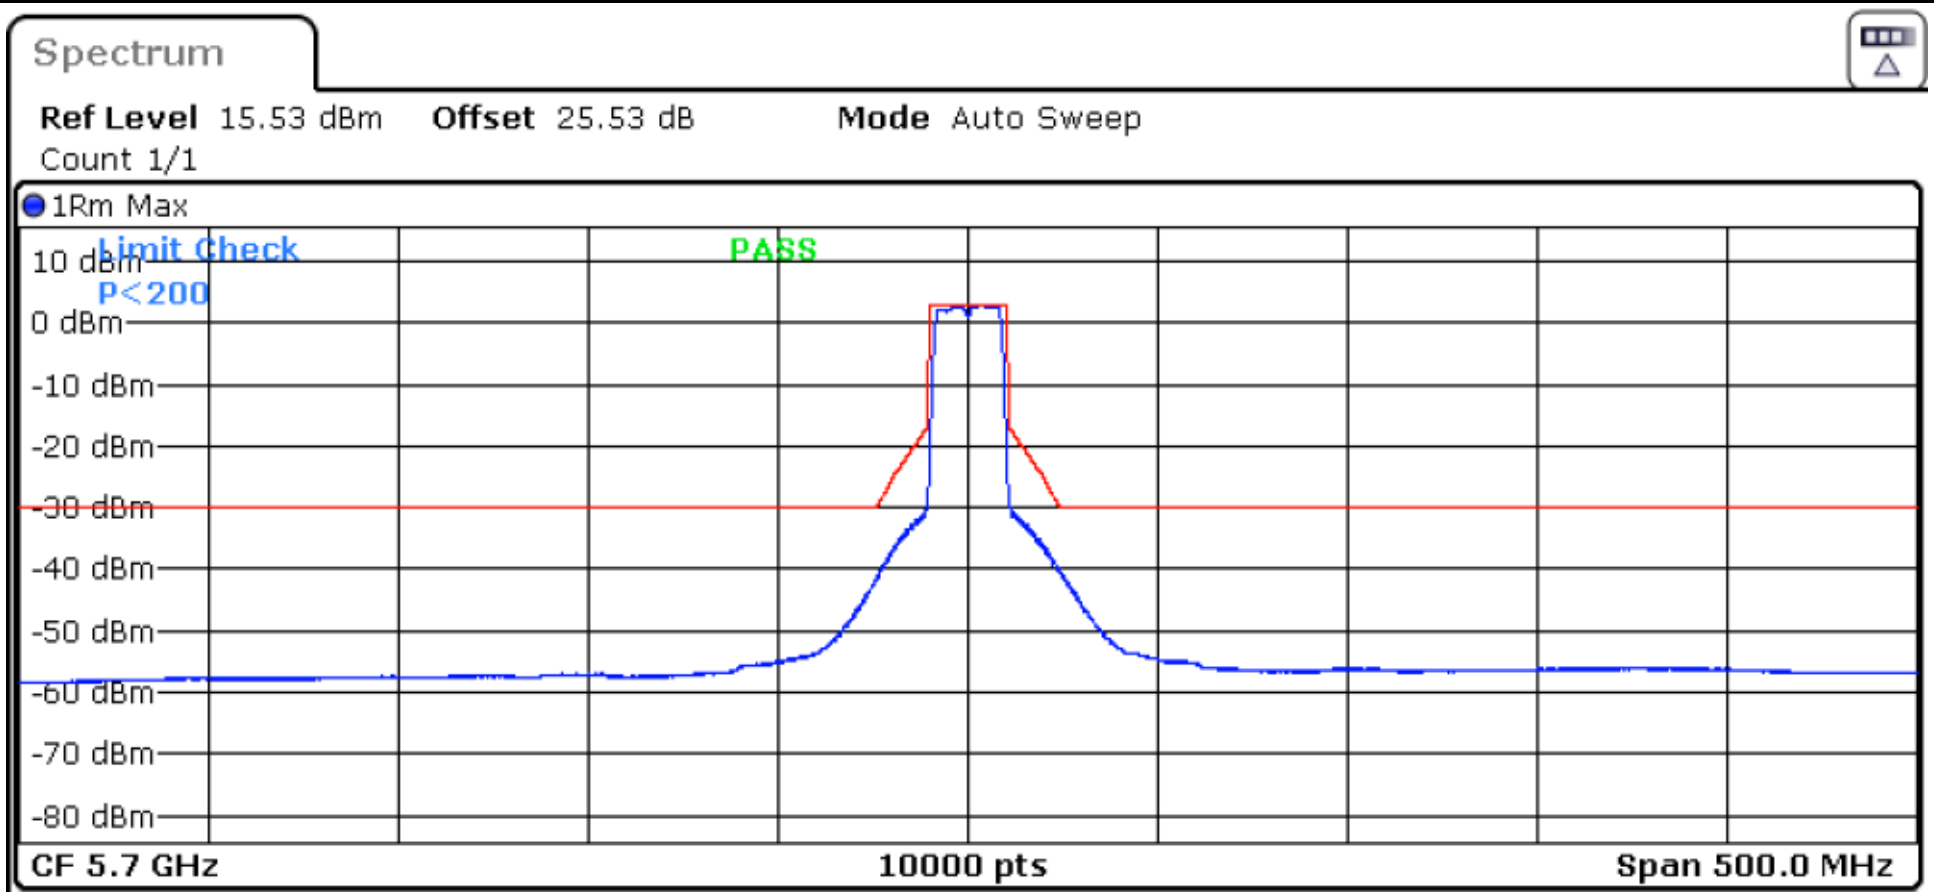

Spectrum Emission Mask Standard: None

Peak Power 2.82 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-250.000 MHz	-216.000 MHz	1.000 MHz	5.48378 GHz	-57.85 dBm	-60.67 dB	-27.85 dB
-216.000 MHz	-180.000 MHz	1.000 MHz	5.50028 GHz	-57.60 dBm	-60.42 dB	-27.60 dB
-180.000 MHz	-30.000 MHz	1.000 MHz	5.66988 GHz	-47.37 dBm	-50.18 dB	-17.37 dB
-30.000 MHz	-20.000 MHz	1.000 MHz	5.67603 GHz	-41.07 dBm	-43.89 dB	-11.12 dB
-20.000 MHz	-11.000 MHz	1.000 MHz	5.68058 GHz	-36.14 dBm	-38.96 dB	-11.47 dB
-11.000 MHz	-10.000 MHz	1.000 MHz	5.68903 GHz	-29.99 dBm	-32.81 dB	-13.31 dB
10.000 MHz	11.000 MHz	1.000 MHz	5.71098 GHz	-29.93 dBm	-32.75 dB	-13.25 dB
11.000 MHz	20.000 MHz	1.000 MHz	5.71878 GHz	-35.13 dBm	-37.94 dB	-11.03 dB
20.000 MHz	30.000 MHz	1.000 MHz	5.72398 GHz	-39.96 dBm	-42.77 dB	-10.00 dB
30.000 MHz	180.000 MHz	1.000 MHz	5.73023 GHz	-45.98 dBm	-48.79 dB	-15.98 dB

Date: 3.MAR.2026 16:38:31

11N40SISO_Ant6_5190

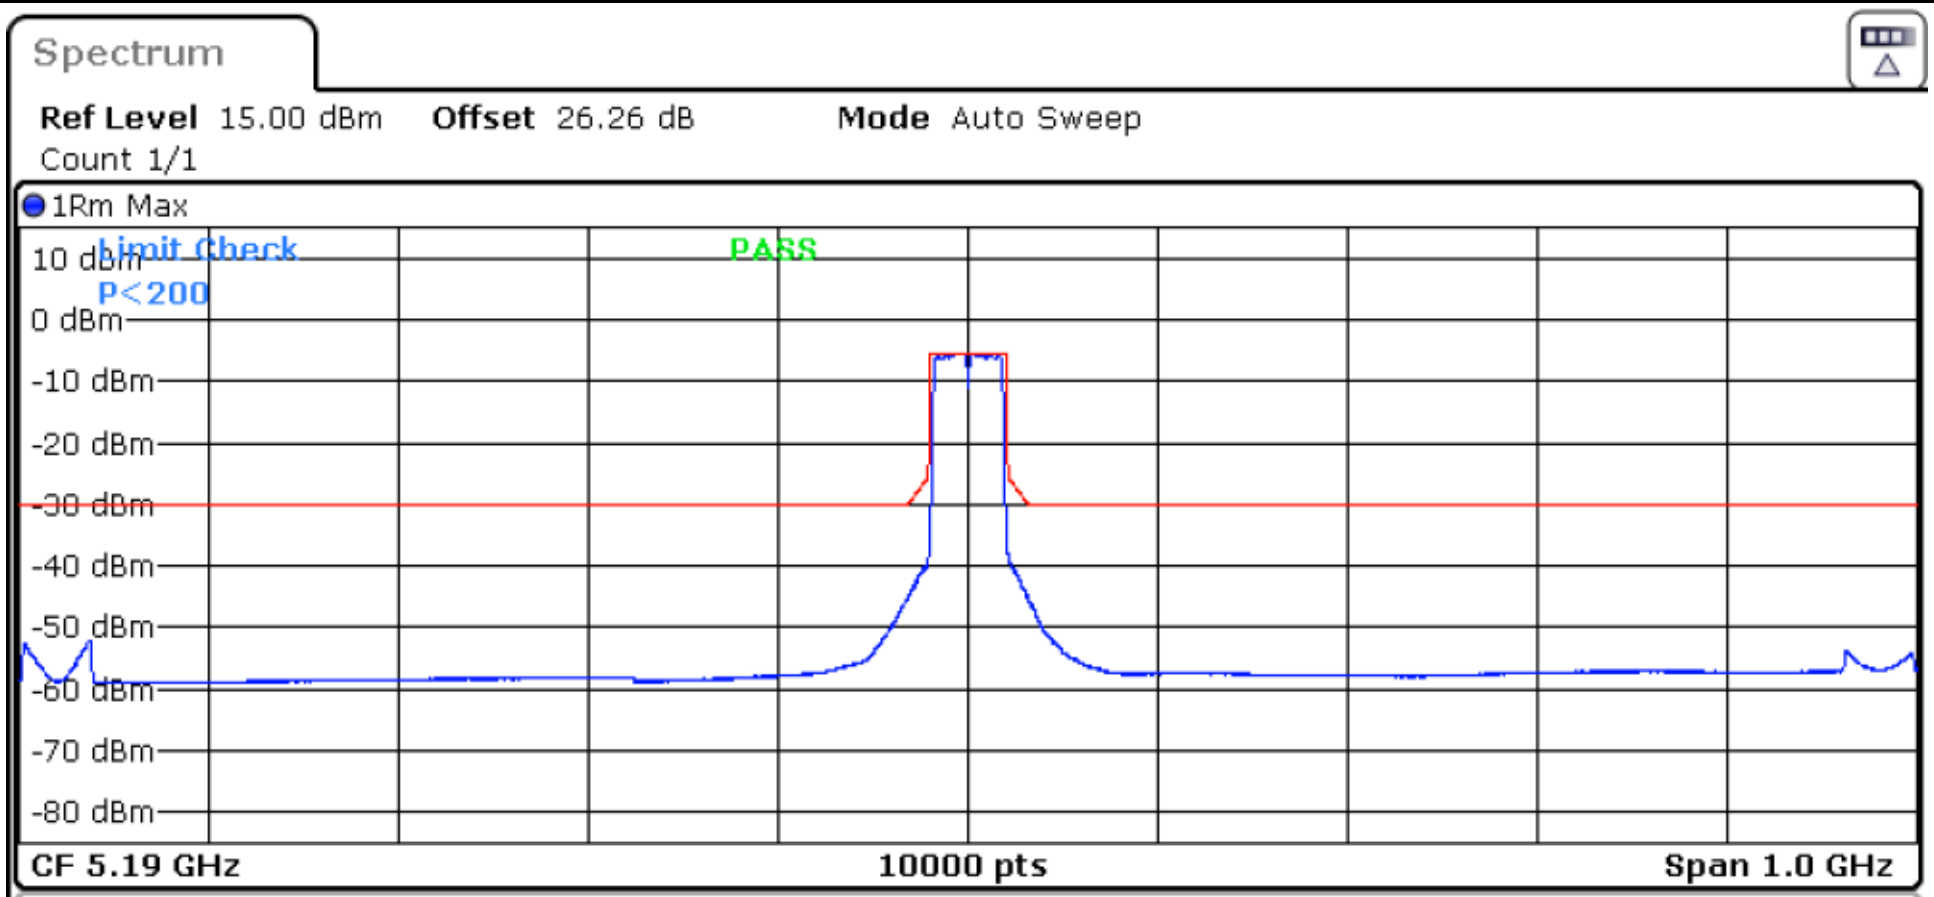

Spectrum Emission Mask Standard: None

Peak Power -5.52 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-500.000 MHz	-432.000 MHz	1.000 MHz	4.72725 GHz	-52.09 dBm	-46.57 dB	-22.09 dB
-432.000 MHz	-360.000 MHz	1.000 MHz	4.82725 GHz	-58.60 dBm	-53.08 dB	-28.60 dB
-360.000 MHz	-60.000 MHz	1.000 MHz	5.12955 GHz	-55.95 dBm	-50.43 dB	-25.95 dB
-60.000 MHz	-40.000 MHz	1.000 MHz	5.14985 GHz	-49.62 dBm	-44.10 dB	-19.62 dB
-40.000 MHz	-21.000 MHz	1.000 MHz	5.16895 GHz	-38.70 dBm	-33.18 dB	-13.16 dB
-21.000 MHz	-20.000 MHz	1.000 MHz	5.16905 GHz	-38.71 dBm	-33.19 dB	-14.19 dB
20.000 MHz	21.000 MHz	1.000 MHz	5.21095 GHz	-38.05 dBm	-32.54 dB	-13.54 dB
21.000 MHz	40.000 MHz	1.000 MHz	5.21115 GHz	-38.67 dBm	-33.15 dB	-13.08 dB
40.000 MHz	60.000 MHz	1.000 MHz	5.23005 GHz	-50.49 dBm	-44.98 dB	-20.49 dB
60.000 MHz	360.000 MHz	1.000 MHz	5.25025 GHz	-55.86 dBm	-50.34 dB	-25.86 dB

Date: 3.MAR.2026 16:44:11

11N40SISO_Ant6_5230

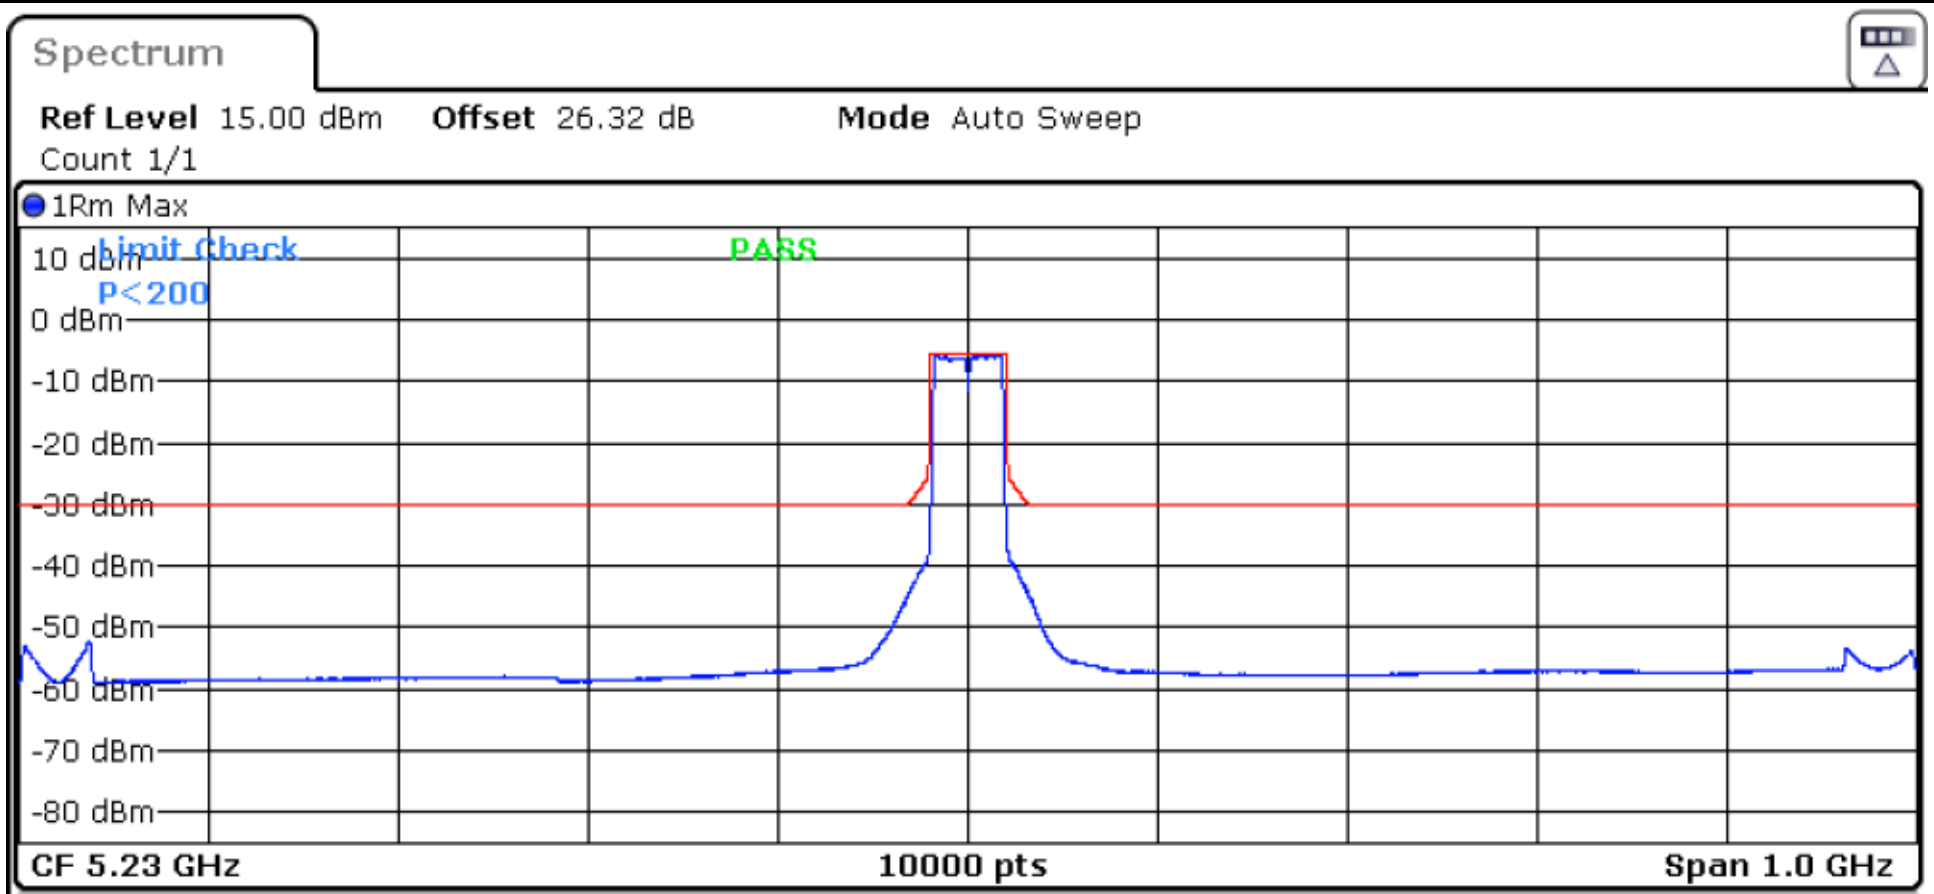

Spectrum Emission Mask Standard: None

Peak Power -5.61 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-500.000 MHz	-432.000 MHz	1.000 MHz	4.76725 GHz	-52.37 dBm	-46.77 dB	-22.37 dB
-432.000 MHz	-360.000 MHz	1.000 MHz	4.85705 GHz	-58.31 dBm	-52.71 dB	-28.31 dB
-360.000 MHz	-60.000 MHz	1.000 MHz	5.16995 GHz	-56.05 dBm	-50.45 dB	-26.05 dB
-60.000 MHz	-40.000 MHz	1.000 MHz	5.18975 GHz	-49.84 dBm	-44.24 dB	-19.84 dB
-40.000 MHz	-21.000 MHz	1.000 MHz	5.20885 GHz	-38.32 dBm	-32.71 dB	-12.65 dB
-21.000 MHz	-20.000 MHz	1.000 MHz	5.20905 GHz	-38.19 dBm	-32.58 dB	-13.58 dB
20.000 MHz	21.000 MHz	1.000 MHz	5.25095 GHz	-37.66 dBm	-32.05 dB	-13.05 dB
21.000 MHz	40.000 MHz	1.000 MHz	5.25115 GHz	-38.29 dBm	-32.68 dB	-12.62 dB
40.000 MHz	60.000 MHz	1.000 MHz	5.27005 GHz	-50.66 dBm	-45.05 dB	-20.66 dB
60.000 MHz	360.000 MHz	1.000 MHz	5.29025 GHz	-55.82 dBm	-50.22 dB	-25.82 dB

Date: 3.MAR.2026 17:35:15

11N40SISO_Ant6_5270

Spectrum

Ref Level 15.00 dBm **Offset** 26.25 dB **Mode** Auto Sweep
Count 1/1

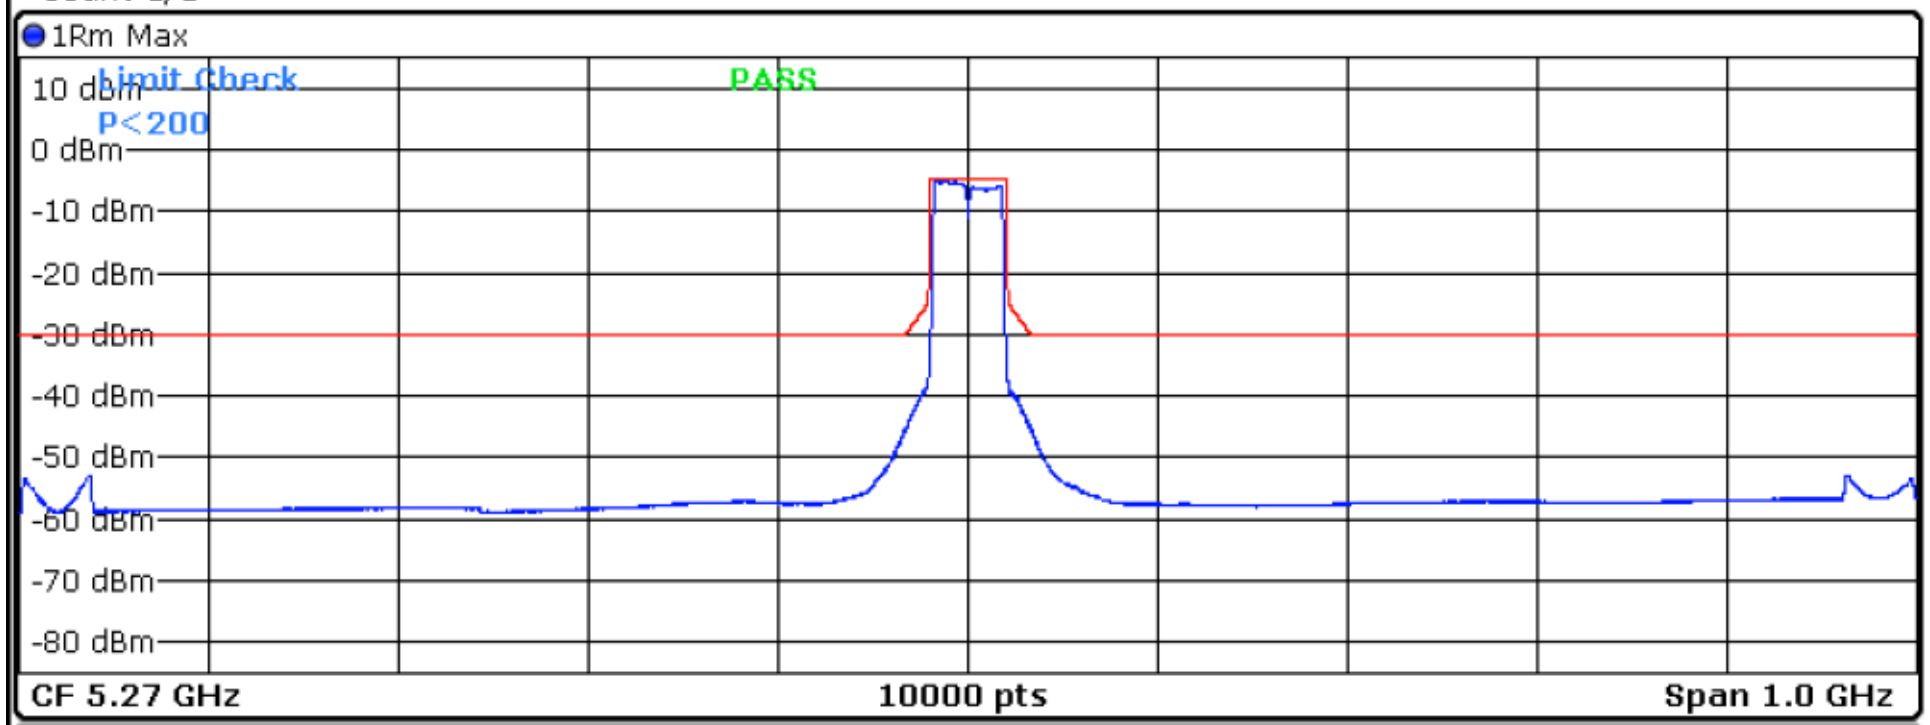

Spectrum Emission Mask **Standard: None**
Peak Power -4.93 dBm **RBW 1.000 MHz**

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-500.000 MHz	-432.000 MHz	1.000 MHz	4.80685 GHz	-52.79 dBm	-47.86 dB	-22.79 dB
-432.000 MHz	-360.000 MHz	1.000 MHz	4.90905 GHz	-58.31 dBm	-53.38 dB	-28.31 dB
-360.000 MHz	-60.000 MHz	1.000 MHz	5.20975 GHz	-56.25 dBm	-51.33 dB	-26.25 dB
-60.000 MHz	-40.000 MHz	1.000 MHz	5.22995 GHz	-50.08 dBm	-45.16 dB	-20.08 dB
-40.000 MHz	-21.000 MHz	1.000 MHz	5.24895 GHz	-37.53 dBm	-32.60 dB	-12.58 dB
-21.000 MHz	-20.000 MHz	1.000 MHz	5.24905 GHz	-37.27 dBm	-32.34 dB	-13.34 dB
20.000 MHz	21.000 MHz	1.000 MHz	5.29095 GHz	-37.67 dBm	-32.74 dB	-13.74 dB
21.000 MHz	40.000 MHz	1.000 MHz	5.29115 GHz	-38.08 dBm	-33.15 dB	-13.09 dB
40.000 MHz	60.000 MHz	1.000 MHz	5.31005 GHz	-50.23 dBm	-45.30 dB	-20.23 dB
60.000 MHz	360.000 MHz	1.000 MHz	5.33035 GHz	-55.47 dBm	-50.54 dB	-25.47 dB

Measuring...

Date: 3.MAR.2026 17:40:08

11N40SISO_Ant6_5310

Spectrum

Ref Level 15.00 dBm **Offset** 26.23 dB **Mode** Auto Sweep
Count 1/1

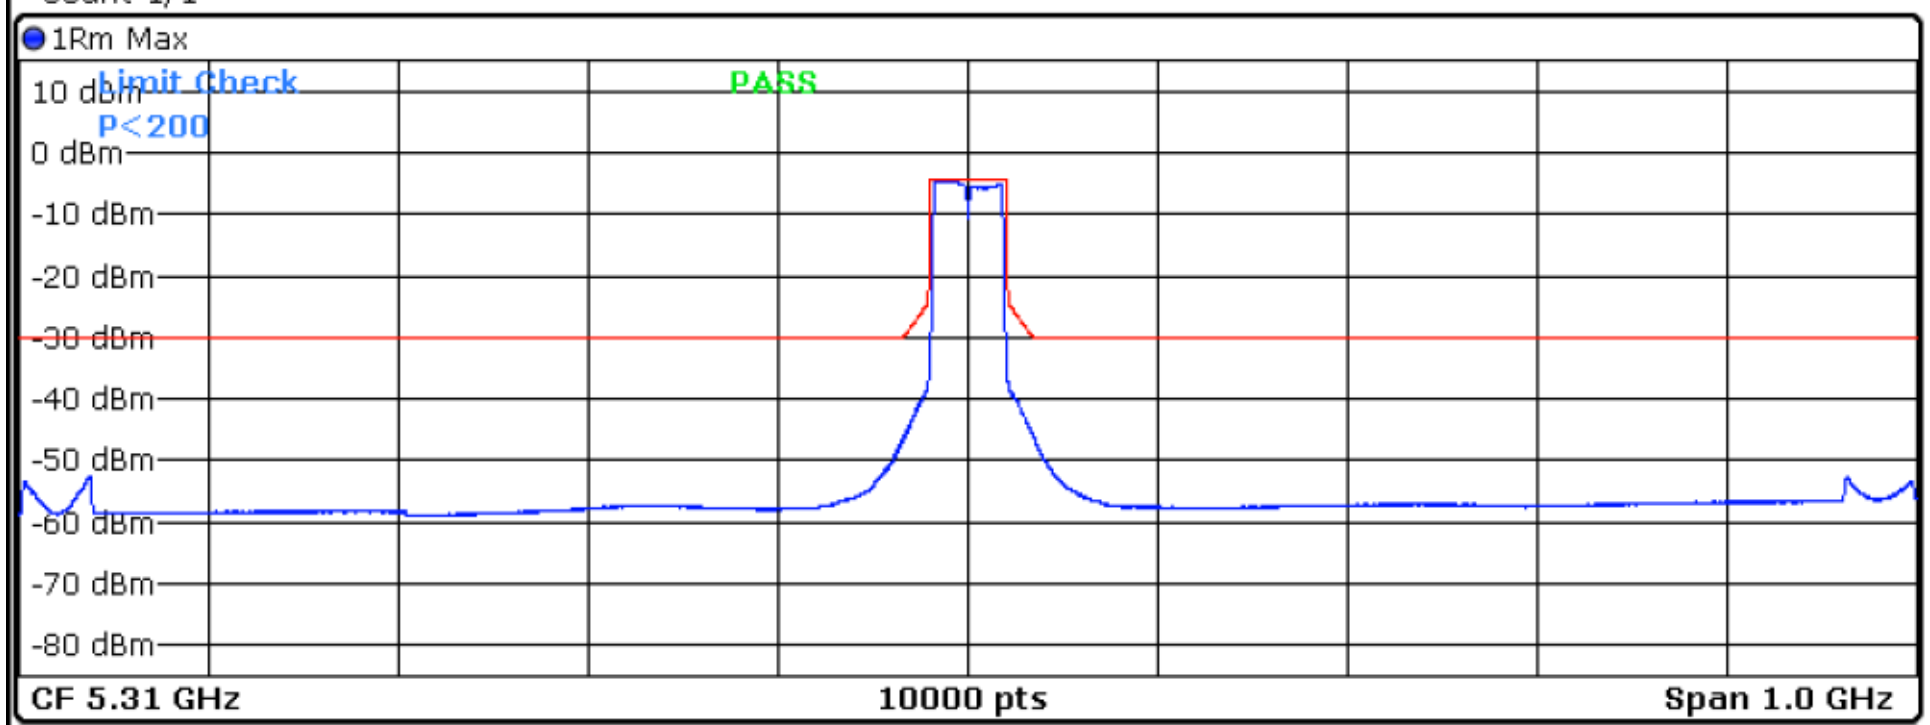

Spectrum Emission Mask **Standard: None**
Peak Power -4.47 dBm **RBW 1.000 MHz**

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-500.000 MHz	-432.000 MHz	1.000 MHz	4.84705 GHz	-52.56 dBm	-48.09 dB	-22.56 dB
-432.000 MHz	-360.000 MHz	1.000 MHz	4.93745 GHz	-58.25 dBm	-53.78 dB	-28.25 dB
-360.000 MHz	-60.000 MHz	1.000 MHz	5.24995 GHz	-55.96 dBm	-51.49 dB	-25.96 dB
-60.000 MHz	-40.000 MHz	1.000 MHz	5.26995 GHz	-50.12 dBm	-45.65 dB	-20.12 dB
-40.000 MHz	-21.000 MHz	1.000 MHz	5.28885 GHz	-37.65 dBm	-33.18 dB	-13.11 dB
-21.000 MHz	-20.000 MHz	1.000 MHz	5.28905 GHz	-37.23 dBm	-32.76 dB	-13.76 dB
20.000 MHz	21.000 MHz	1.000 MHz	5.33095 GHz	-37.16 dBm	-32.69 dB	-13.69 dB
21.000 MHz	40.000 MHz	1.000 MHz	5.33105 GHz	-37.39 dBm	-32.92 dB	-12.90 dB
40.000 MHz	60.000 MHz	1.000 MHz	5.35015 GHz	-49.93 dBm	-45.46 dB	-19.93 dB
60.000 MHz	360.000 MHz	1.000 MHz	5.37015 GHz	-55.76 dBm	-51.29 dB	-25.76 dB

Measuring...

Date: 3.MAR.2026 17:43:27

11N40SISO_Ant6_5510

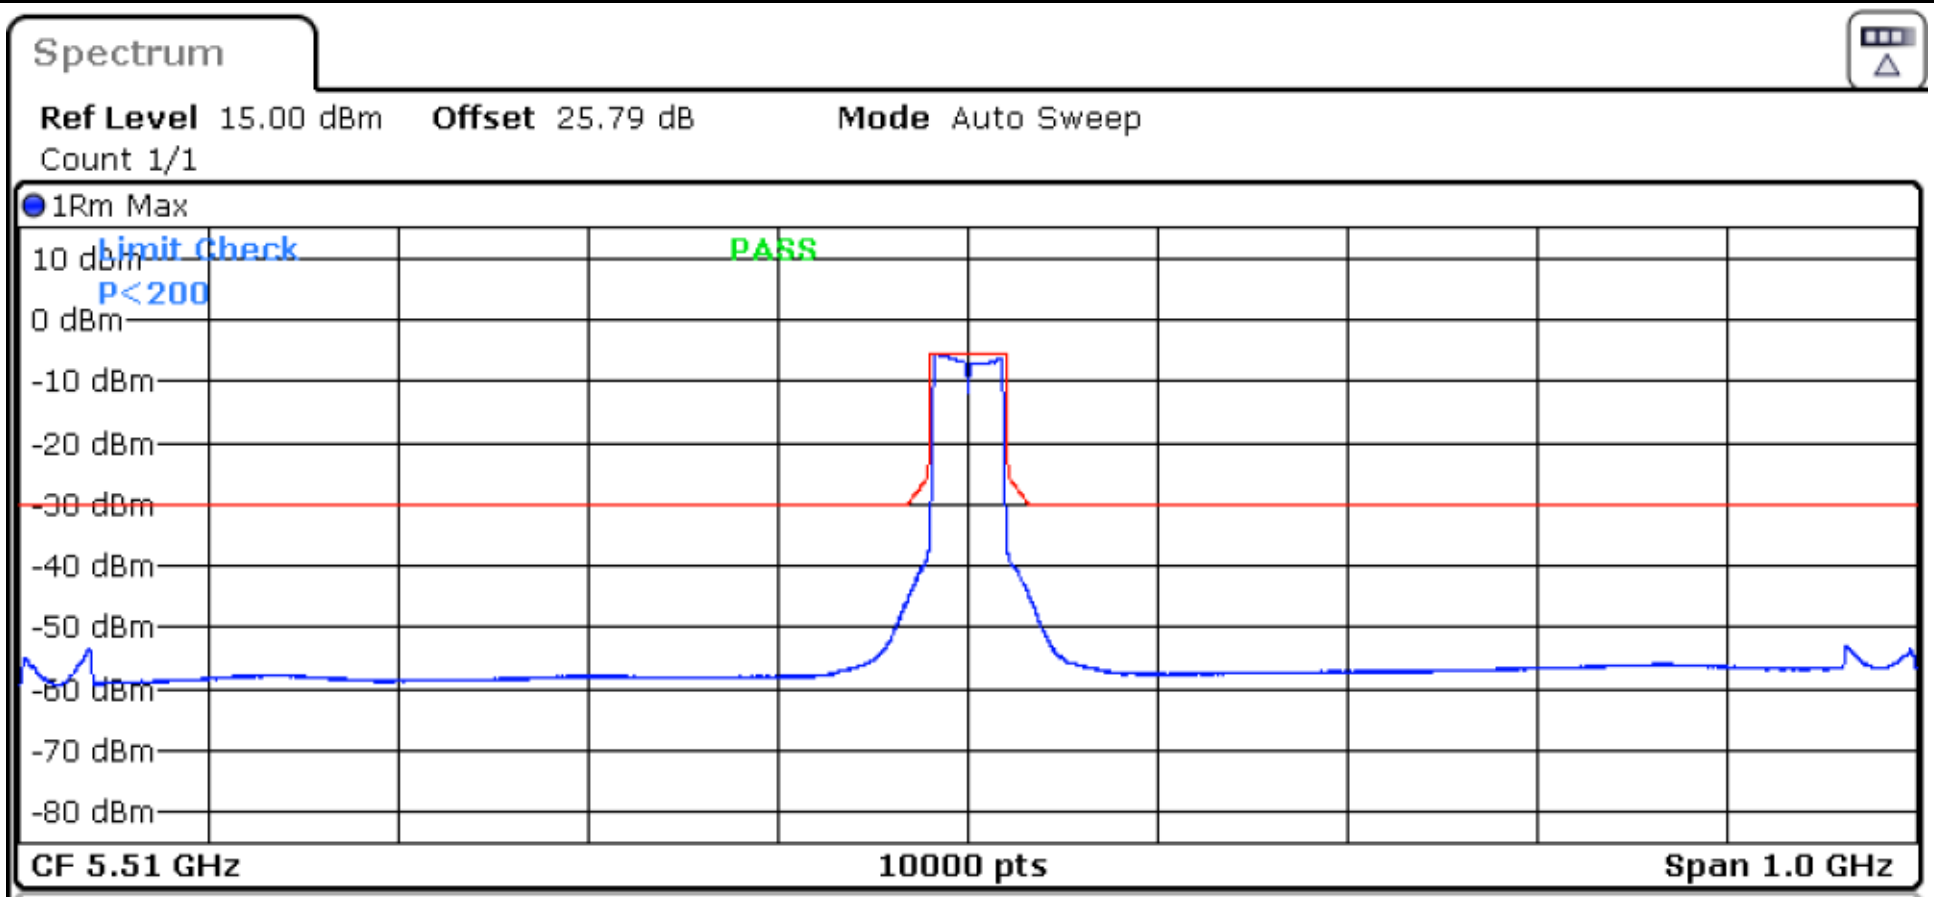

Spectrum Emission Mask Standard: None

Peak Power -5.41 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-500.000 MHz	-432.000 MHz	1.000 MHz	5.04705 GHz	-53.57 dBm	-48.15 dB	-23.57 dB
-432.000 MHz	-360.000 MHz	1.000 MHz	5.14275 GHz	-57.67 dBm	-52.26 dB	-27.67 dB
-360.000 MHz	-60.000 MHz	1.000 MHz	5.44965 GHz	-56.49 dBm	-51.08 dB	-26.49 dB
-60.000 MHz	-40.000 MHz	1.000 MHz	5.46985 GHz	-51.22 dBm	-45.81 dB	-21.22 dB
-40.000 MHz	-21.000 MHz	1.000 MHz	5.48895 GHz	-38.12 dBm	-32.70 dB	-12.68 dB
-21.000 MHz	-20.000 MHz	1.000 MHz	5.48905 GHz	-37.63 dBm	-32.22 dB	-13.22 dB
20.000 MHz	21.000 MHz	1.000 MHz	5.53095 GHz	-38.07 dBm	-32.65 dB	-13.65 dB
21.000 MHz	40.000 MHz	1.000 MHz	5.53105 GHz	-38.19 dBm	-32.78 dB	-12.76 dB
40.000 MHz	60.000 MHz	1.000 MHz	5.55025 GHz	-51.02 dBm	-45.61 dB	-21.02 dB
60.000 MHz	360.000 MHz	1.000 MHz	5.86995 GHz	-55.95 dBm	-50.54 dB	-25.95 dB

Date: 3.MAR.2026 17:48:05

11N40SISO_Ant6_5670

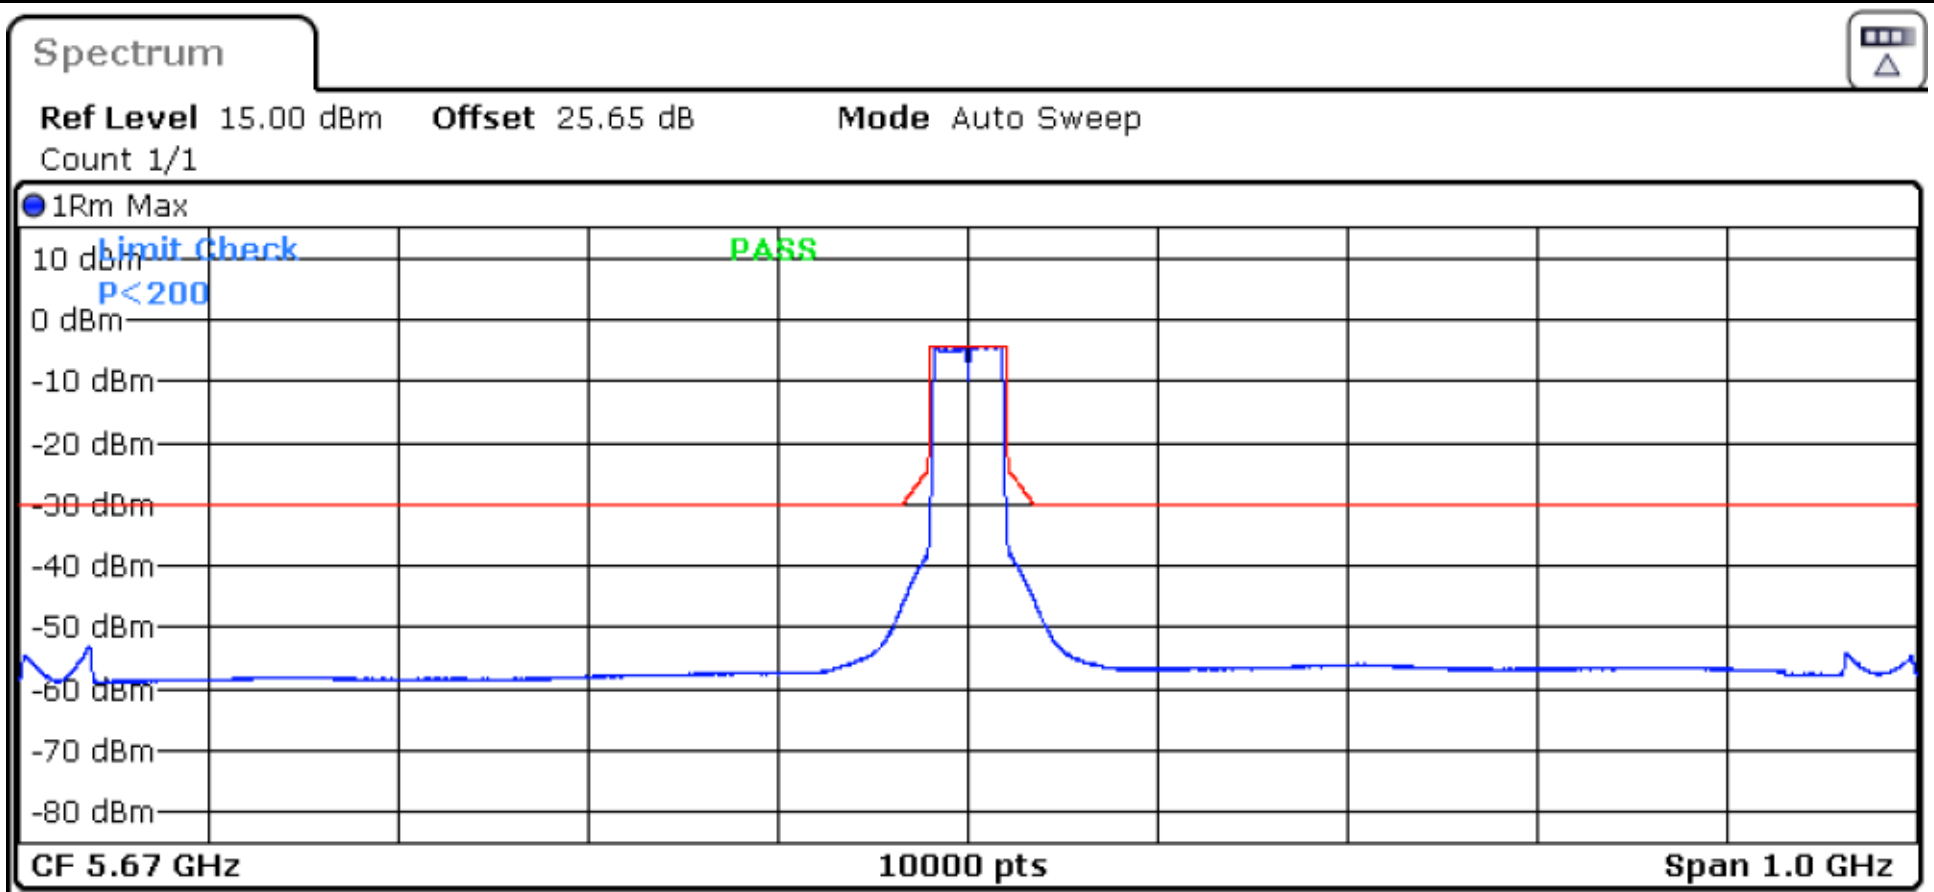

Spectrum Emission Mask Standard: None

Peak Power -4.25 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-500.000 MHz	-432.000 MHz	1.000 MHz	5.20695 GHz	-53.14 dBm	-48.88 dB	-23.14 dB
-432.000 MHz	-360.000 MHz	1.000 MHz	5.30795 GHz	-58.07 dBm	-53.81 dB	-28.07 dB
-360.000 MHz	-60.000 MHz	1.000 MHz	5.60985 GHz	-55.62 dBm	-51.36 dB	-25.62 dB
-60.000 MHz	-40.000 MHz	1.000 MHz	5.62985 GHz	-50.07 dBm	-45.81 dB	-20.07 dB
-40.000 MHz	-21.000 MHz	1.000 MHz	5.64895 GHz	-37.30 dBm	-33.04 dB	-13.02 dB
-21.000 MHz	-20.000 MHz	1.000 MHz	5.64905 GHz	-37.26 dBm	-33.00 dB	-14.00 dB
20.000 MHz	21.000 MHz	1.000 MHz	5.69095 GHz	-36.99 dBm	-32.74 dB	-13.74 dB
21.000 MHz	40.000 MHz	1.000 MHz	5.69105 GHz	-36.94 dBm	-32.69 dB	-12.67 dB
40.000 MHz	60.000 MHz	1.000 MHz	5.71025 GHz	-49.42 dBm	-45.16 dB	-19.42 dB
60.000 MHz	360.000 MHz	1.000 MHz	5.73005 GHz	-55.41 dBm	-51.15 dB	-25.41 dB

Date: 3.MAR.2026 17:51:18

11AC80SISO_Ant6_5210

Spectrum

Ref Level 15.00 dBm Offset 26.25 dB Mode Auto Sweep

Count 1/1

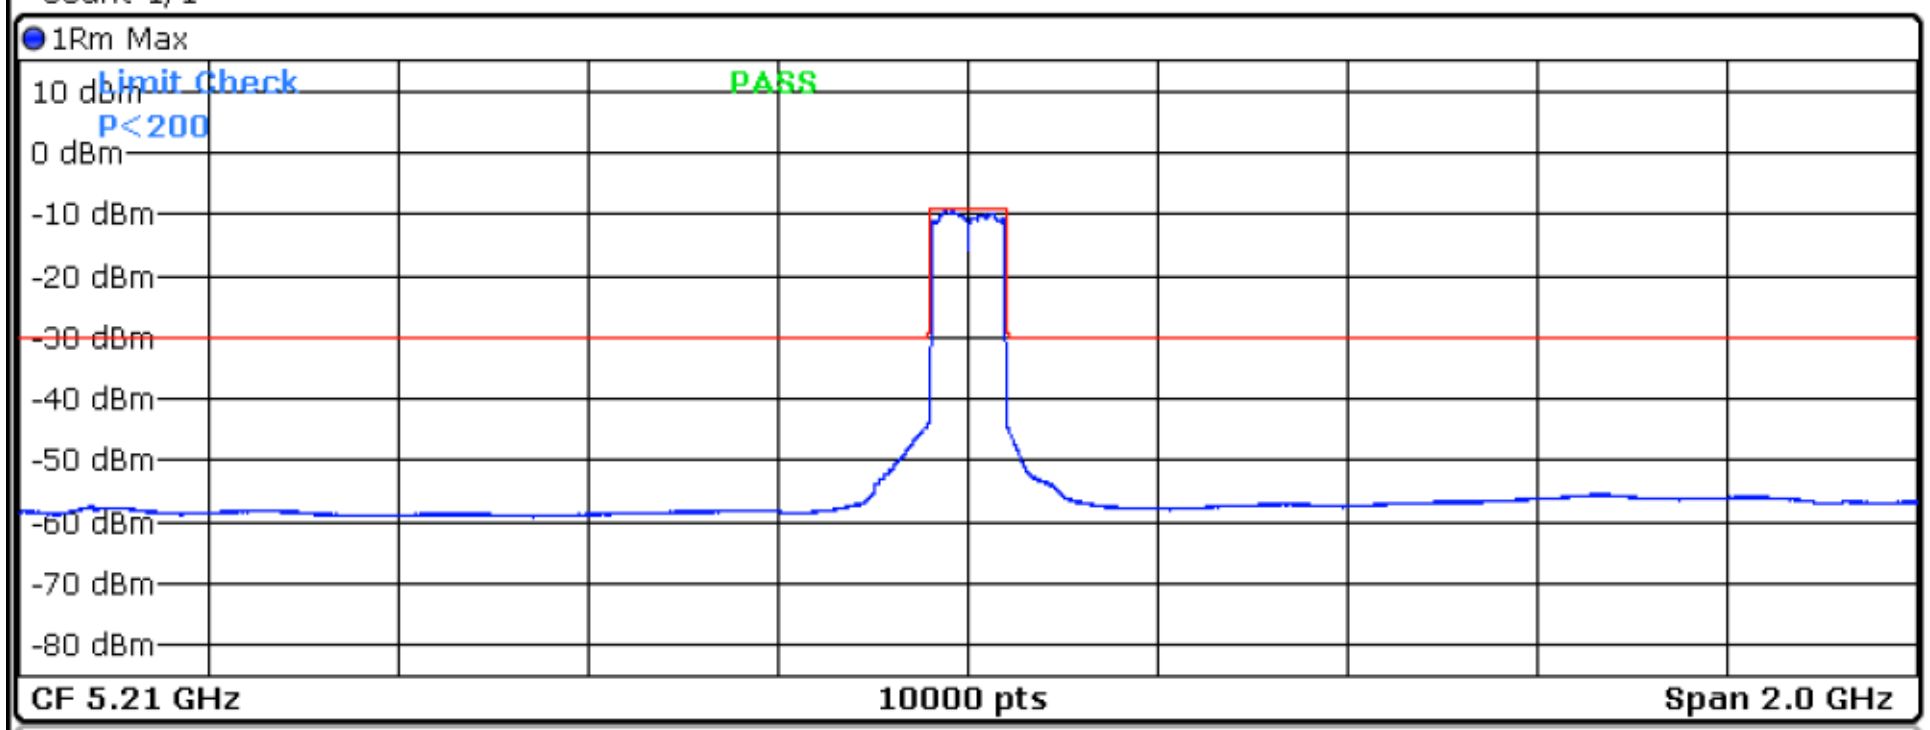

Spectrum Emission Mask Standard: None

Peak Power -9.26 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-1.000 GHz	-864.000 MHz	1.000 MHz	4.28670 GHz	-57.35 dBm	-48.10 dB	-27.35 dB
-864.000 MHz	-720.000 MHz	1.000 MHz	4.47370 GHz	-58.04 dBm	-48.78 dB	-28.04 dB
-720.000 MHz	-120.000 MHz	1.000 MHz	5.08830 GHz	-57.21 dBm	-47.95 dB	-27.21 dB
-120.000 MHz	-80.000 MHz	1.000 MHz	5.12970 GHz	-51.43 dBm	-42.17 dB	-21.43 dB
-80.000 MHz	-41.000 MHz	1.000 MHz	5.16750 GHz	-43.77 dBm	-34.51 dB	-14.21 dB
-41.000 MHz	-40.000 MHz	1.000 MHz	5.16910 GHz	-43.71 dBm	-34.45 dB	-16.45 dB
40.000 MHz	41.000 MHz	1.000 MHz	5.25090 GHz	-44.33 dBm	-35.07 dB	-17.07 dB
41.000 MHz	80.000 MHz	1.000 MHz	5.25170 GHz	-44.57 dBm	-35.31 dB	-15.17 dB
80.000 MHz	120.000 MHz	1.000 MHz	5.29130 GHz	-53.55 dBm	-44.29 dB	-23.55 dB
120.000 MHz	720.000 MHz	1.000 MHz	5.87550 GHz	-55.44 dBm	-46.19 dB	-25.44 dB

Date: 3.MAR.2026 17:58:57

11AC80SISO_Ant6_5290

Spectrum

Ref Level 15.00 dBm Offset 26.42 dB Mode Auto Sweep

Count 1/1

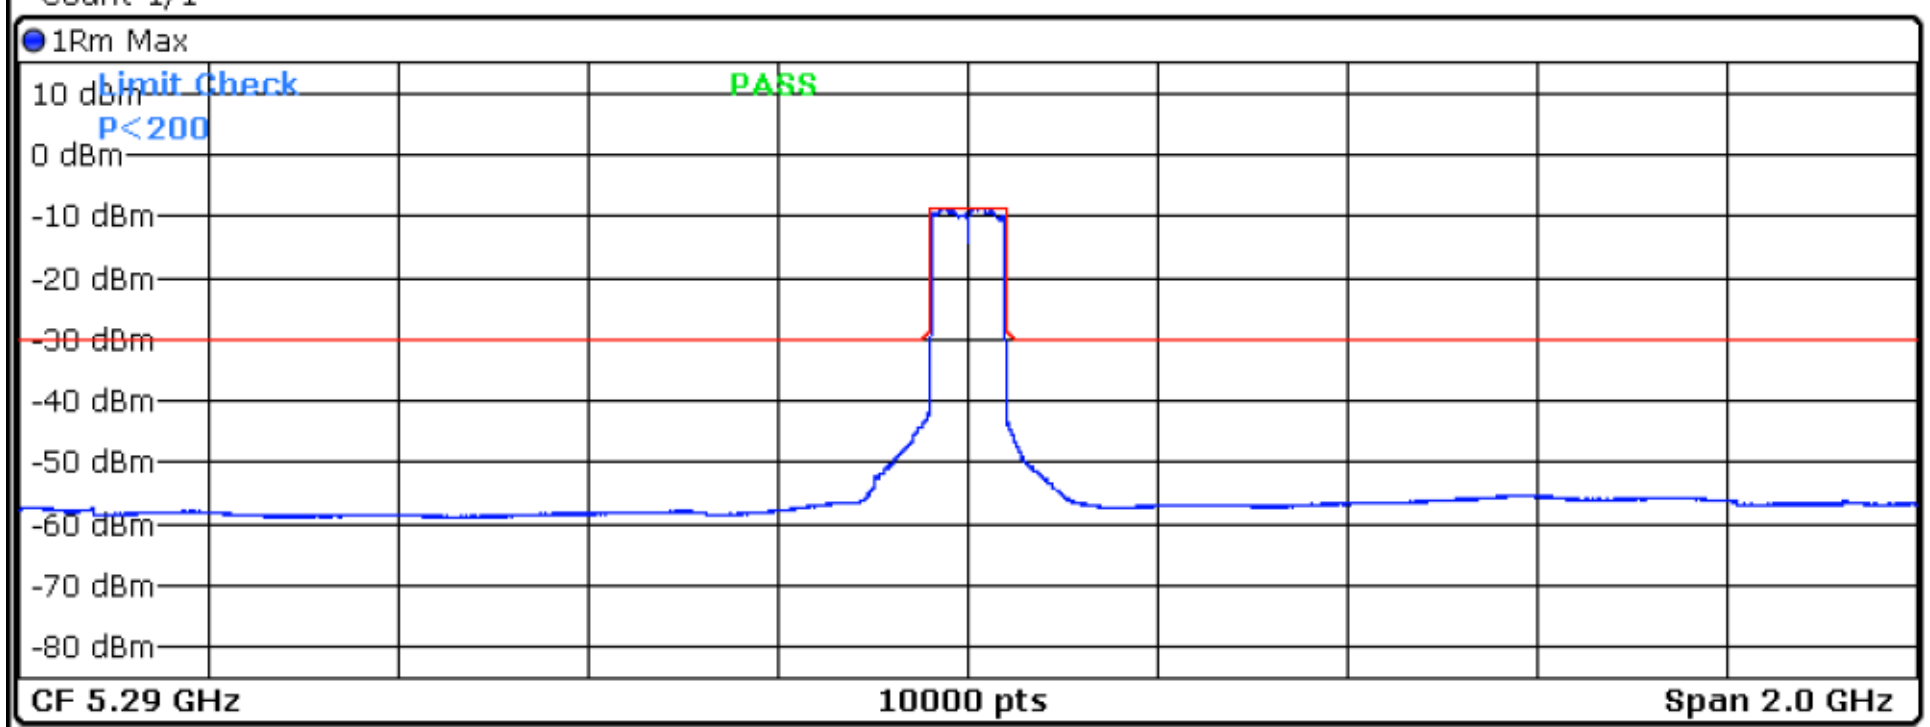

Spectrum Emission Mask Standard: None

Peak Power -8.55 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-1.000 GHz	-864.000 MHz	1.000 MHz	4.30290 GHz	-57.29 dBm	-48.74 dB	-27.29 dB
-864.000 MHz	-720.000 MHz	1.000 MHz	4.47050 GHz	-57.85 dBm	-49.29 dB	-27.85 dB
-720.000 MHz	-120.000 MHz	1.000 MHz	5.15370 GHz	-56.50 dBm	-47.95 dB	-26.50 dB
-120.000 MHz	-80.000 MHz	1.000 MHz	5.20950 GHz	-50.21 dBm	-41.66 dB	-20.21 dB
-80.000 MHz	-41.000 MHz	1.000 MHz	5.24770 GHz	-42.06 dBm	-33.50 dB	-13.24 dB
-41.000 MHz	-40.000 MHz	1.000 MHz	5.24910 GHz	-41.94 dBm	-33.39 dB	-15.39 dB
40.000 MHz	41.000 MHz	1.000 MHz	5.33090 GHz	-43.43 dBm	-34.88 dB	-16.88 dB
41.000 MHz	80.000 MHz	1.000 MHz	5.33190 GHz	-43.54 dBm	-34.99 dB	-14.80 dB
80.000 MHz	120.000 MHz	1.000 MHz	5.37030 GHz	-52.63 dBm	-44.08 dB	-22.63 dB
120.000 MHz	720.000 MHz	1.000 MHz	5.87510 GHz	-55.20 dBm	-46.65 dB	-25.20 dB

Date: 3.MAR.2026 18:03:33

11AC80SISO_Ant6_5530

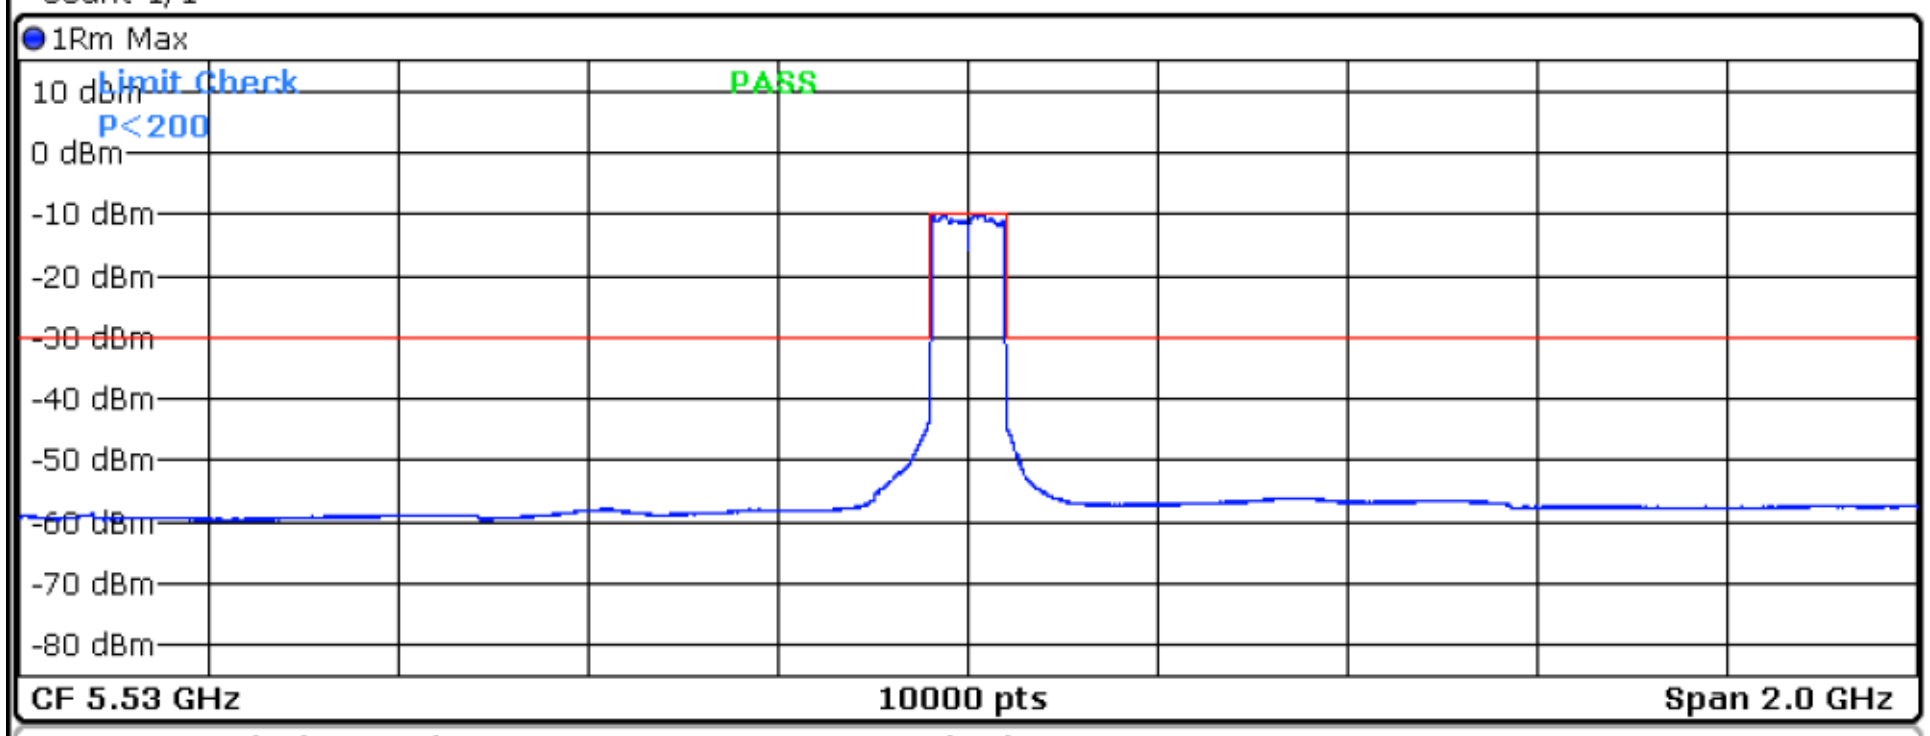

Spectrum Emission Mask Standard: None

Peak Power -10.09 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-1.000 GHz	-864.000 MHz	1.000 MHz	4.60730 GHz	-58.53 dBm	-48.44 dB	-28.53 dB
-864.000 MHz	-720.000 MHz	1.000 MHz	4.68310 GHz	-59.23 dBm	-49.14 dB	-29.23 dB
-720.000 MHz	-120.000 MHz	1.000 MHz	5.40950 GHz	-57.54 dBm	-47.44 dB	-27.54 dB
-120.000 MHz	-80.000 MHz	1.000 MHz	5.44950 GHz	-53.29 dBm	-43.19 dB	-23.29 dB
-80.000 MHz	-41.000 MHz	1.000 MHz	5.48890 GHz	-43.76 dBm	-33.66 dB	-13.76 dB
-41.000 MHz	-40.000 MHz	1.000 MHz	5.48910 GHz	-43.67 dBm	-33.57 dB	-15.57 dB
40.000 MHz	41.000 MHz	1.000 MHz	5.57090 GHz	-44.63 dBm	-34.54 dB	-16.54 dB
41.000 MHz	80.000 MHz	1.000 MHz	5.57110 GHz	-44.74 dBm	-34.65 dB	-14.74 dB
80.000 MHz	120.000 MHz	1.000 MHz	5.61010 GHz	-55.19 dBm	-45.10 dB	-25.19 dB
120.000 MHz	720.000 MHz	1.000 MHz	5.87510 GHz	-55.99 dBm	-45.90 dB	-25.99 dB

Date: 3.MAR.2026 18:08:22

Appendix B Radiated Spurious Emission Test Data

Test Engineer :	Juggler Zhang	Relative Humidity :	42 ~ 43％
		Temperature :	22~ 23℃

Radiated Spurious Emission Test Modes

Antenna	Mode	TX/RX	Test Function	Condition	Modulation	Channel	Frequency	Axis
6	Mode 1	Tx	802.11a	6Mbps	OFDM	CH36	5180	Z
6	Mode 2	Tx	802.11a	6Mbps	OFDM	CH64	5320	Z
6	Mode 3	Tx	802.11a	6Mbps	OFDM	CH100	5500	Z
6	Mode 4	Tx	802.11n HT20	MCS0	OFDM	CH36	5180	Z
6	Mode 5	Tx	802.11n HT20	MCS0	OFDM	CH64	5320	Z
6	Mode 6	Tx	802.11n HT20	MCS0	OFDM	CH100	5500	Z
6	Mode 7	Tx	802.11n HT40	MCS0	OFDM	CH38	5190	Z
6	Mode 8	Tx	802.11n HT40	MCS0	OFDM	CH62	5310	Z
6	Mode 9	Tx	802.11n HT40	MCS0	OFDM	CH102	5510	Z
6	Mode 10	Tx	802.11ac VHT80	MCS0	OFDM	CH42	5210	Z
6	Mode 11	Tx	802.11ac VHT80	MCS0	OFDM	CH58	5290	Z
6	Mode 12	Tx	802.11ac VHT80	MCS0	OFDM	CH106	5530	Z
6	Mode 13	RX	802.11n HT20	MCS0	OFDM	CH64	5320	Z

Note: RX mode is verified worse case of TX modes.

Summary of each worse mode

Mode	Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization	Result
1	17512.92	-36.95	-30.00	-6.95	Horizontal	Pass
2	17729.26	-37.45	-30.00	-7.45	Horizontal	Pass
3	17840.49	-37.74	-30.00	-7.74	Horizontal	Pass
4	17907.72	-36.71	-30.00	-6.71	Horizontal	Pass
5	6986.50	-35.11	-30.00	-5.11	Horizontal	Pass
6	6997.00	-35.40	-30.00	-5.40	Horizontal	Pass
7	6983.50	-35.57	-30.00	-5.57	Horizontal	Pass
8	6985.00	-35.67	-30.00	-5.67	Horizontal	Pass
9	7000.00	-35.64	-30.00	-5.64	Horizontal	Pass
10	17773.27	-37.46	-30.00	-7.46	Horizontal	Pass
11	17813.60	-37.62	-30.00	-7.62	Horizontal	Pass
12	17756.15	-37.28	-30.00	-7.28	Horizontal	Pass
13	31.94	-63.14	-57.00	-6.14	Horizontal	Pass

Mode	1	
	802.11a OFDM_CH36	
Ant	6	
Pol.	Horizontal	Vertical

Tx

Horizontal

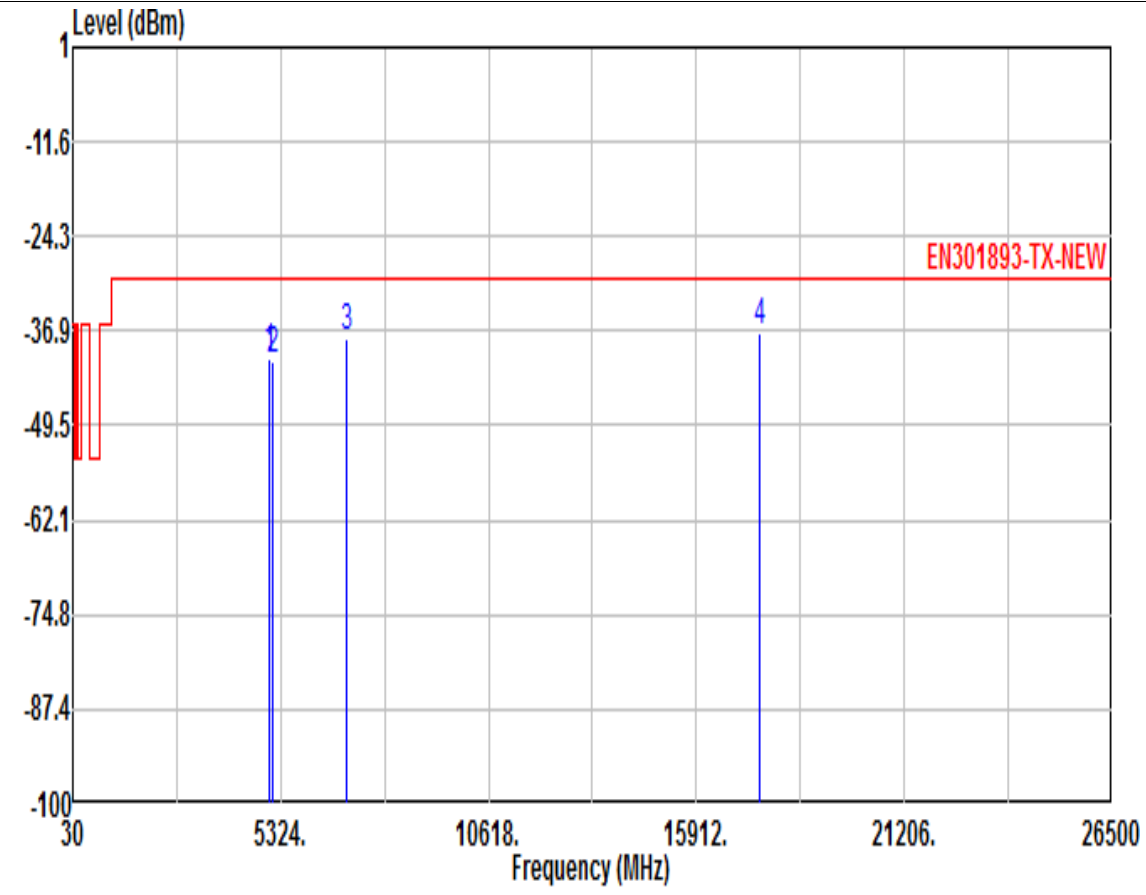

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5042.50	-40.61	-10.61	-30.00	-69.65	29.04	HORIZONTAL
2	5125.75	-41.08	-11.08	-30.00	-70.04	28.96	HORIZONTAL
3	7000.00	-37.98	-7.98	-30.00	-69.48	31.50	HORIZONTAL
4 @	17512.92	-36.95	-6.95	-30.00	-77.16	40.21	HORIZONTAL

Vertical

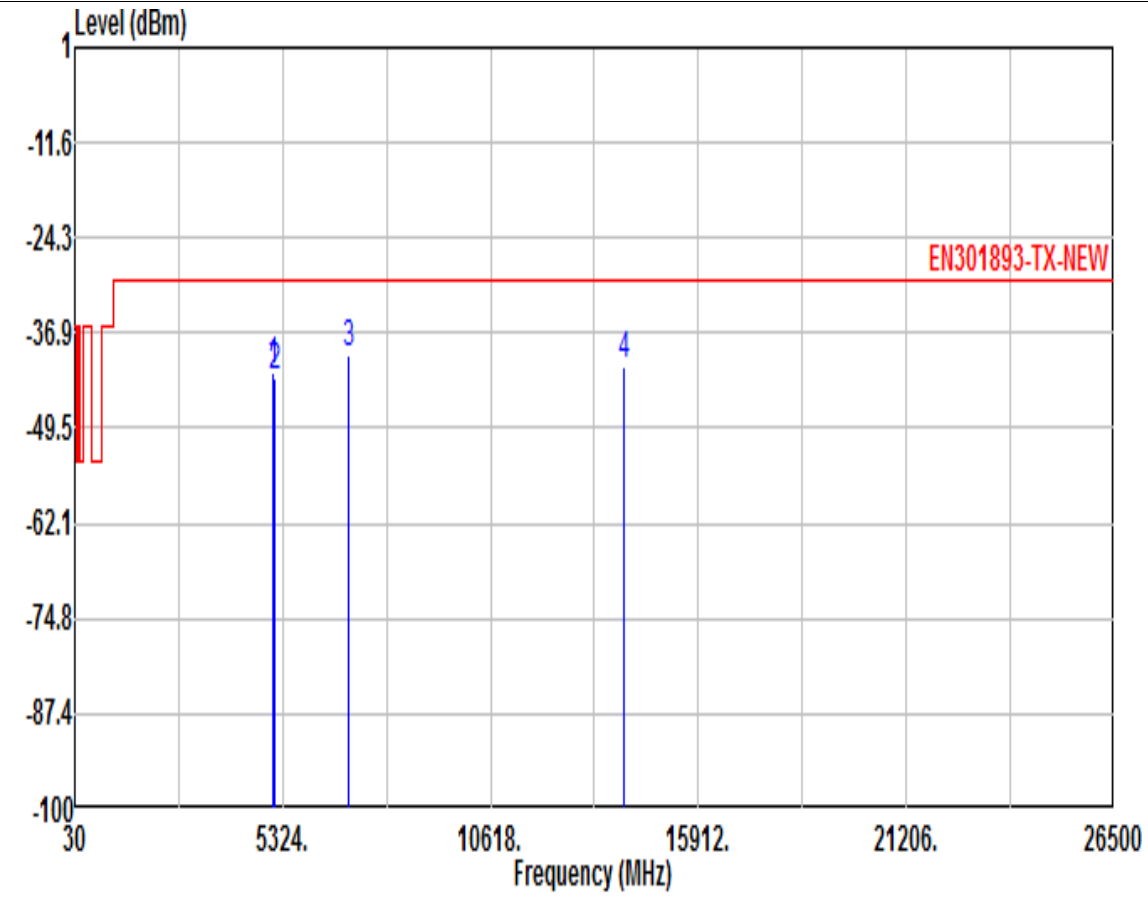

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5072.50	-42.10	-12.10	-30.00	-68.40	26.30	VERTICAL
2	5130.10	-42.82	-12.82	-30.00	-69.12	26.30	VERTICAL
3 @	6994.00	-39.61	-9.61	-30.00	-68.38	28.77	VERTICAL
4	14008.61	-41.16	-11.16	-30.00	-77.26	36.10	VERTICAL

Mode	2	
	802.11a OFDM_CH64	
Ant	6	
Pol.	Horizontal	Vertical
Tx	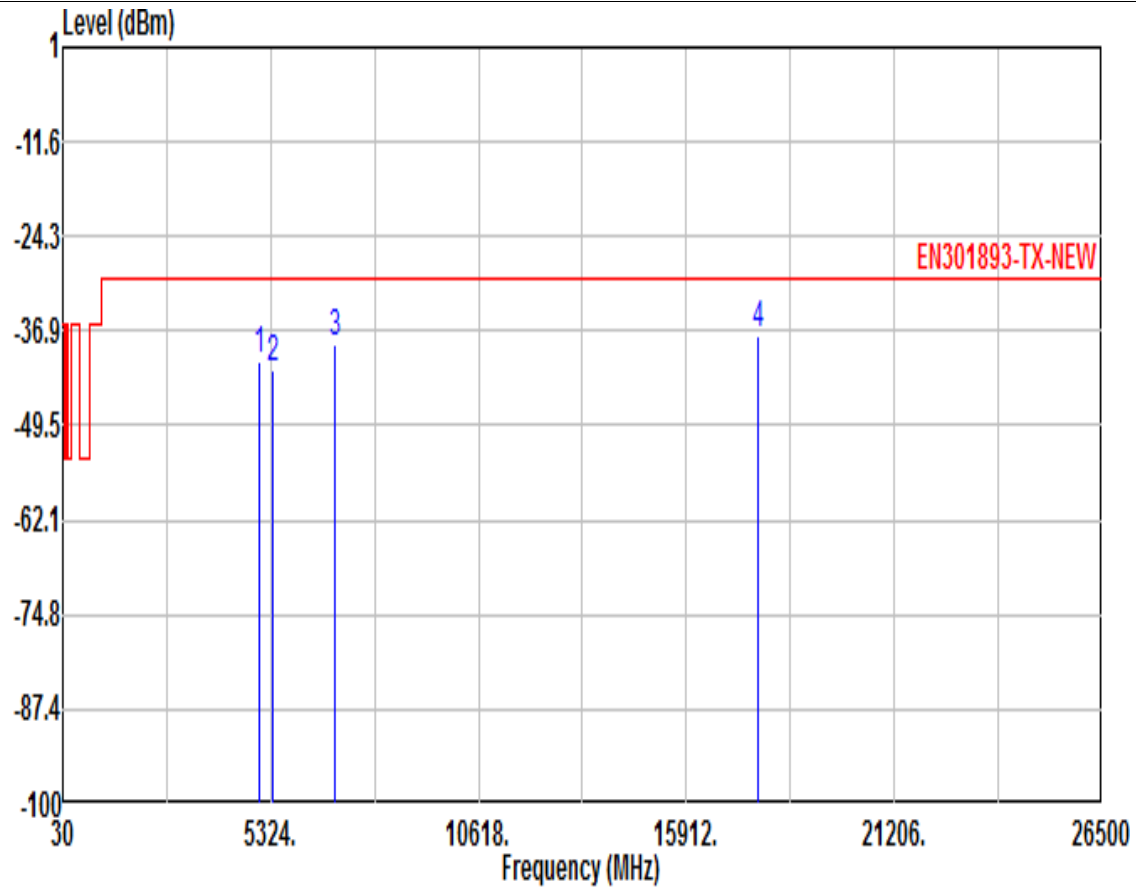	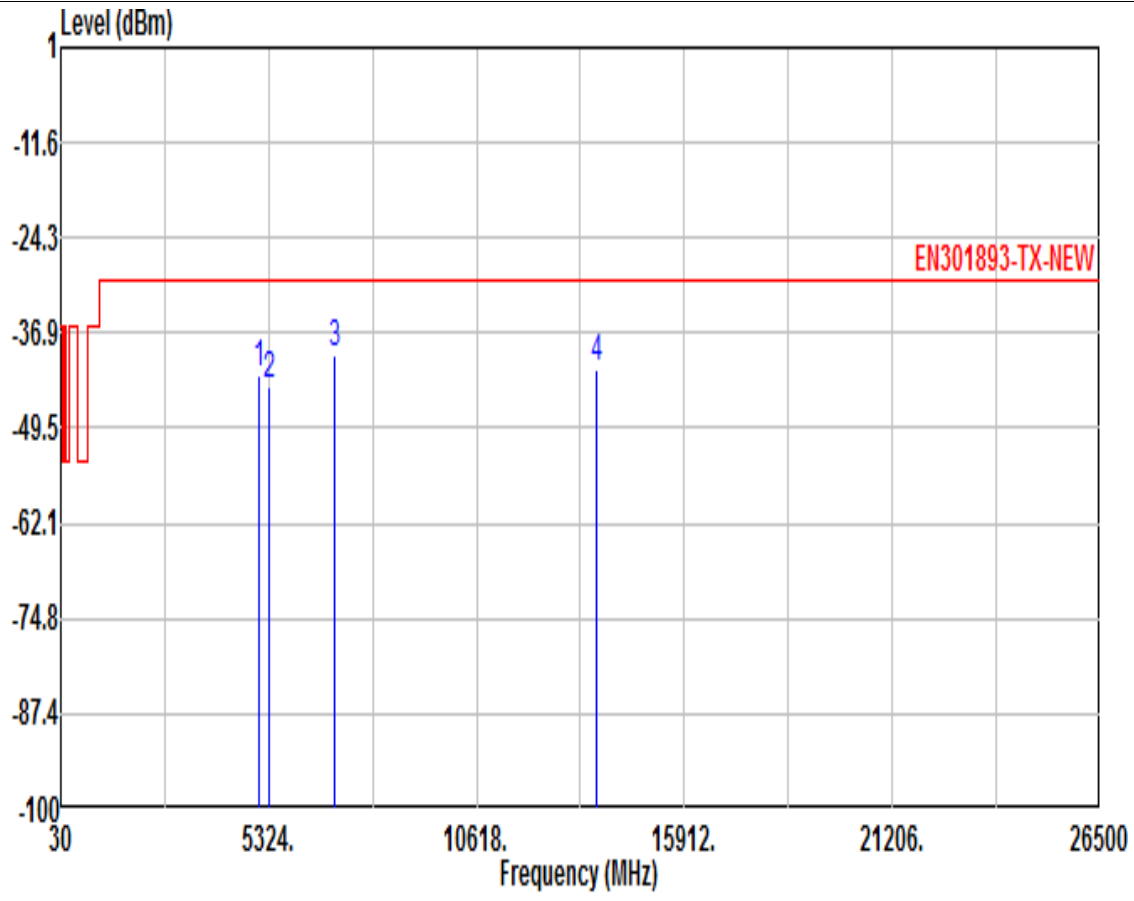

Horizontal:

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5050.00	-40.92	-10.92	-30.00	-69.94	29.02	HORIZONTAL
2	5390.85	-42.07	-12.07	-30.00	-71.08	29.01	HORIZONTAL
3	6971.50	-38.52	-8.52	-30.00	-69.73	31.21	HORIZONTAL
4 @	17729.26	-37.45	-7.45	-30.00	-77.90	40.45	HORIZONTAL

Vertical:

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5069.50	-42.59	-12.59	-30.00	-68.90	26.31	VERTICAL
2	5350.85	-43.83	-13.83	-30.00	-69.79	25.96	VERTICAL
3 @	6998.50	-39.88	-9.88	-30.00	-68.69	28.81	VERTICAL
4	13676.15	-41.57	-11.57	-30.00	-77.44	35.87	VERTICAL

Mode	3	
	802.11a OFDM_CH100	
Ant	6	
Pol.	Horizontal	Vertical

Tx

Horizontal

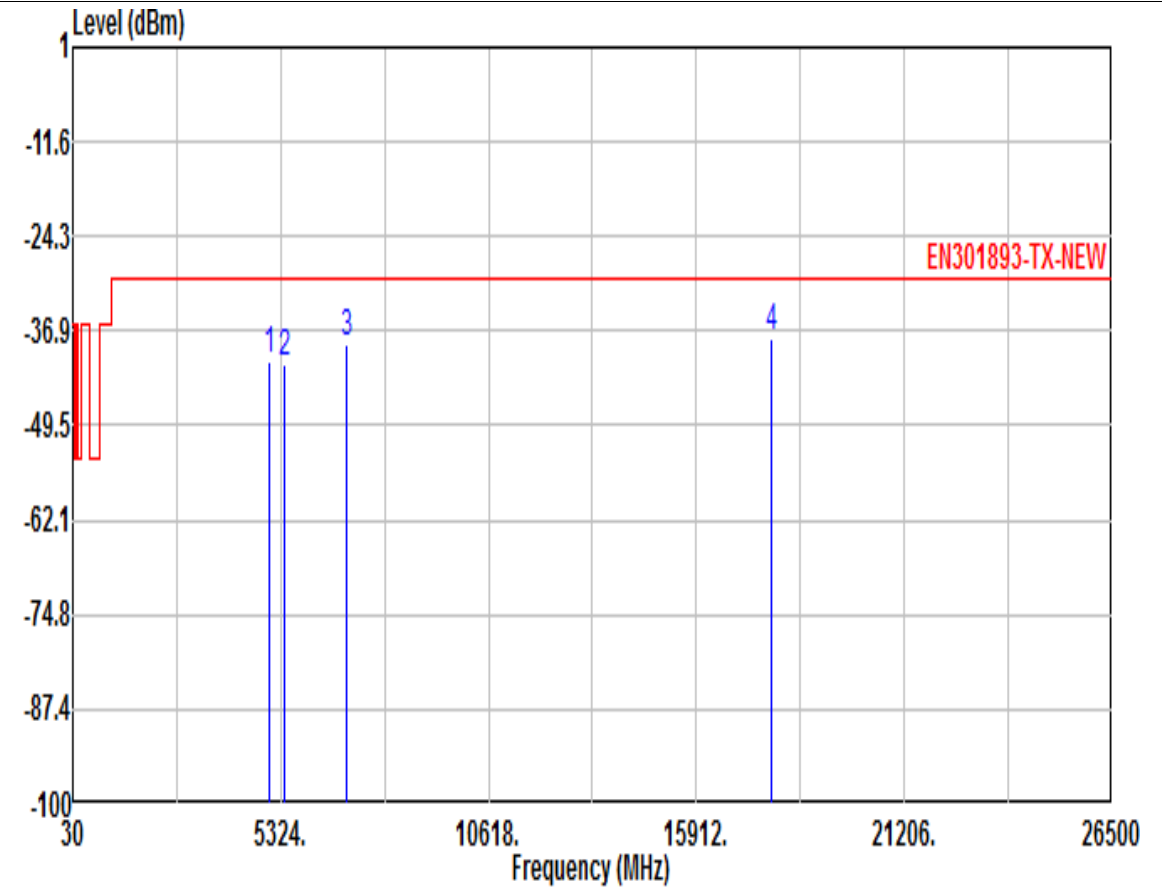

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5045.50	-40.76	-10.76	-30.00	-69.80	29.04	HORIZONTAL
2	5438.68	-41.31	-11.31	-30.00	-70.61	29.30	HORIZONTAL
3	7000.00	-38.63	-8.63	-30.00	-70.13	31.50	HORIZONTAL
4 @	17840.49	-37.74	-7.74	-30.00	-78.30	40.56	HORIZONTAL

Vertical

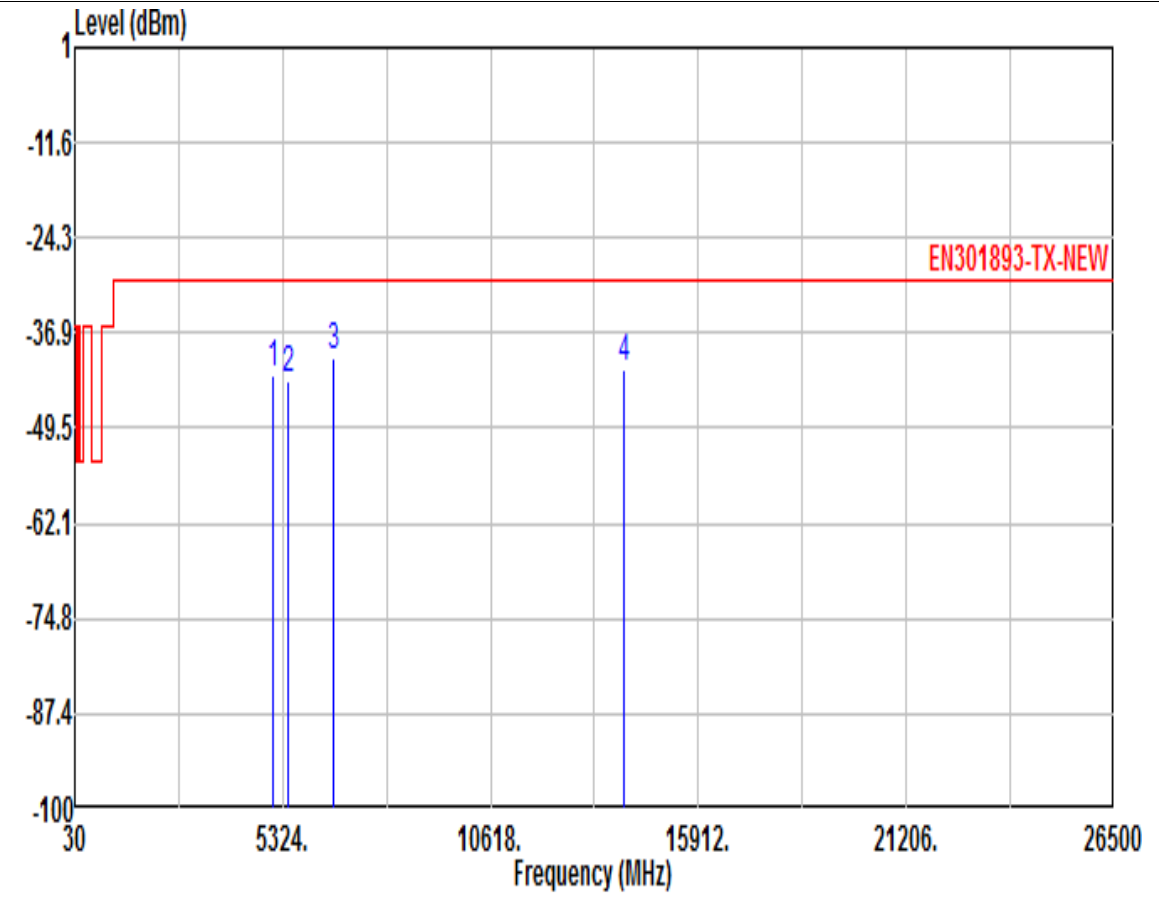

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5071.00	-42.50	-12.50	-30.00	-68.80	26.30	VERTICAL
2	5469.16	-43.40	-13.40	-30.00	-69.95	26.55	VERTICAL
3 @	6628.00	-40.00	-10.00	-30.00	-68.99	28.99	VERTICAL
4	14022.06	-41.56	-11.56	-30.00	-77.65	36.09	VERTICAL

Mode	4	
	802.11n HT20 OFDM_CH36	
Ant	6	
Pol.	Horizontal	Vertical

Tx

Horizontal

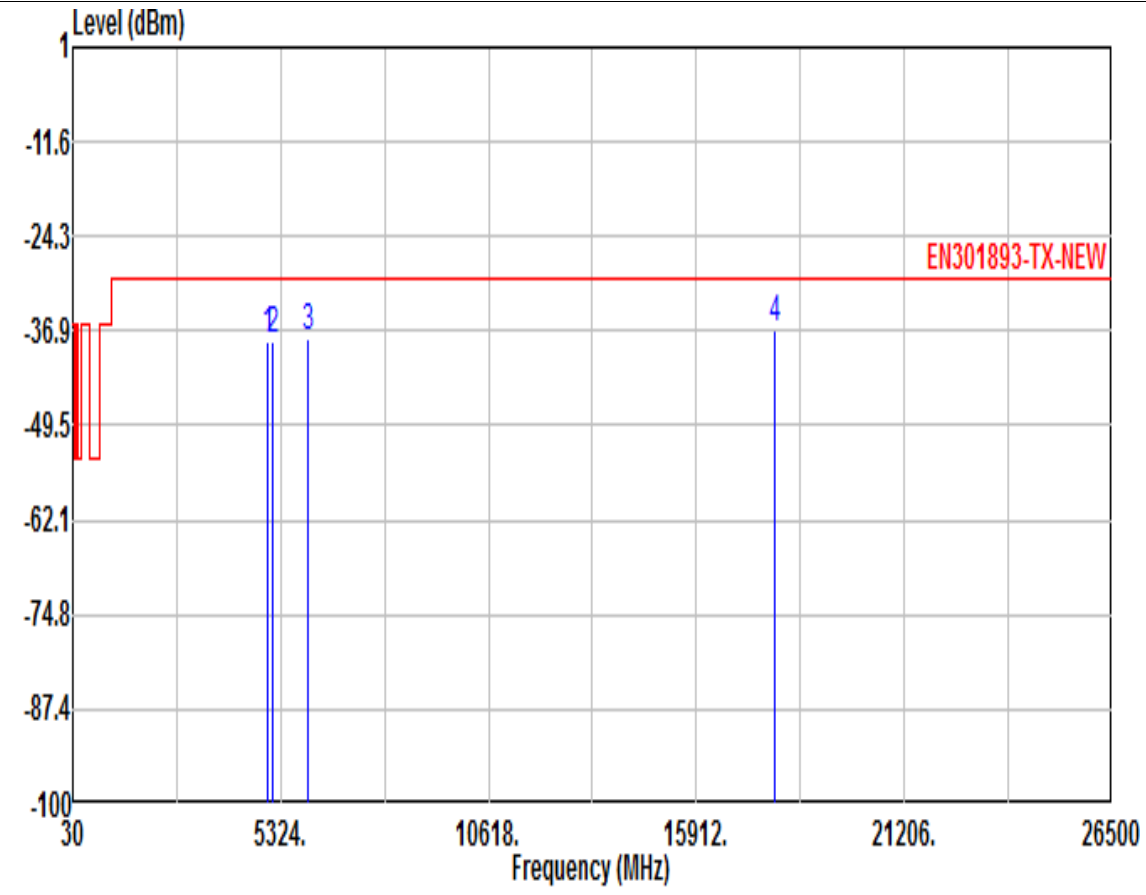

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5000.50	-38.34	-8.34	-30.00	-66.47	28.13	HORIZONTAL
2	5126.05	-38.32	-8.32	-30.00	-66.46	28.14	HORIZONTAL
3	5999.50	-37.69	-7.69	-30.00	-67.08	29.39	HORIZONTAL
4 @	17907.72	-36.71	-6.71	-30.00	-82.31	45.60	HORIZONTAL

Vertical

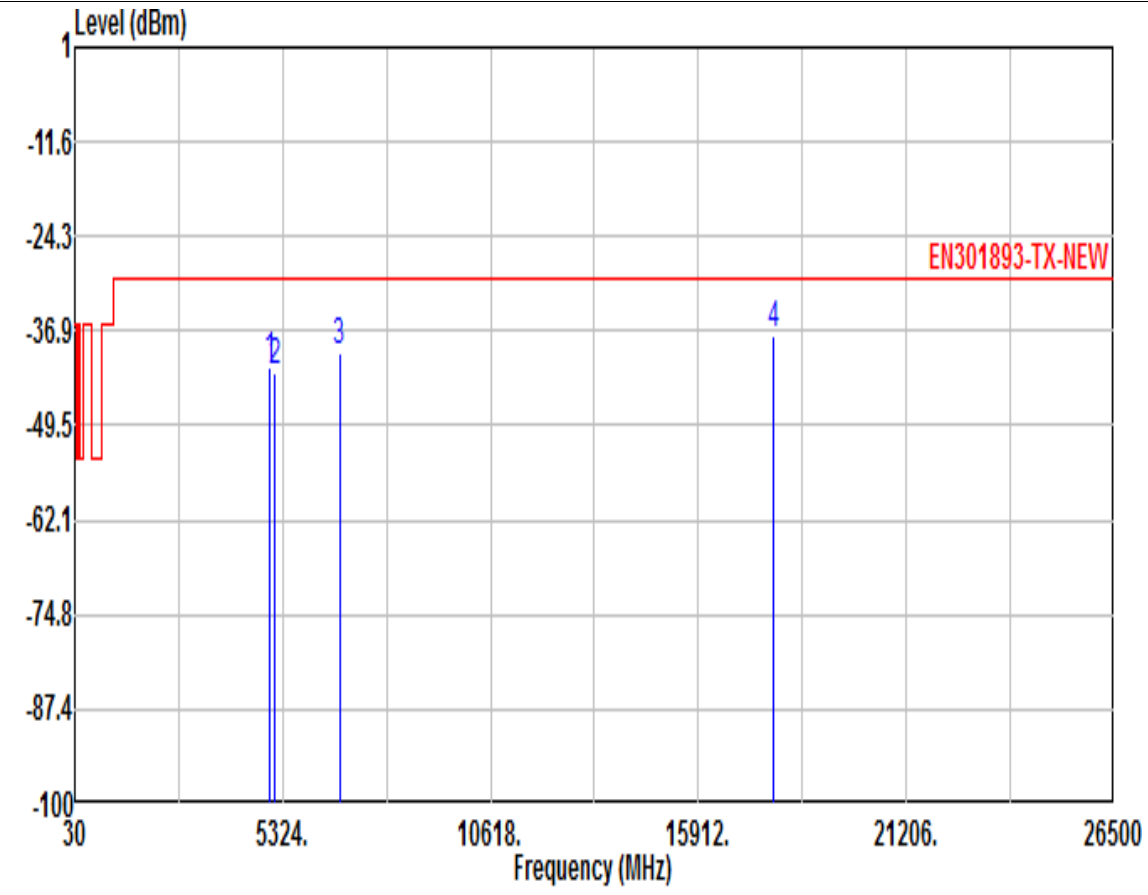

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5005.00	-41.70	-11.70	-30.00	-68.18	26.48	VERTICAL
2	5126.65	-42.39	-12.39	-30.00	-68.47	26.08	VERTICAL
3	6766.00	-39.76	-9.76	-30.00	-67.52	27.76	VERTICAL
4 @	17838.05	-37.49	-7.49	-30.00	-79.05	41.56	VERTICAL

Mode	5	
	802.11n HT20 OFDM_CH64	
Ant	6	
Pol.	Horizontal	Vertical
Tx		

Horizontal

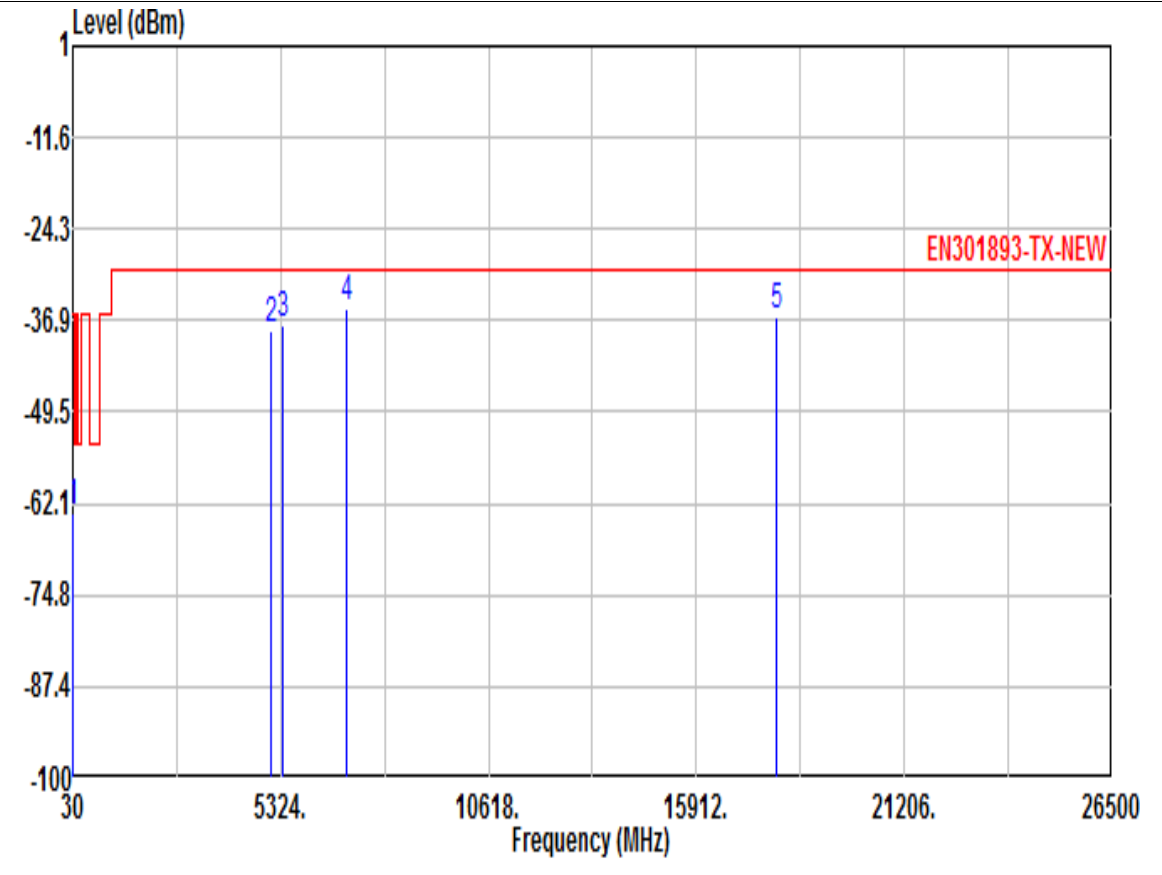

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	31.94	-63.40	-27.40	-36.00	-66.49	3.09	HORIZONTAL
2	5092.00	-38.13	-8.13	-30.00	-66.18	28.05	HORIZONTAL
3	5366.50	-37.62	-7.62	-30.00	-66.80	29.18	HORIZONTAL
4 @	6986.50	-35.11	-5.11	-30.00	-65.29	30.18	HORIZONTAL
5	17930.33	-36.50	-6.50	-30.00	-82.20	45.70	HORIZONTAL

Vertical

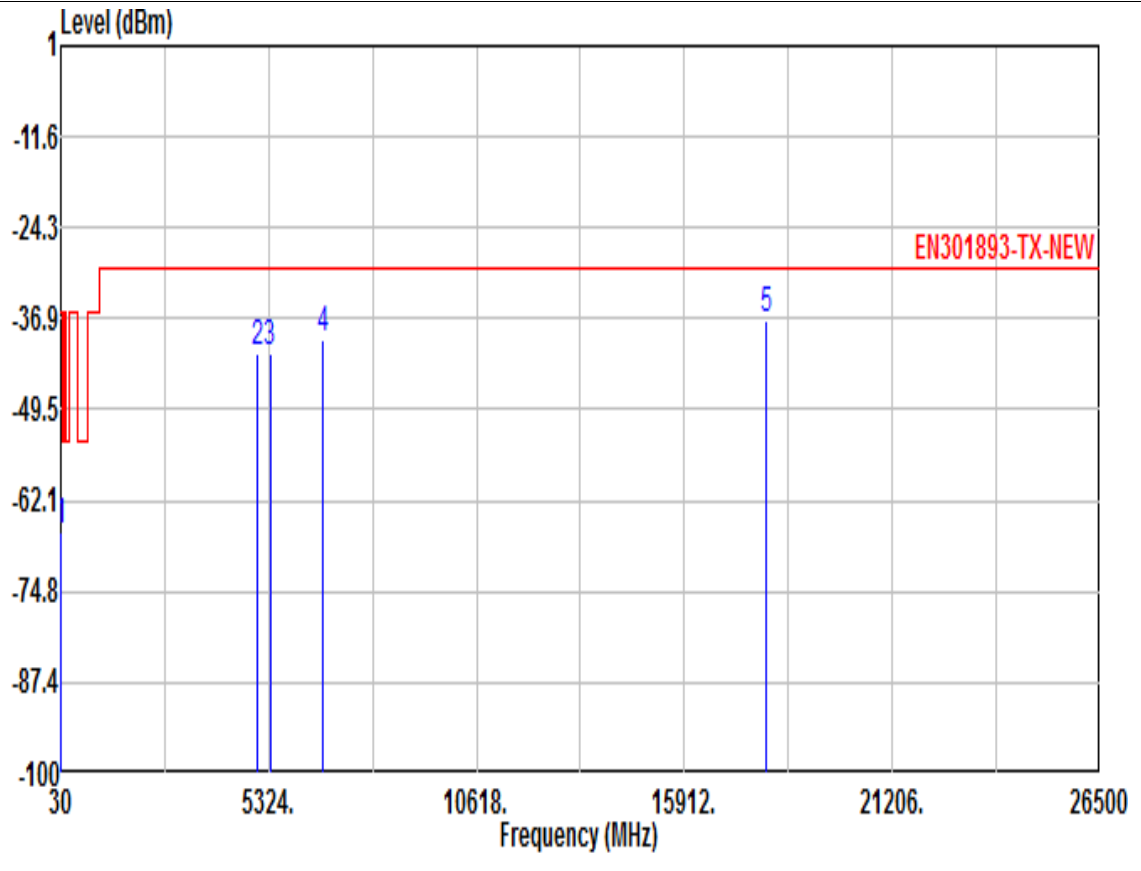

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	31.94	-66.63	-30.63	-36.00	-67.69	1.06	VERTICAL
2	5015.50	-41.68	-11.68	-30.00	-68.11	26.43	VERTICAL
3	5354.10	-41.79	-11.79	-30.00	-68.30	26.51	VERTICAL
4	6695.50	-39.74	-9.74	-30.00	-67.49	27.75	VERTICAL
5 @	17995.72	-37.29	-7.29	-30.00	-79.52	42.23	VERTICAL

Mode	6	
	802.11n HT20 OFDM_CH100	
Ant	6	
Pol.	Horizontal	Vertical

Tx

Horizontal

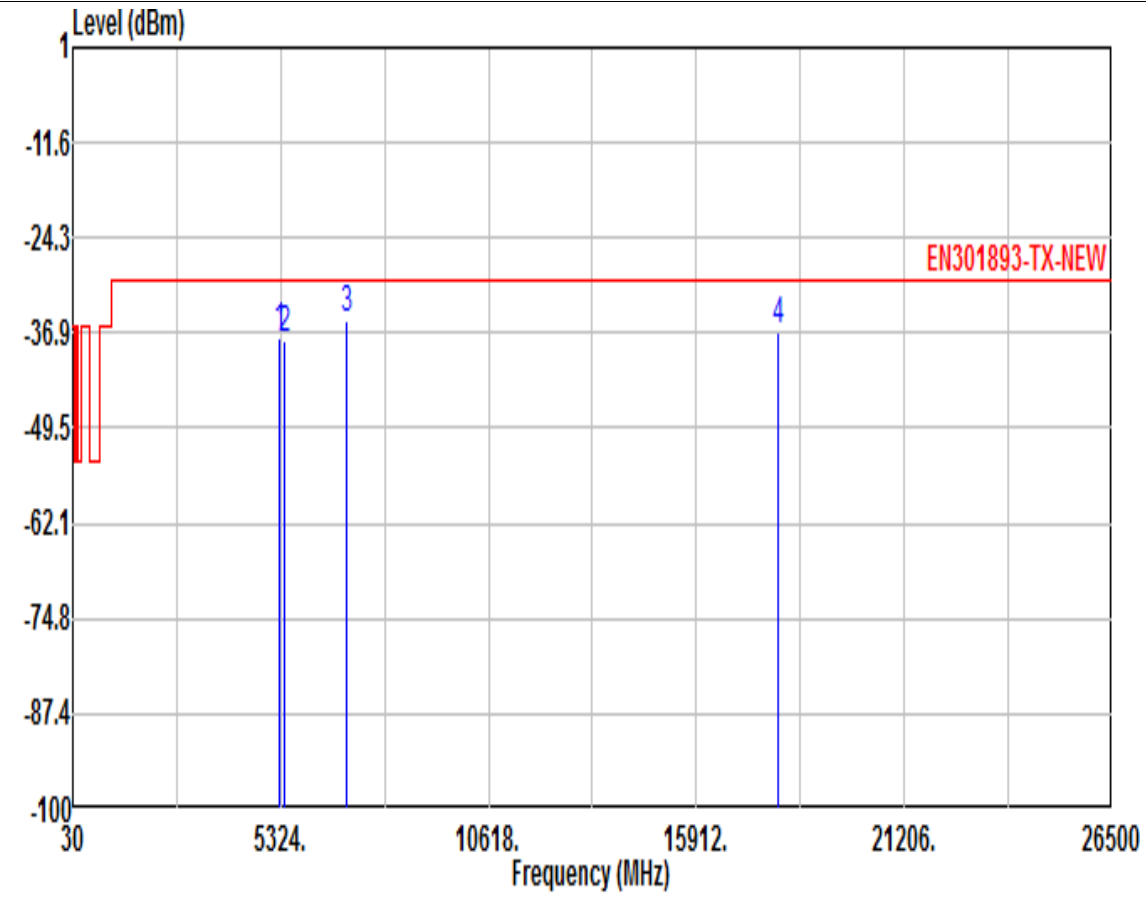

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5303.50	-37.42	-7.42	-30.00	-66.46	29.04	HORIZONTAL
2	5433.52	-37.74	-7.74	-30.00	-67.03	29.29	HORIZONTAL
3 @	6997.00	-35.40	-5.40	-30.00	-65.59	30.19	HORIZONTAL
4	17989.61	-36.75	-6.75	-30.00	-82.71	45.96	HORIZONTAL

Vertical

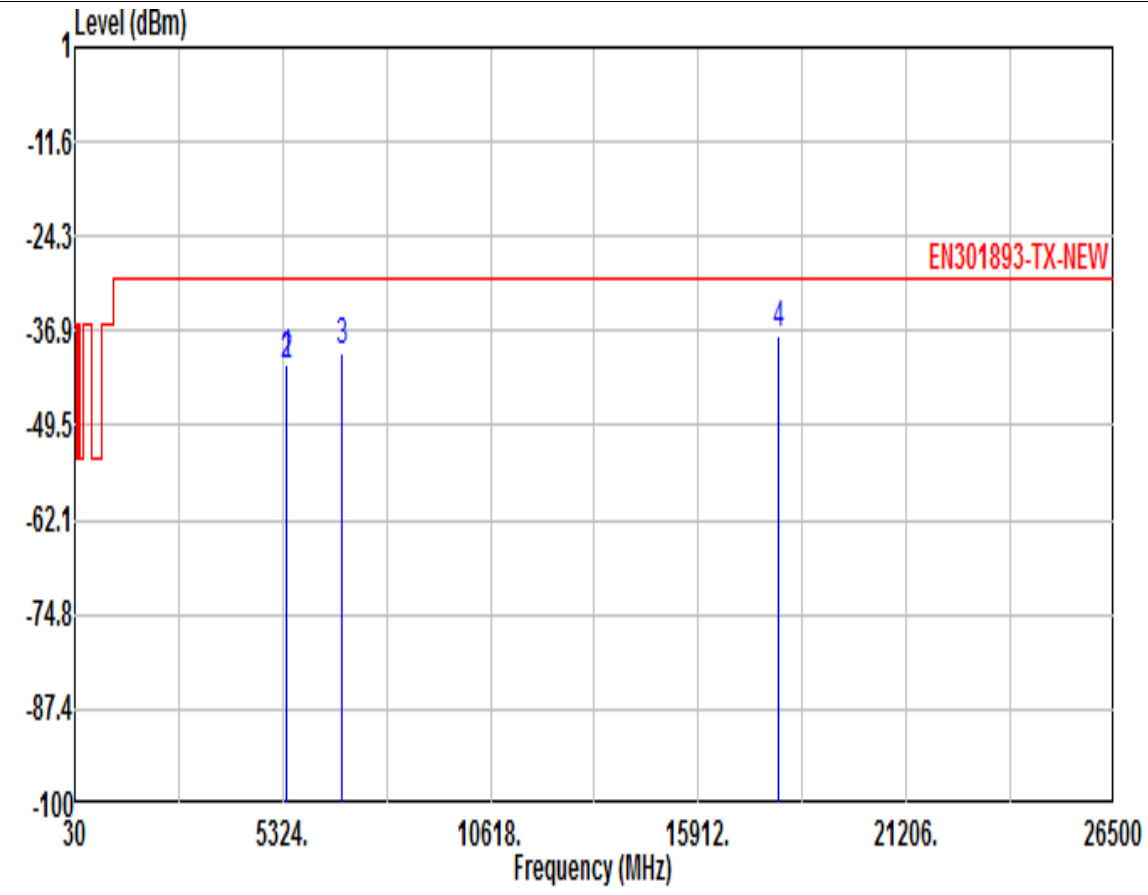

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5411.50	-41.44	-11.44	-30.00	-68.13	26.69	VERTICAL
2	5423.56	-41.71	-11.71	-30.00	-68.41	26.70	VERTICAL
3	6826.00	-39.81	-9.81	-30.00	-67.59	27.78	VERTICAL
4 @	17945.61	-37.40	-7.40	-30.00	-79.41	42.01	VERTICAL

Mode	7	
	802.11n HT40 OFDM_CH38	
Ant	6	
Pol.	Horizontal	Vertical
Tx	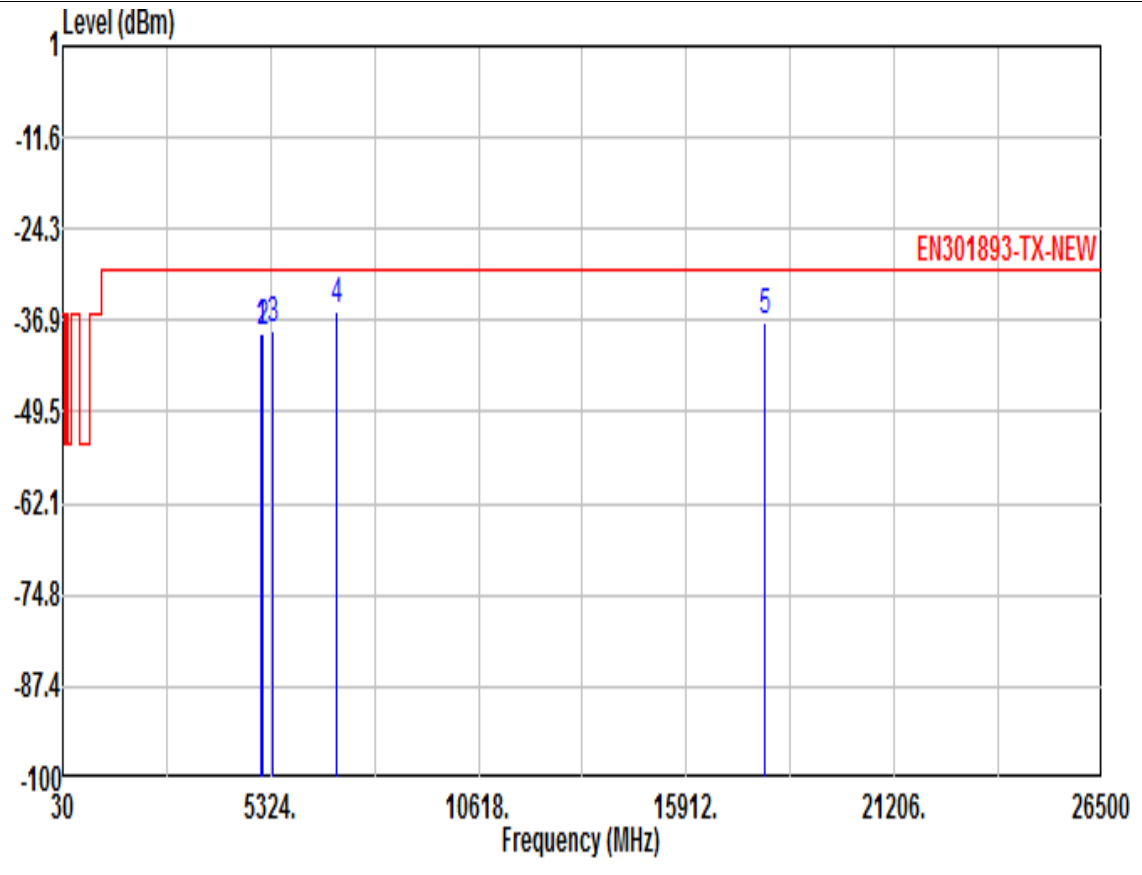	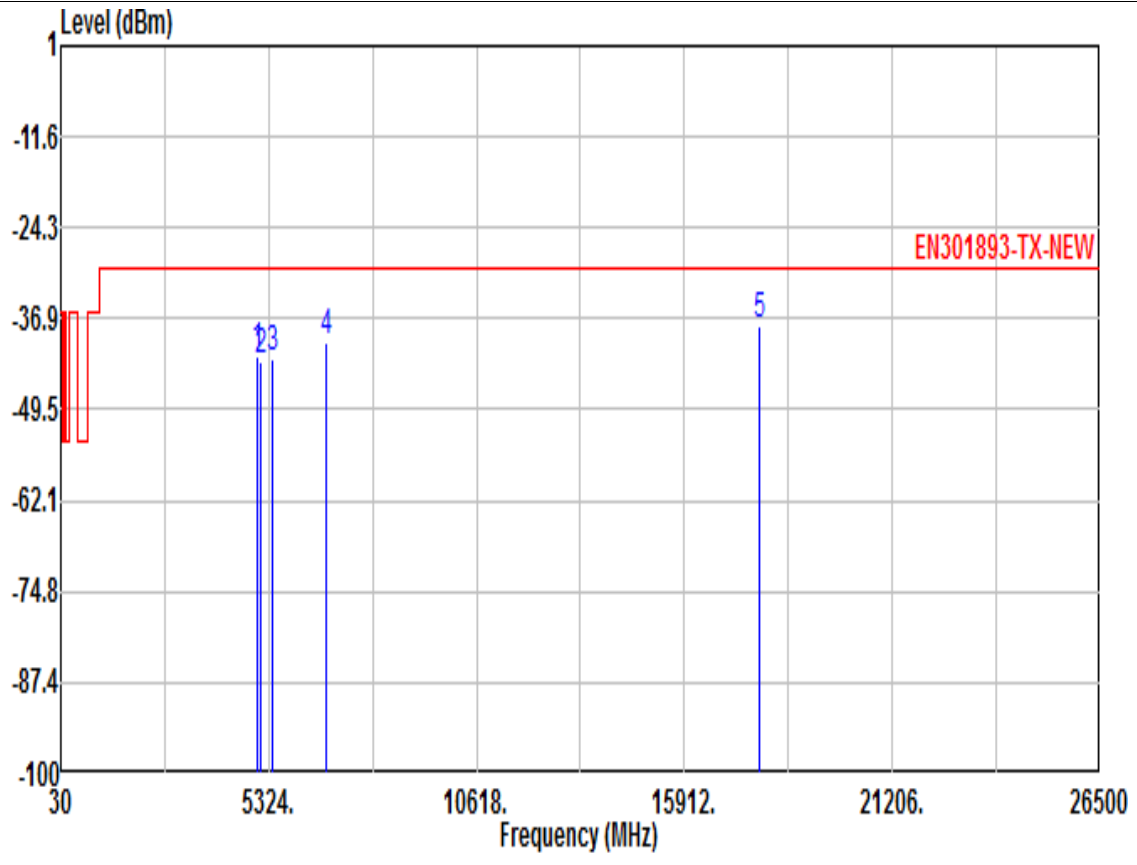

Horizontal

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5068.00	-38.69	-8.69	-30.00	-66.76	28.07	HORIZONTAL
2	5111.85	-38.77	-8.77	-30.00	-66.85	28.08	HORIZONTAL
3	5365.30	-38.10	-8.10	-30.00	-67.28	29.18	HORIZONTAL
4 @	6983.50	-35.57	-5.57	-30.00	-65.75	30.18	HORIZONTAL
5	17918.11	-36.99	-6.99	-30.00	-82.64	45.65	HORIZONTAL

Vertical

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5024.50	-42.03	-12.03	-30.00	-68.42	26.39	VERTICAL
2	5100.90	-42.70	-12.70	-30.00	-68.72	26.02	VERTICAL
3	5398.95	-42.38	-12.38	-30.00	-69.06	26.68	VERTICAL
4	6773.50	-40.24	-10.24	-30.00	-68.01	27.77	VERTICAL
5 @	17838.66	-37.93	-7.93	-30.00	-79.50	41.57	VERTICAL

Mode	8	
	802.11n HT40 OFDM_CH62	
Ant	6	
Pol.	Horizontal	Vertical

Tx

Horizontal

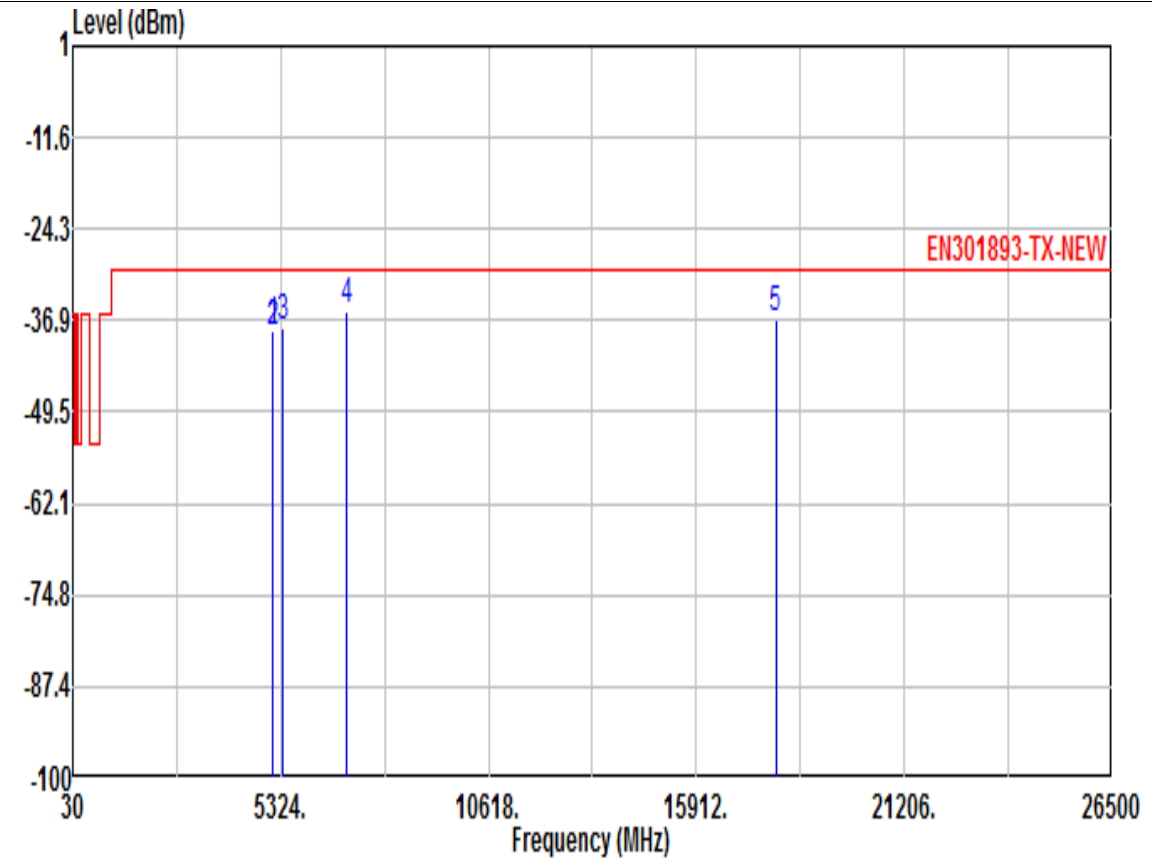

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5099.50	-38.40	-8.40	-30.00	-66.44	28.04	HORIZONTAL
2	5111.70	-38.47	-8.47	-30.00	-66.55	28.08	HORIZONTAL
3	5365.70	-37.86	-7.86	-30.00	-67.04	29.18	HORIZONTAL
4 @	6985.00	-35.67	-5.67	-30.00	-65.85	30.18	HORIZONTAL
5	17927.27	-36.82	-6.82	-30.00	-82.51	45.69	HORIZONTAL

Vertical

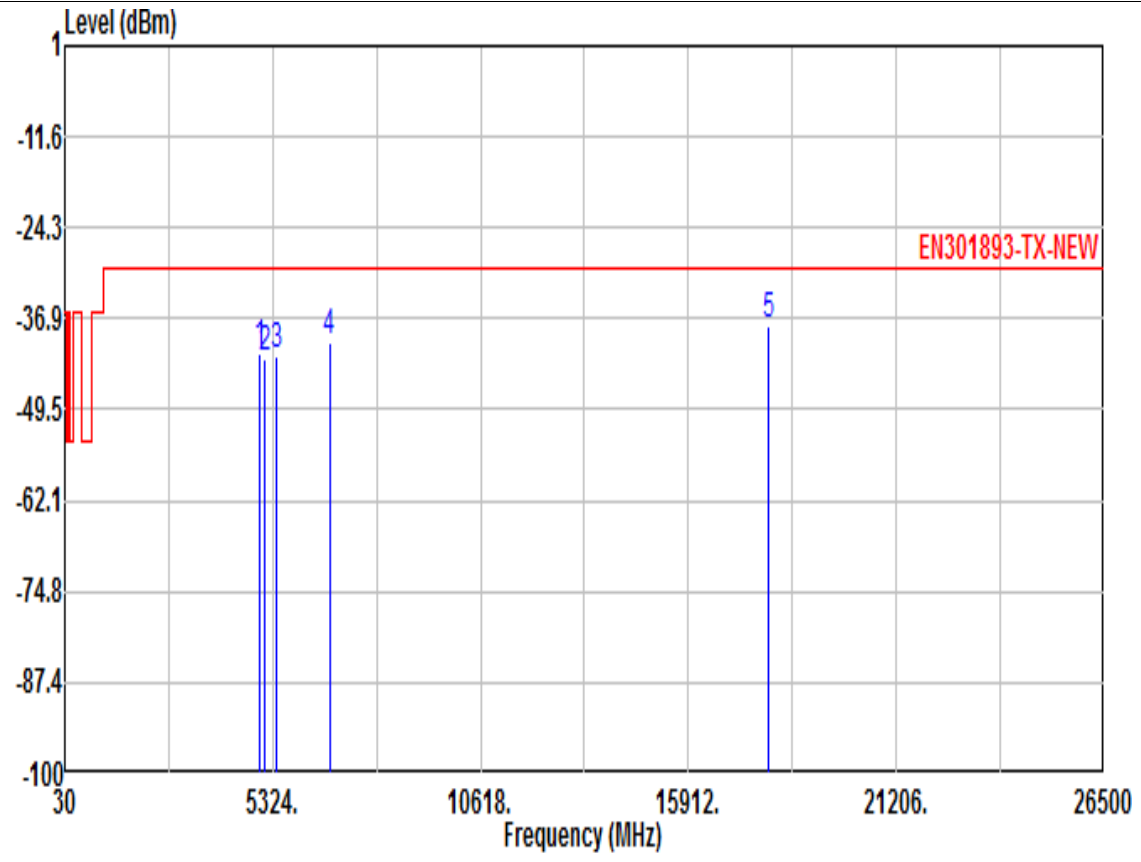

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5000.50	-41.86	-11.86	-30.00	-68.36	26.50	VERTICAL
2	5103.85	-42.45	-12.45	-30.00	-68.48	26.03	VERTICAL
3	5399.85	-41.99	-11.99	-30.00	-68.67	26.68	VERTICAL
4	6766.00	-40.03	-10.03	-30.00	-67.79	27.76	VERTICAL
5 @	17942.55	-37.69	-7.69	-30.00	-79.69	42.00	VERTICAL

Mode	9	
	802.11n HT40 OFDM_CH102	
Ant	6	
Pol.	Horizontal	Vertical

Tx

Horizontal

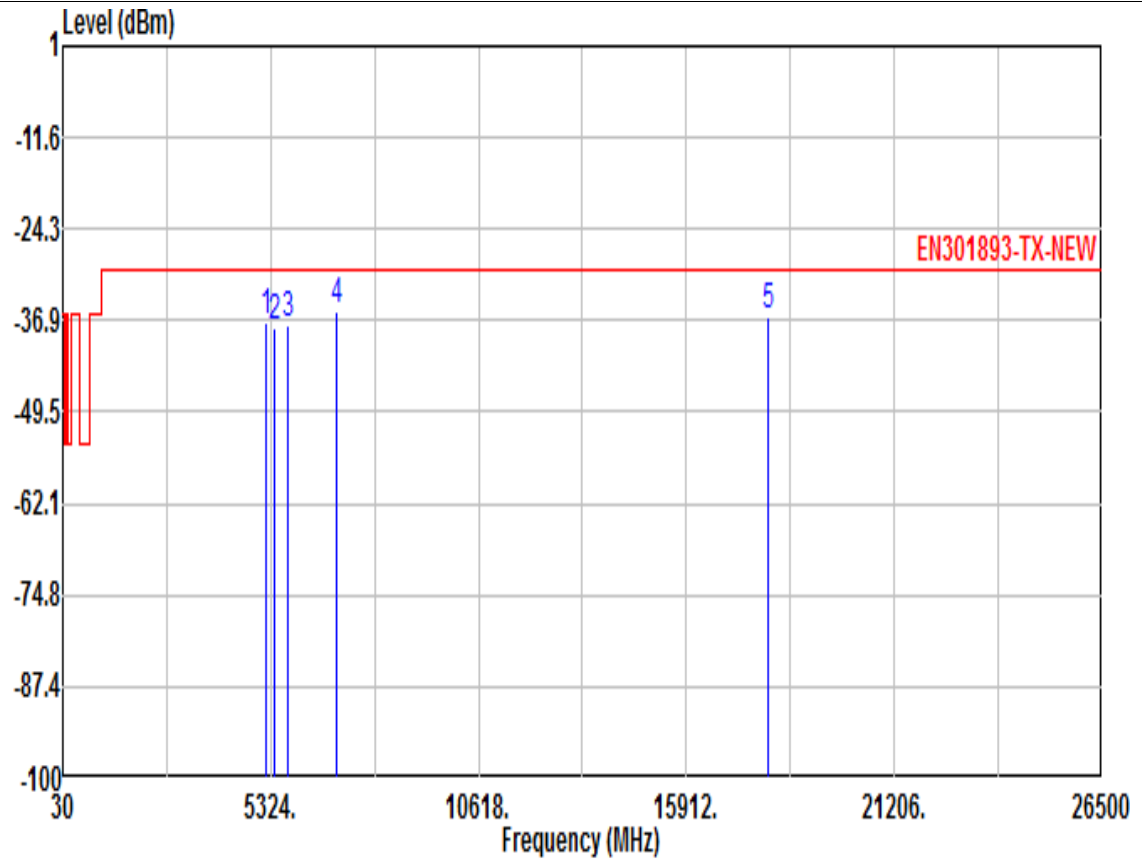

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5224.00	-37.29	-7.29	-30.00	-65.85	28.56	HORIZONTAL
2	5435.92	-37.98	-7.98	-30.00	-67.28	29.30	HORIZONTAL
3	5755.25	-37.35	-7.35	-30.00	-66.84	29.49	HORIZONTAL
4 @	7000.00	-35.64	-5.64	-30.00	-65.84	30.20	HORIZONTAL
5	17984.11	-36.51	-6.51	-30.00	-82.45	45.94	HORIZONTAL

Vertical

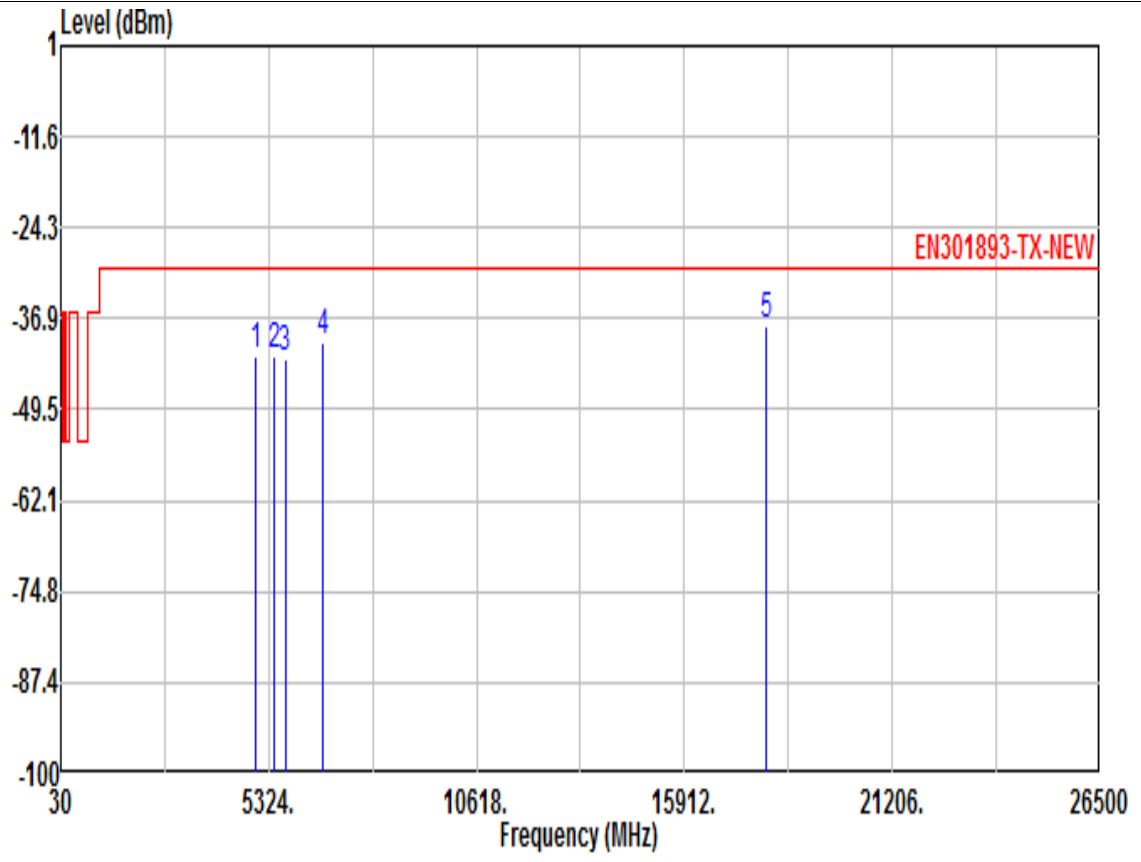

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5000.50	-42.11	-12.11	-30.00	-68.61	26.50	VERTICAL
2	5465.32	-41.96	-11.96	-30.00	-68.69	26.73	VERTICAL
3	5739.35	-42.57	-12.57	-30.00	-69.14	26.57	VERTICAL
4	6712.00	-40.16	-10.16	-30.00	-67.92	27.76	VERTICAL
5 @	17982.89	-37.75	-7.75	-30.00	-79.92	42.17	VERTICAL

Mode	10	
	802.11ac VHT80 OFDM_CH42	
Ant	6	
Pol.	Horizontal	Vertical

Tx

Horizontal

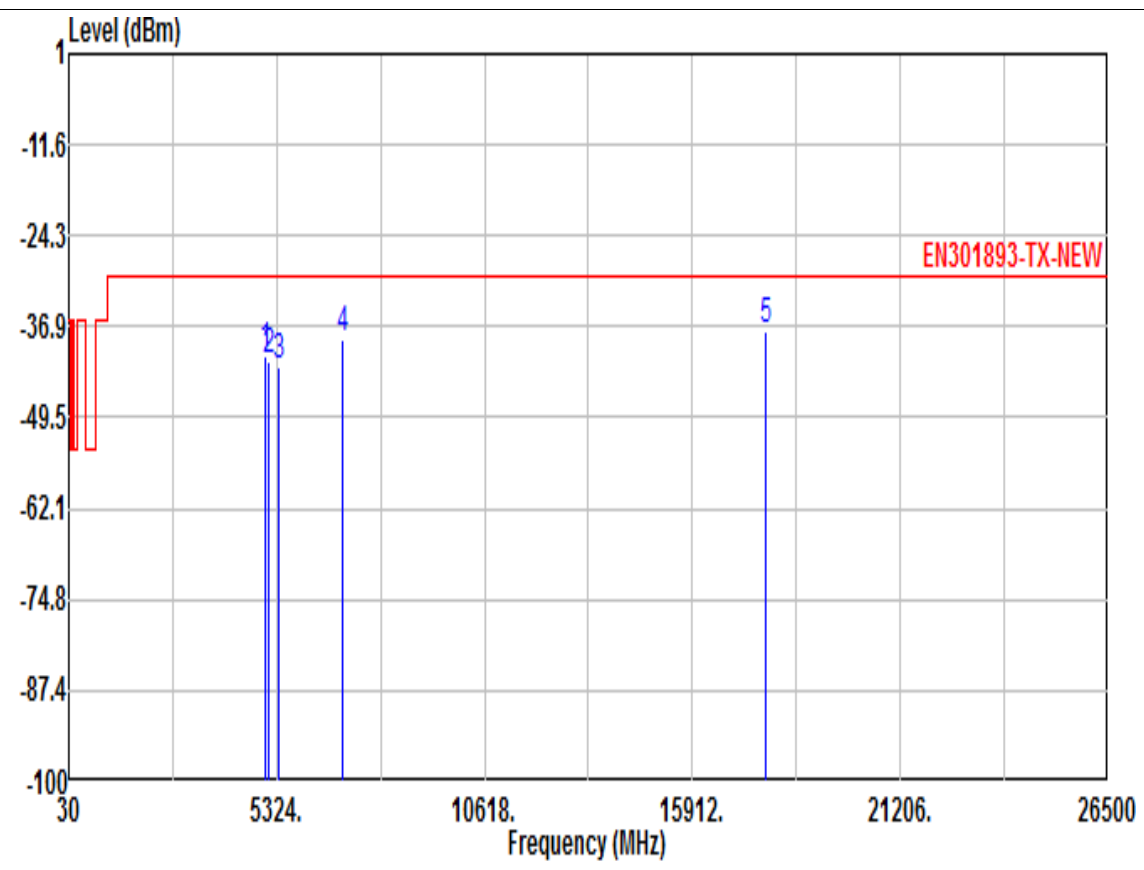

Result		Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
		MHz	dBm	dB	dBm	dBm	dB	
1		5039.50	-40.85	-10.85	-30.00	-69.89	29.04	HORIZONTAL
2		5128.30	-41.77	-11.77	-30.00	-70.73	28.96	HORIZONTAL
3		5393.20	-42.35	-12.35	-30.00	-71.45	29.10	HORIZONTAL
4		7000.00	-38.68	-8.68	-30.00	-70.18	31.50	HORIZONTAL
5	@	17773.27	-37.46	-7.46	-30.00	-77.95	40.49	HORIZONTAL

Vertical

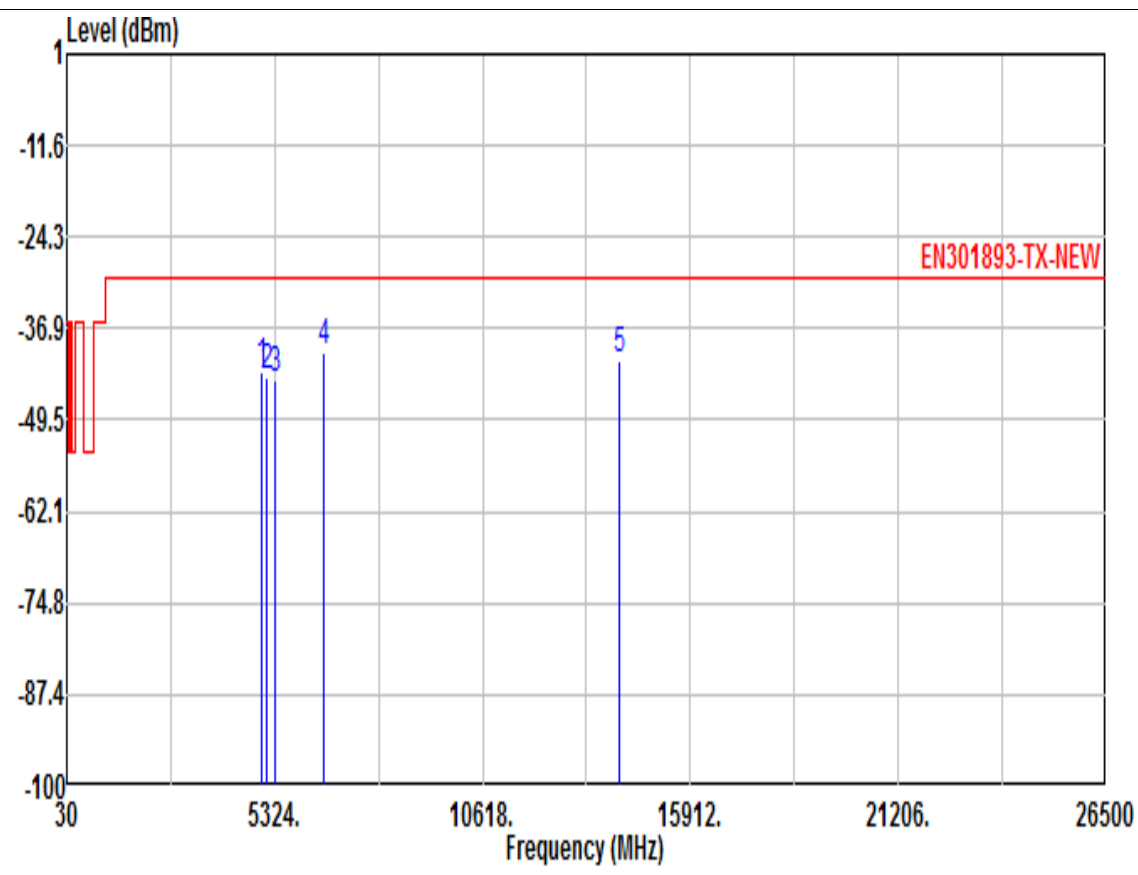

Result		Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
		MHz	dBm	dB	dBm	dBm	dB	
1		5000.50	-42.79	-12.79	-30.00	-69.26	26.47	VERTICAL
2		5130.20	-43.43	-13.43	-30.00	-69.73	26.30	VERTICAL
3		5350.35	-44.13	-14.13	-30.00	-70.09	25.96	VERTICAL
4	@	6574.00	-40.10	-10.10	-30.00	-69.09	28.99	VERTICAL
5		14091.12	-41.19	-11.19	-30.00	-77.22	36.03	VERTICAL

Mode	11	
	802.11ac VHT80 OFDM_CH58	
Ant	6	
Pol.	Horizontal	Vertical

Tx

Horizontal

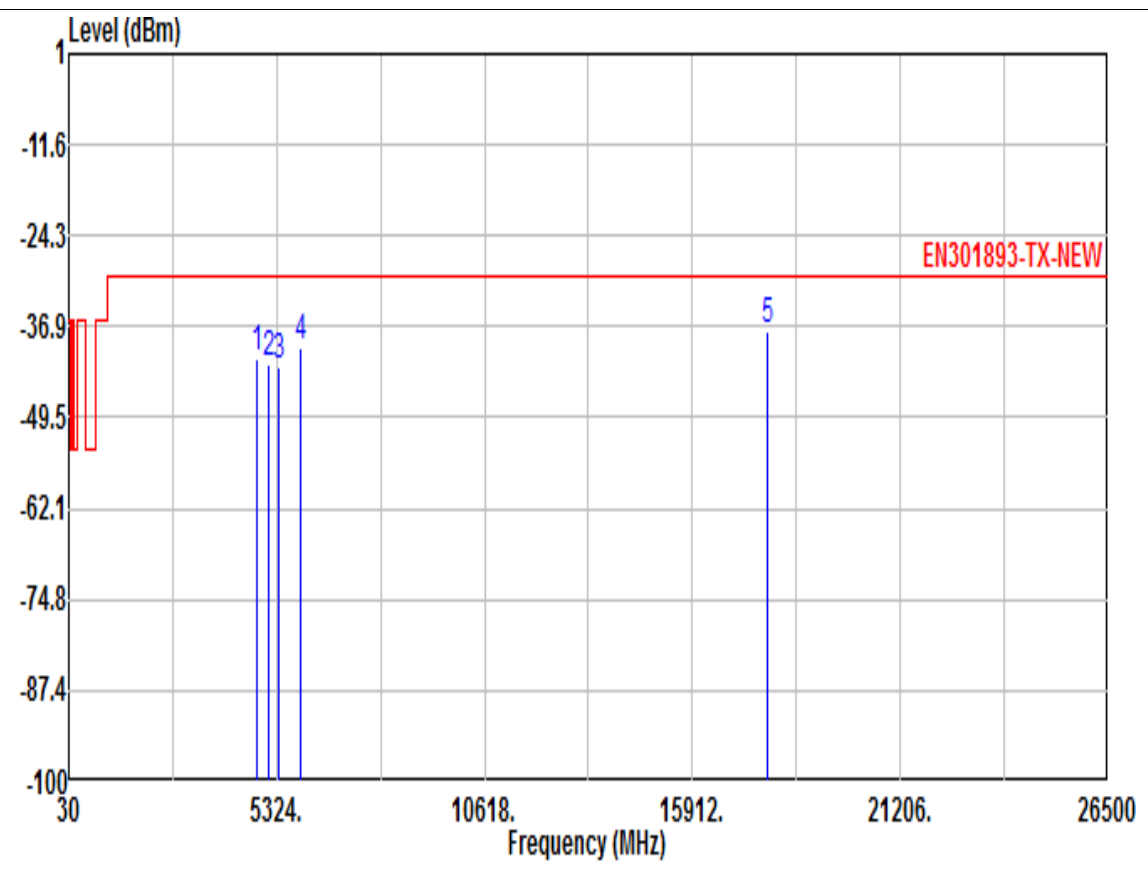

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	4814.50	-41.42	-11.42	-30.00	-70.59	29.17	HORIZONTAL
2	5134.15	-42.08	-12.08	-30.00	-71.03	28.95	HORIZONTAL
3	5390.90	-42.55	-12.55	-30.00	-71.56	29.01	HORIZONTAL
4	5921.50	-39.88	-9.88	-30.00	-70.80	30.92	HORIZONTAL
5 @	17813.60	-37.62	-7.62	-30.00	-78.15	40.53	HORIZONTAL

Vertical

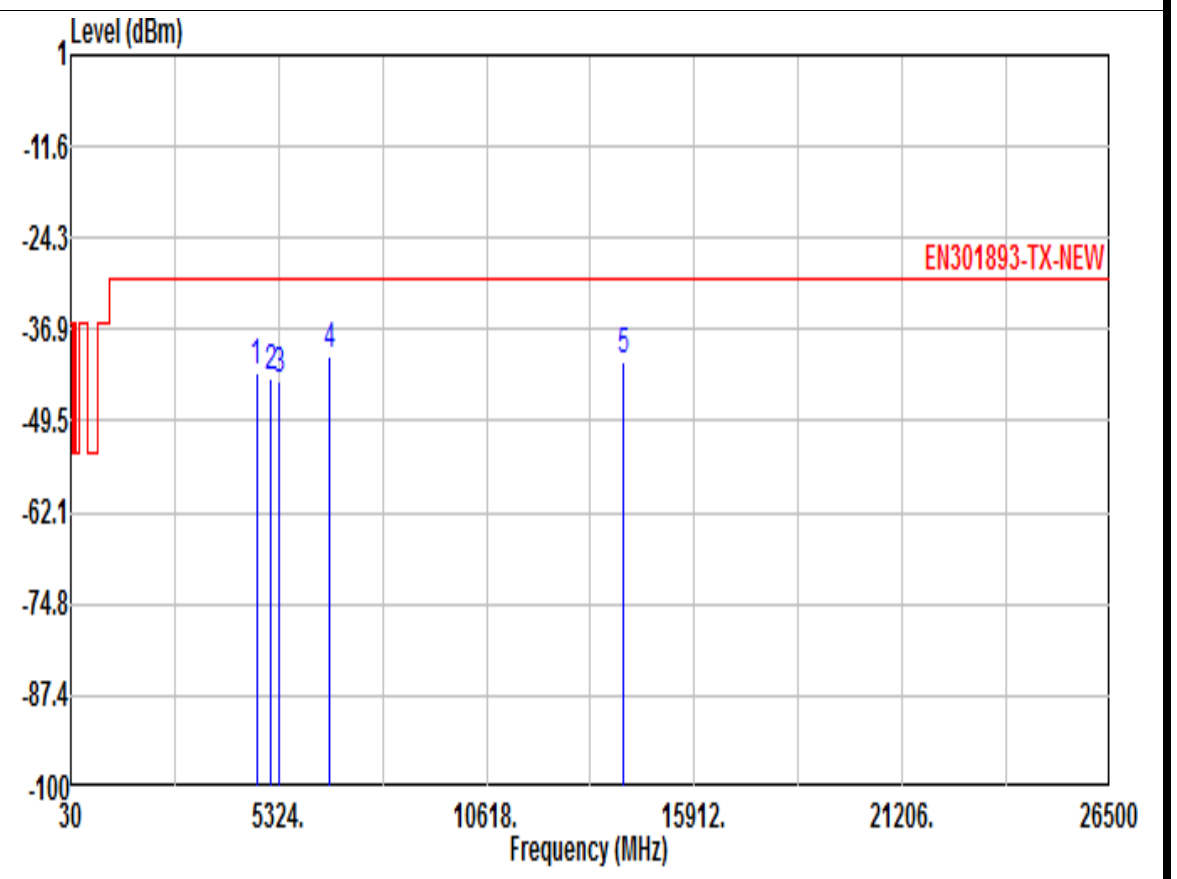

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	4756.00	-42.65	-12.65	-30.00	-68.82	26.17	VERTICAL
2	5101.00	-43.72	-13.72	-30.00	-70.01	26.29	VERTICAL
3	5352.80	-44.11	-14.11	-30.00	-70.07	25.96	VERTICAL
4 @	6634.00	-40.42	-10.42	-30.00	-69.39	28.97	VERTICAL
5	14092.34	-41.17	-11.17	-30.00	-77.20	36.03	VERTICAL

<table>
<tr><td rowspan="2">Mode</td><td colspan="2">12</td></tr>
<tr><td colspan="2">802.11ac VHT80 OFDM_CH106</td></tr>
<tr><td>Ant</td><td colspan="2">6</td></tr>
<tr><td>Pol.</td><td>Horizontal</td><td>Vertical</td></tr>
<tr><td>Tx</td><td>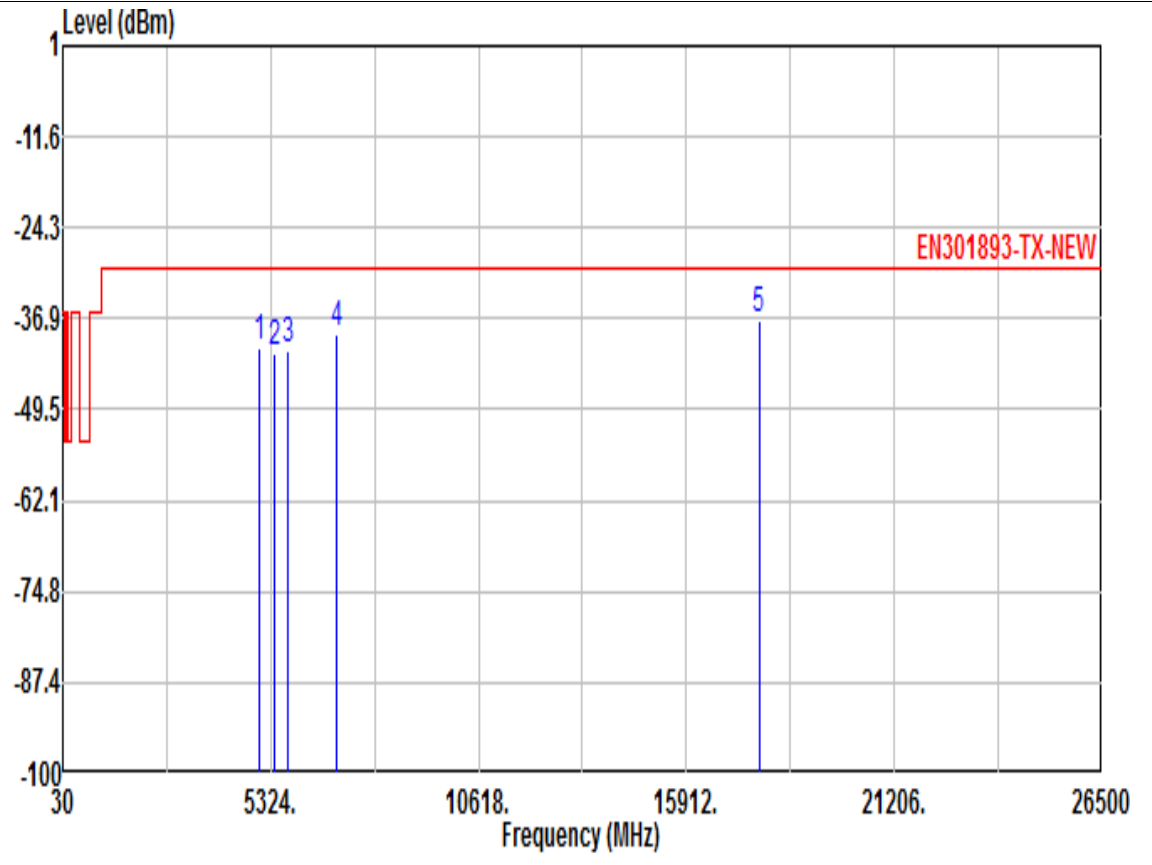</td><td>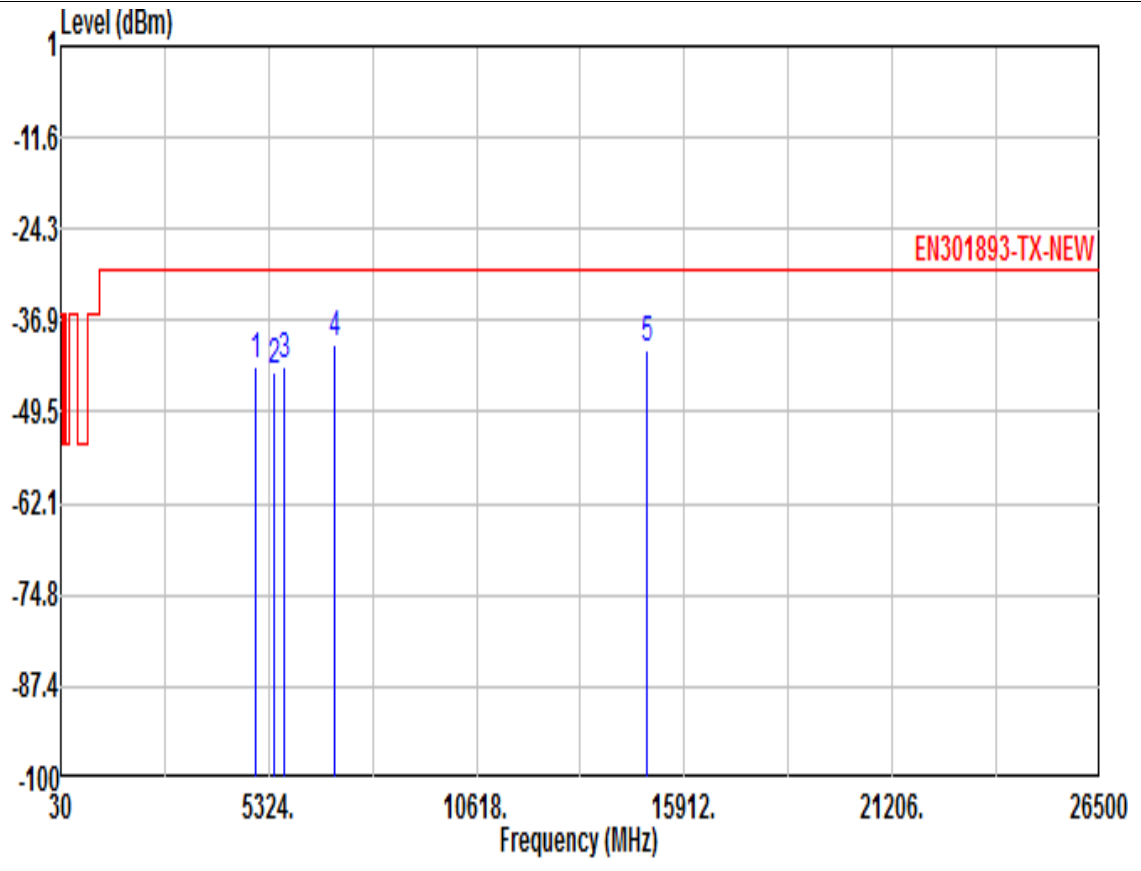</td></tr>
</table>

Horizontal:

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5048.50	-41.10	-11.10	-30.00	-70.14	29.04	HORIZONTAL
2	5435.80	-41.73	-11.73	-30.00	-71.03	29.30	HORIZONTAL
3	5764.60	-41.33	-11.33	-30.00	-71.26	29.93	HORIZONTAL
4	6998.50	-38.95	-8.95	-30.00	-70.41	31.46	HORIZONTAL
5 @	17756.15	-37.28	-7.28	-30.00	-77.76	40.48	HORIZONTAL

Vertical:

Result	Freq	Level	Margin	Limit Line	Read Level	Factor	Pol/Phase
	MHz	dBm	dB	dBm	dBm	dB	
1	5000.50	-43.13	-13.13	-30.00	-69.60	26.47	VERTICAL
2	5467.48	-43.84	-13.84	-30.00	-70.38	26.54	VERTICAL
3	5729.30	-43.08	-13.08	-30.00	-70.07	26.99	VERTICAL
4 @	6998.50	-40.25	-10.25	-30.00	-69.06	28.81	VERTICAL
5	14966.28	-40.87	-10.87	-30.00	-76.60	35.73	VERTICAL

<table>
<tr><td rowspan="2">Mode</td><td colspan="2">13</td></tr>
<tr><td colspan="2">802.11n HT20 OFDM_CH64</td></tr>
<tr><td>Ant</td><td colspan="2">6</td></tr>
<tr><td>Pol.</td><td>Horizontal</td><td>Vertical</td></tr>
<tr><td>RX</td>
<td>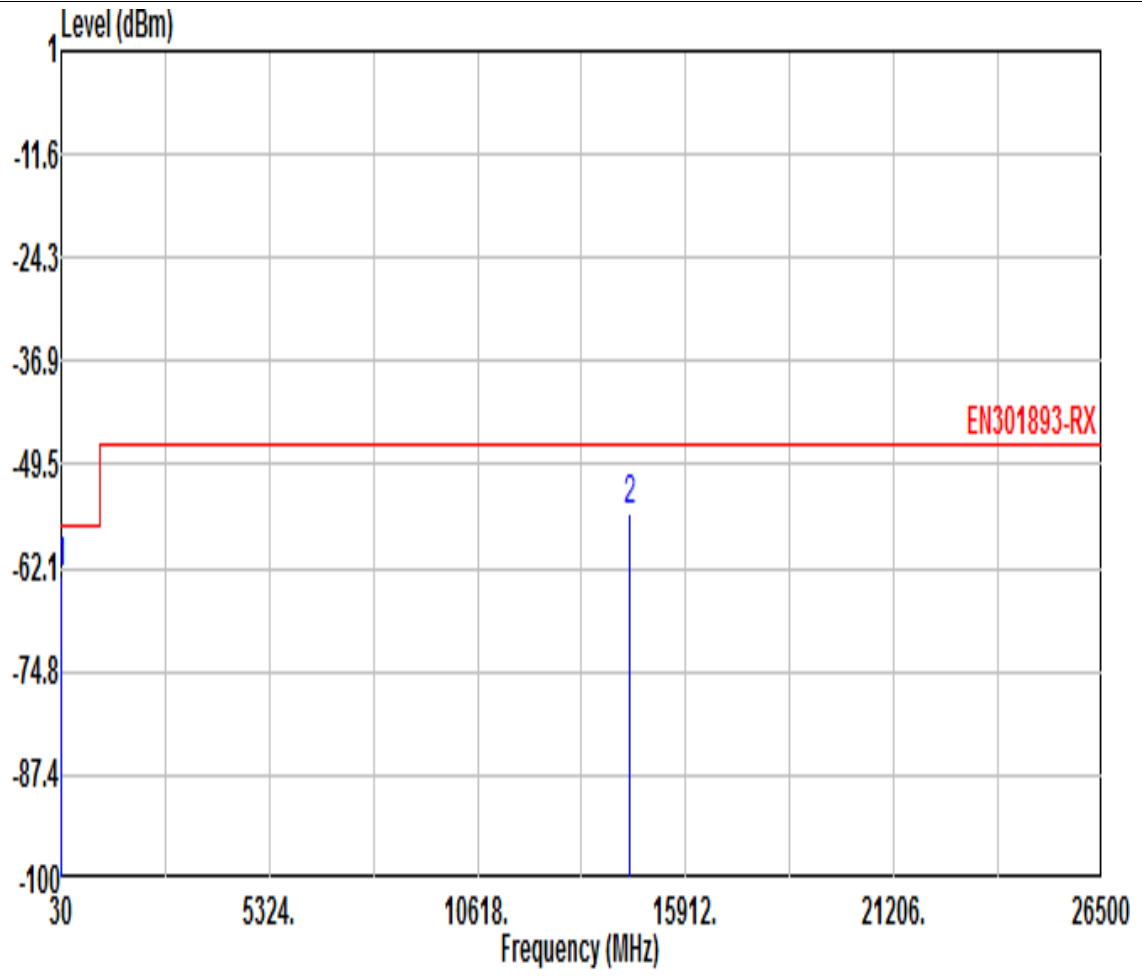

<table>
<tr><td>Result</td><td>Freq</td><td>Level</td><td>Margin</td><td>Limit Line</td><td>Read Level</td><td>Factor</td><td>Pol/Phase</td></tr>
<tr><td></td><td>MHz</td><td>dBm</td><td>dB</td><td>dBm</td><td>dBm</td><td>dB</td><td></td></tr>
<tr><td>1 @</td><td>31.94</td><td>-63.14</td><td>-6.14</td><td>-57.00</td><td>-66.23</td><td>3.09</td><td>HORIZONTAL</td></tr>
<tr><td>2</td><td>14495.92</td><td>-55.52</td><td>-8.52</td><td>-47.00</td><td>-51.64</td><td>-3.88</td><td>HORIZONTAL</td></tr>
</table>
</td>
<td>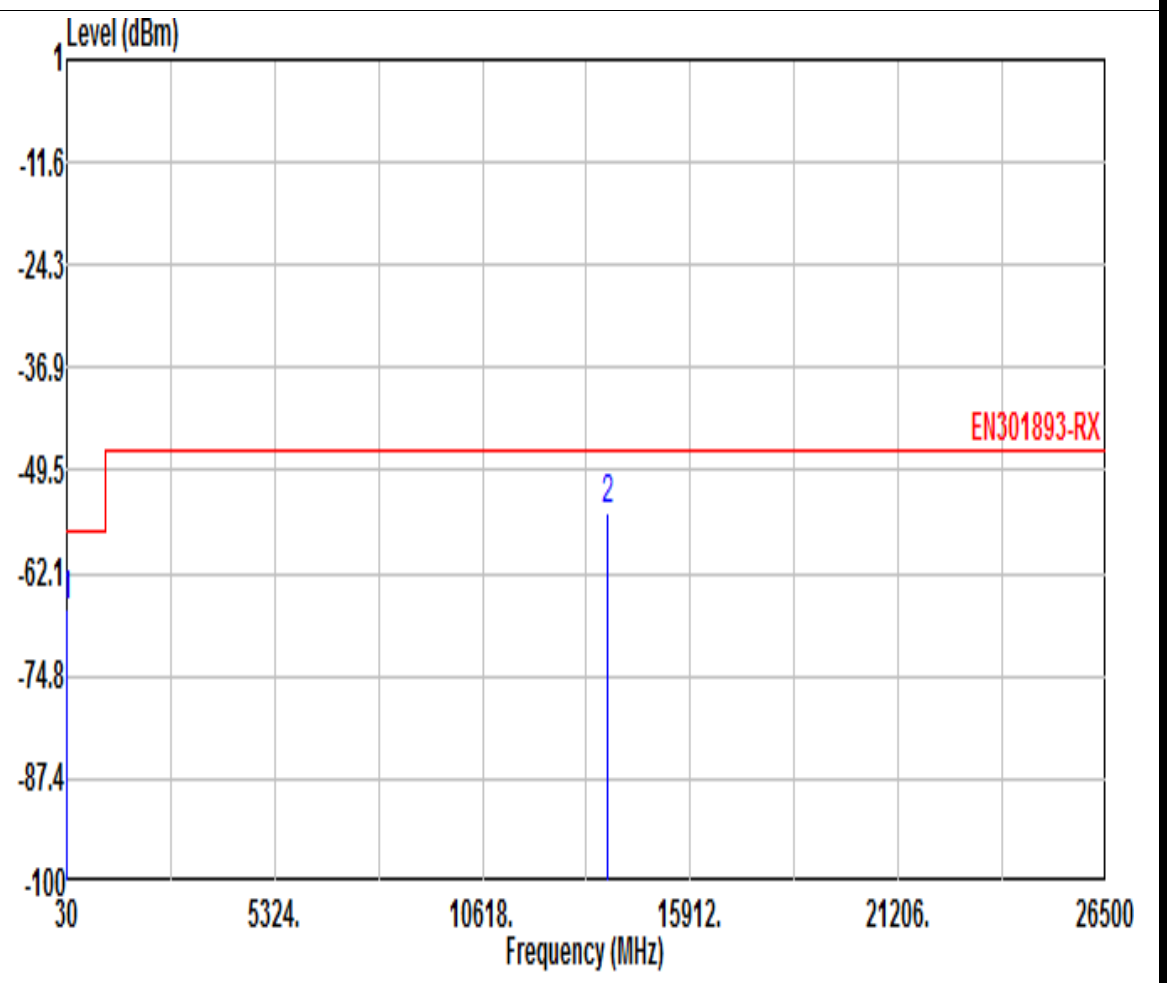

<table>
<tr><td>Result</td><td>Freq</td><td>Level</td><td>Margin</td><td>Limit Line</td><td>Read Level</td><td>Factor</td><td>Pol/Phase</td></tr>
<tr><td></td><td>MHz</td><td>dBm</td><td>dB</td><td>dBm</td><td>dBm</td><td>dB</td><td></td></tr>
<tr><td>1</td><td>31.94</td><td>-66.56</td><td>-9.56</td><td>-57.00</td><td>-67.62</td><td>1.06</td><td>VERTICAL</td></tr>
<tr><td>2 @</td><td>13808.32</td><td>-54.52</td><td>-7.52</td><td>-47.00</td><td>-49.52</td><td>-5.00</td><td>VERTICAL</td></tr>
</table>
</td></tr>
</table>