
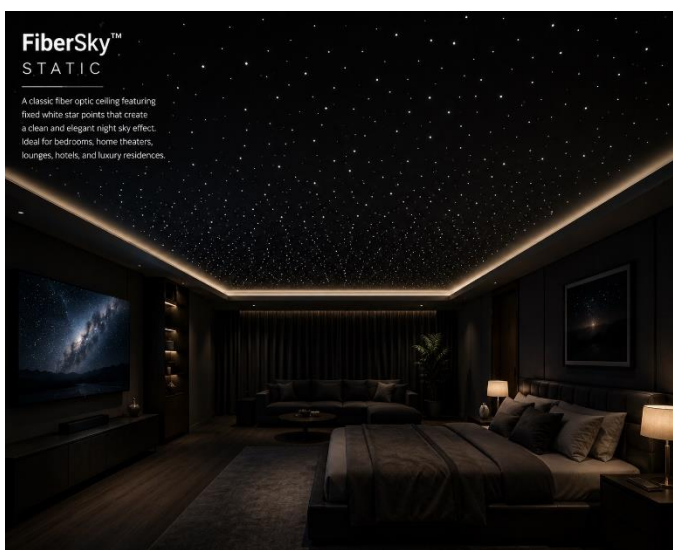


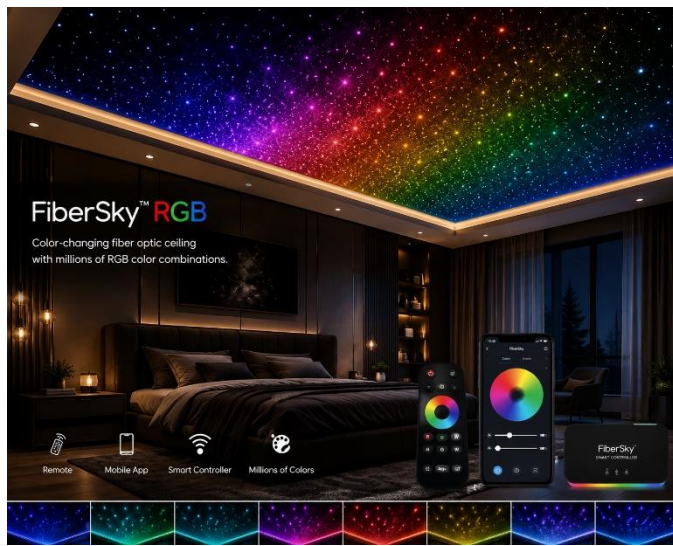

NOOH™

FIBER OPTIC STAR LIGHTS

HEAD OFFICE : D 180, SECTOR 10, NOIDA 201301, INDIA
www.noohliving.com; info@noohliving.com,
 +91-9718921229; +91-9958748979


FIBER OPTIC STAR LIGHTS



Pre Requirements details for fiber optic costing.


Fiber Optic Star Ceilings

A unique feature of fiber optic lighting is its ability to illuminate a number of points from one light source. One of the best demonstrations of this is shown in star effect ceilings. Extremely difficult to achieve with conventional lighting methods, fiber optics make it easy to implement this stunning feature in almost any location where access above the ceiling is available.

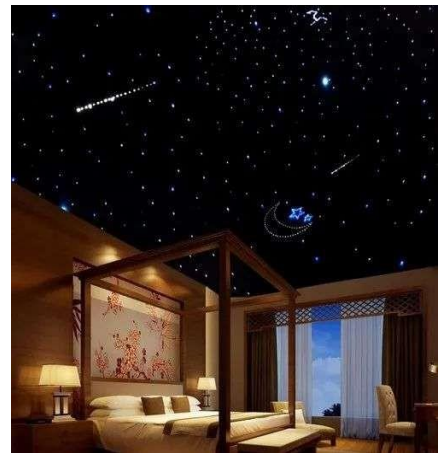

- **Calculation Of Costing** The calculation of
 - **Cost depends on mainly 3 things.**
 - **a.)Total no. Of stars required in the ceiling**
 - **b.)The area of the ceiling in sq ft**
 - **c.)the distance of the Light source from the fibre optic area.**
 - **So, the pricing of fibre Optic is Always different in every site due To different size of the area, no. Of stars required by the client and the Provision done for the Light source.**
- So, we always take the measurement Of every site and offer the budget**
- After the calculation of Fibre strands depending upon the above mentioned factors. The minimum no. Of stars per sq Ft area We suggest is 5 nos. The standard no. Of star we suggest Per sq ft is 7 nos**

HOME THEATER FIBER OPTIC STAR LIGHTS

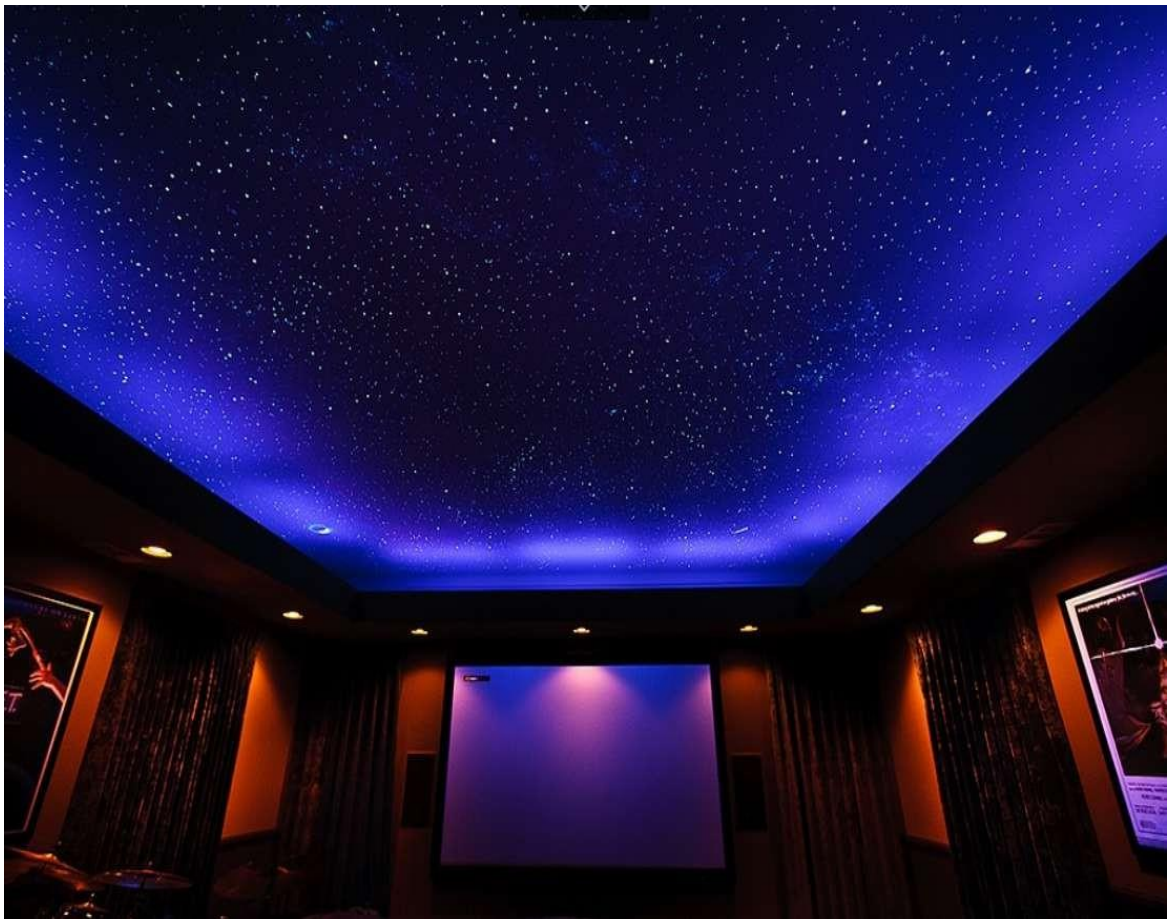

N   **H** TM

FIBER OPTIC STAR LIGHTS

Star Density Interactive Tool




Thickness Of Fiber

Strands of .5mm fiber:

Strands of 0.75mm fiber:

Strands of 1.00mm fiber:

Strands of 1.50mm fiber:

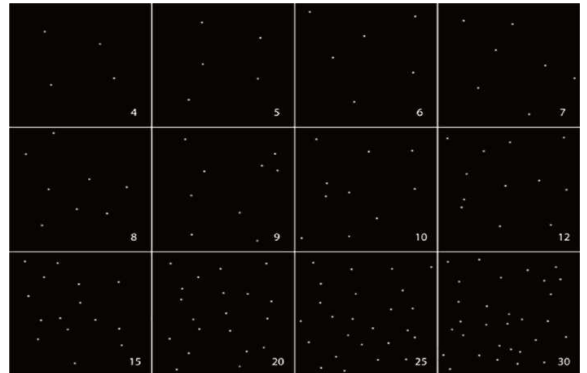

STAR DENSITY

Preferred star density is something very personal, however you should also consider the size of room you are installing the effect in. Generally larger rooms benefit from a less dense fill whereas smaller rooms can look great with a higher density of stars. The diagram below illustrates star density. Each square represents 1 square meter and the number in the square is the number of stars,

Star Ceiling Density Calculator

A unique feature of fiber optic lighting is its ability to illuminate a number of points from one light source. One of the best demonstrations of this is shown in star effect ceilings. Extremely difficult to achieve with conventional lighting methods, fiber optics make it easy to implement this stunning feature in almost any location where access above the ceiling is available.

FIBER OPTIC CRYSTAL **NOOH**TM STAR LIGHTS

The range of crystal fittings are all designed to give a bright sparkling point of light and a pattern of light cast onto the surrounding surfaces. They are made from high quality European crystal glass. Four crystal fittings are available, each of a different size and shape to give alternative patterns and spreads of light. The crystals are attractive with either a white light source or color changing model. The crystals are designed for use with 1.5, 1.8 or 2mm active diameter fiber via a special Crystal ferrule connection. The crystal flanges are finished in chrome or gold colors as standard. Other finishes are available at extra cost. Accessory tubes in three lengths are available to allow easy mounting through single or double skinned substrates.

Thickness Of Fiber

Strands of 1.50mm fiber:



SWIMMING POOL FIBER OPTIC STAR LIGHTS



N  **H** TM

FIBER OPTIC STAR SPECS

Multi Stand End Glow Fiber Optic Cable for Starlight Pool

End Glow Fiber Optic Cable for Starlight Pool

End Glow Fiber Optic Cable is a kind of end lighting fiber optic light that diameter from 1.5 to 3.0 mm with black PVC jacket. It is a kind of completely safe lighting products, without any UV, electricity. And these various diameter of , 1.5 mm, 2.0 mm, 2.5 mm, 3.0 mm end glow fiber optic cables are used for swimming starlight pool.

1. Item No: PMMA-1.5/2.0/2.5/3.0
2. Inner diameter: 1.5/2.0/2.5/3.0 mm
3. Out diameter: 2.5/3.0/3.5/4.0 mm



Recommended Applications

Starlight pool lighting, Underwater lighting, Patio Lighting, Sauna lighting

Basic Specification for End Glow

Fiber Optic Cable for Starlight Pool

Inner Diameter for end light fiber cables:

1.5/2.0/2.5/3.0 mm

Out Diameter for end light fiber cables:

2.5/3.0/3.5/4.0 mm

Plastic fiber optic strands operation

temperature: -60°C –

170°C Main materials:

PMMA

Technical Details for End Glow Fiber Optic Cable for Starlight Pool

PMMA-1.5	1.5 mm	2.5 mm	1400 m/roll	Black	PMMA
PMMA -2.0	2.0 mm	3.0 mm	1050 m/roll	Black	PMMA
PMMA -2.5	2.5 mm	3.5 mm	750 m/roll	Black	PMMA
PMMA -3.0	3.0 mm	4.0 mm	450 m/roll	Black	PMMA



LED LIGHT SOURCE SPECS

IP43 45W/90W LED Swimming Pool Fiber Optic Illuminator



Power: 45/90 Watt

Work voltage: AC 110~265 V, 50/60 Hz

Fiber cables quantity: 1050 * Diameter of 0.75 mm

5 DMX512 Channels: CH1: Color, CH2: Speed, CH3: — , CH4:

Quality Warranty: 3 years

IP43 45W/90WLED Swimming Pool Fiber Optic Illuminator

Waterproof 45/90 Watt LED swimming pool fiber optic light source is a newest waterproof Outdoor fiber optic illumination which is the best replacement for traditional waterproof metal 150/250 Watt light engines with DMX512.

The waterproof LED light engine adopted the quality high power 45/90 Watt LED chips as bulbs, use the front 6 sections color wheel to make color changing. It is used in swimming pool lighting now.

FIBER OPTIC STAR LIGHTS FITTINGS

Fiber Optic Underwater Lighting Fitting for Swimming Pool Floor

Materials: Stainless steel + PMMA

1. Available for fiber cables: Diameter of 1-14 mm
2. Package: 50 pieces per plastic bag
3. Applications: Swimming pool lighting, underwater lighting, floor Lighting.



Basic Specification for Fiber Optic Swimming Pool Fittings

Materials: Stainless steel + PMMA lens

Suitable for PMMA fiber optic light cables at diameter of 1-14 mm Applications: landscape, pool, floor or stair

Quality Warranty: 3 years



Fiber Optic Underwater Lighting Fitting for Swimming Pool Floor

Stainless steel fiber optic underwater lighting fitting is a kind of star end fittings for pool floor light. They are the third element for fiber optic pool light. Because of no power and UV. So, It is completely safe light products. And these stainless steel end star fittings are used for outdoor and indoor floor light. Such as: landscape gardens, pools and stairs.

THANKS

FiberSky™
GALAXY PRO

The Most Advanced Programmable
Fiber Optic Ceiling System

- TWINKLING STARS
- SHOOTING STARS
- CONSTELLATIONS
- GALAXY EFFECTS
- METEOR ANIMATIONS
- DMX / SMART CONTROL
- MILLIONS OF COLORS
- CUSTOM SCENES
- SYNCHRONIZED LIGHT SHOWS

DMX 512
DM2
COMPATIBLE

APP
CONTROL

VOICE
CONTROL

TIME
SCHEDULER

MUSIC
SYNC

SCENE
MEMORY

DESIGN THE UNIVERSE.
CONTROL THE MAGIC.

NOOH ELEVATED LIVING LLP

HEAD OFFICE : D 180, SECTOR 10, NOIDA 201301, INDIA

www.noohliving.com; info@noohliving.com,

+91-9718921229; +91-9958748979