



400A Starter Generators

400SG SERIES GENERATORS

The Skurka 400SG AMP Series starter-generators are designed for starting turbine engines. They also operate as an engine-driven source of DC power and are normally rated at 30 volts, 400 amperes over a speed range of 7,200 - 12,000 rpm.

Interpole and compensating winding are provided in the negative circuit to prevent field distortion and ensure favorable commutation conditions.

TYPICAL AIRCRAFT APPLICATIONS:

- SAAB: 340
- RAYTHEON: HAWKER 700, 800, 800XP & APU
- CANADAIR: CL215, 415 WATER-BOMBER
- BOMBARDIER: DASH 8
- VIKING: CL 415 WATER BOMBER
- LEARJET: 60
- BOMBARDIER: DASH 8-400
- EMBRAER: EMB-120, PHENOM 100 & 300
- MARSH AVIATION: S2 TRACKER CONVERSION

DESIGN FEATURES:

- Improved drive shaft and damper are designed for longer life.
- Dynamic balancing to 5 grain-inches is performed on each armature and fan.
- Armature conductors are silver brazed to the commutator risers for maximum durability.
- Latest high temperature insulating materials are used for longer life.
- Armatures and field coils are vacuum impregnated to insure maximum insulation performance.
- Super precision bearings are carefully selected and packed with high temperature grease to fit application.
- Wedge type armature construction and steel banding insure safe over speed condition.
- Cast aluminum axial fan provides more cooling air throughout entire speed range and eliminates blade flattening at high speed.


PRODUCT SPECIFICATIONS:

LENGTH:	12.90 INCHES	MAXIMUM OVERSPEED:	14,000 RPM
DIAMETER:	6.21 INCHES	TYPICAL STARTER OUTPUT AT 1000 RPM WITH 20V INPUT:	12.5 HP
WEIGHT (APPROXIMATE)	37.5 LBS	MAXIMUM OPERATING ALTITUDE:	55,000 FT
RATED OUTPUT:	12 KW	MAXIMUM STATIC TORQUE:	1600 ± IN-LB.
RATED TERMINAL VOLTAGE:	30 V DC	OVER HUNG MOMENT:	165 IN-LB MAX
COOLING:	BLAST-COOLED WITH FAN	RATED START LOCKED ROTOR TORQUE:	20 FT.-LB 800 AMPS 12 V MAX
CONT. LOAD WITHIN SPEED RANGE:	400 AMPS	MAXIMUM ALLOWABLE START CURRENT & VOLTAGE	2000 AMPS 30 V
GENERATOR MODE SPEED RANGE:	7,200-12,000 RPM	EQUALIZING VOLTAGE AT RATED LOAD CURRENT:	1.49 – 1.97 V
MINIMUM SPEED:	6,800 RPM 28 V 400 AMPS	RESISTANCE RANGE IN SERIES WITH THE SHUNT FIELD:	0.5 - 35
MINIMUM SPEED FOR REGULATION:	7,200 RPM 30 V 400 AMPS	ALLOWABLE BRUSH WEAR:	0.700 IN.
MAXIMUM SPEED FOR REGULATION:	13,000 RPM	ALLOWABLE COMMUTATOR WEAR:	0.200 IN.




400A Starter Generators


400 AMP SERIES OUTLINE

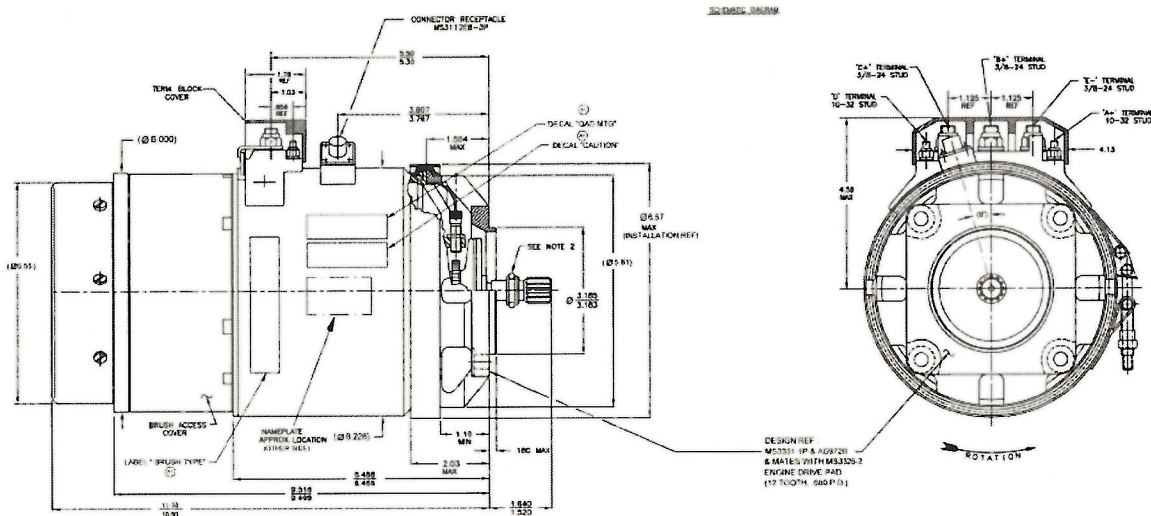

**SPEED-TORQUE CURVE
400SG138Q STARTER GENERATOR**

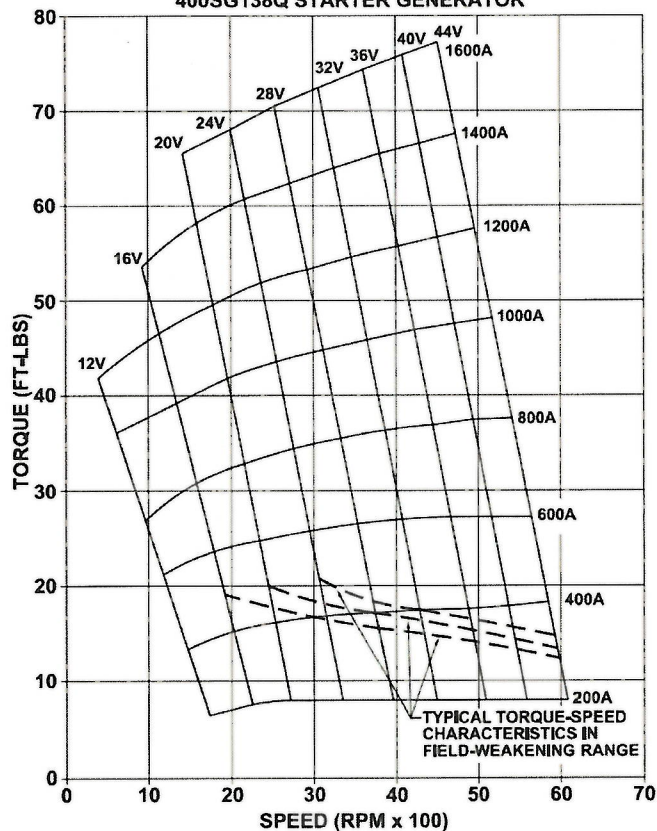

SPEED-LOAD CURVE

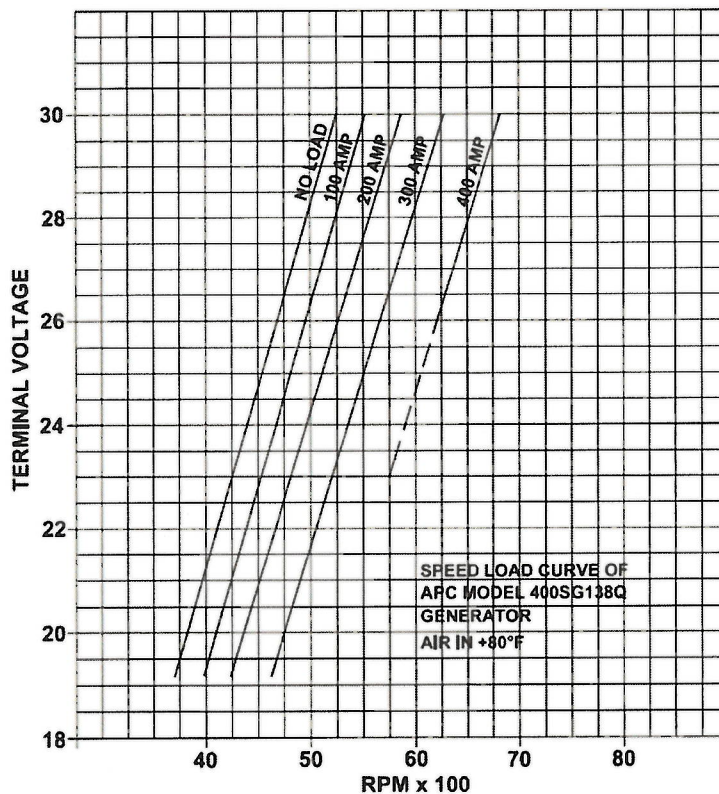

Victoria Alonzo
Customer Account Representative

Main Tel: 805-484-8884 x 270
Fax: 805-482-7771
Email: valonzo@skurka-aero.com

Tarik Ahmed
Sales Account Manager

Tel: 805-484-8884 ext. 249
Cell: 805-910-5469
Fax: 805-482-7771
Email: tahmed@skurka-aero.com