



Practical 4c

Steps to simulation of hybrid:


- 1) Add the devices PCs and switch by clicking on end devices from the left panel.

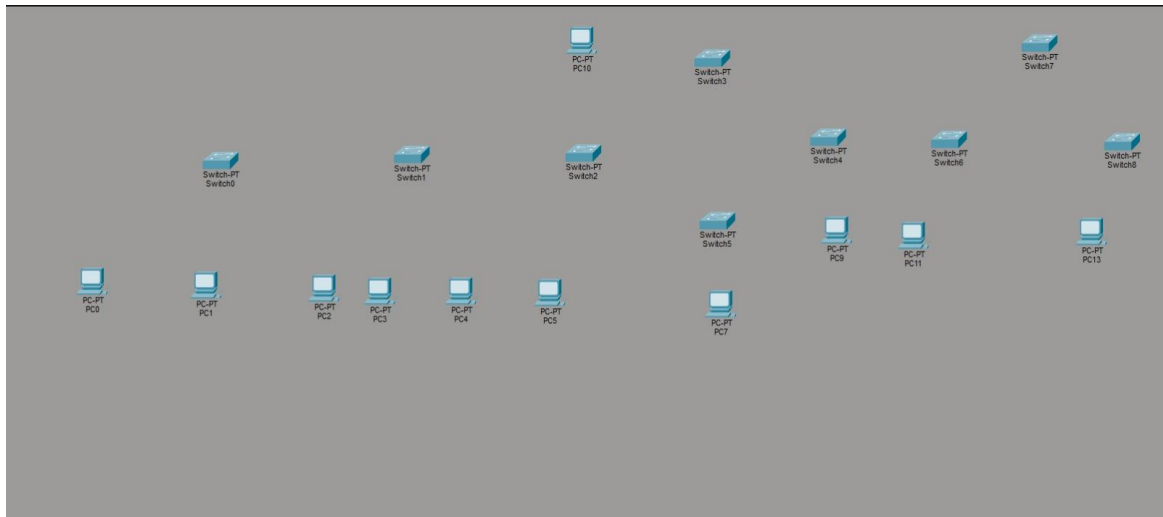


- 2) Connect all the PCs to switch by making connection through cables.

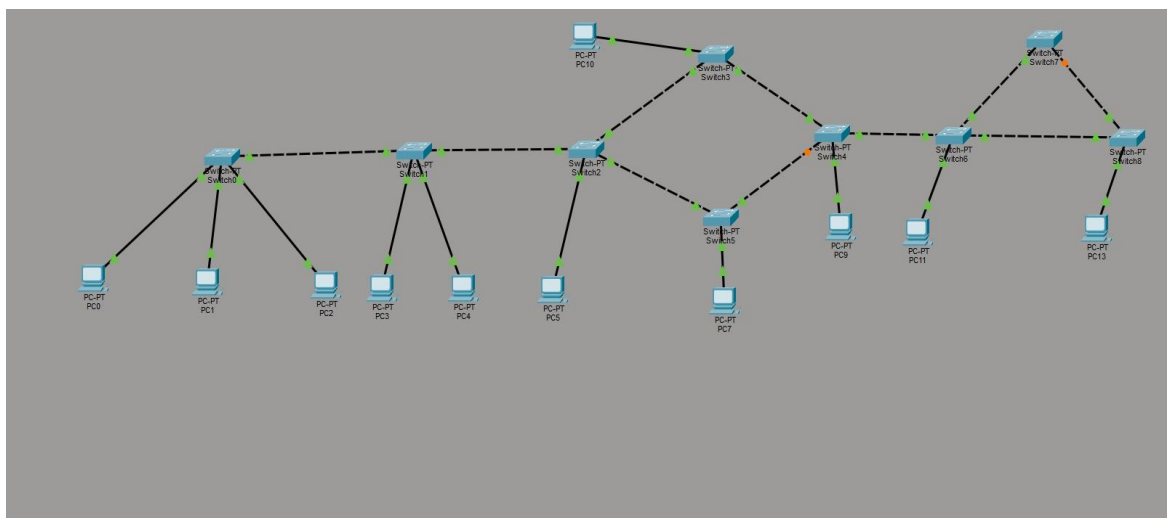


- 3) Assign the IP address to each PCs

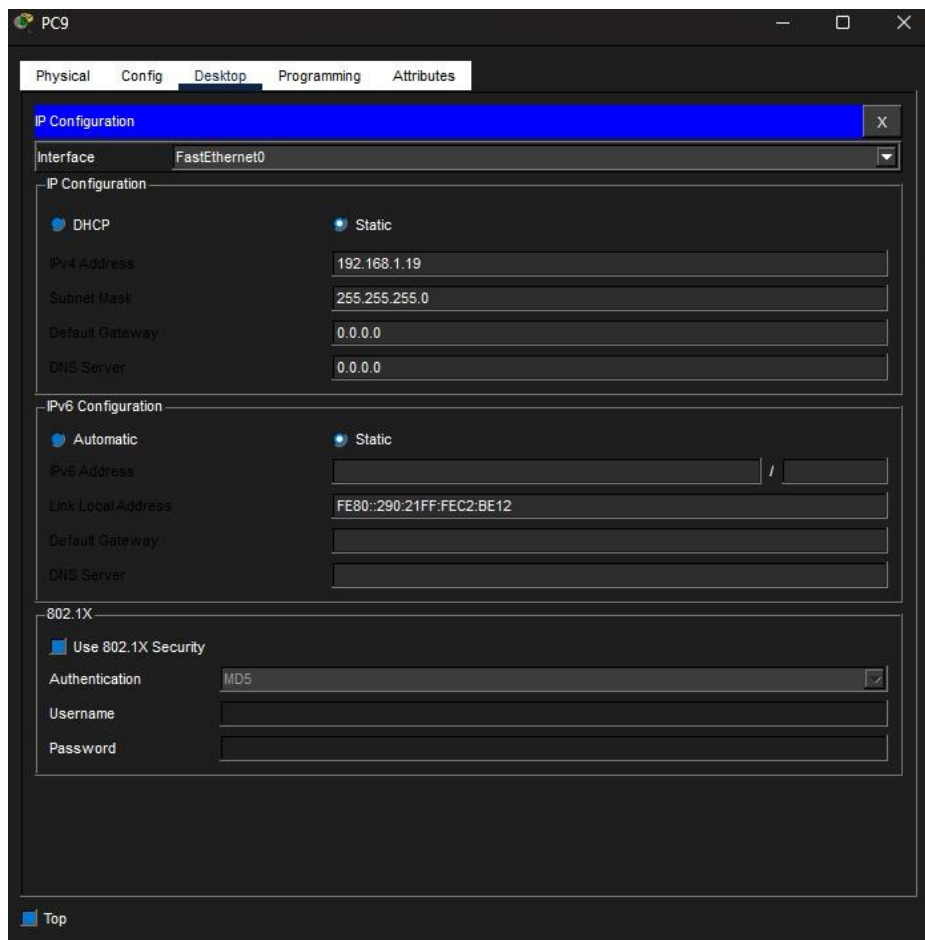

- 4) Test the connection by sending the message and click on simulation and click on run button to see the message transfer.

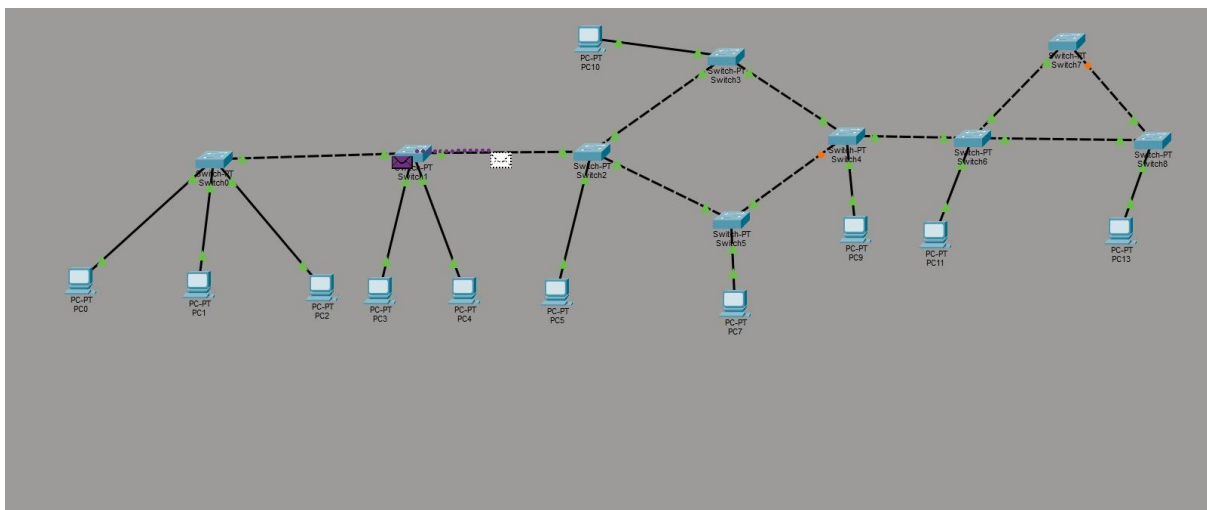

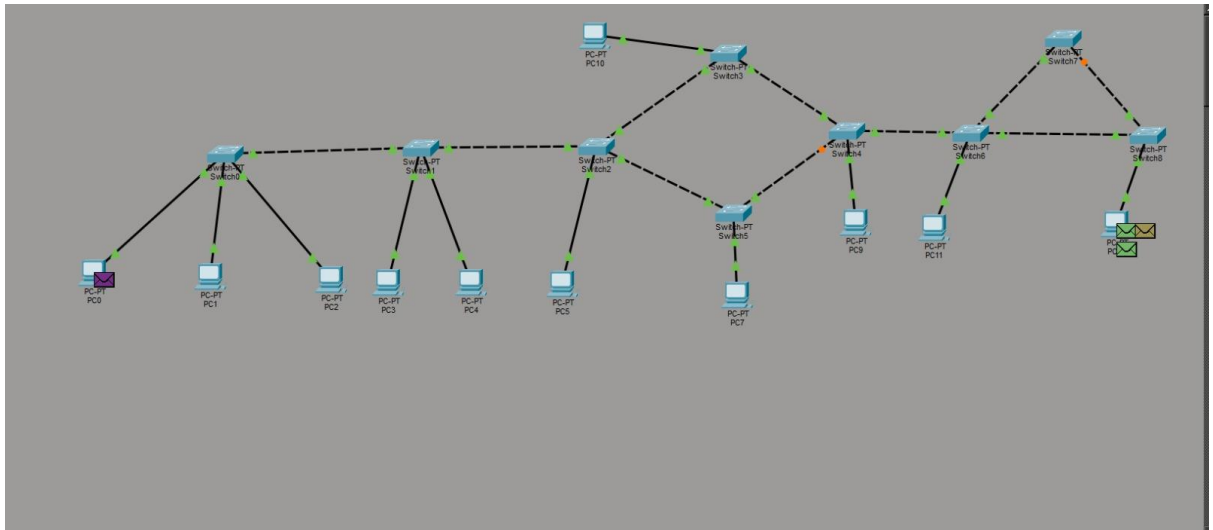

- 5) Also verify the connection by typing ping 192.168.1.11 in the command prompt and when the replies received then the connection is successful.

```
PC13
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.11

Pinging 192.168.1.11 with 32 bytes of data:

Reply from 192.168.1.11: bytes=32 time=33ms TTL=128
Reply from 192.168.1.11: bytes=32 time=16ms TTL=128
Reply from 192.168.1.11: bytes=32 time=16ms TTL=128
Reply from 192.168.1.11: bytes=32 time=16ms TTL=128

Ping statistics for 192.168.1.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 16ms, Maximum = 33ms, Average = 20ms

C:\>
```