



Practical 6


Perform an initial Router configuration

- 1) Add the PCs, router and switch and then connect them.

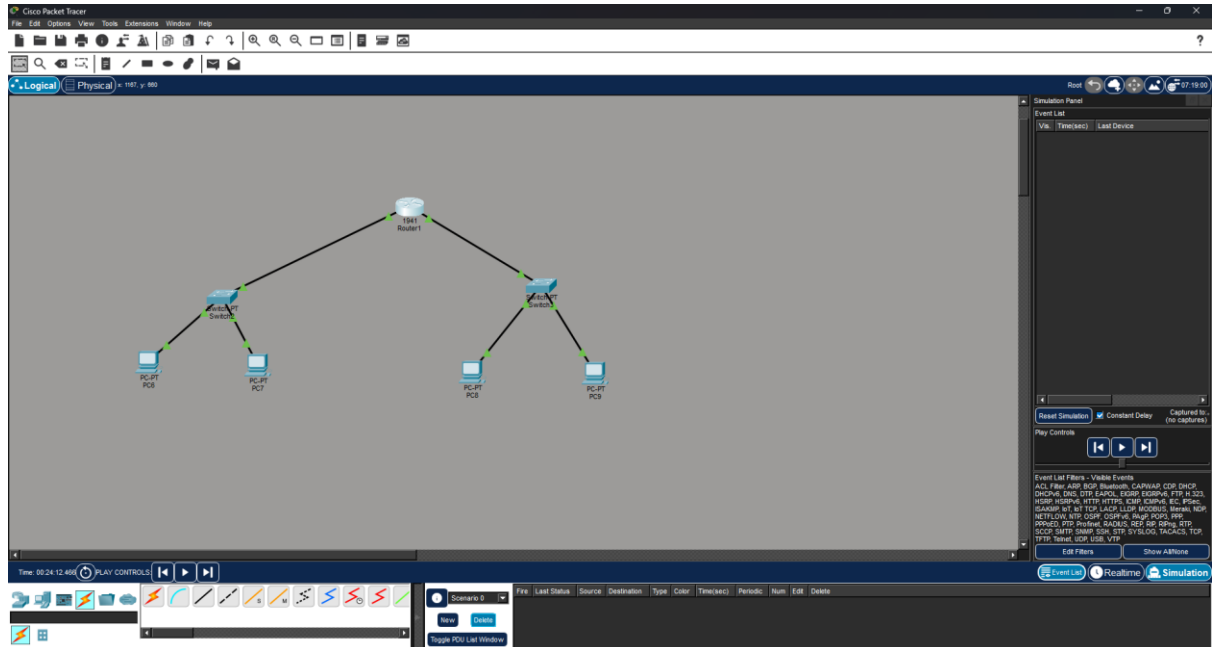



- 2) Give IP address to all PCs of both the network.

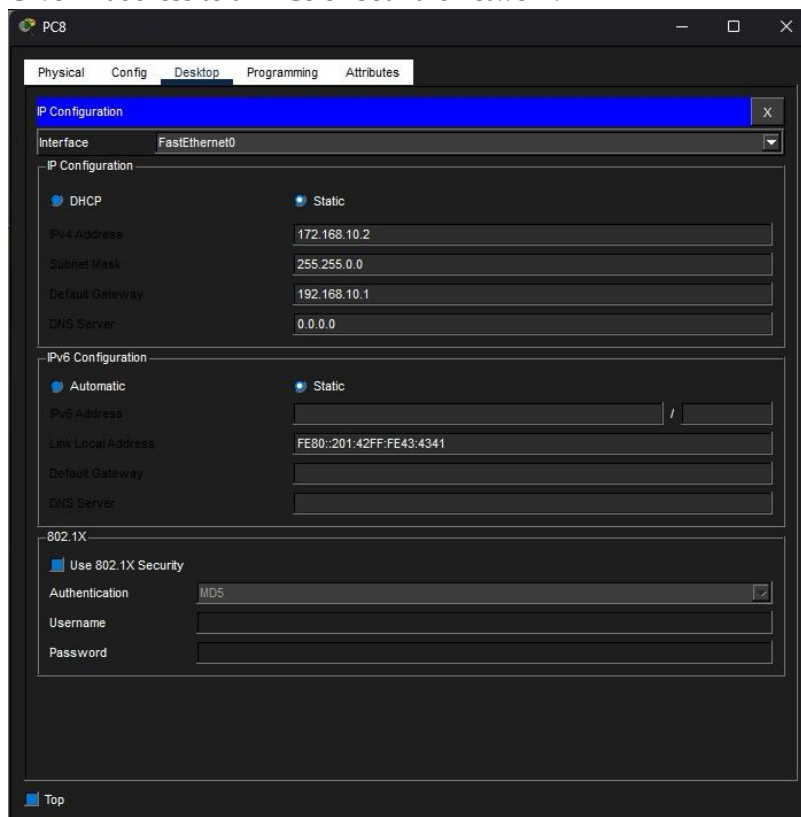

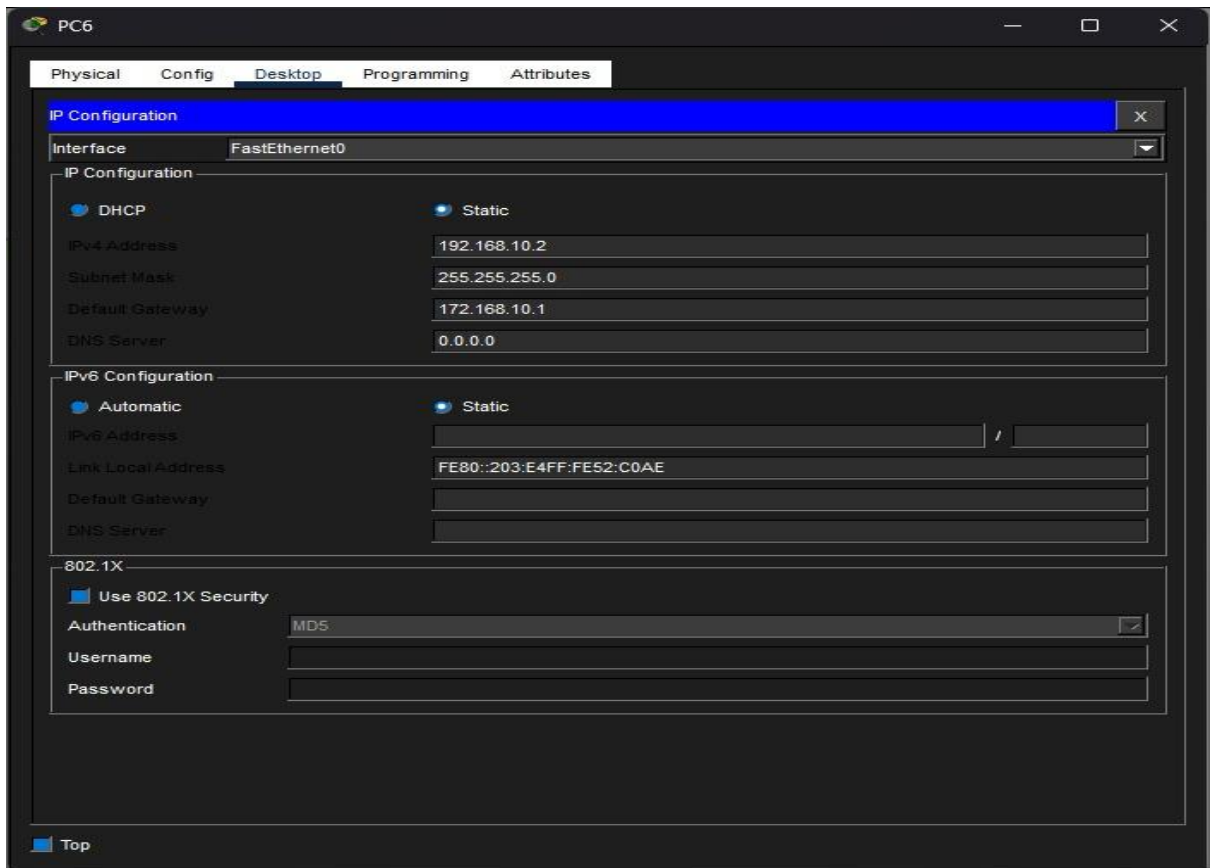


- 3) Then click on Router and go to config and in interface give ip address to both the gigabitethernet cables. .

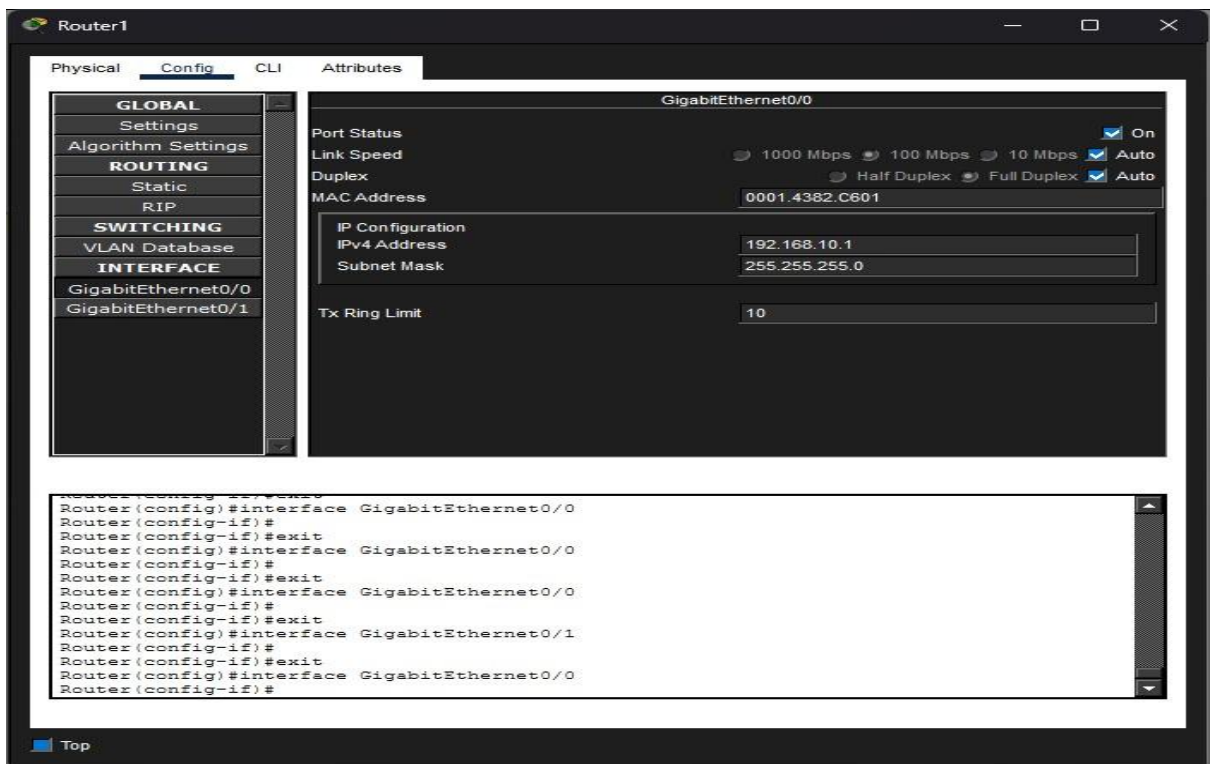

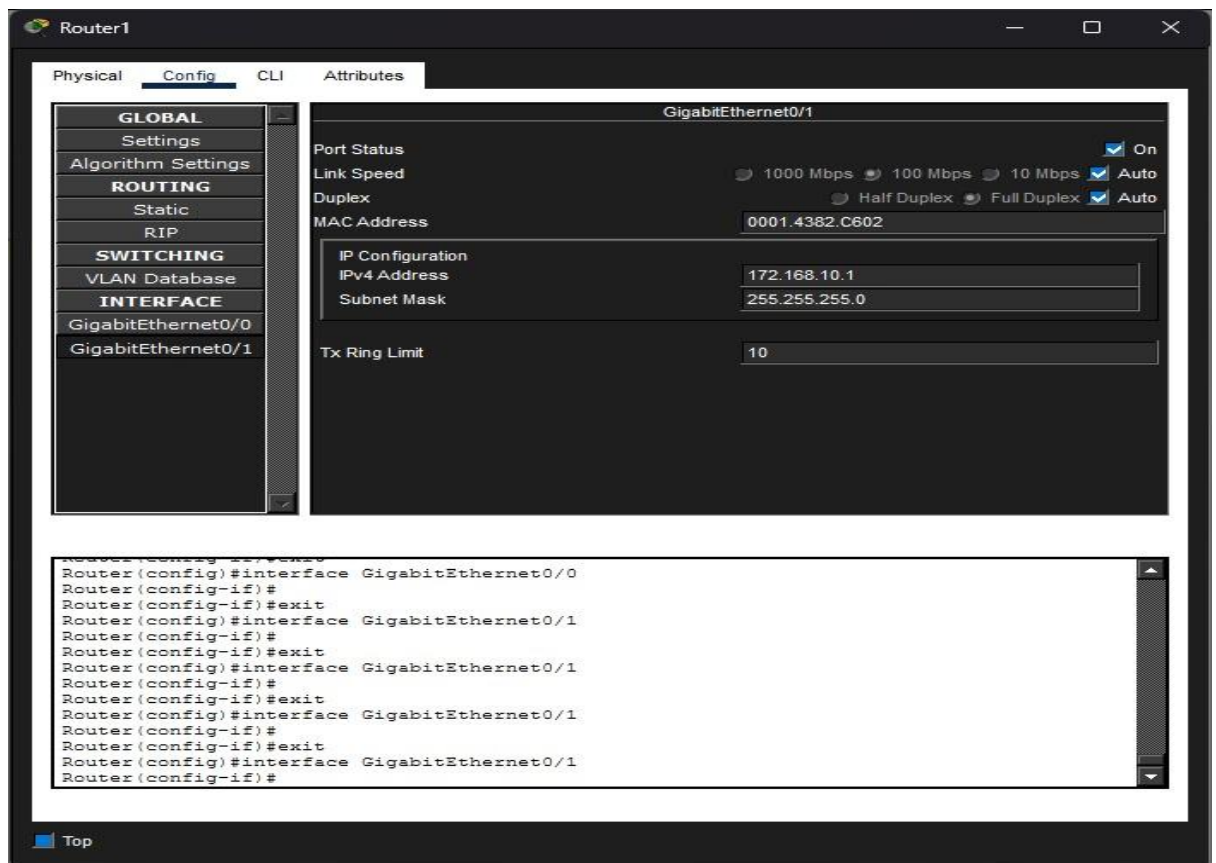

- 4) Go to CLI and type NO SHUTDOWN in both the GigabitEthernet0/1 and GigabitEthernet0/0 to make the link down to up.

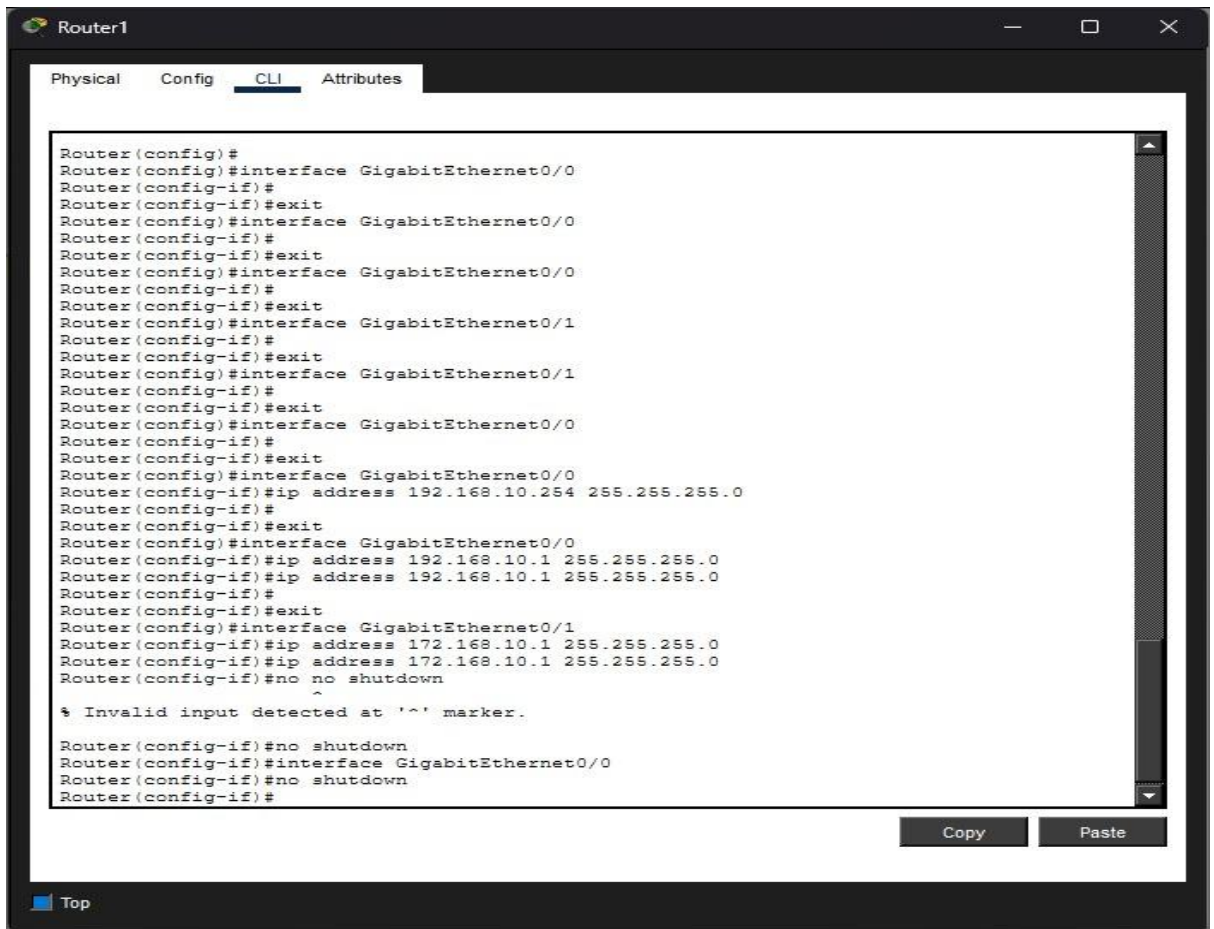

5) Now check the connection by sending the packet.

