


Practical 7



To implement client server Network :

Steps to implement for HTTP :


- 1) Add the PCs and switch and make a local area connection then add the server to the local area.

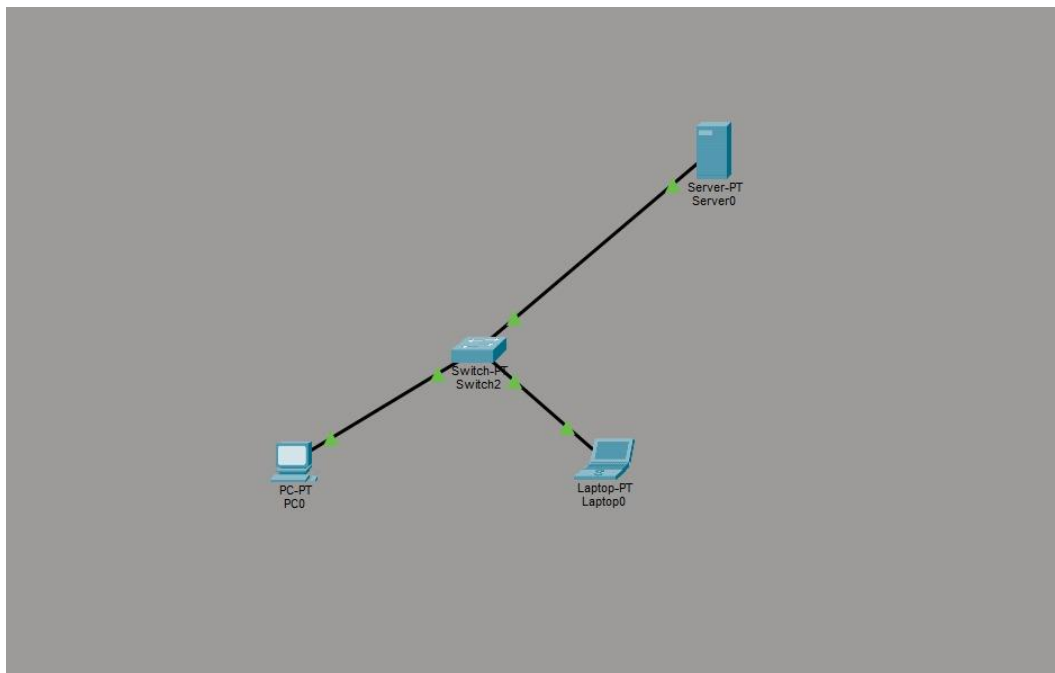


- 2) Provide the IP address to both PCs and the server.

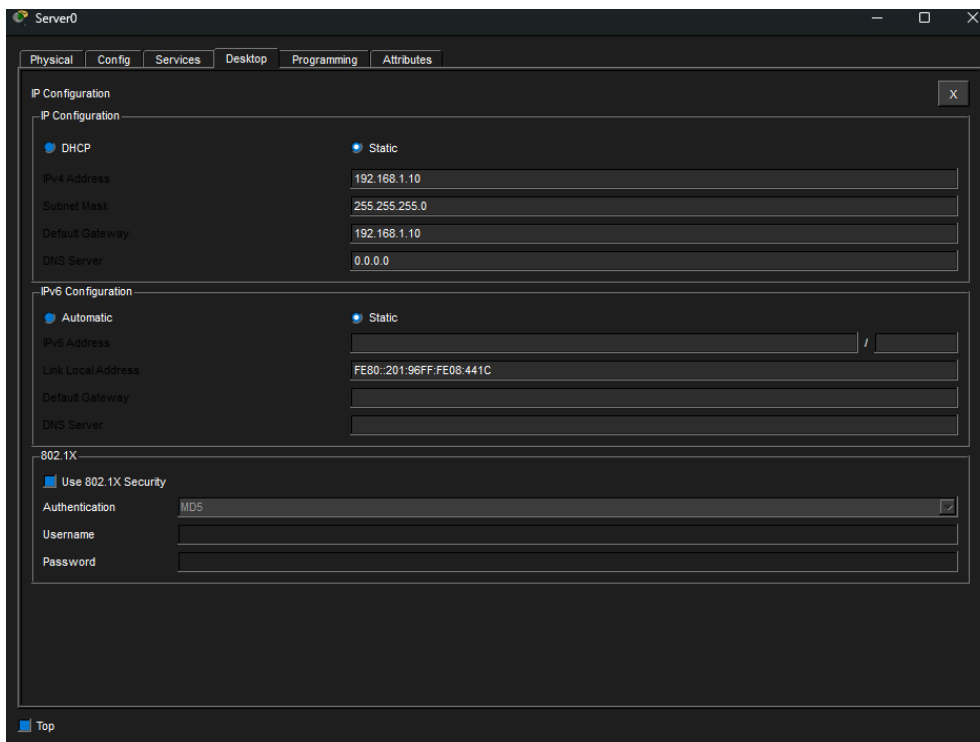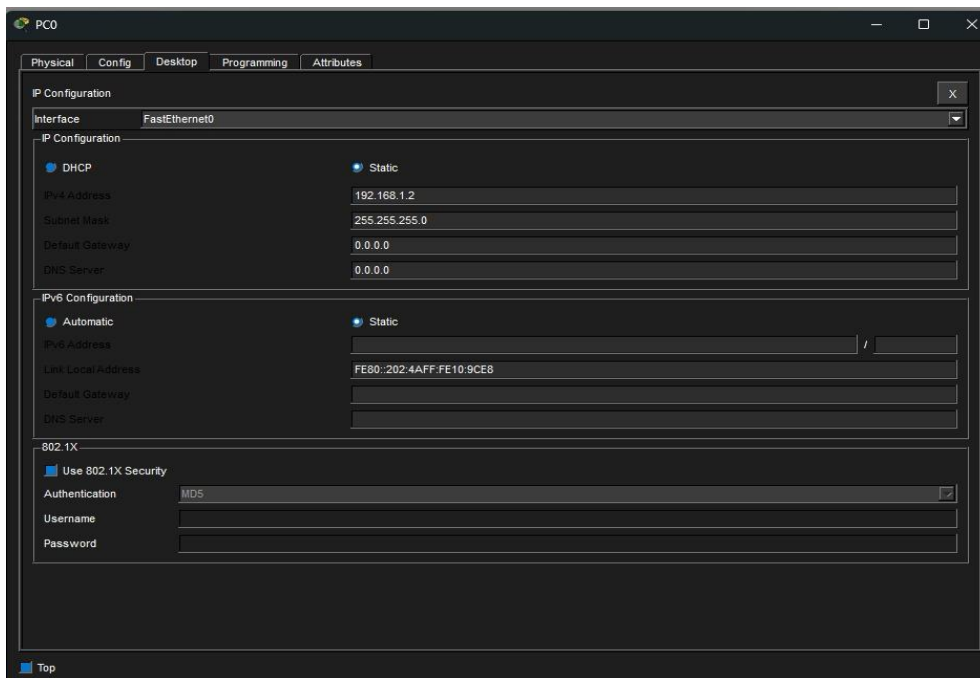


3) Then set the default gateway of server same as the IP address of the server.

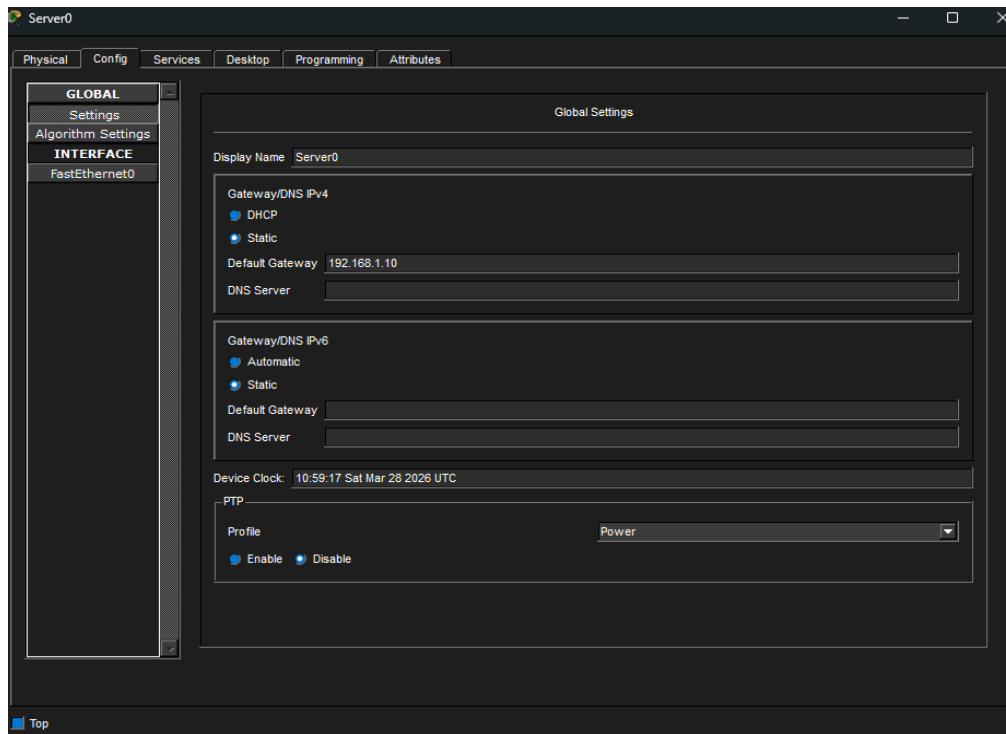

4) Then on the all services of HTTP.

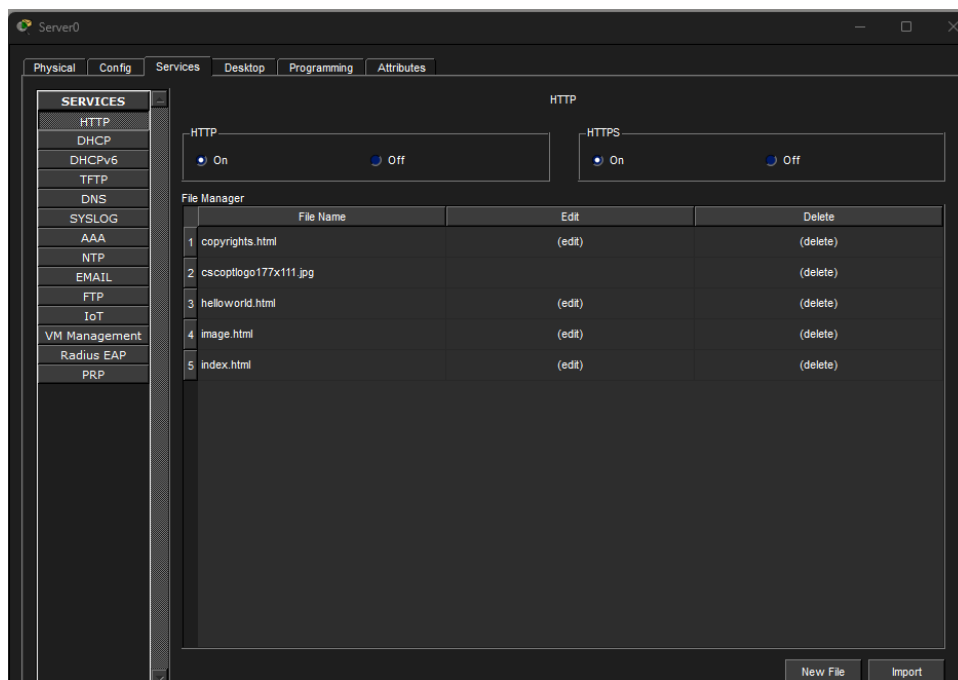



5) Then by clicking on any pc go to web browser and type the URL of the server to check the connection.

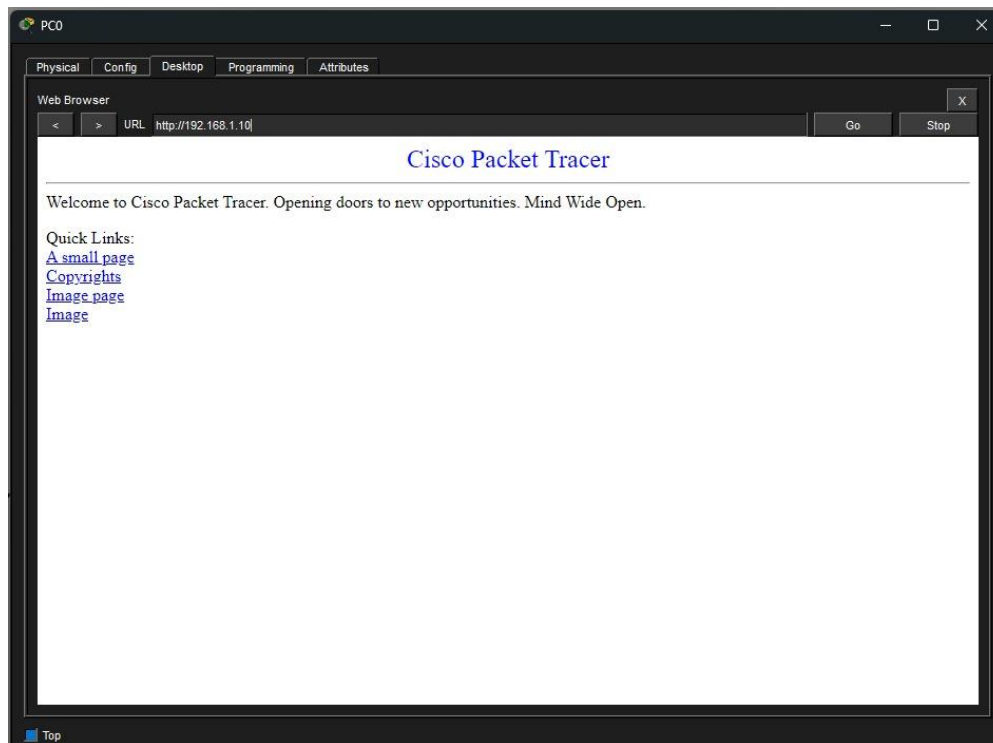


Steps to implement for DHCP:


1) Change the IP configuration to DHCP for both the PCs

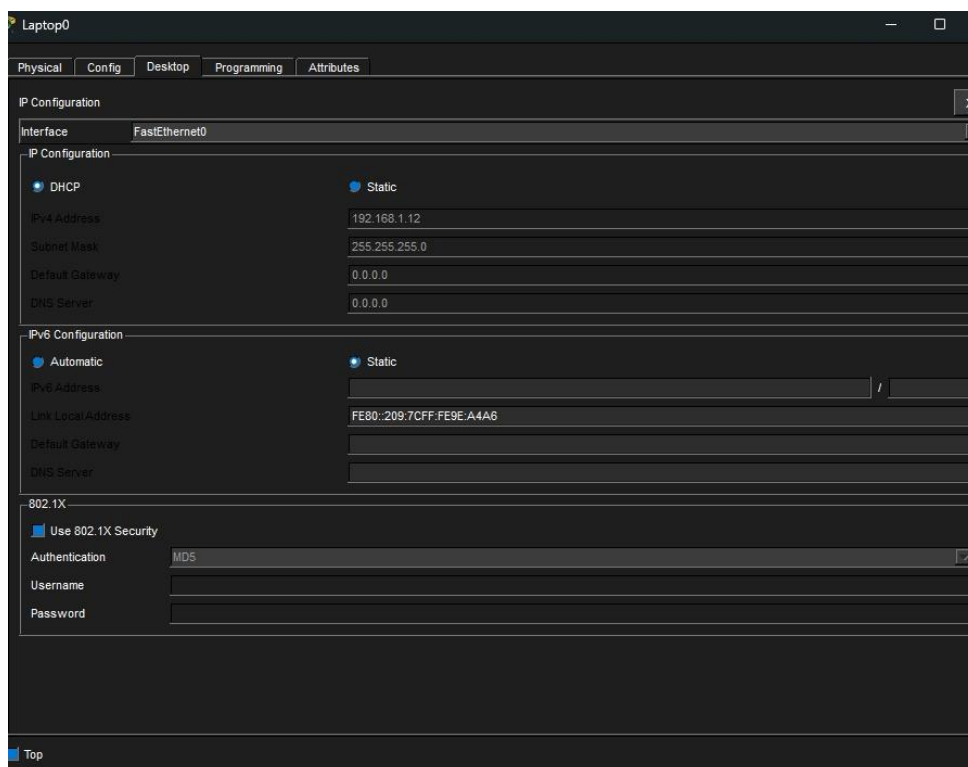

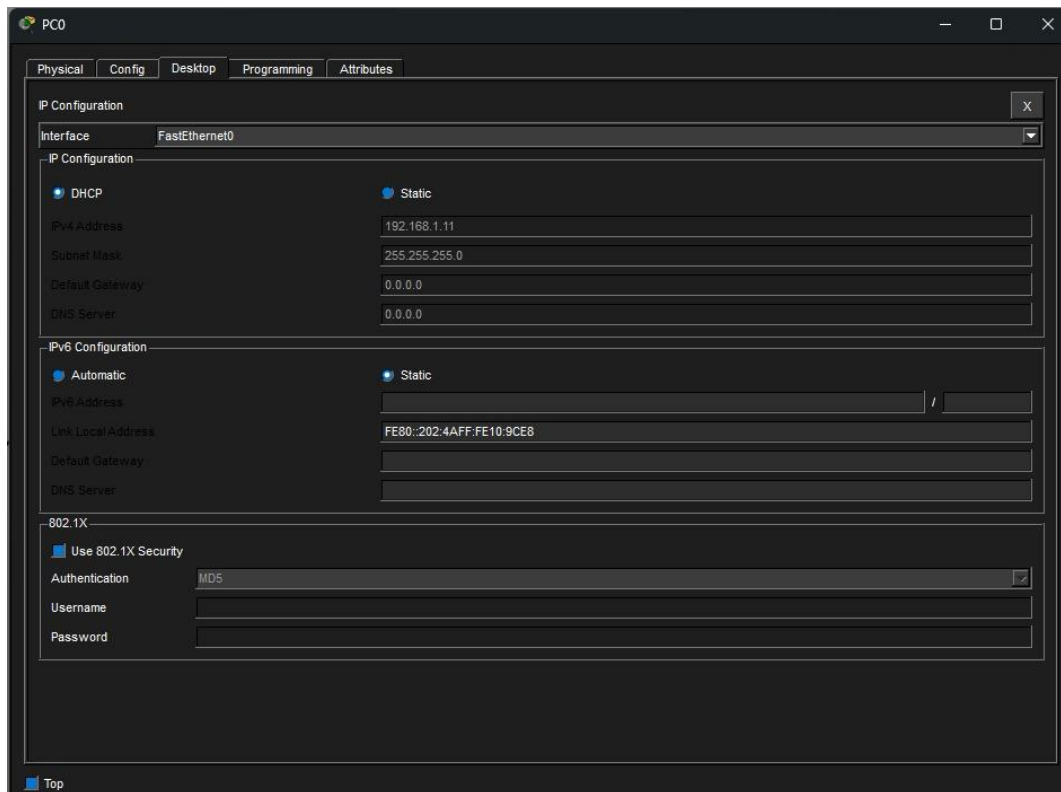


2) The default gateway and IP configuration again static and default gateway is same as the IP address of the server.

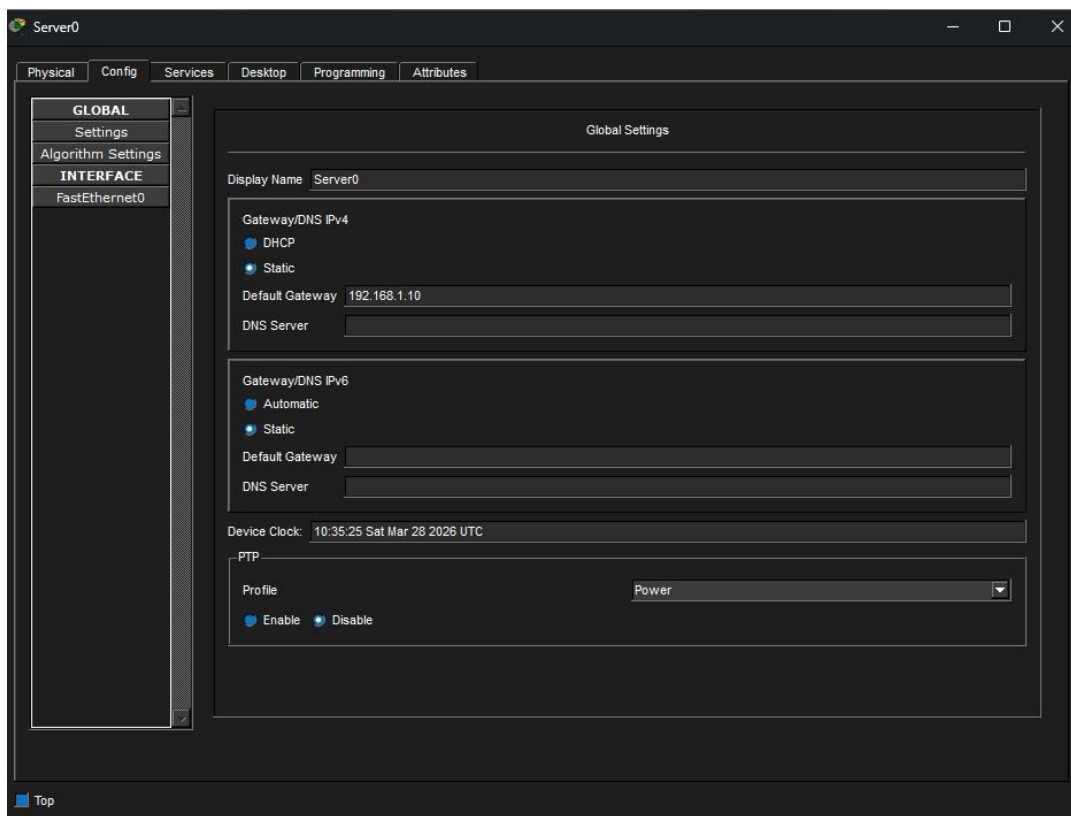


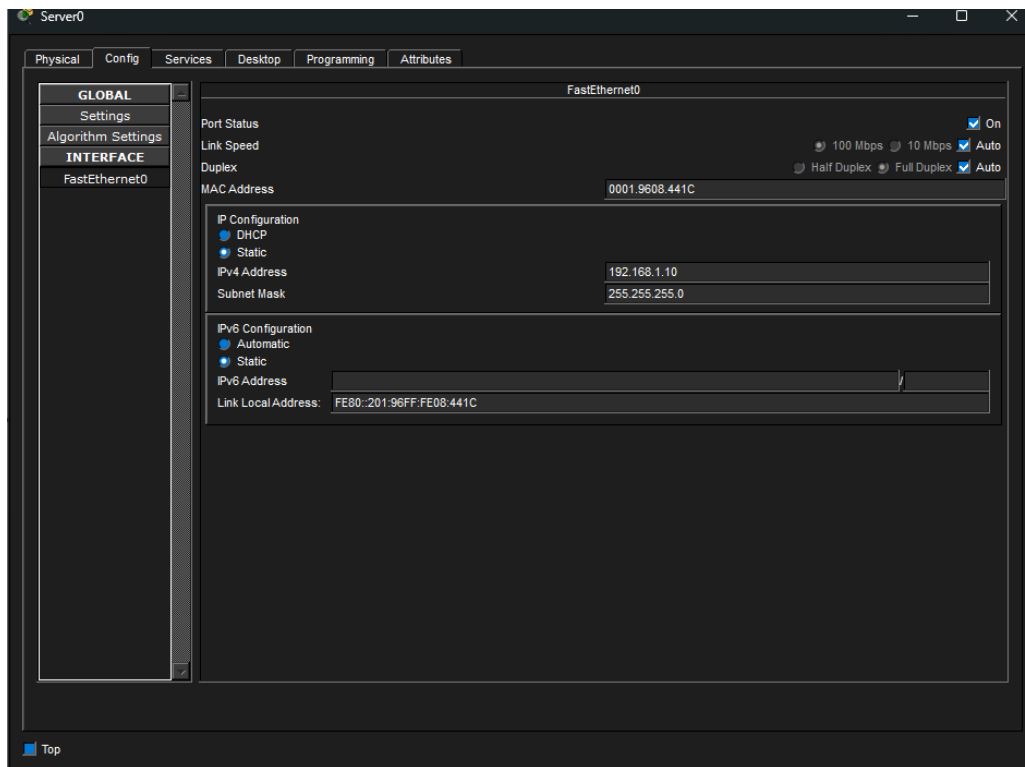

3) Then the default IP address for the PCs will generate showing PCs connected to server.

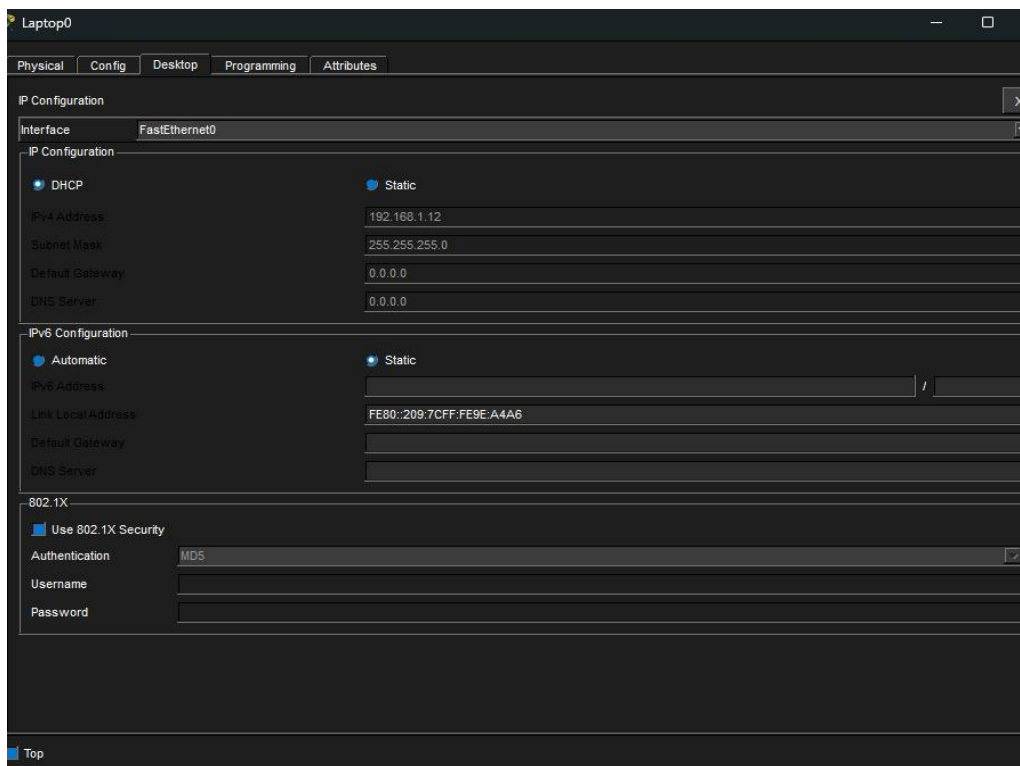

4) Then in DHCP change the Start IP address to next IP from the IP address of server and also change the maximum number of users by 8 and save the changes.

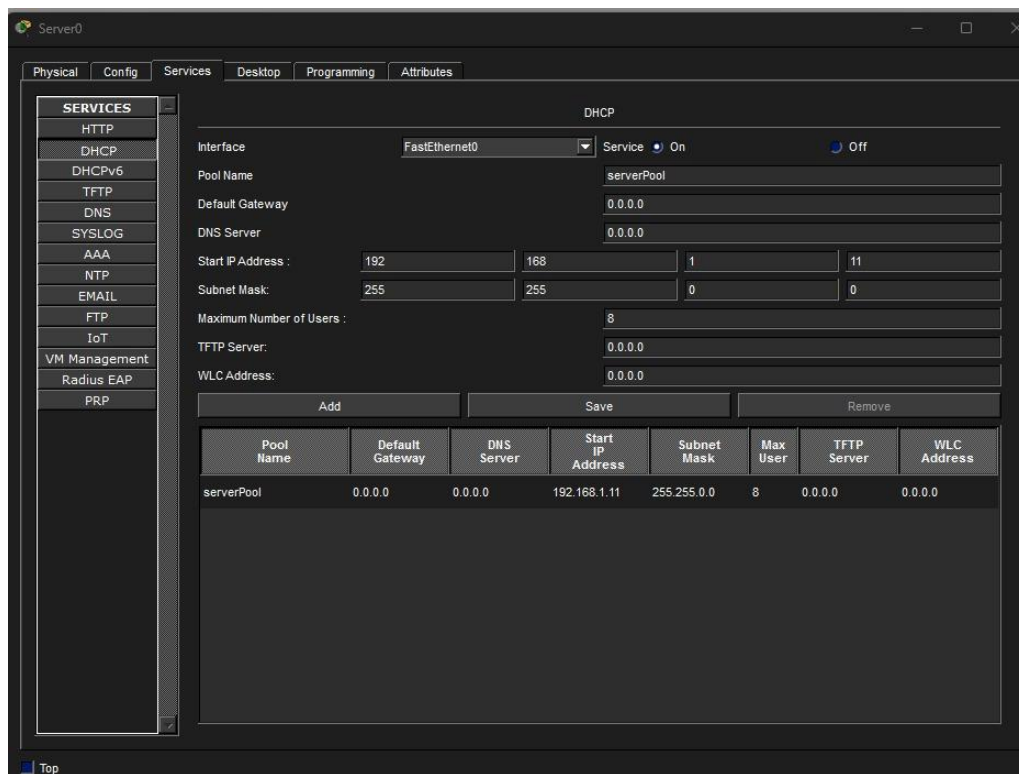

5) Then by clicking on any pc go to web browser and type the URL of the server to check the connection.

