

1. General Description

The EM74HCT595 is 8-bit serial-in/serial or parallel-out shift registers with storage registers and 3-state outputs. Both the shift and storage register have separate clocks. The device features a serial input (DS) and a serial output (Q7S) to enable cascading and an asynchronous reset $\overline{MR}$ input. A LOW on $\overline{MR}$ will reset the shift register. Data is shifted on the LOW-to-HIGH transitions of the SHCP input. The data in the shift register is transferred to the storage register on a LOW-to-HIGH transition of the STCP input. If both clocks are connected together, the shift register will always be one clock pulse ahead of the storage register. Data in the storage register appears at the output whenever the output enable input ($\overline{OE}$) is LOW. A HIGH on $\overline{OE}$ causes the outputs to assume a high-impedance OFF-state. Operation of the $\overline{OE}$ input does not affect the state of the registers. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of V_{CC} .

2. Features and Benefits

- High noise immunity
- CMOS low power dissipation
- 8-bit serial input
- 8-bit serial or parallel output
- Storage register with 3-state outputs
- Shift register with direct clear
- Latch-up performance exceeds 250 mA
- Complies with JEDEC standard:
 - JESD7A(4.5 V to 6.0 V)
- Input levels: TTL level
- ESD protection:
 - HBM ANSI/ESDA/JEDEC JS-001 Class 2 exceeds 3500 V
 - CDM ANSI/ESDA/JEDEC JS-002 Class C3 exceeds 2000 V
- Multiple package options
- Specified from -40 °C to +85 °C and from -40 °C to +125 °C

EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

3.Applications

- Serial-to-parallel data conversion
- Remote control holding register


4.Ordering Information

Table 1. Ordering information

Type number	Topside marking	Package		
		Name	Description	Quantity
EM74HCT595D	HCT595 XYYWW	SOP-16L	plastic small outline package; 16 leads; body width 3.9 mm	3000
EM74HCT595PW	HCT595 XYYWW	TSSOP-16L	plastic thin shrink small outline package; 16 leads; body width 4.4 mm	3000
EM74HCT595DB	HCT595 XYYWW	SSOP-16L	plastic small outline package; 16 leads; body width 5.3 mm	2000

MARKING INFORMATION

NOTE: XYYWW = Vendor Code and Data Code.



5. Function Diagram

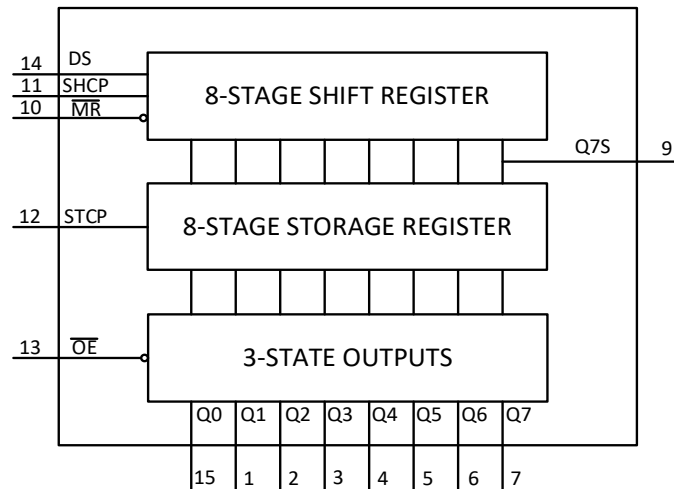


Fig. 1. Functional diagram

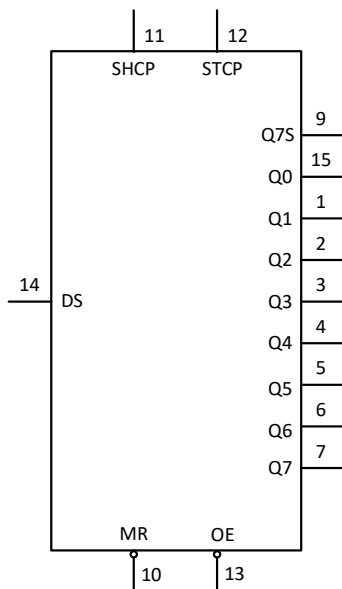


Fig. 2. Logic symbol


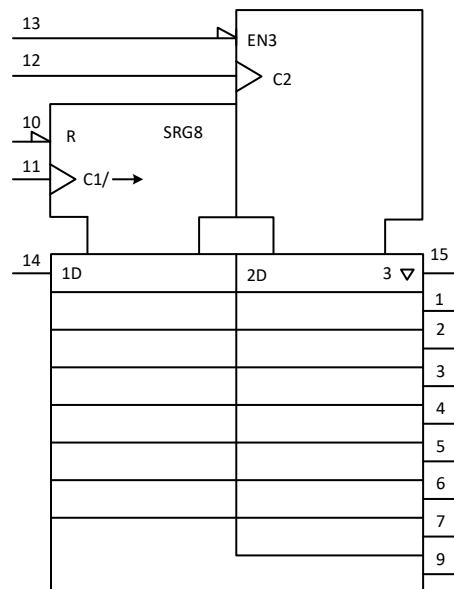


Fig. 3. IEC logic symbol


EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

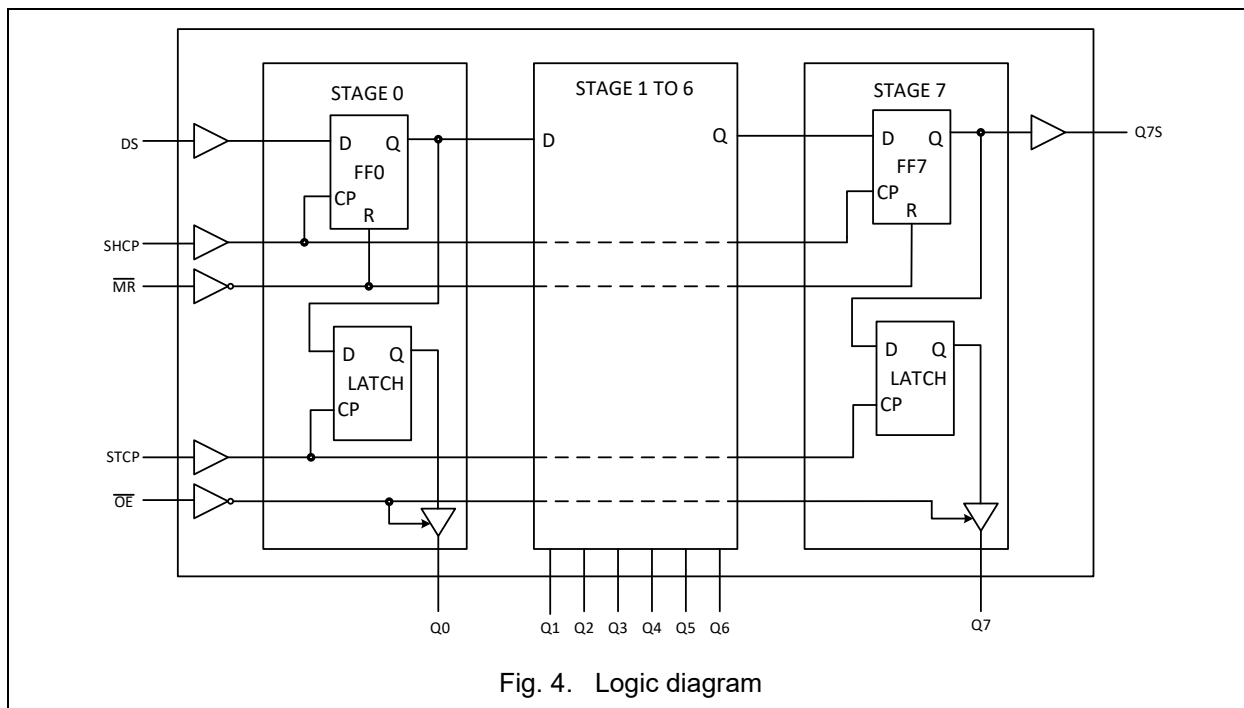

6. Pinning Information

6.1. Pinning

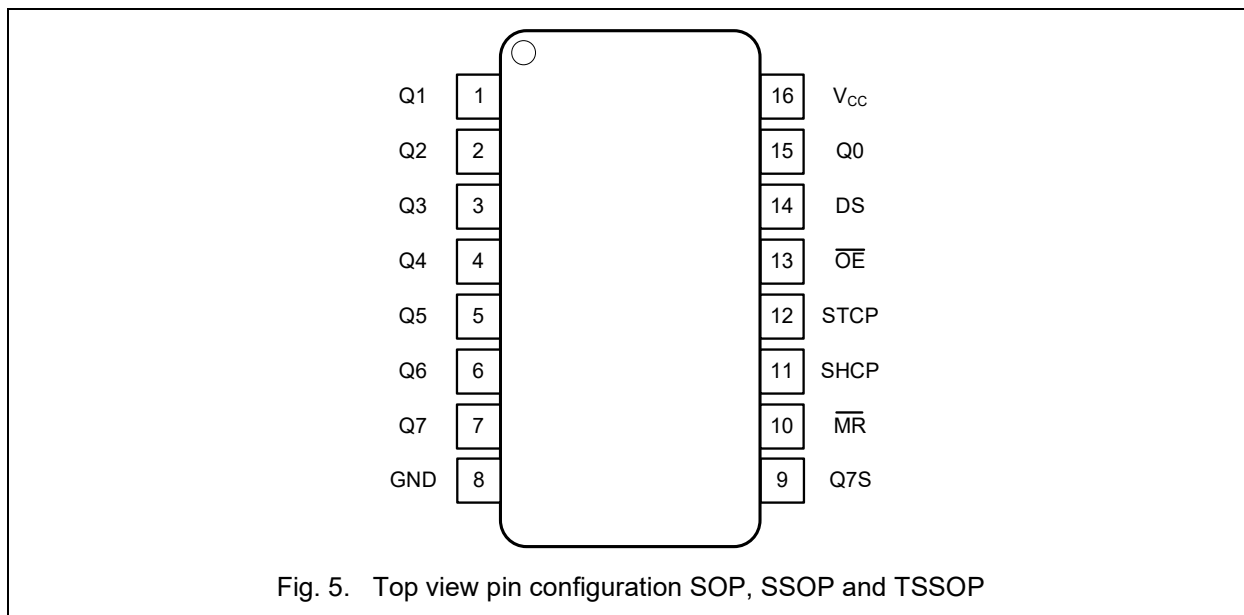

EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

6.2. Pin description**Table 2. Pin description**

Symbol	Pin	Description
Q0, Q1, Q2, Q3, Q4, Q5, Q6, Q7	15, 1, 2, 3, 4, 5, 6, 7	Parallel data output
GND	8	Ground (0V)
Q7S	9	Serial data output
$\overline{\text{MR}}$	10	Master reset (active LOW)
SHCP	11	Shift register clock input
STCP	12	Storage register clock input
$\overline{\text{OE}}$	13	Output enable input (active LOW)
DS	14	Serial data input
V _{CC}	16	Supply voltage

EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

7.Functional Description

Table 3. Function table

H = HIGH voltage level; L = LOW voltage level; ↑ = LOW-to-HIGH transition;

X = don't care; NC = no change; Z = high-impedance OFF-state.

Control				Input	Output		Function
SHCP	STCP	$\overline{OE}$	$\overline{MR}$	DS	Q7S	Qn	
X	X	L	L	X	L	NC	a LOW-level on $\overline{MR}$ only affects the shift registers
X	↑	L	L	X	L	L	empty shift register loaded into storage register
X	X	H	L	X	L	Z	shift register clear; parallel outputs in high-impedance OFF-state
↑	X	L	H	H	Q6S	NC	logic HIGH-level shifted into shift register stage 0. Contents of all shift register stages shifted through, e.g. previous state of stage 6 (internal Q6S) appears on the serial output (Q7S).
X	↑	L	H	X	NC	QnS	contents of shift register stages (internal QnS) are transferred to the storage register and parallel output stages
↑	↑	L	H	X	Q6S	QnS	contents of shift register shifted through; previous contents of the shift register is transferred to the storage register and the parallel output stages

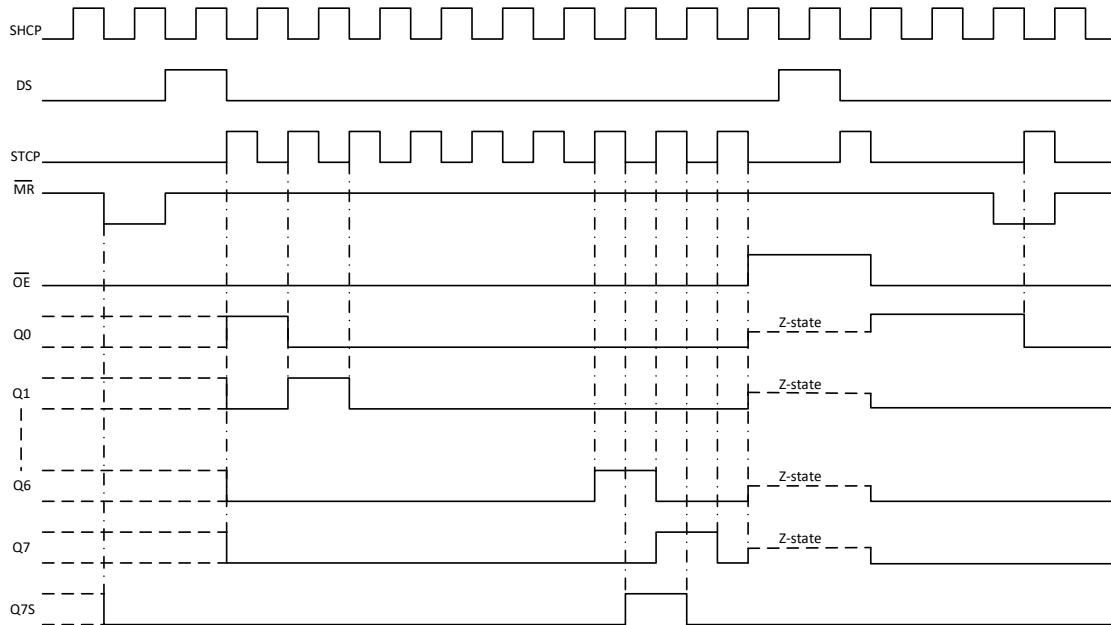


Fig. 6. Timing diagram

EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

8. Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Table 4. Absolute Maximum Ratings

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND.

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		-0.5	7.0	V
I_{IK}	input clamping current	$V_O < -0.5 \text{ V}$ or $V_O > V_{CC} + 0.5 \text{ V}$ [1]		± 20	mA
I_{OK}	output clamping current	$V_O < -0.5 \text{ V}$ or $V_O > V_{CC} + 0.5 \text{ V}$ [1]		± 20	mA
I_O	output current	$-0.5 \text{ V} < V_O < V_{CC} + 0.5 \text{ V}$		± 35	mA
I_{CC}	supply current			70	mA
I_{GND}	ground current		-70		mA
P_{tot}	total power dissipation	$T_{amb} = -40 \text{ }^\circ\text{C}$ to $+125 \text{ }^\circ\text{C}$		500	mW
T_{stg}	storage temperature		-65	150	$^\circ\text{C}$

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

9. Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. EnergyMath does not recommend exceeding them or designing to Absolute Maximum Ratings.

Table 5. Recommended Operating Conditions

Symbol	Parameter	Conditions	EM74HCT595			Unit
			Min	Typ	Max	
V_{CC}	supply voltage		2.7	5.0	5.5	V
V_I	input voltage		0		V_{CC}	V
V_O	output voltage		0		V_{CC}	V
T_{amb}	ambient temperature		-40	+25	+125	$^\circ\text{C}$
$\Delta t/\Delta V$	input transition rise and fall rate	$V_{CC} = 3.0 \text{ V}$			371	ns/V
		$V_{CC} = 4.5 \text{ V}$		1.67	139	ns/V
		$V_{CC} = 6.0 \text{ V}$				ns/V

EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

10. Static Characteristics

Table 6. Static characteristics

At recommended operating conditions. Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	-40 °C to +85 °C			-40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	
V_{IH}	HIGH-level input voltage	$V_{CC} = 3.0 \text{ V}$	2.0			2.0		V
		$V_{CC} = 4.5 \text{ V}$	2.0			2.0		V
		$V_{CC} = 5.5 \text{ V}$	2.0			2.0		V
V_{IL}	LOW-level input voltage	$V_{CC} = 3.0 \text{ V}$			0.6		0.6	V
		$V_{CC} = 4.5 \text{ V}$			0.8		0.8	V
		$V_{CC} = 5.5 \text{ V}$			0.8		0.8	V
V_{OH}	HIGH-level output voltage	$V_I = V_{IH} \text{ or } V_{IL}$						
		all outputs						
		$I_O = -20 \mu\text{A}; V_{CC} = 3.0 \text{ V}$	2.9			2.9		V
		$I_O = -20 \mu\text{A}; V_{CC} = 4.5 \text{ V}$	4.4			4.4		V
		Q7S output						
		$I_O = -4.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	3.84			3.7		V
		Qn bus driver outputs						
V_{OL}	LOW-level output voltage	$V_I = V_{IH} \text{ or } V_{IL}$						
		all outputs						
		$I_O = 20 \mu\text{A}; V_{CC} = 3.0 \text{ V}$			0.1		0.1	V
		$I_O = 20 \mu\text{A}; V_{CC} = 4.5 \text{ V}$			0.1		0.1	V
		Q7S output						
		$I_O = 4.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$			0.33		0.4	V
		Qn bus driver outputs						
I_{l1}	input leakage current	$V_I = V_{CC} \text{ or } \text{GND}; V_{CC} = 5.5 \text{ V}$			± 1		± 1	μA
I_{OZ}	OFF-state output current	$V_I = V_{IH} \text{ or } V_{IL}; V_{CC} = 5.5 \text{ V}; V_O = V_{CC} \text{ or } \text{GND}$			± 5		± 10	μA
I_{CC}	supply current	$V_I = V_{CC} \text{ or } \text{GND}; I_O = 0 \text{ A}; V_{CC} = 5.5 \text{ V}$			20		40	μA
ΔI_{CC}	additional supply current	per pin ; $V_I = V_{CC} - 2.1 \text{ V}; I_O = 0 \text{ A}$; other inputs at $V_{CC} \text{ or } \text{GND}$; $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$			450		490	μA
C_i	input capacitance			6.5				pF

[1]All typical values are measured at $T_{amb} = 25^\circ\text{C}$.

EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

11. Dynamic Characteristics

Table 7. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 12.

EM74HCT595								
t _{pd}	propagation delay	SHCP to Q7S; see Fig. 7 [2]						
		V _{CC} = 4.5 V			25		30	ns
		STCP to Qn; see Fig. 8 [2]						
		V _{CC} = 4.5 V			25		30	ns
t _{PHL}	HIGH to LOW propagation delay	$\overline{\text{MR}}$ to Q7S; see Fig. 10						
		V _{CC} = 4.5 V			25		30	ns
t _{en}	enable time	$\overline{\text{OE}}$ to Qn; see Fig. 11 [3]						
		V _{CC} = 4.5 V			20		25	ns
t _{dis}	disable time	$\overline{\text{OE}}$ to Qn; see Fig. 11 [4]						
		V _{CC} = 4.5 V			20		25	ns
t _w	pulse width	SHCP HIGH or LOW; see Fig. 7						
		V _{CC} = 4.5 V	19			22		ns
		STCP HIGH or LOW; see Fig. 8						
		V _{CC} = 4.5 V	19			22		ns
		$\overline{\text{MR}}$ LOW; see Fig.10						
		V _{CC} = 4.5 V	19			22		ns
t _{su}	set up time	DS to SHCP; see Fig.9						
		V _{CC} = 4.5 V	13			15		ns
		SHCP to STCP; see Fig.9						
		V _{CC} = 4.5 V	19			22		ns
t _h	hold time	DS to SHCP; see Fig.9						
		V _{CC} = 4.5 V	3			3		ns
t _{rec}	recovery time	$\overline{\text{MR}}$ to SHCP; see Fig. 10						
		V _{CC} = 4.5 V	13			15		ns
f _{max}	maximum frequency	SHCP or STCP; see Fig. 7 and Fig. 8						
		V _{CC} = 4.5 V	24			20		MHz
C _{PD}	power dissipation capacitance	f _i = 1 MHz; V _I = GND to V _{CC} ; [5][6]		115				pF

[1] Typical values are measured at $T_{amb} = 25 \text{ }^{\circ}\text{C}$.

[2] t_{pd} is the same as t_{PLH} and t_{PHL} .

[3] t_{en} is the same as t_{PZL} and t_{PZH} .

[4] t_{dis} is the same as t_{PLZ} and t_{PHZ} .

[5] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$ where:


EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

f_i = input frequency in MHz;
 f_o = output frequency in MHz;
 C_L = output load capacitance in pF;
 V_{CC} = supply voltage in V;
 N = number of inputs switching;
 $\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.

[6] All 9 outputs switching.


11.1. Waveforms and test circuit

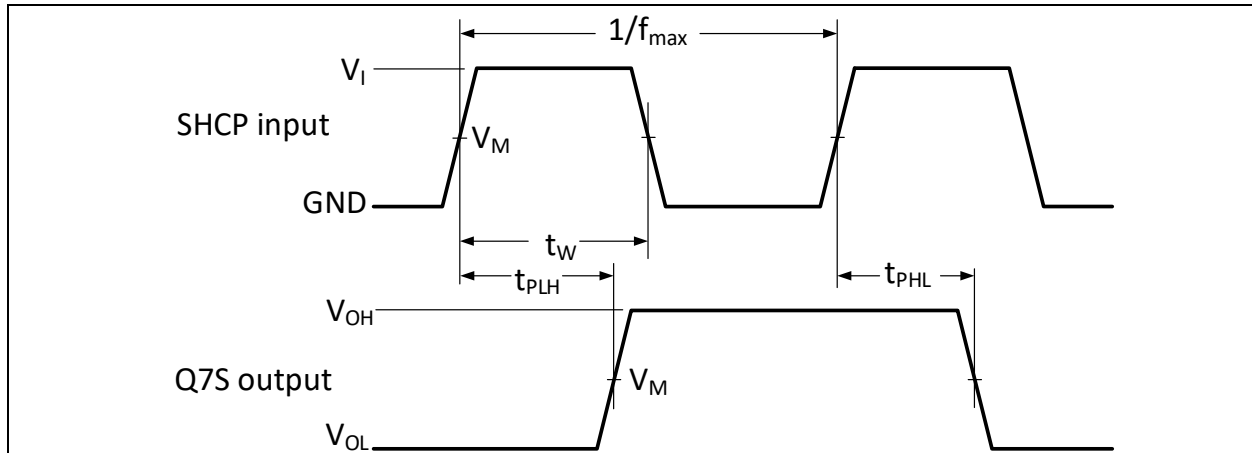

Measurement points are given in Table 8.

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Fig. 7. Shift clock pulse, maximum frequency and input to output propagation delays

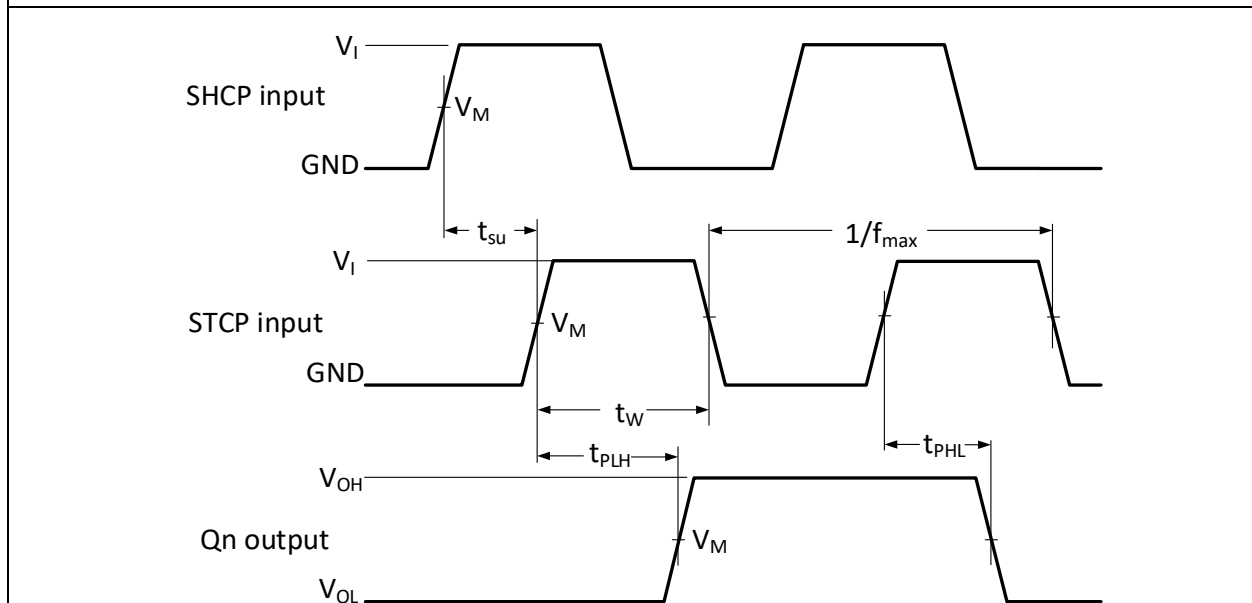

Measurement points are given in Table 8.

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

Fig. 8. Storage clock to output propagation delays


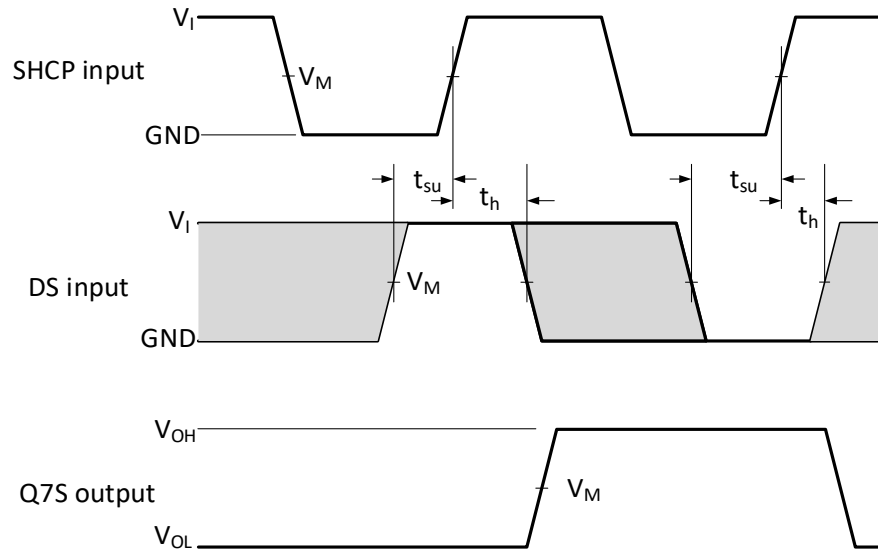



Fig. 9. Data set up and hold times

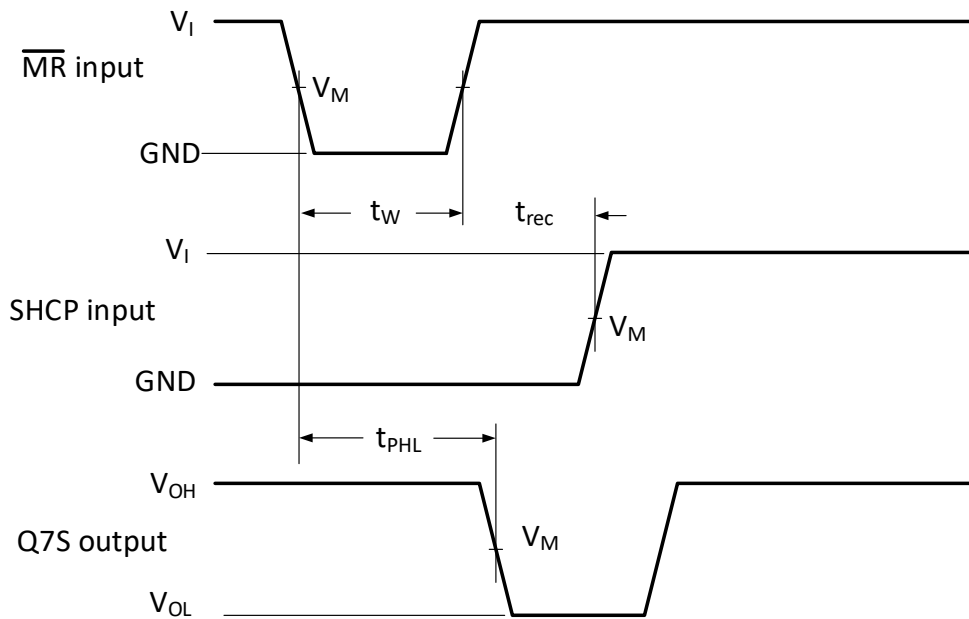

EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

Fig. 10. Master reset to output propagation delays

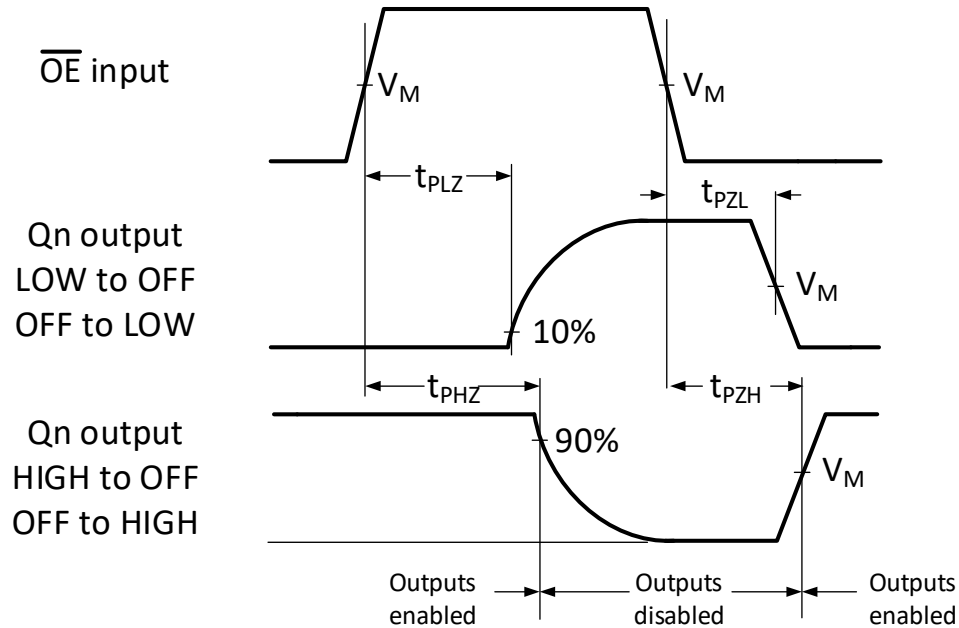

Measurement points are given in Table 8.

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Fig. 11. Enable and disable times

Table 8. Measurement points

Type	Input	Output
	V_M	V_M
EM74HCT595	1.3 V	1.3 V

EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

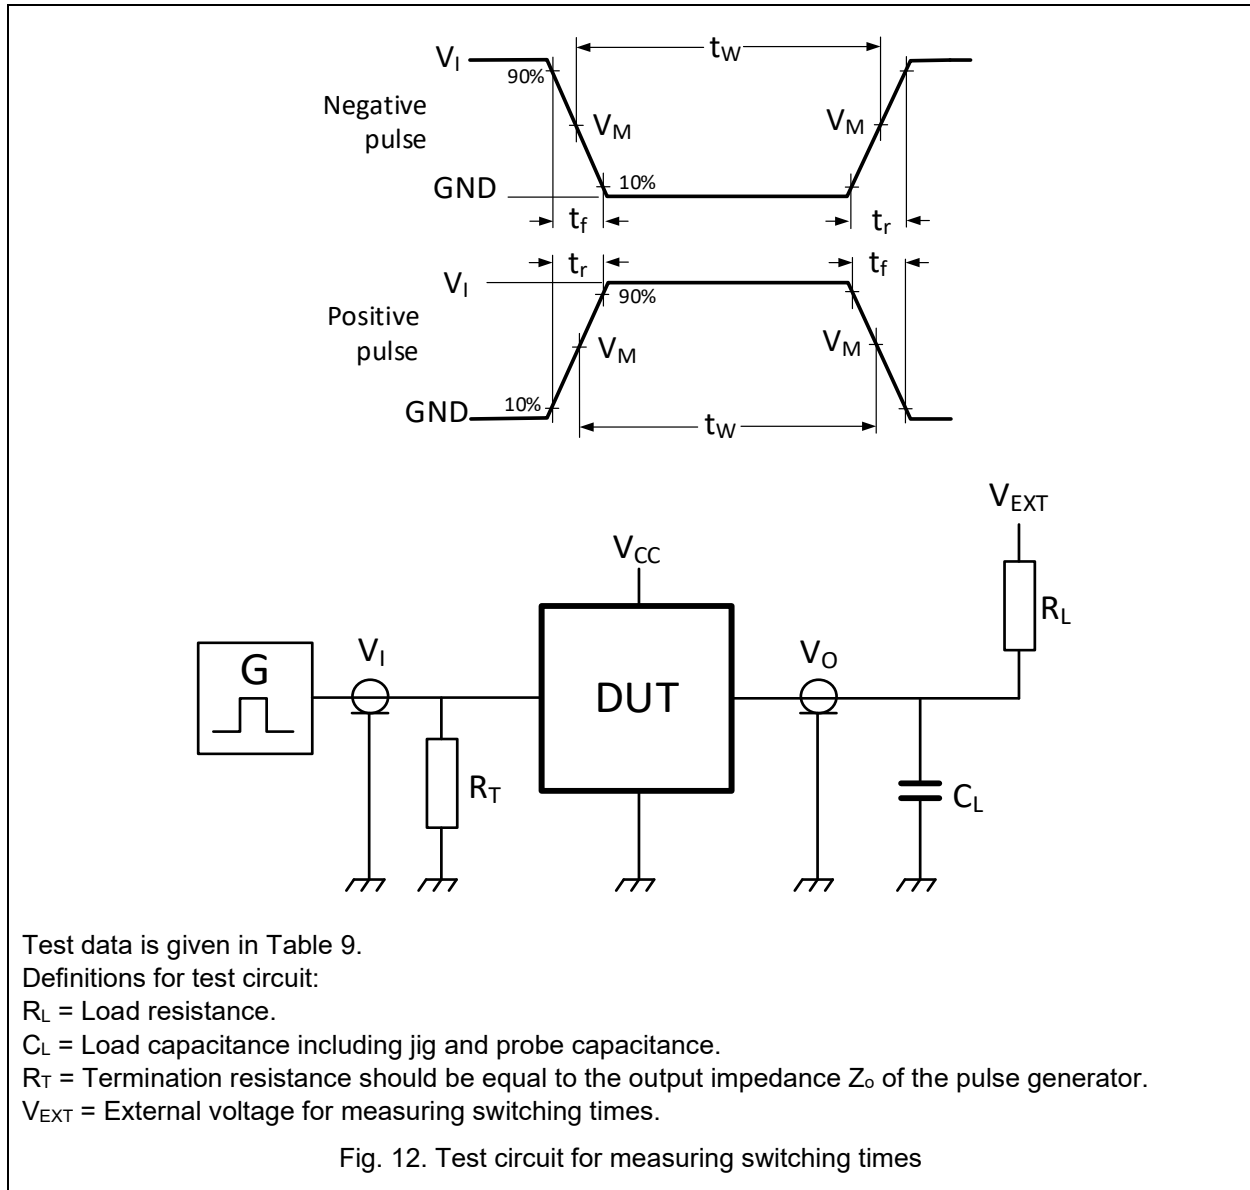


Table 9. Test data


Type	Input		Load		V_{EXT}		
	V_I	$t_r = t_f$	C_L	R_L	t_{PZL}, t_{PLZ}	t_{PHL}, t_{PLH}	t_{PZH}, t_{PHZ}
EM74HCT595	3 V	2.5 ns	15pF	500 Ω	V_{CC}	Open	GND

EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

12. Package Outline

SOP-16L

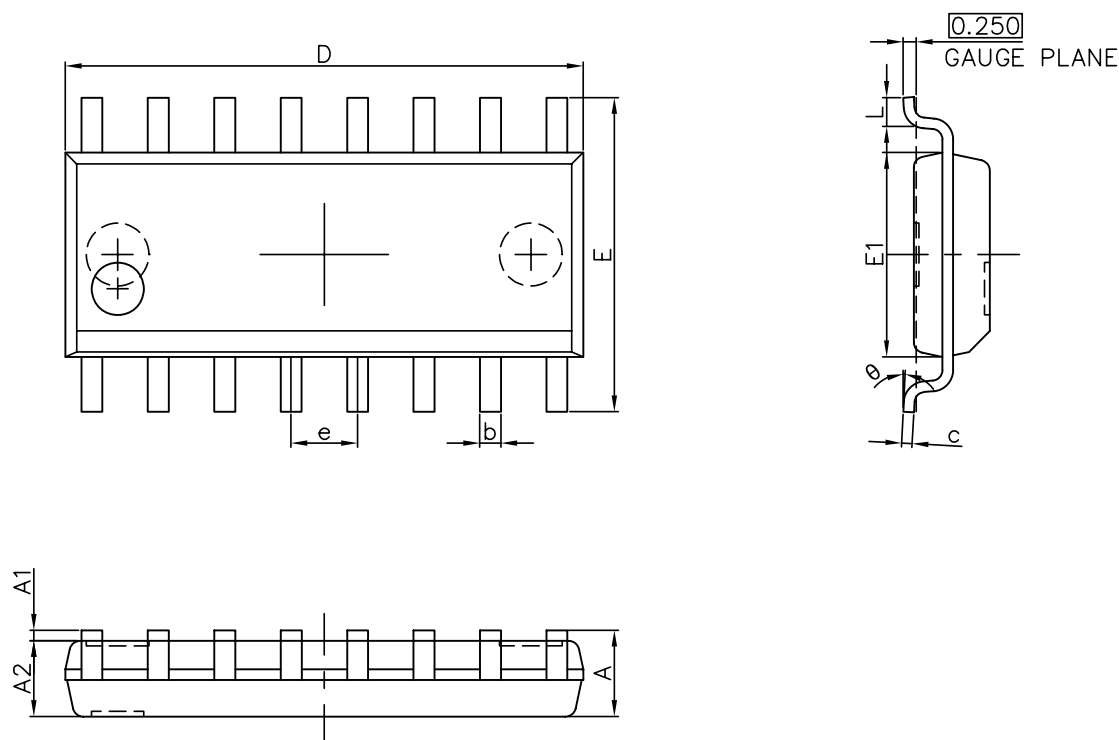


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	—	1.750	—	0.069
A1	0.150	0.250	0.006	0.010
A2	1.400	1.500	0.055	0.059
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	9.800	10.000	0.386	0.394
e	1.270(BSC)		0.050(BSC)	
E	5.900	6.100	0.232	0.240
E1	3.800	4.000	0.150	0.157
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state


TSSOP-16L

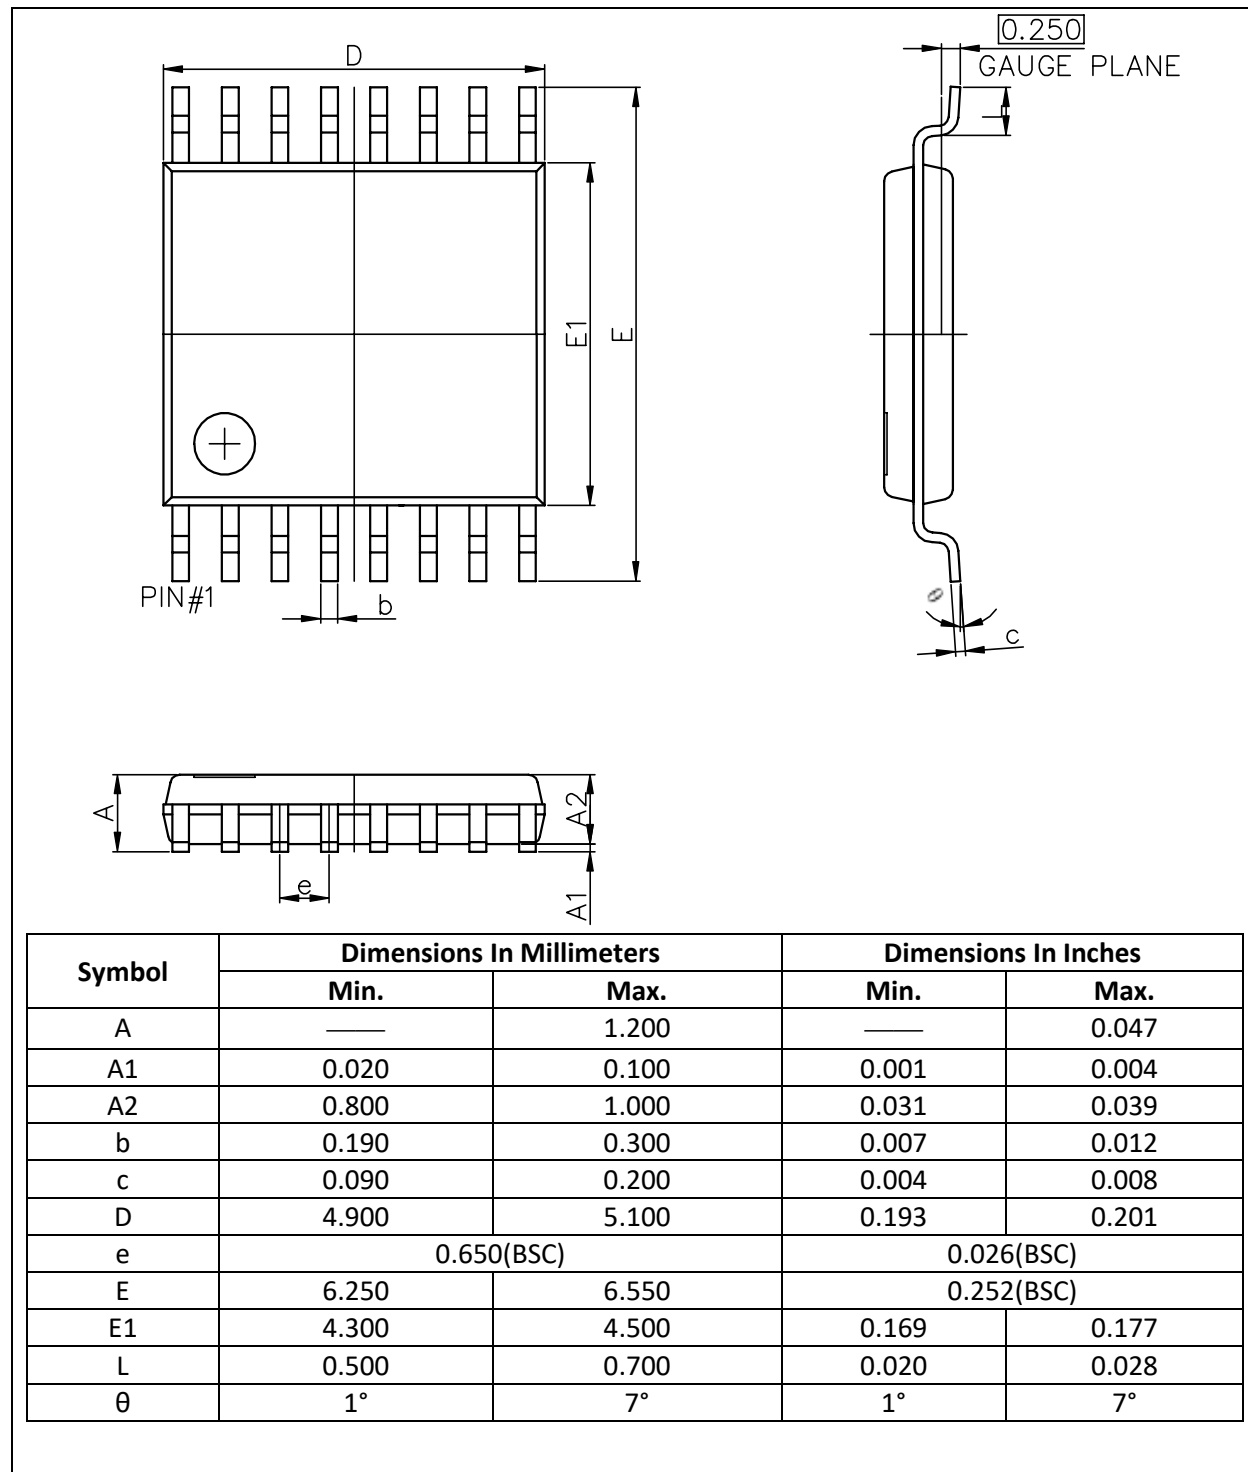

EM74HCT595

8-bit serial-in, serial or parallel-out shift register with output latches; 3-state

SSOP-16L

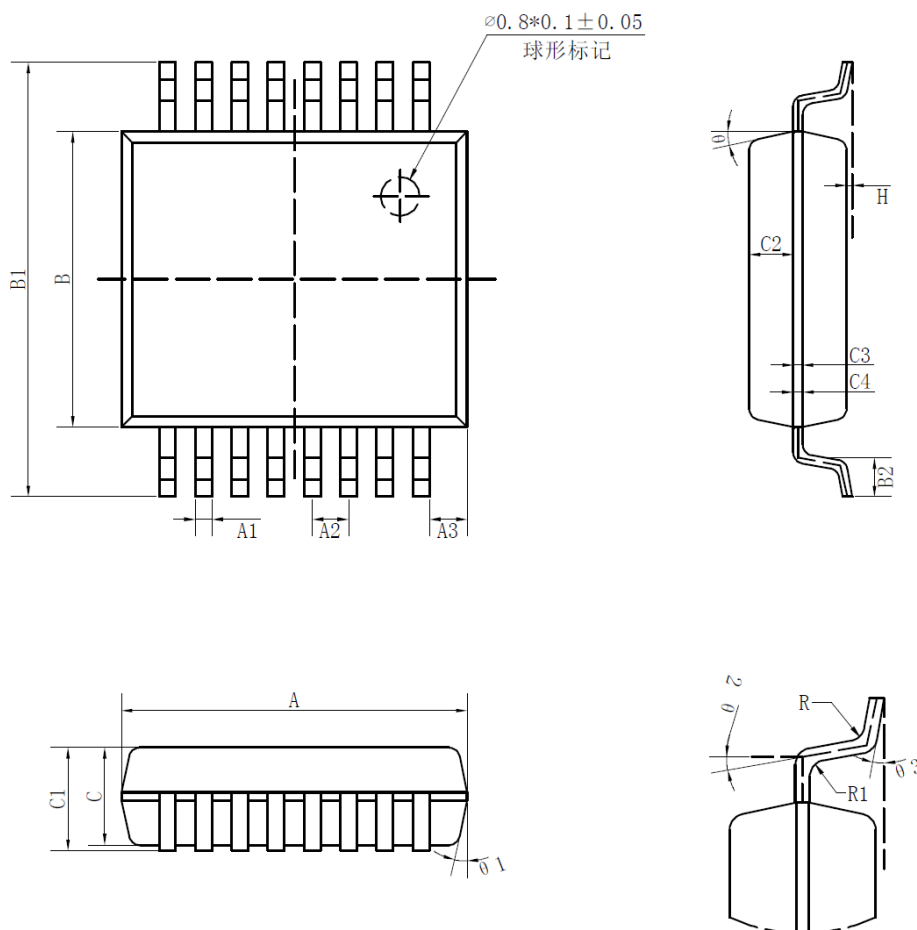

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min.	Max.		Min.	Max.
A	6.15	6.25	C3	0.152	
A1	0.30TYP		C4	0.172	
A2	0.65TYP		H	0.05	0.15
A3	0.675TYP		θ	12° TYP4	
B	5.25	5.35	θ1	12° TYP4	
B1	7.65	7.95	θ2	10° TYP	
B2	0.60	0.80	θ3	0° ~ 8°	
C	1.70	1.80	R	0.20TYP	
C1	1.75	1.95	R1	0.15TYP	
C2	0.799				

EM74HCT595**8-bit serial-in, serial or parallel-out shift register with output latches; 3-state**

13. Abbreviations

Table 10. Abbreviations

Acronym	Description
CMOS	Complementary Metal-Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
HBM	Human Body Model
CDM	Charged Device Model
TTL	Transistor-Transistor Logic

14. Revision History

Table 11. Revision history

Document ID	Release Date	Data sheet status	Change notice	Supersedes
EM74HCT595 Rev. 1.1	Dec 15, 2025	Product datasheet		EM74HCT595 Rev. 1.0
Modifications:	Table 1: topside marking information updated			
EM74HCT595 Rev. 1.0	Apr 28, 2025	Product datasheet		