CS120: Computer Networks

Lecture 15. TCP 1

Zhice Yang

IP: Host-to-host Protocol

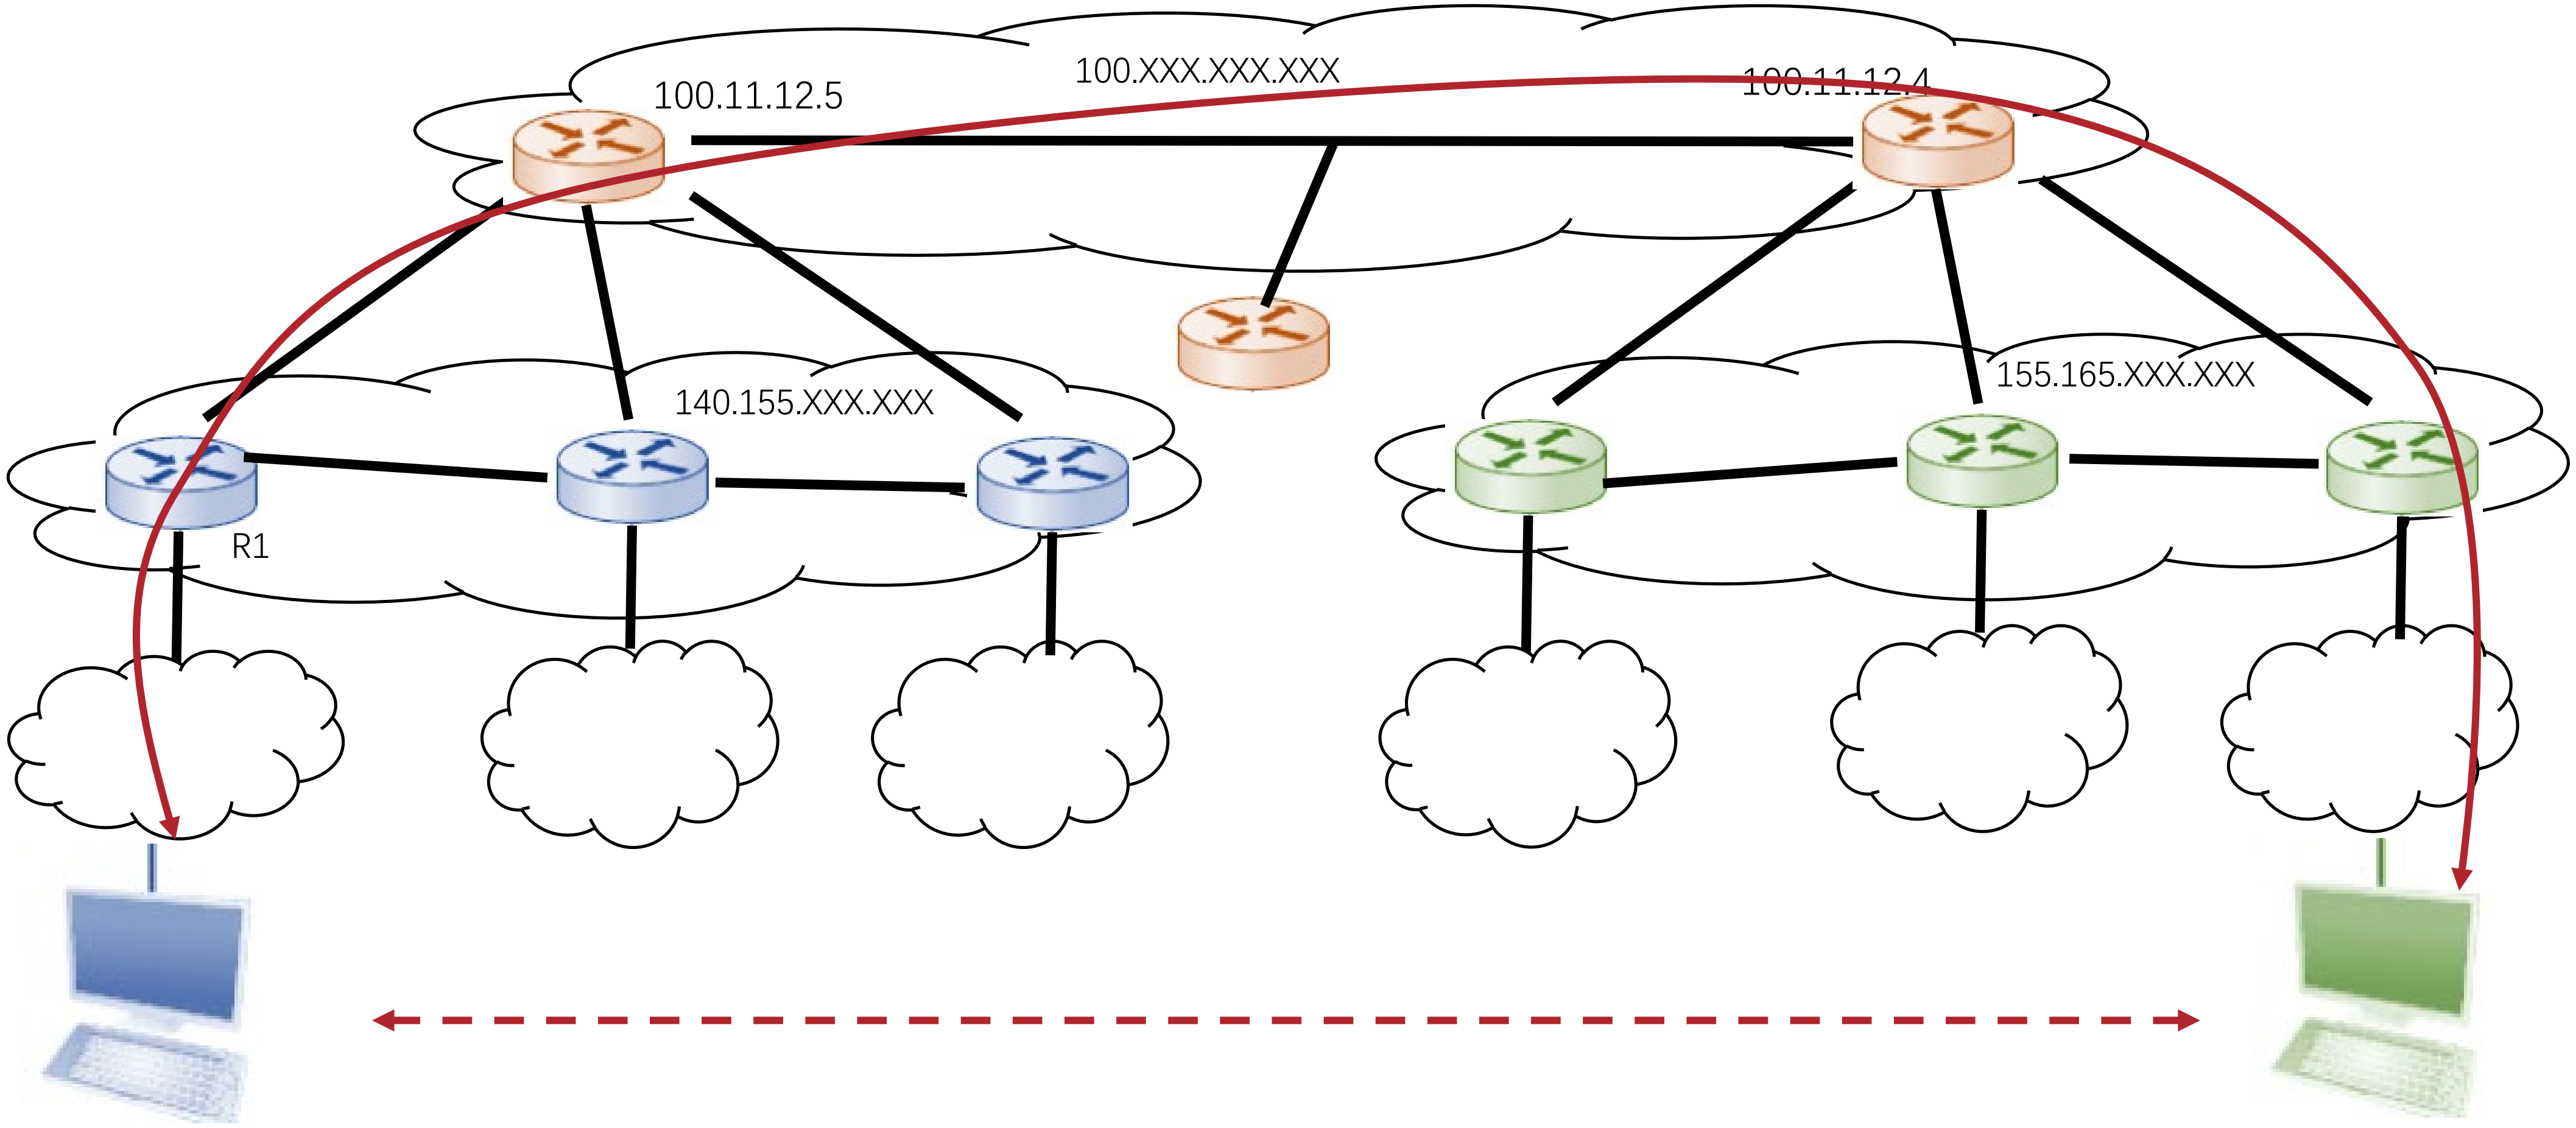

Process-to-process Communication

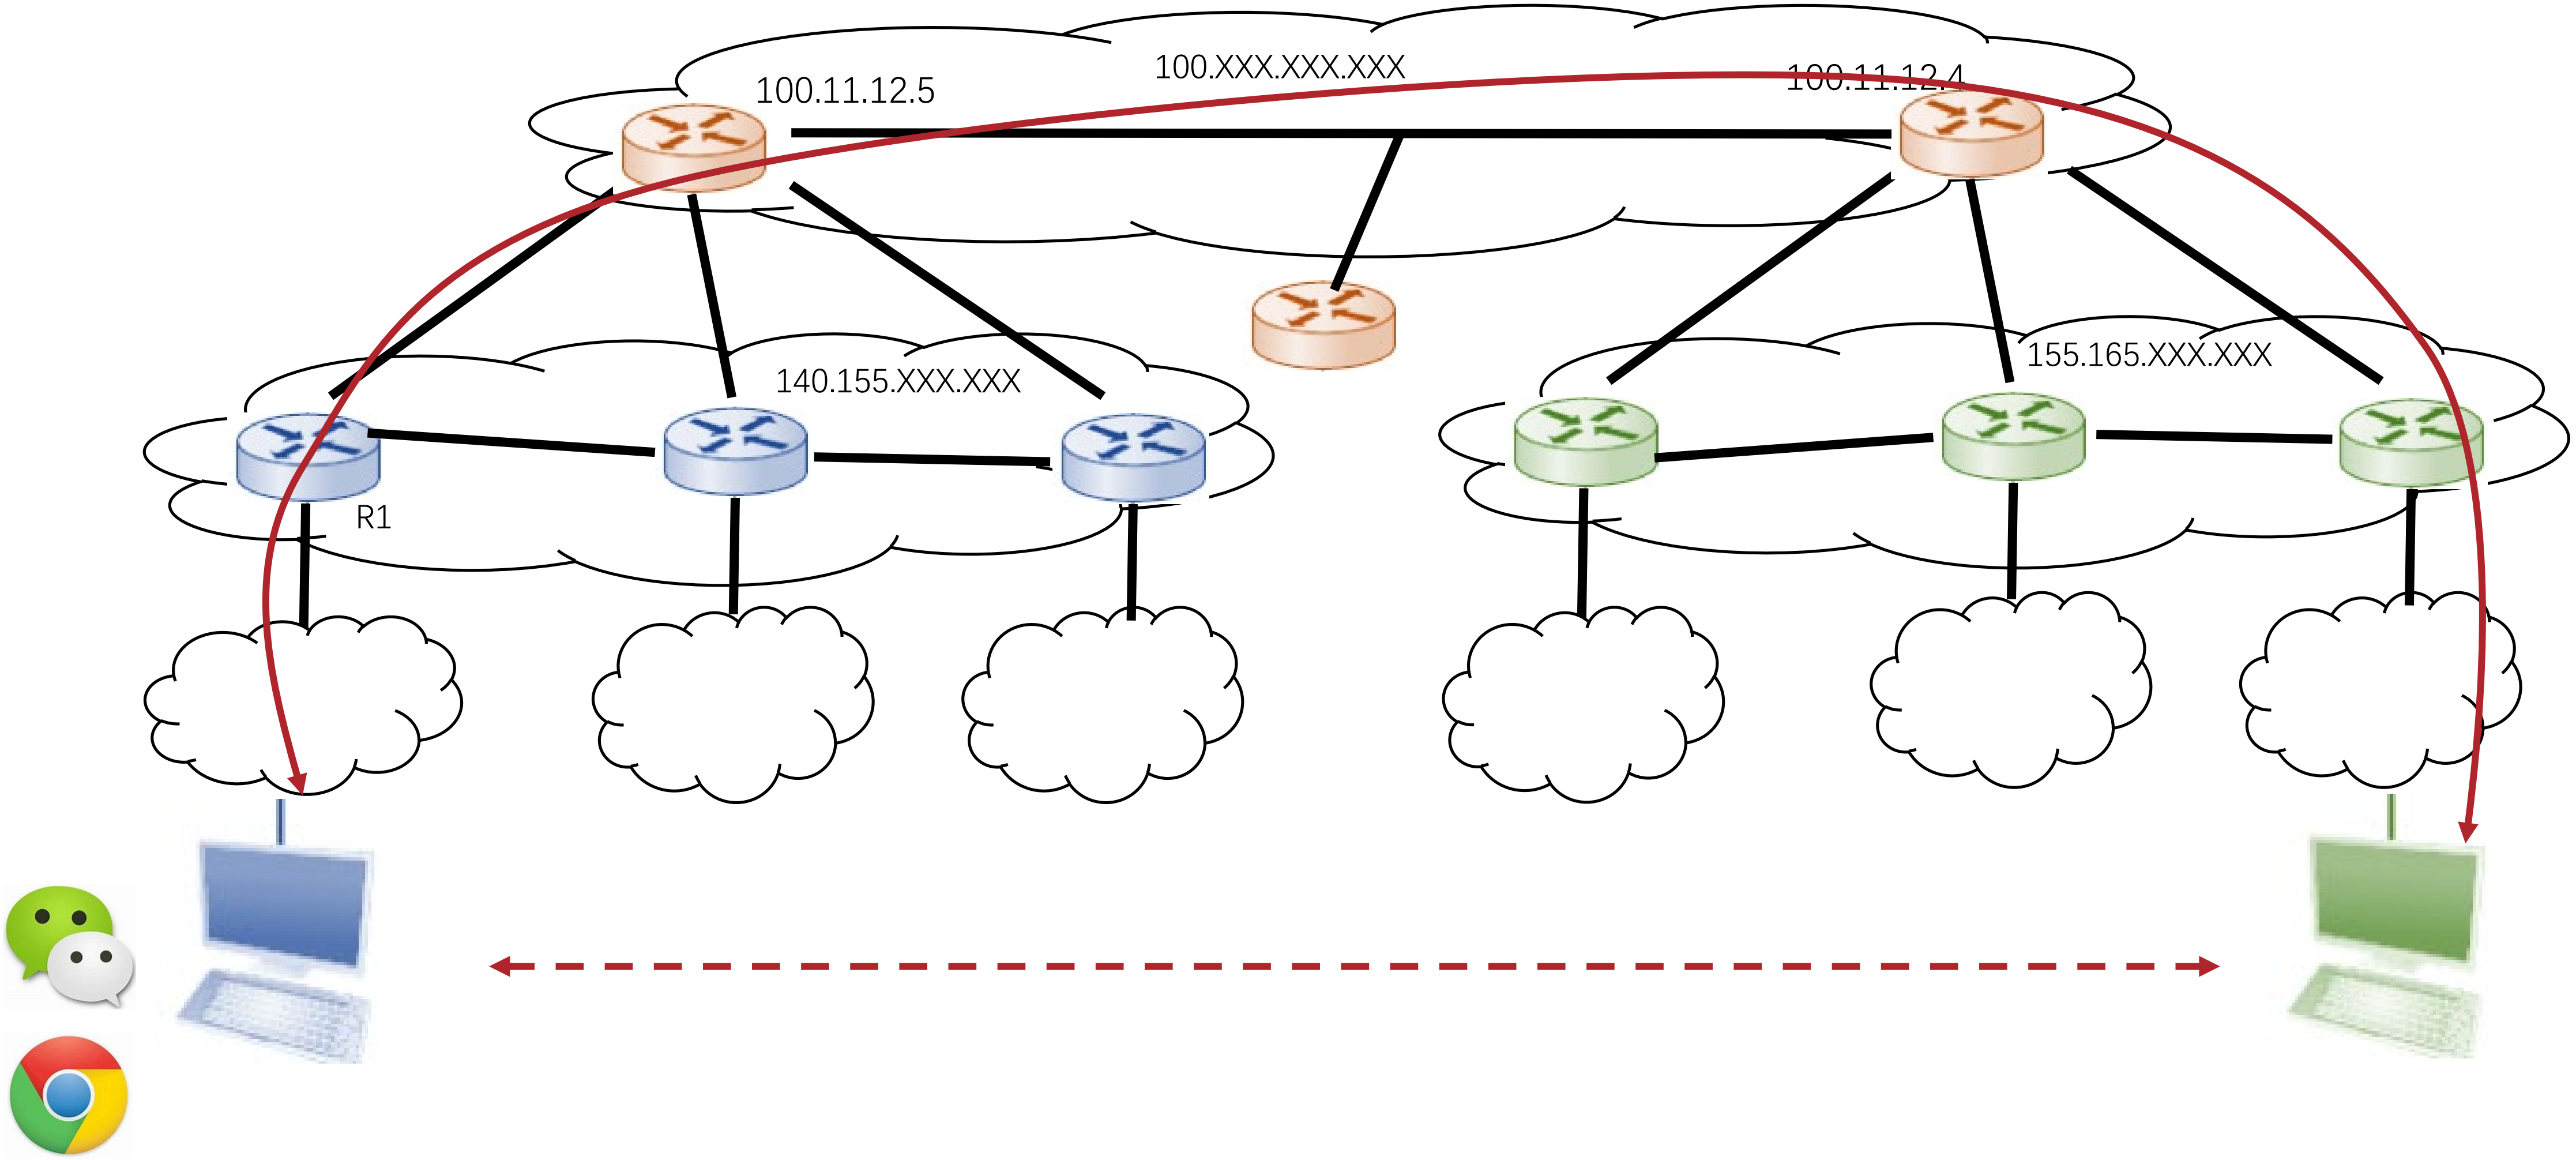

Process-to-process Communication

- Problem: How to turn host-to-host packet delivery service into a process-to-process communication channel

Possible Application Level Requirements:

- Supports multiple application processes
- Reliable message delivery
- Messages are in order
- At most one copy
- Guaranteed delay
- Support arbitrarily large messages
- etc.

Support

IP Layer Provides:

- Host to host communication service

But:

- Messages may be dropped
- Messages may be reordered
- Messages may be duplicated
- Delivering delay is not guaranteed
- Message size is limited

Outline

- Simple Demultiplexer (UDP)
- Reliable Byte Stream (TCP)

User Datagram Protocol (UDP)

- RFC 768
- Direct Extension of IP
  - Best effort
  - Connection Less
  - No Guarantees
- Support Process Multiplexing

UDP Header

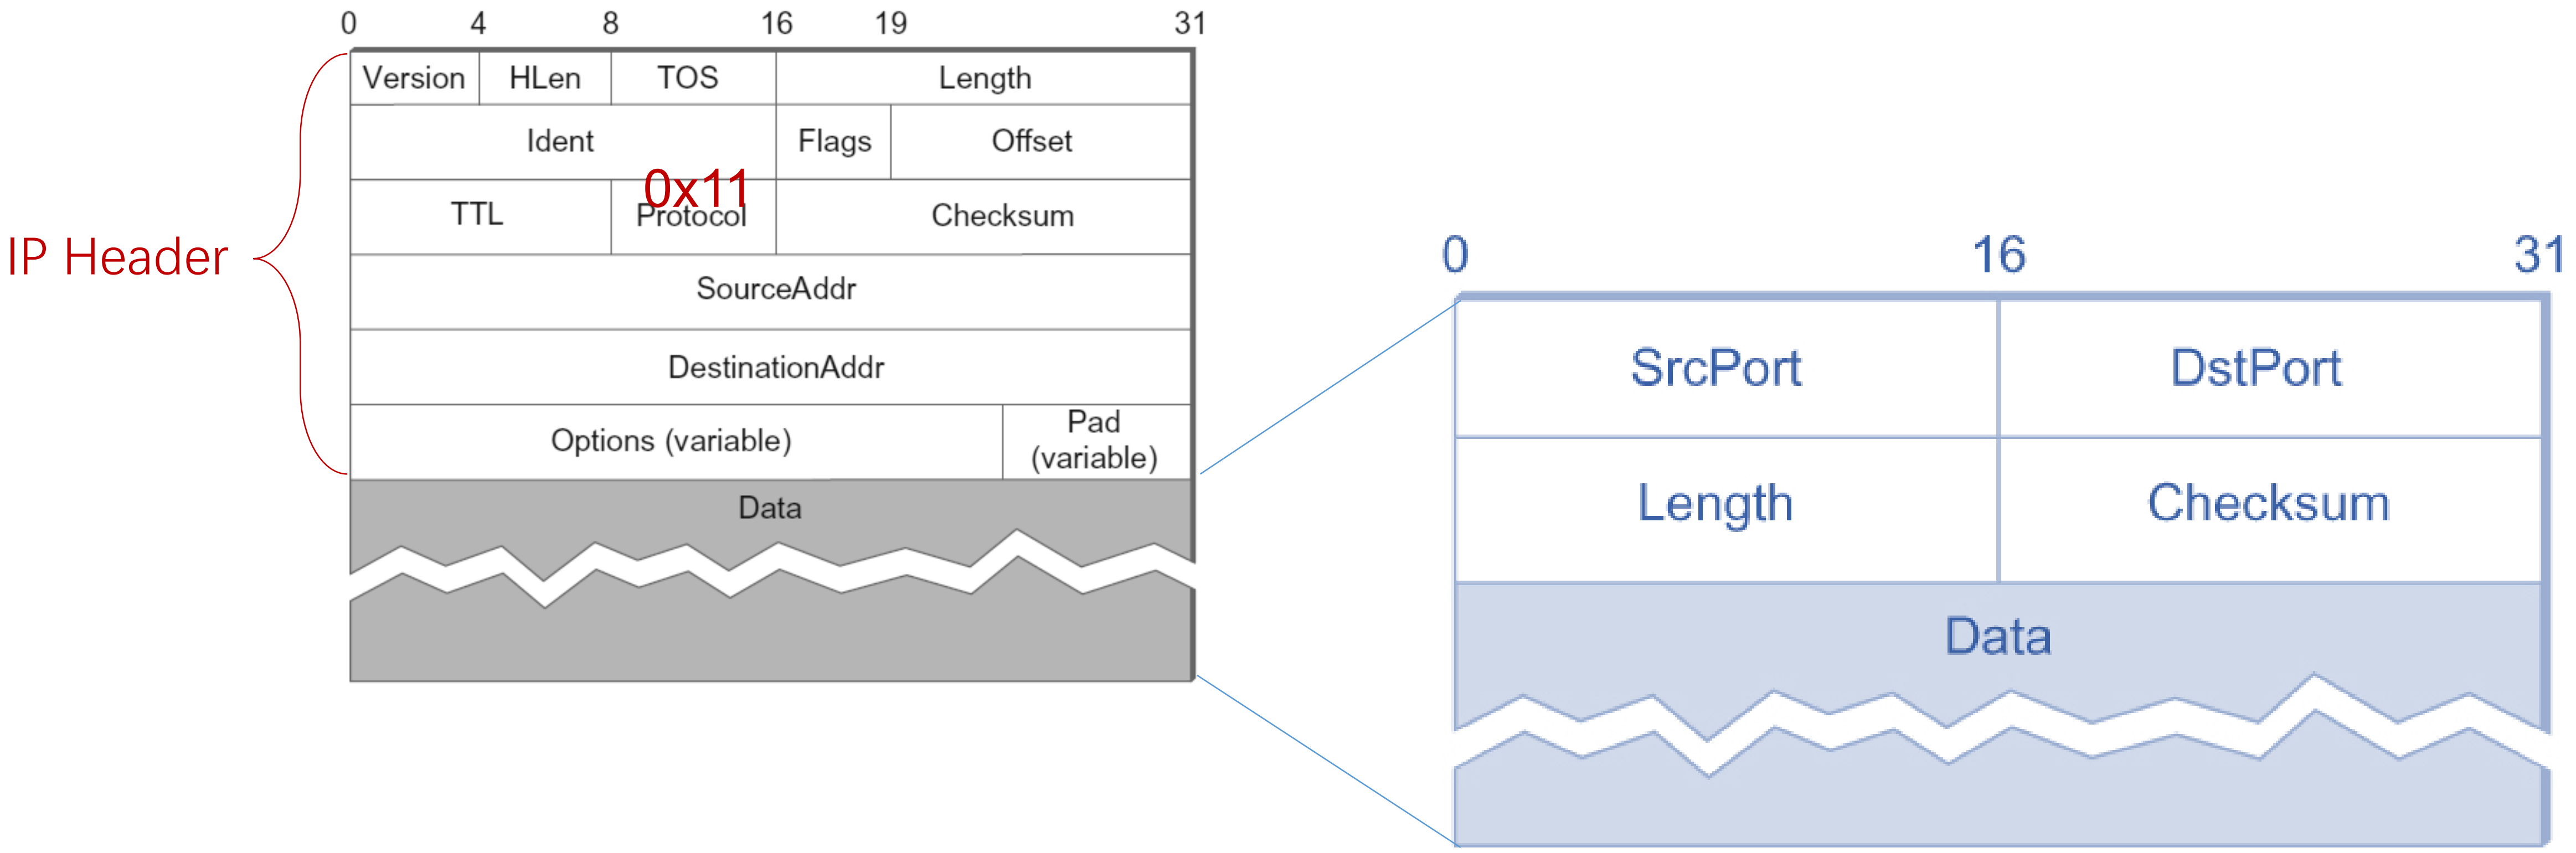
IP Header
0
4
8
16
19
31
Version
HLen
TOS
Length
Ident
Flags
Offset
TTL
0x11
Protocol
Checksum
SourceAddr
DestinationAddr
Options (variable)
Pad (variable)
Data
0
16
31
SrcPort
DstPort
Length
Checksum
Data

UDP Checksum

- UDP Checksum Range: UDP Header + UDP Data + Pseudoheader
  - Simple end-to-end integrity

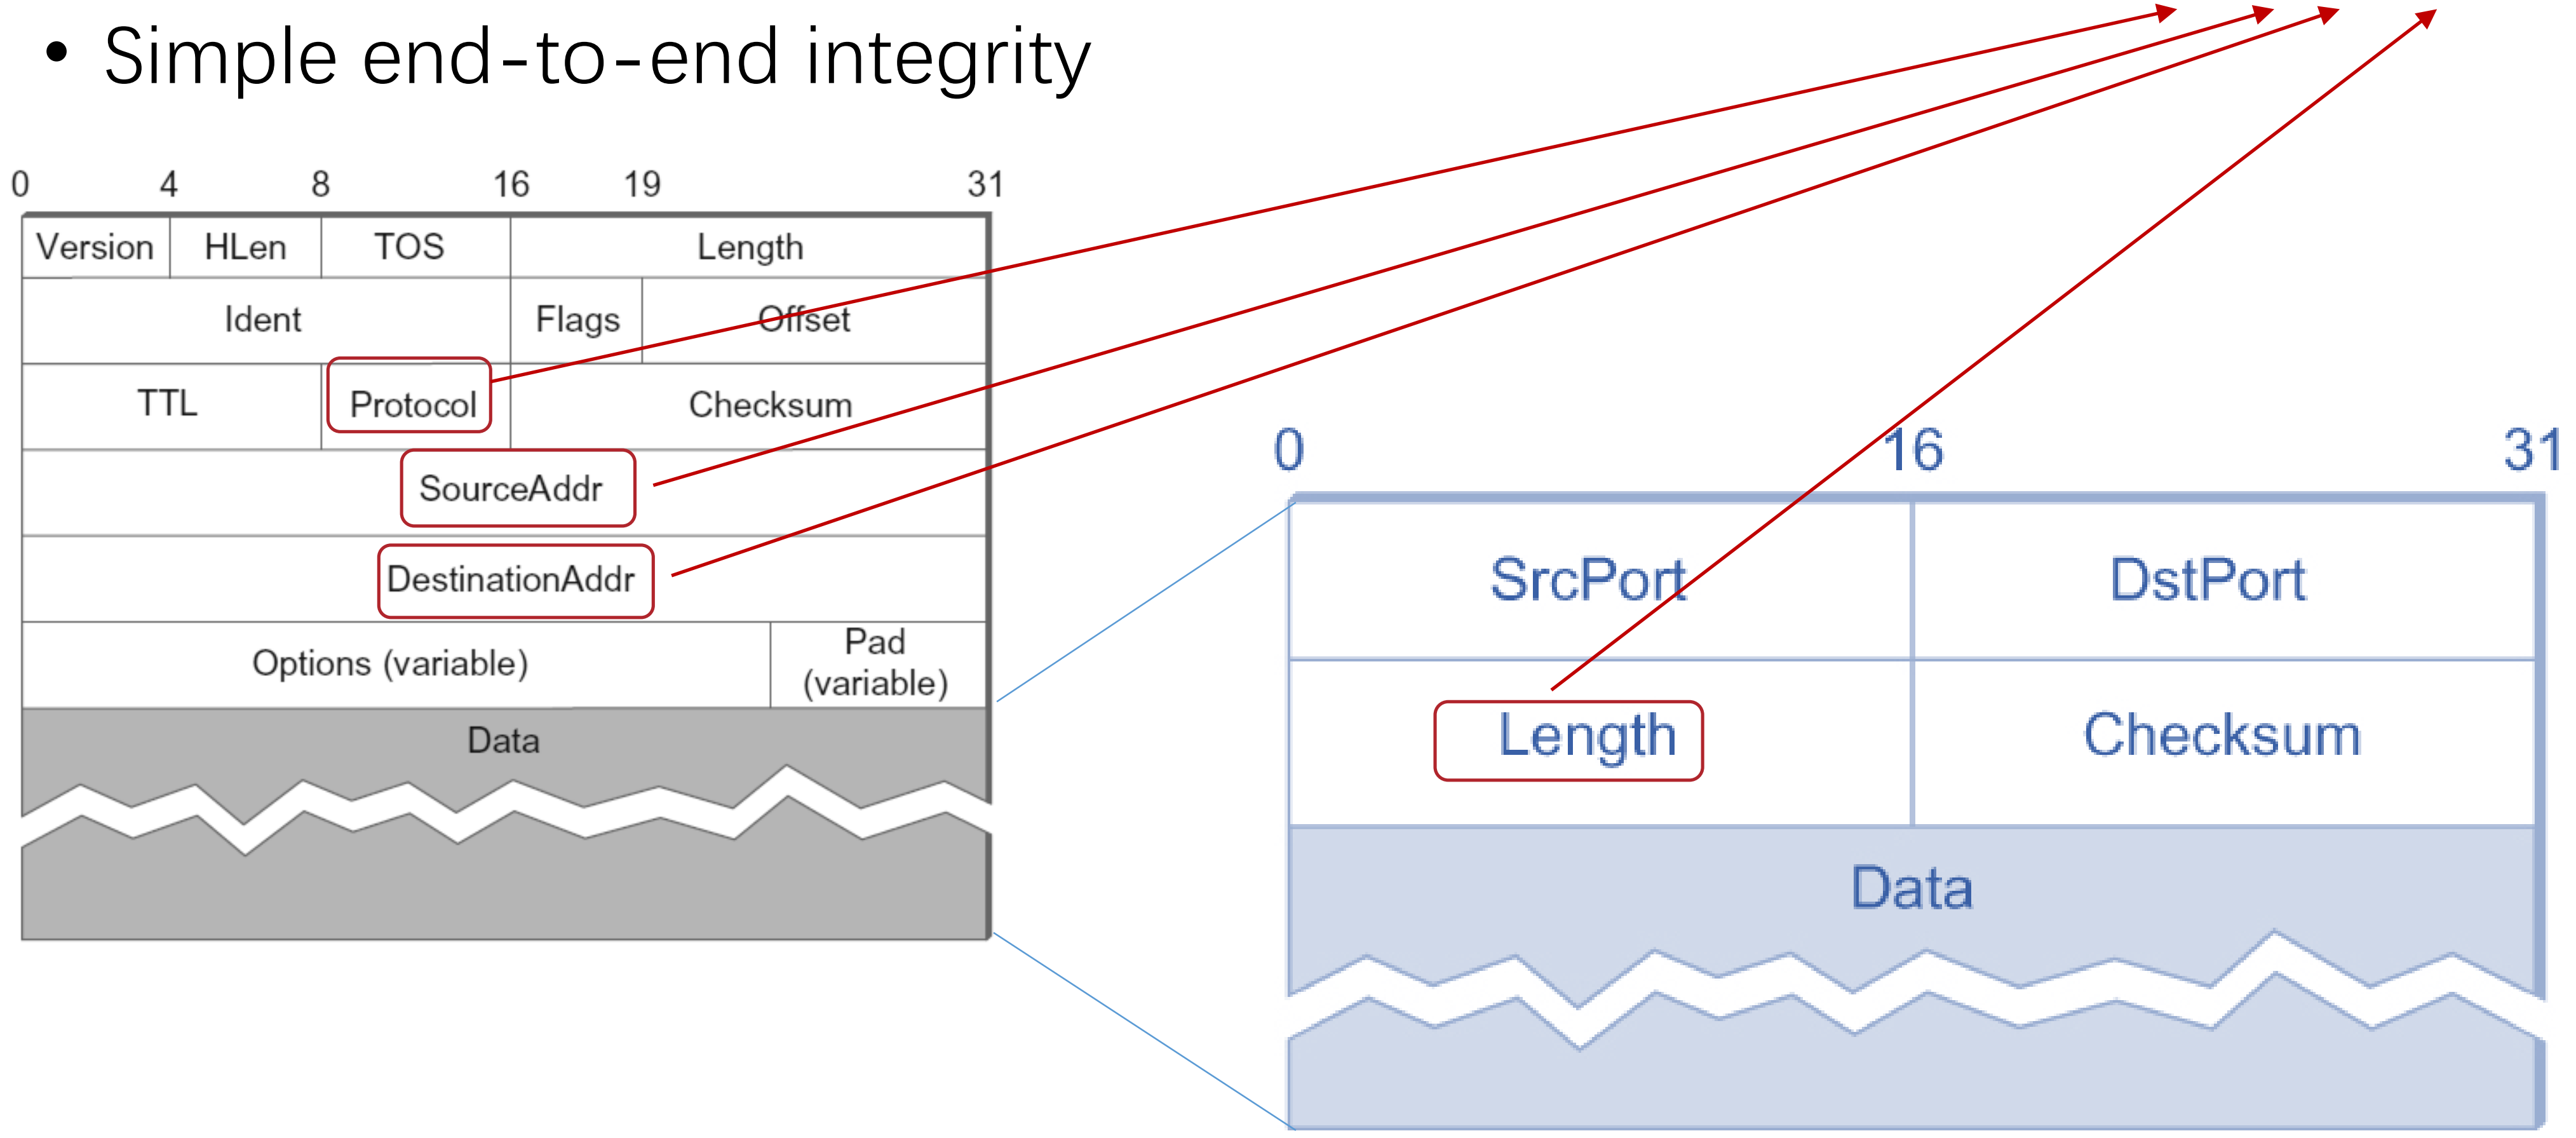

UDP Multiplexing

- UDP Port: the Identifier for Processes

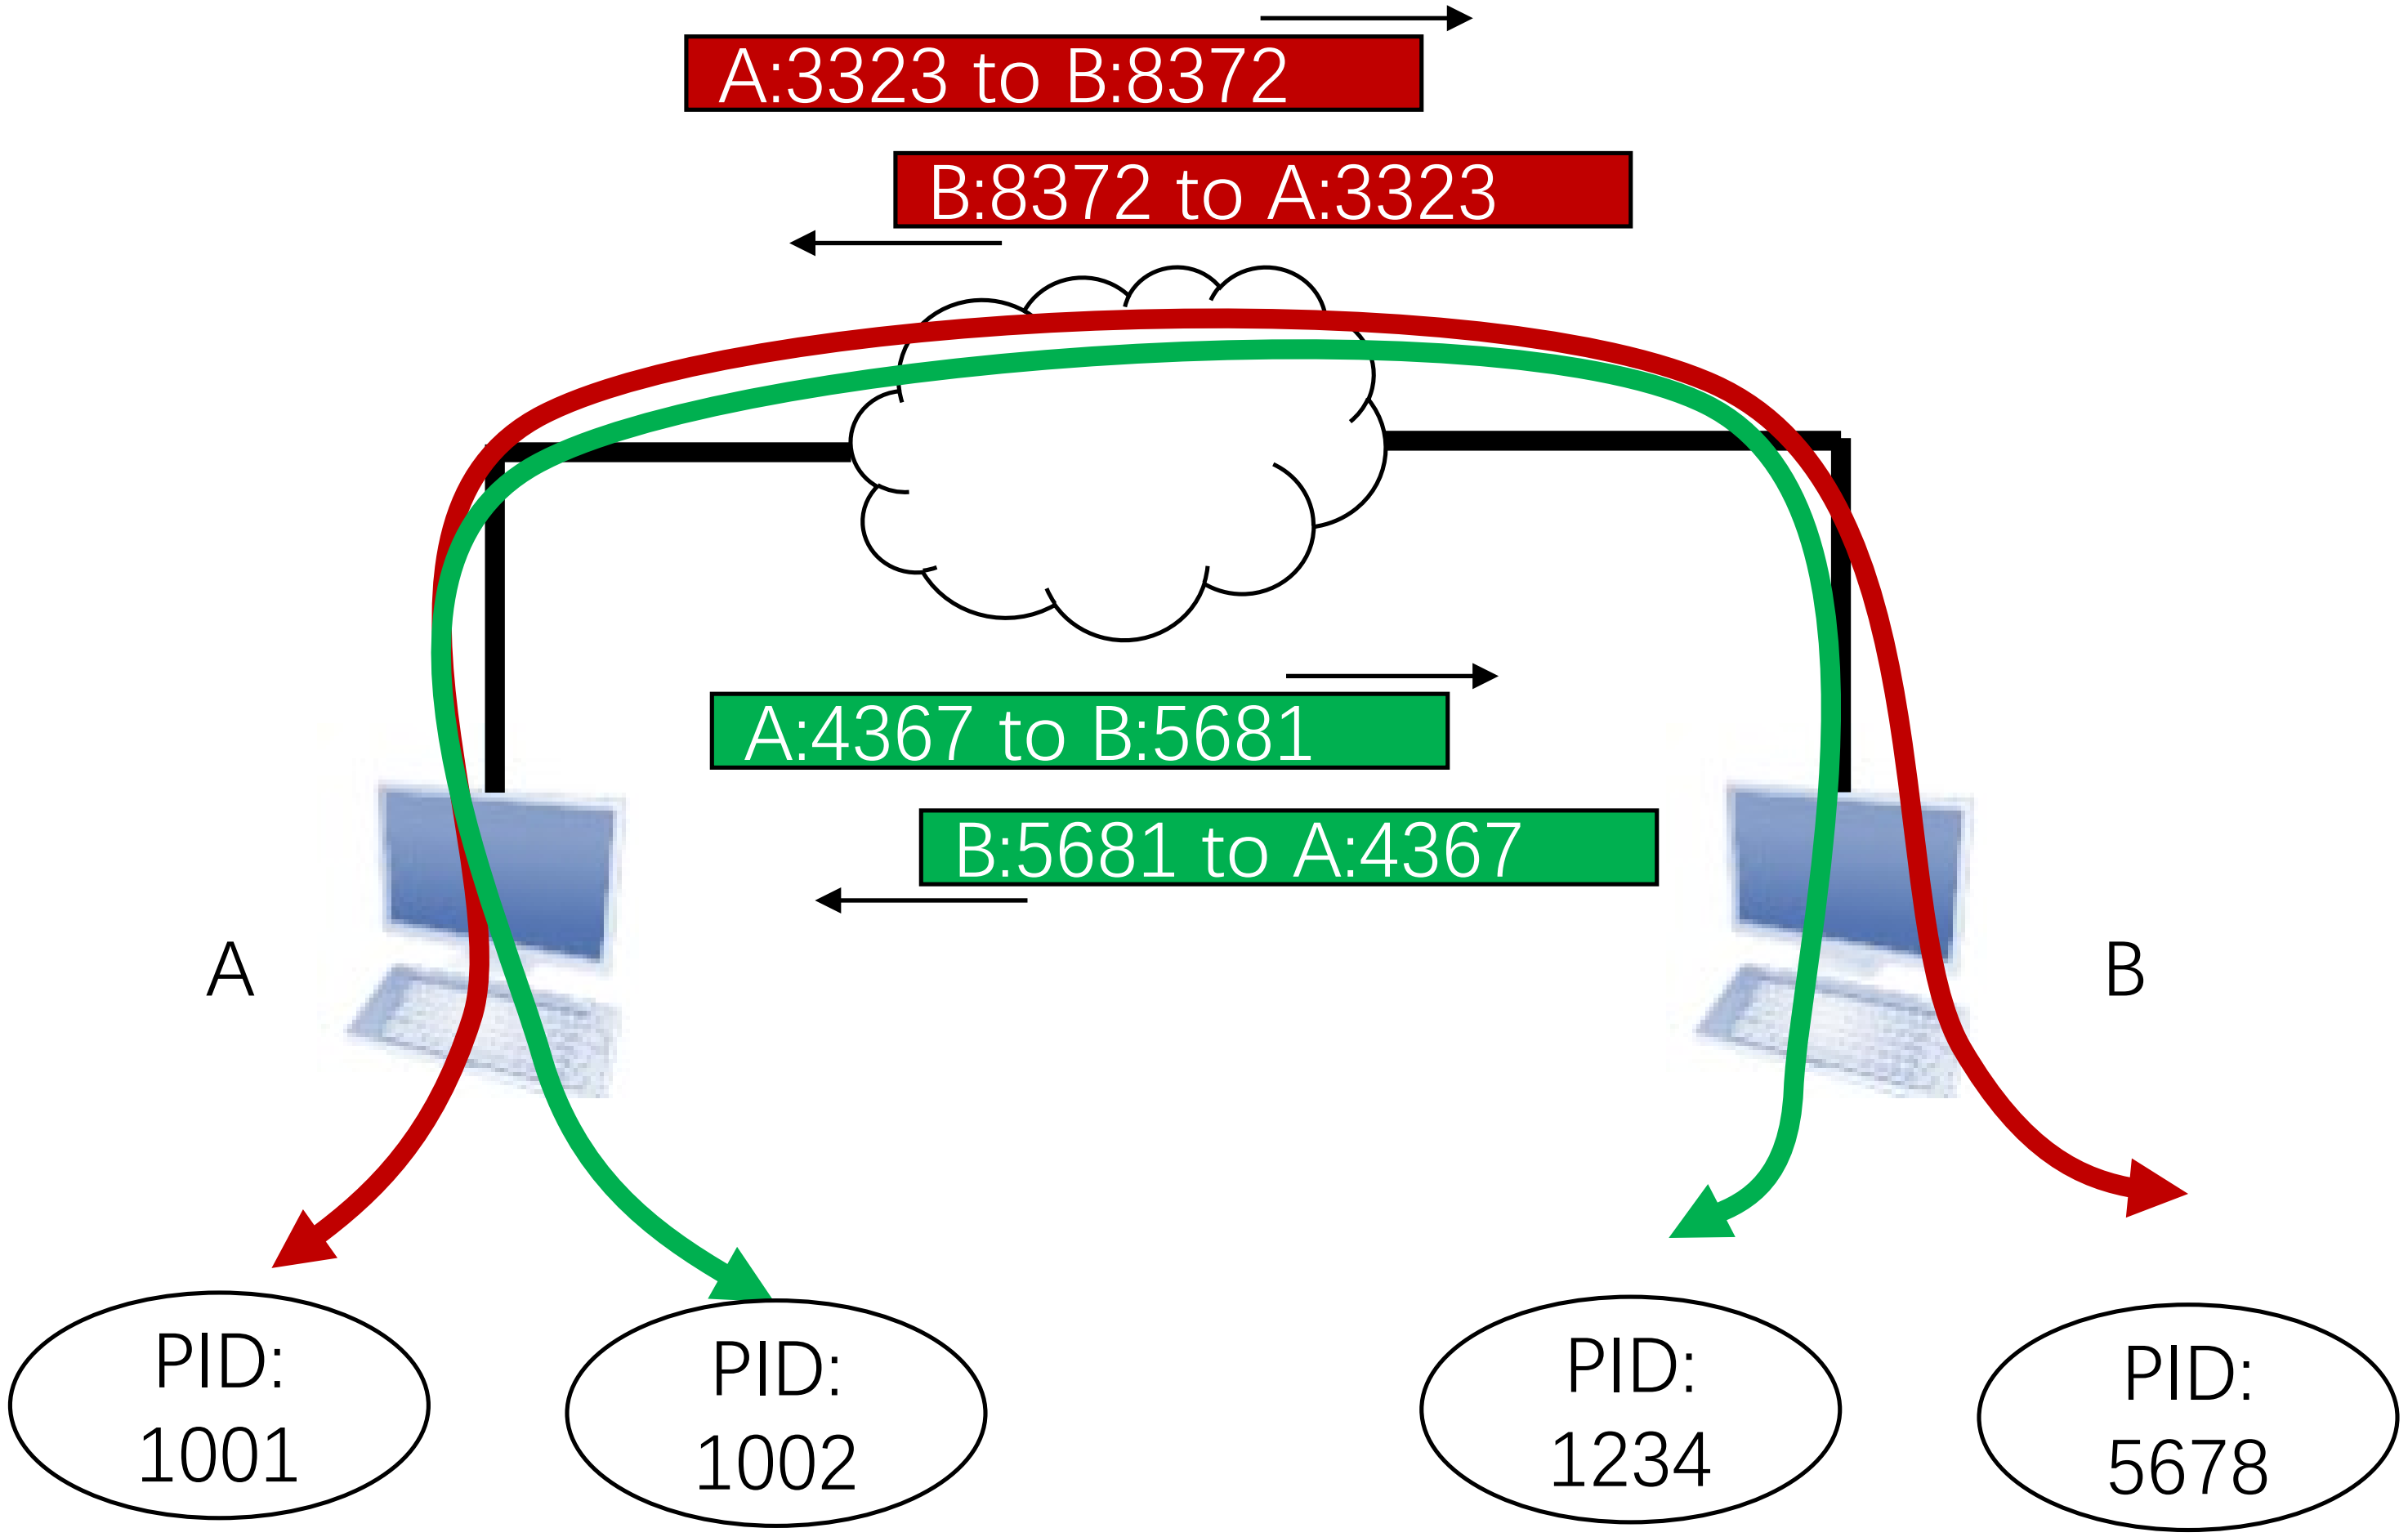

UDP Multiplexing

- Initiate Connection: Default Port
  - stored in /etc/services

A:3323 to B:67

Port Number	Protocol	Function
21	TCP	FTP (File Transfer Protocol)
22	TCP/UDP	SSH (ssh,scp copy or sftp)
23	TCP/UDP	Telnet
25	TCP/UDP	SMTP (for sending outgoing emails)
43	TCP	WHOIS function
53	TCP/UDP	DNS Server (Domain name service for DNS requests)
67	UDP	DHCP Server
68	TCP	DHCP Client
70	TCP	Gopher Protocol
79	TCP	Finger protocol
110	TCP	POP3 (for receiving email)
119	TCP	NNTP (Network News Transfer Protocol)
143	TCP/UDP	IMAP4 Protocol (for email service)

⋮

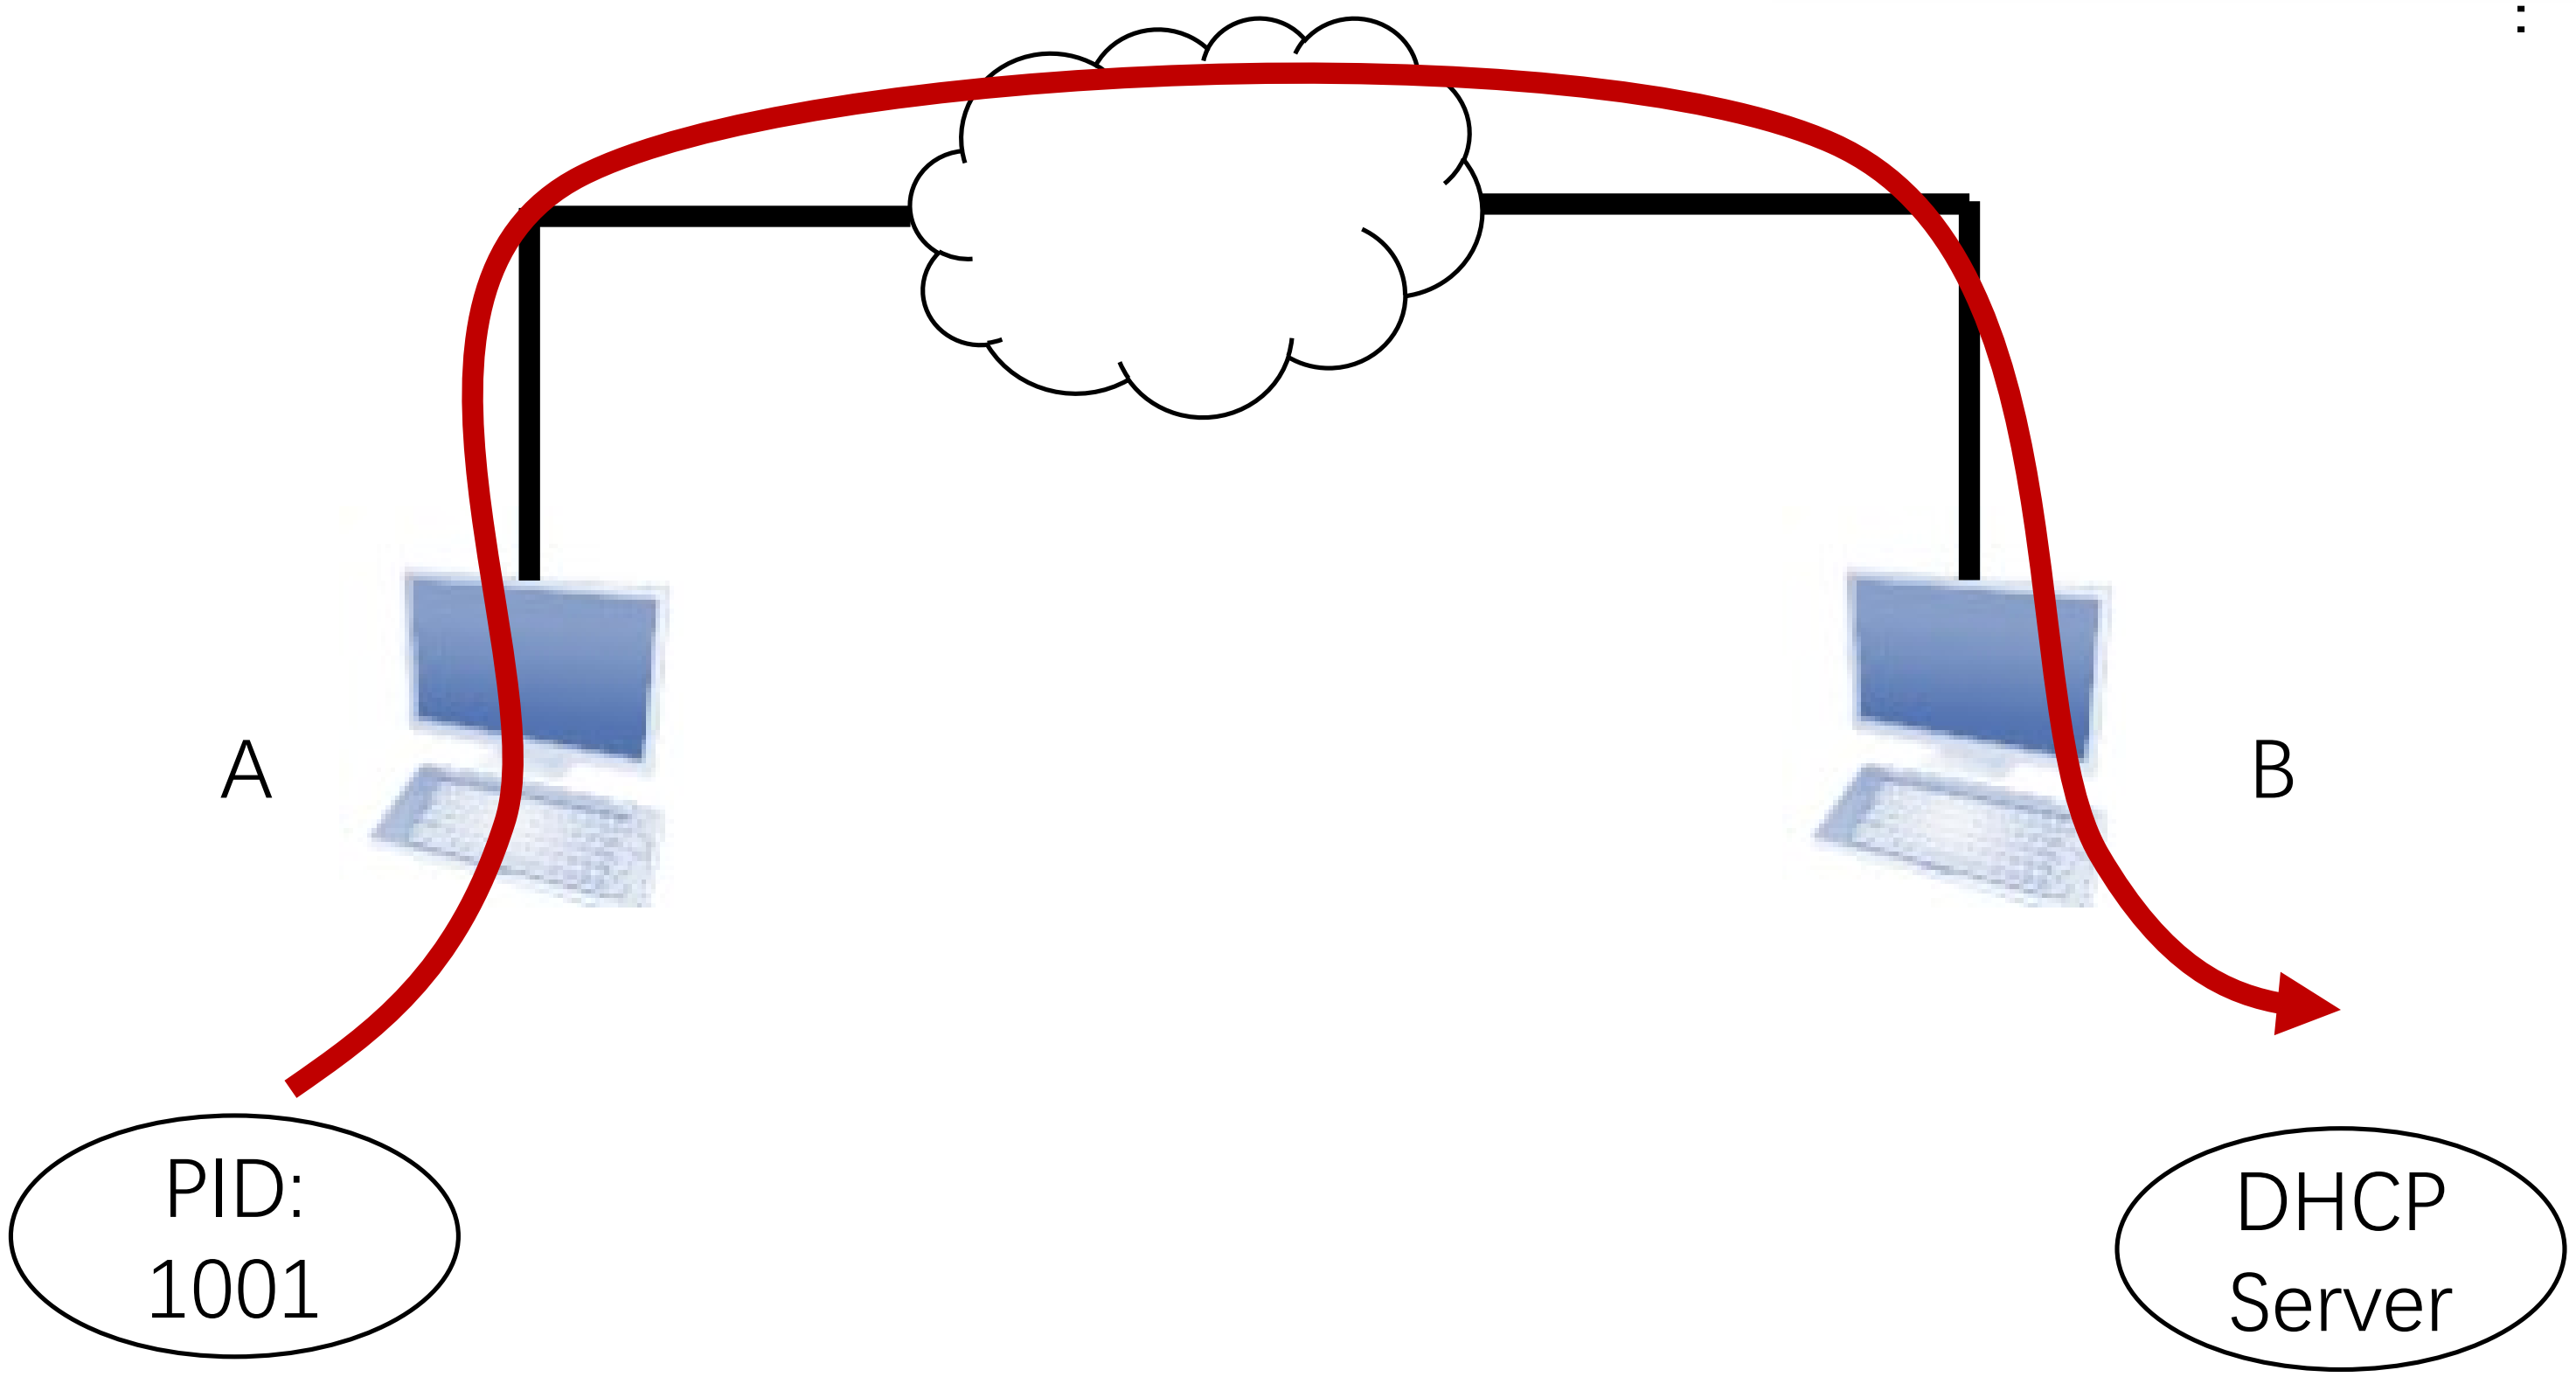

UDP Multiplexing

- Ports in OS

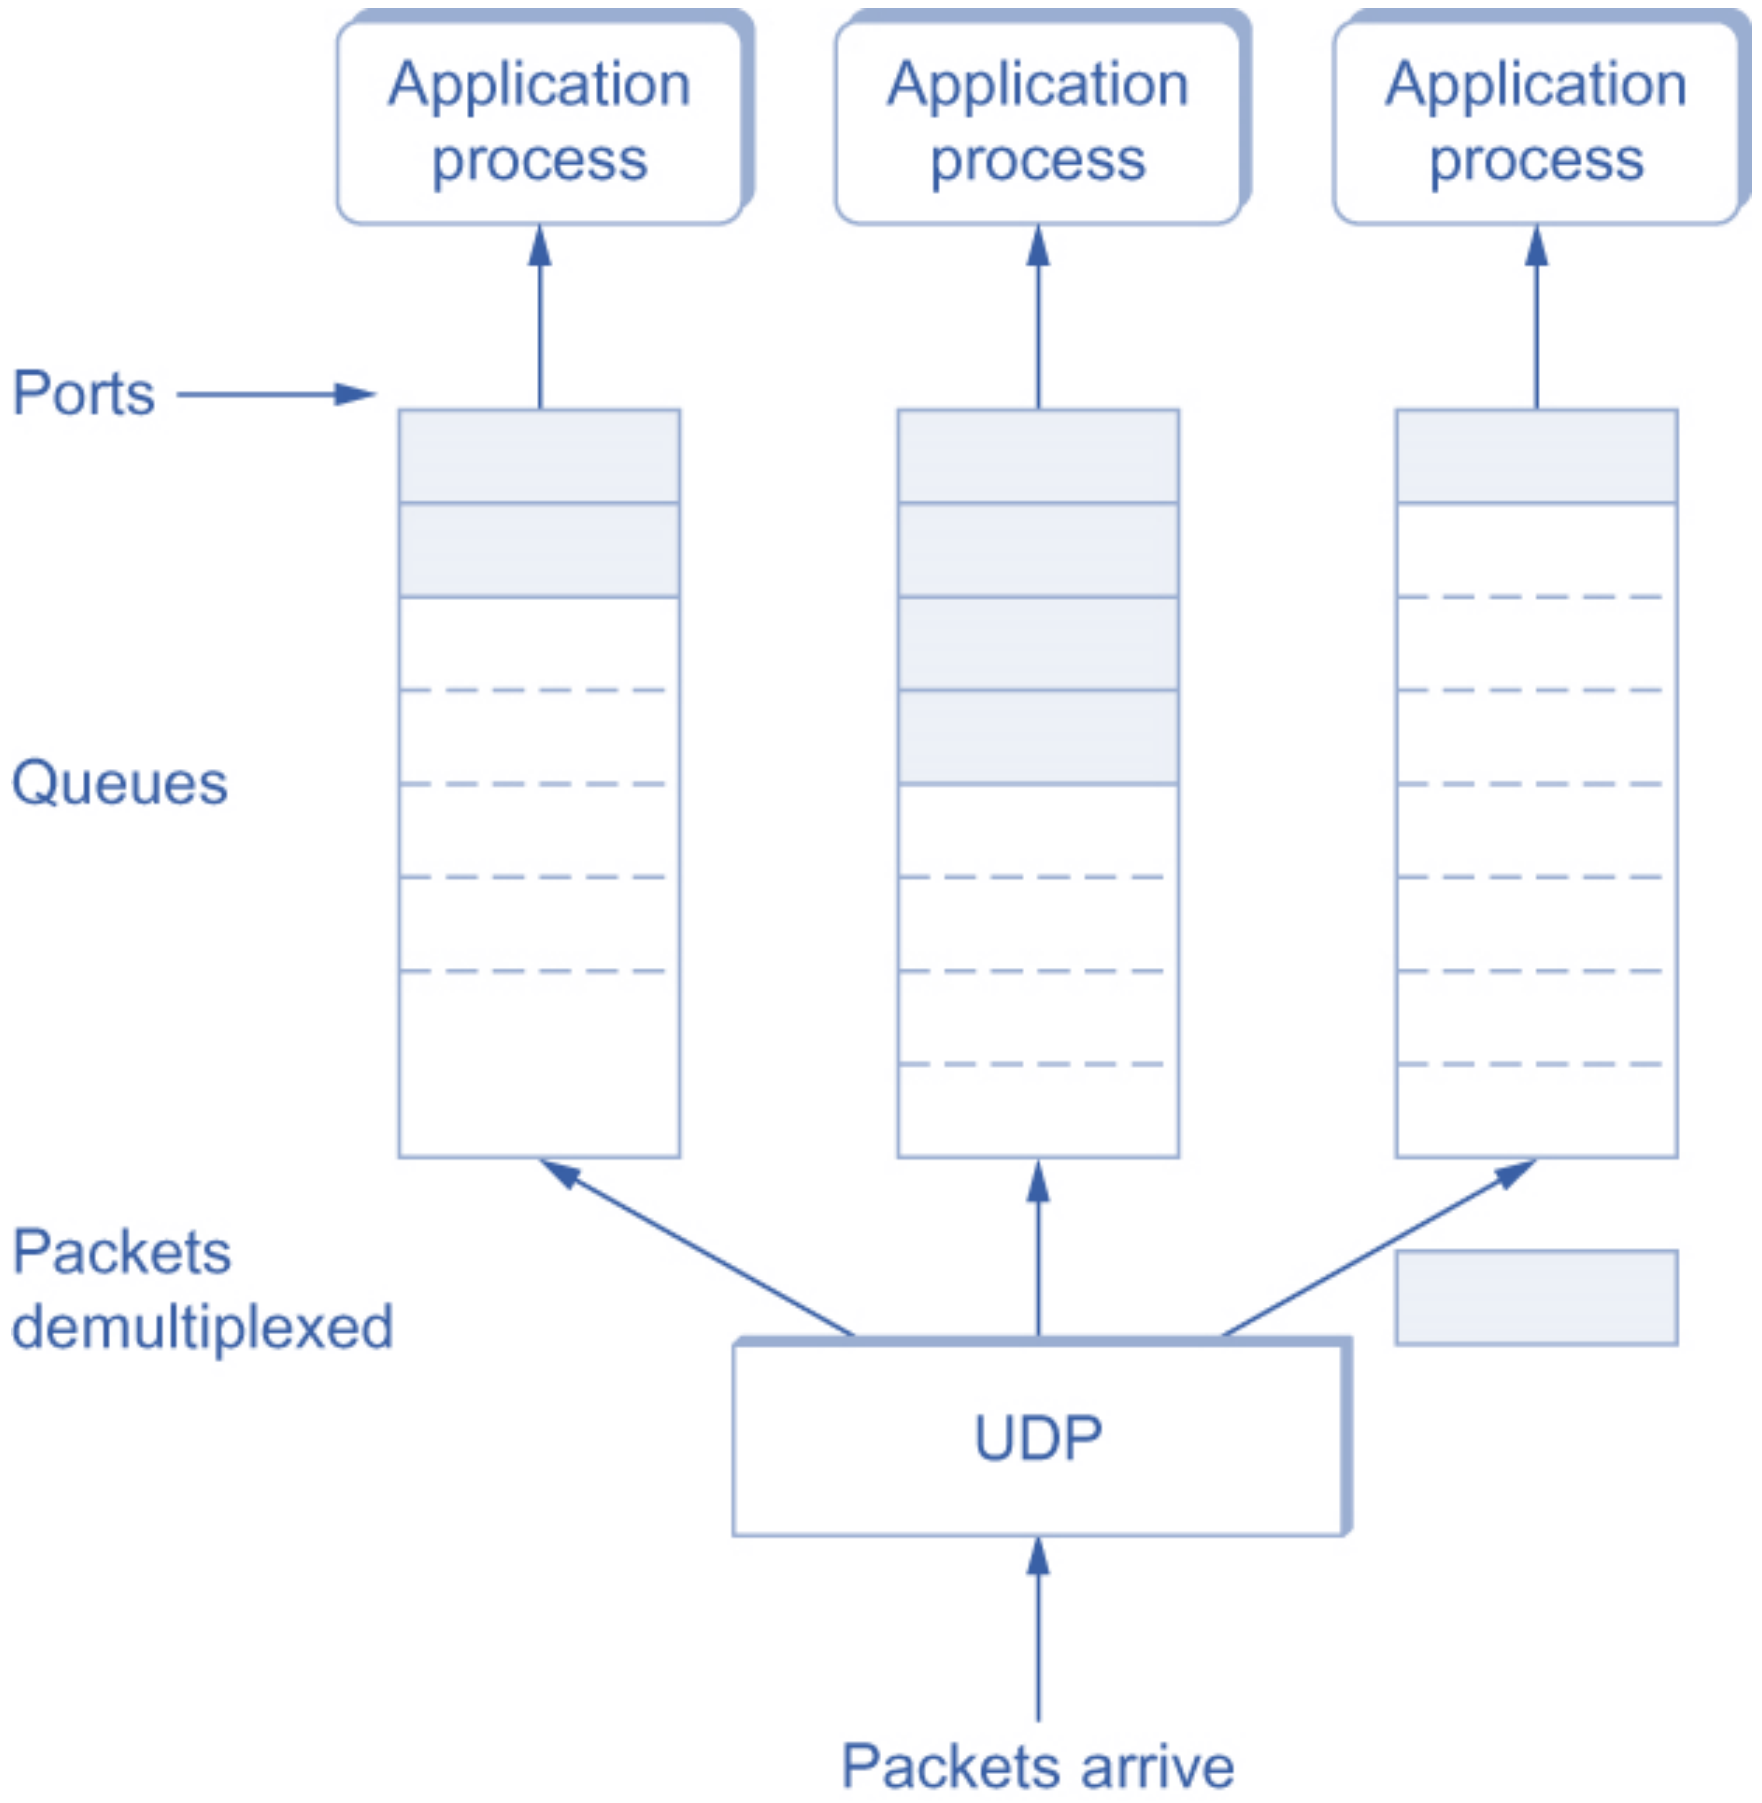

Demo

- netstat

User Datagram Protocol (UDP)

- RFC 768
- Direct Extension of IP
  - Best effort
  - Connection Less
  - No Guarantees
- Support Process Multiplexing

- UDP Use:
  - Loss tolerant, Rate sensitive
    - Video Stream
  - No Connection Setup delay, “One Time” Transfer
    - DNS
    - DHCP
  - Reliable Transfer over UDP
    - Add reliability at application layer, e.g., QUIC

Process-to-process Communication

- Problem: How to turn host-to-host packet delivery service into a process-to-process communication channel

Possible Application Level Requirements:

- ✓ Supports multiple application processes
- Reliable message delivery
- Messages are in order
- At most one copy
- Guaranteed delay
- Support arbitrarily large messages
- etc.

Support

IP Layer Provides:

- Host to host communication service

But:

- Messages may be dropped
- Messages may be reordered
- Messages may be duplicated
- Delivering delay is not guaranteed
- Message size is limited

Transmission Control Protocol (TCP)

- RFC: 793,1122,1323, 2018, 2581
- Goal: Reliable, In-order Delivery
  - Connection oriented
    - Reliable message delivery
    - Messages are in order
    - At most one copy
  - Flow control
  - Congestion control

TCP: Communicate Model

- TCP Peers Communicate through Segments

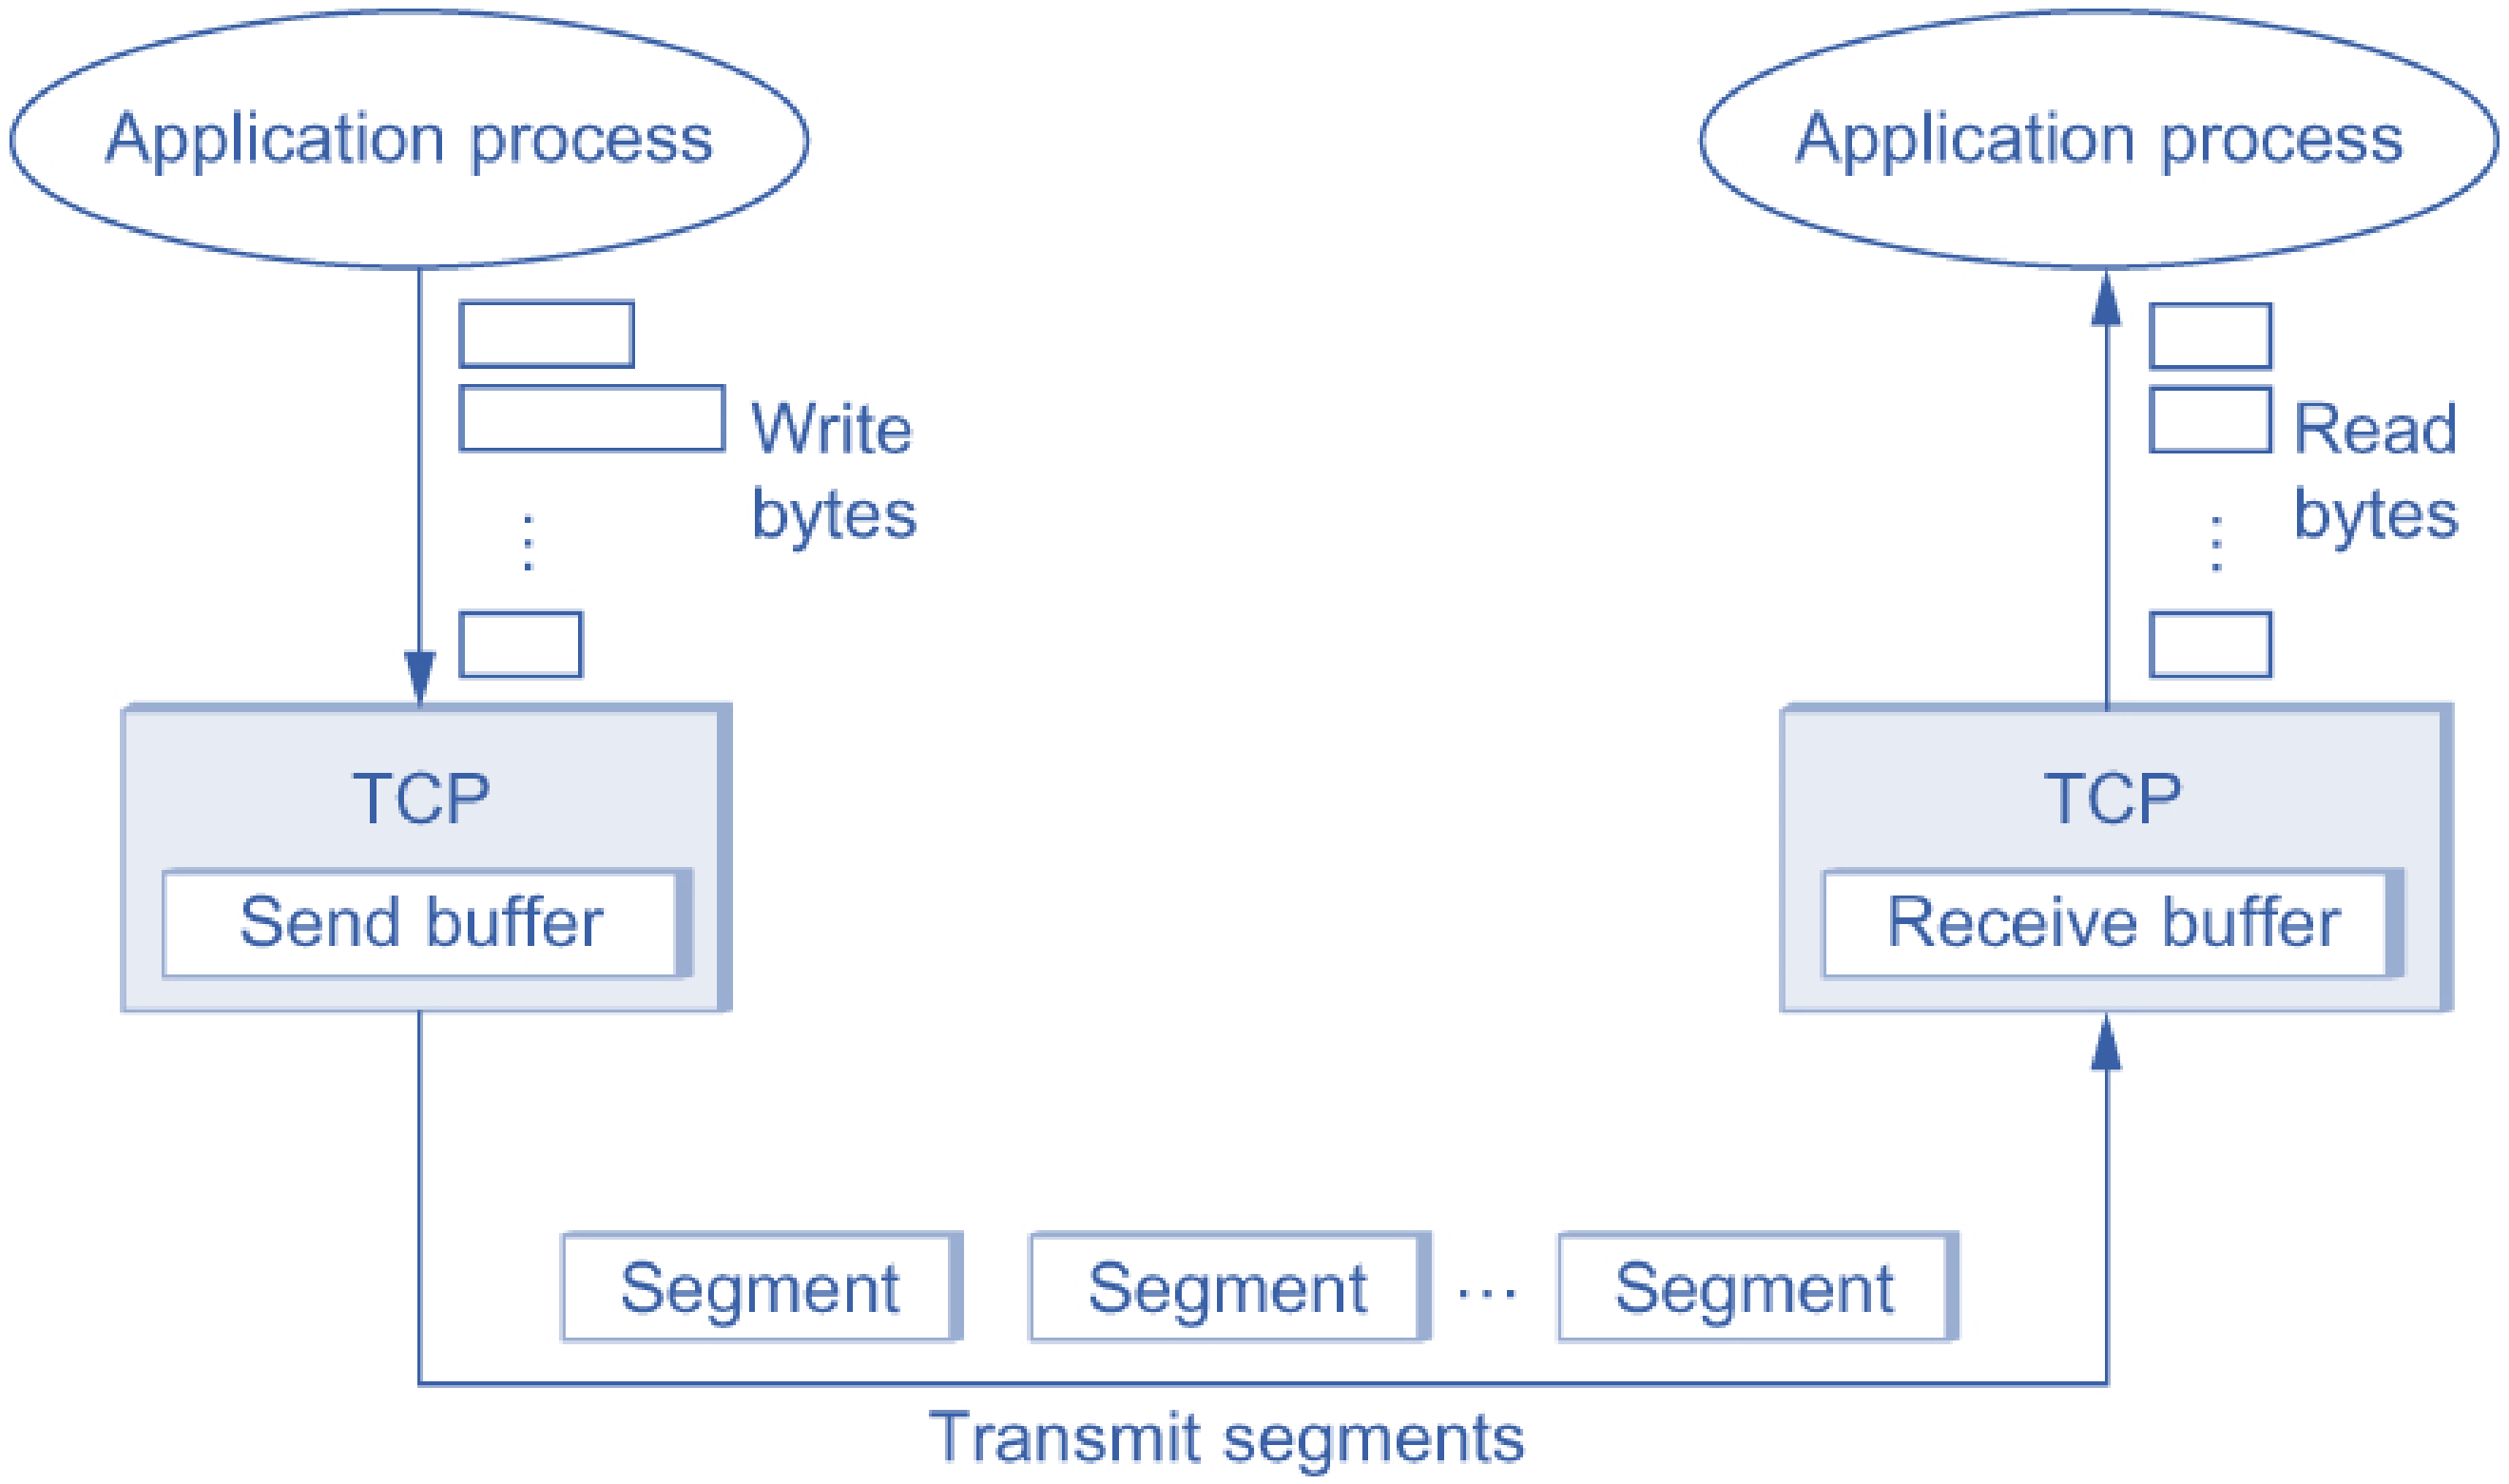

Transmission Control Protocol (TCP)

- RFC: 793,1122,1323, 2018, 2581
- Goal: Reliable, In-order Delivery
  - Connection oriented
    - Reliable message delivery
    - Messages are in order
    - At most one copy
  - Flow control
  - Congestion control
- Core Algorithm: Sliding Window

Difference from Simple Sliding Window

- Connection Establishment
  - Need to share connection parameters
- Adaptive Timeout
  - Need to handle dynamic RTT in IP network
- Timeout Packet
  - Need to distinguish old packets
- Flow Control
  - Need to know the receiver’s capability
- Congestion Control
  - Need to estimate the network capacity

TCP: Header

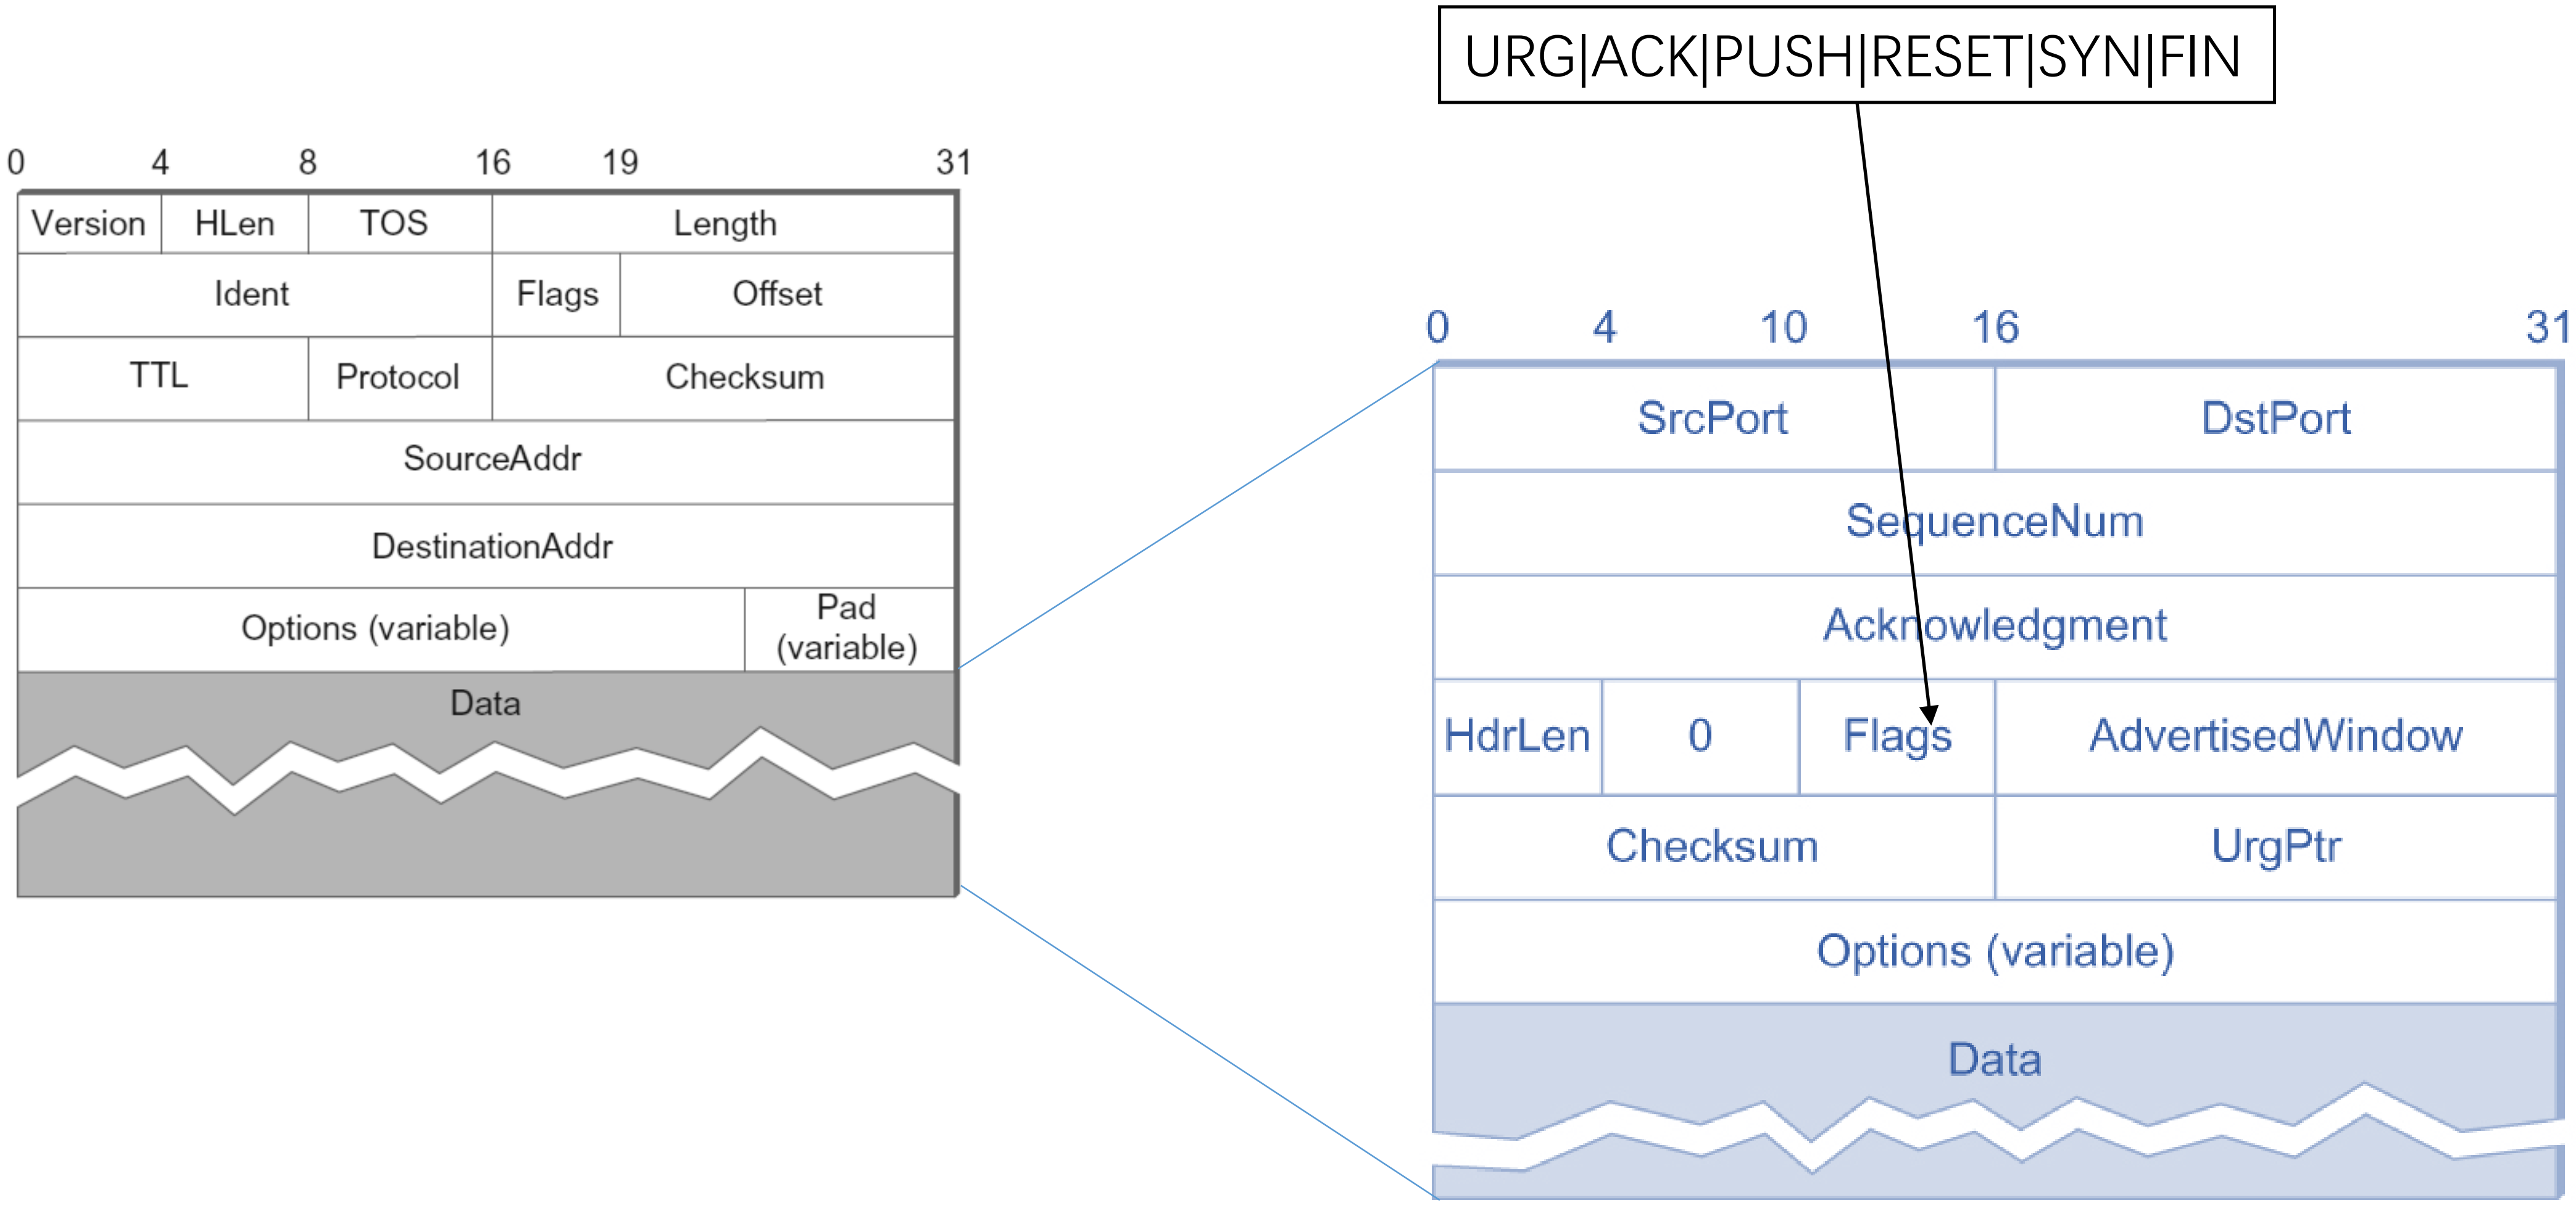

0
4
8
16
19
31
Version
HLen
TOS
Length
Ident
Flags
Offset
TTL
Protocol
Checksum
SourceAddr
DestinationAddr
Options (variable)
Pad (variable)
Data
URG|ACK|PUSH|RESET|SYN|FIN
0
4
10
16
31
SrcPort
DstPort
SequenceNum
Acknowledgment
HdrLen
0
Flags
AdvertisedWindow
Checksum
UrgPtr
Options (variable)
Data

Connection Establishment

- Why?
  - Reserve Connection Resource (buffer, etc.)
  - Negotiate Sequence Number
  - Reject Out-of-time Connection Request

Connection Establishment

- Sequence Number
  - The pointer of the data byte in the segment
  - Initial sequence number is exchanged in connection establishment
  - Initial sequence number is a random number (32bits):
    - To avoid segments with same sequence number from dead connections
      - maximum segment lifetime: 120 seconds
    - Security concern
      - Sequence number prediction attack
- Acknowledgement
  - Next sequence number expected

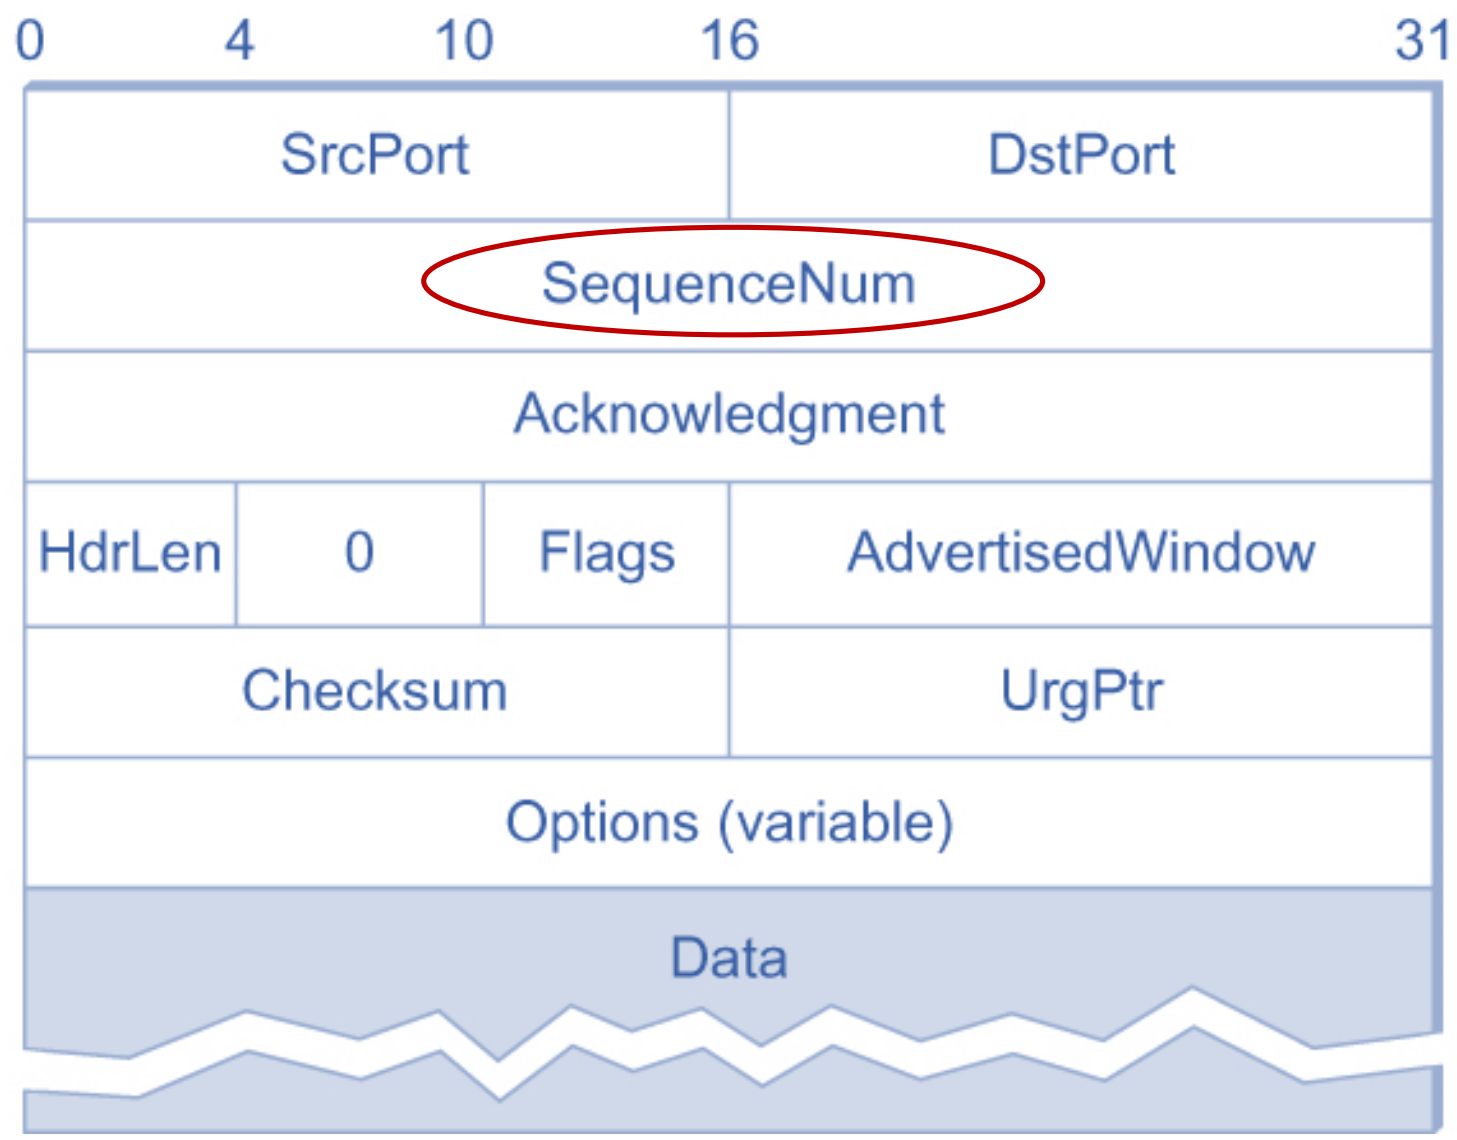

Connection Establishment

- Three-way Handshake
  - To share the sequence number
  - To reserve resource

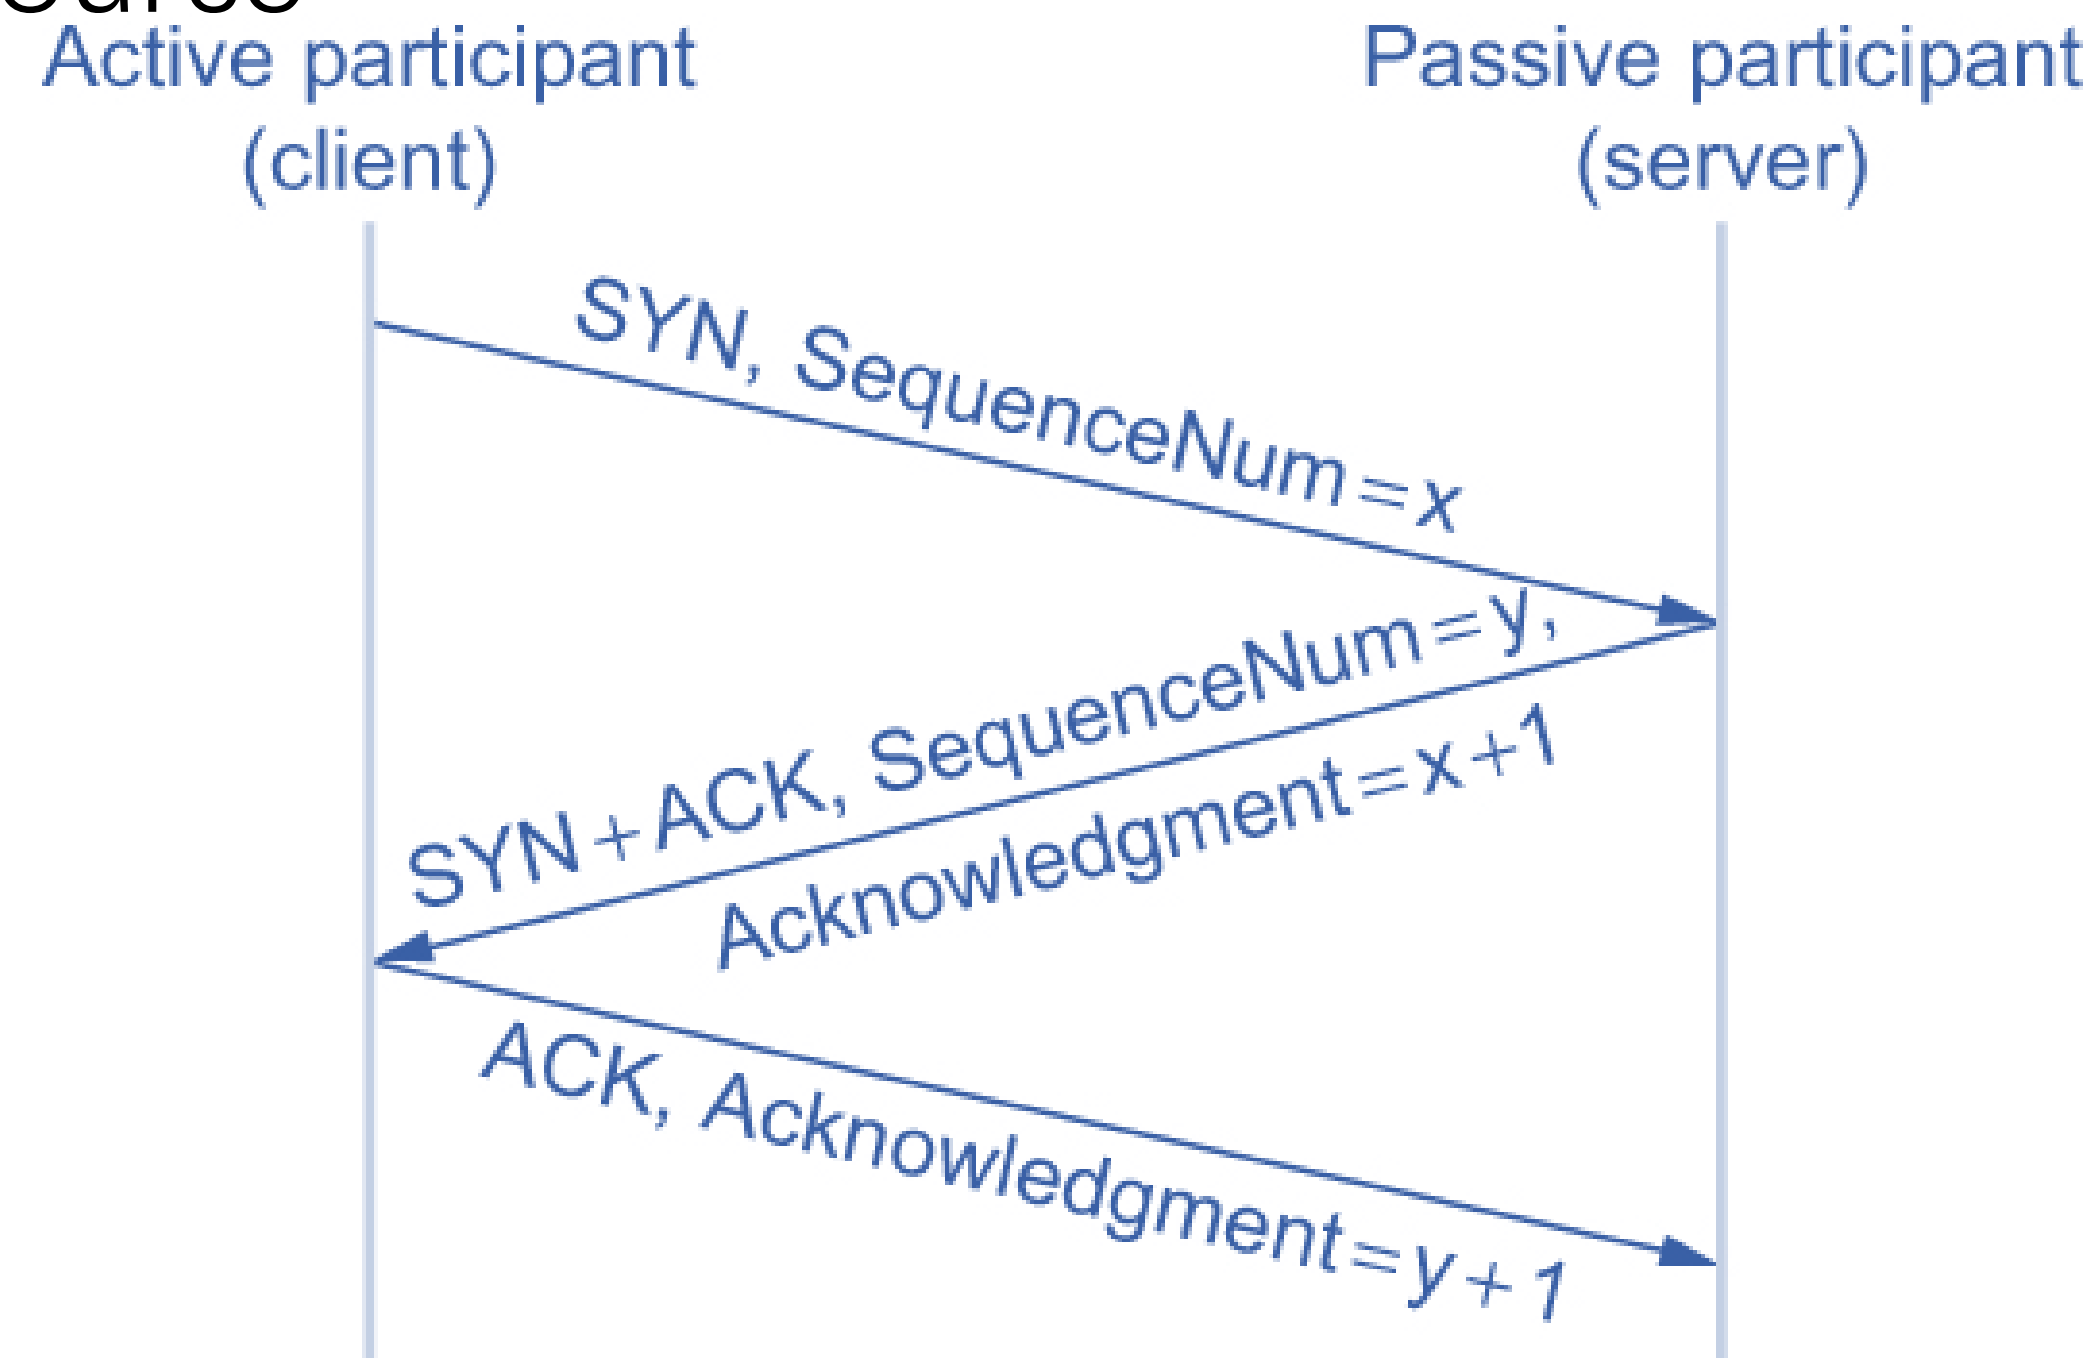

CS 120 LEC 16

Connection Establishment

- Why two-way handshake is not enough ?
  - To eliminate out-of-order connection request
    - Three-way: client will not response to the SYN+ACK if the connection request is old
  - To confirm the client knows the server is ready
    - In case SYN+ACK loss

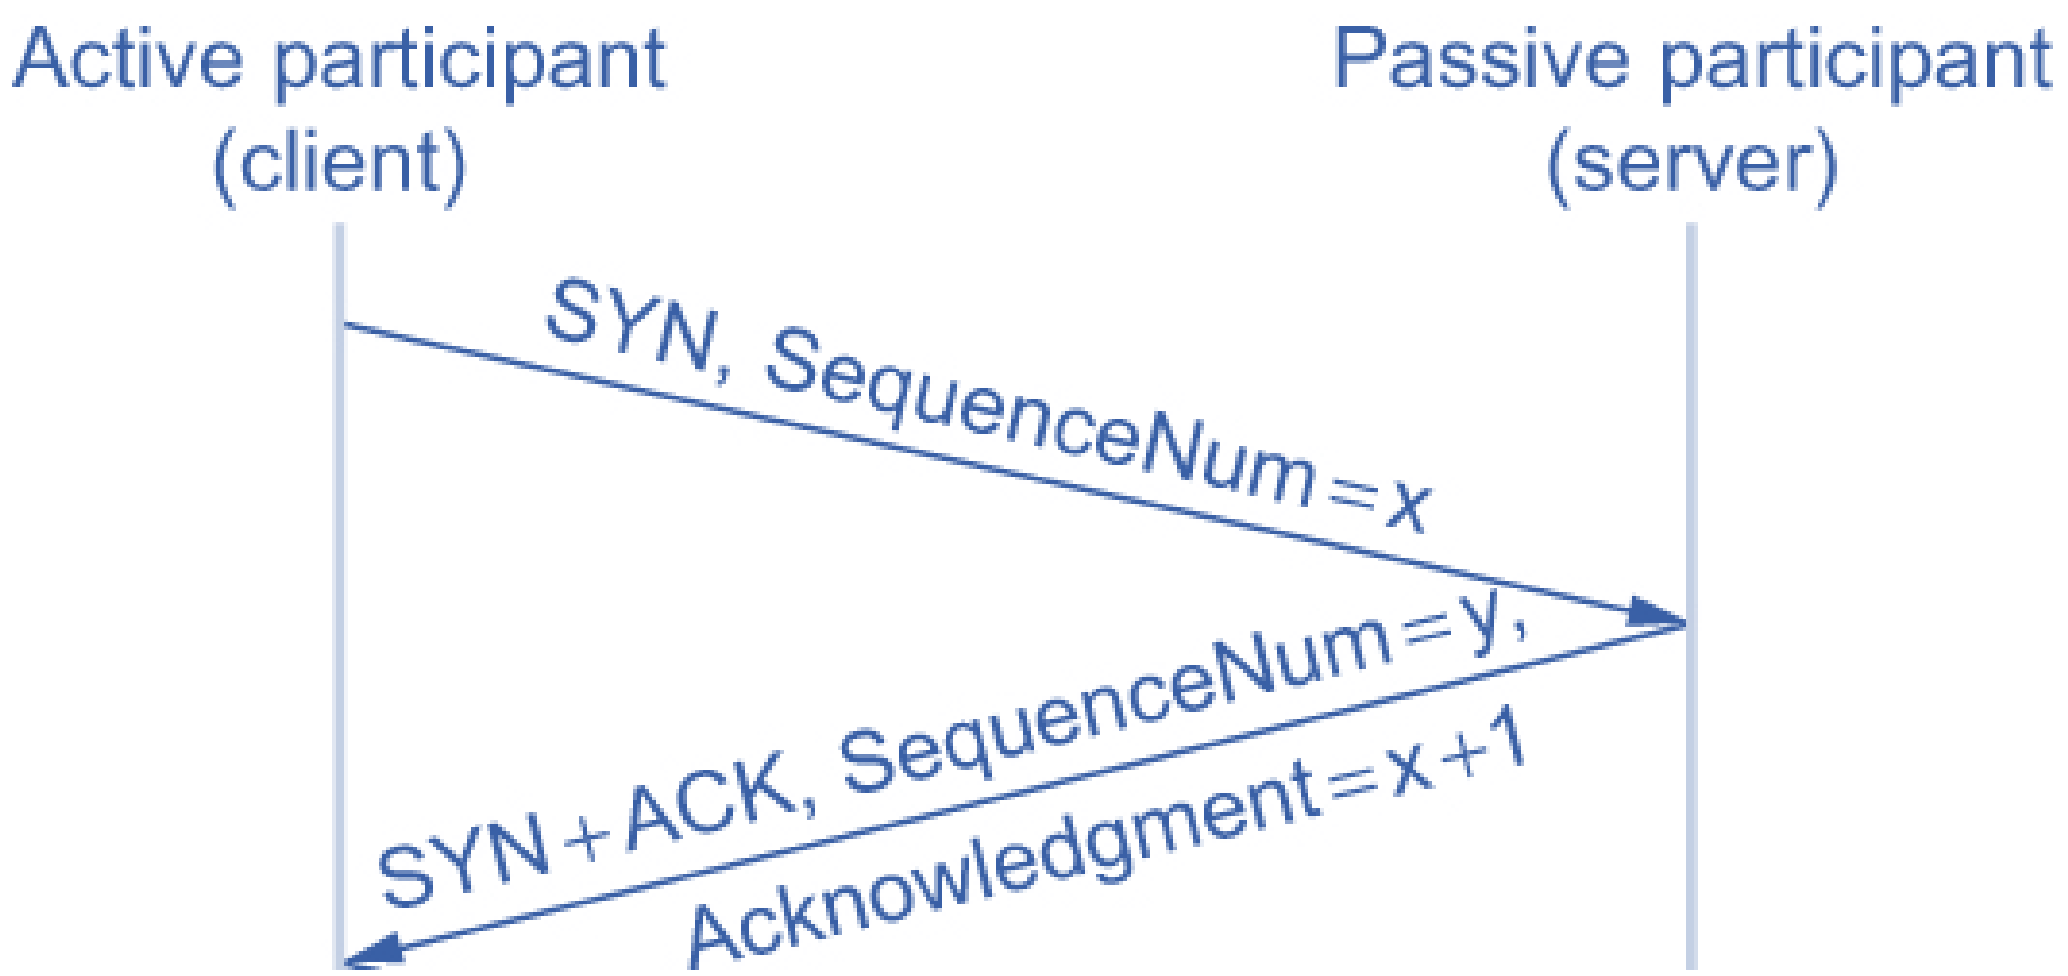

Connection Establishment

- Three-way Handshake
  - SYN loss
    - Client retransmits, until receives SYN+ACK from server

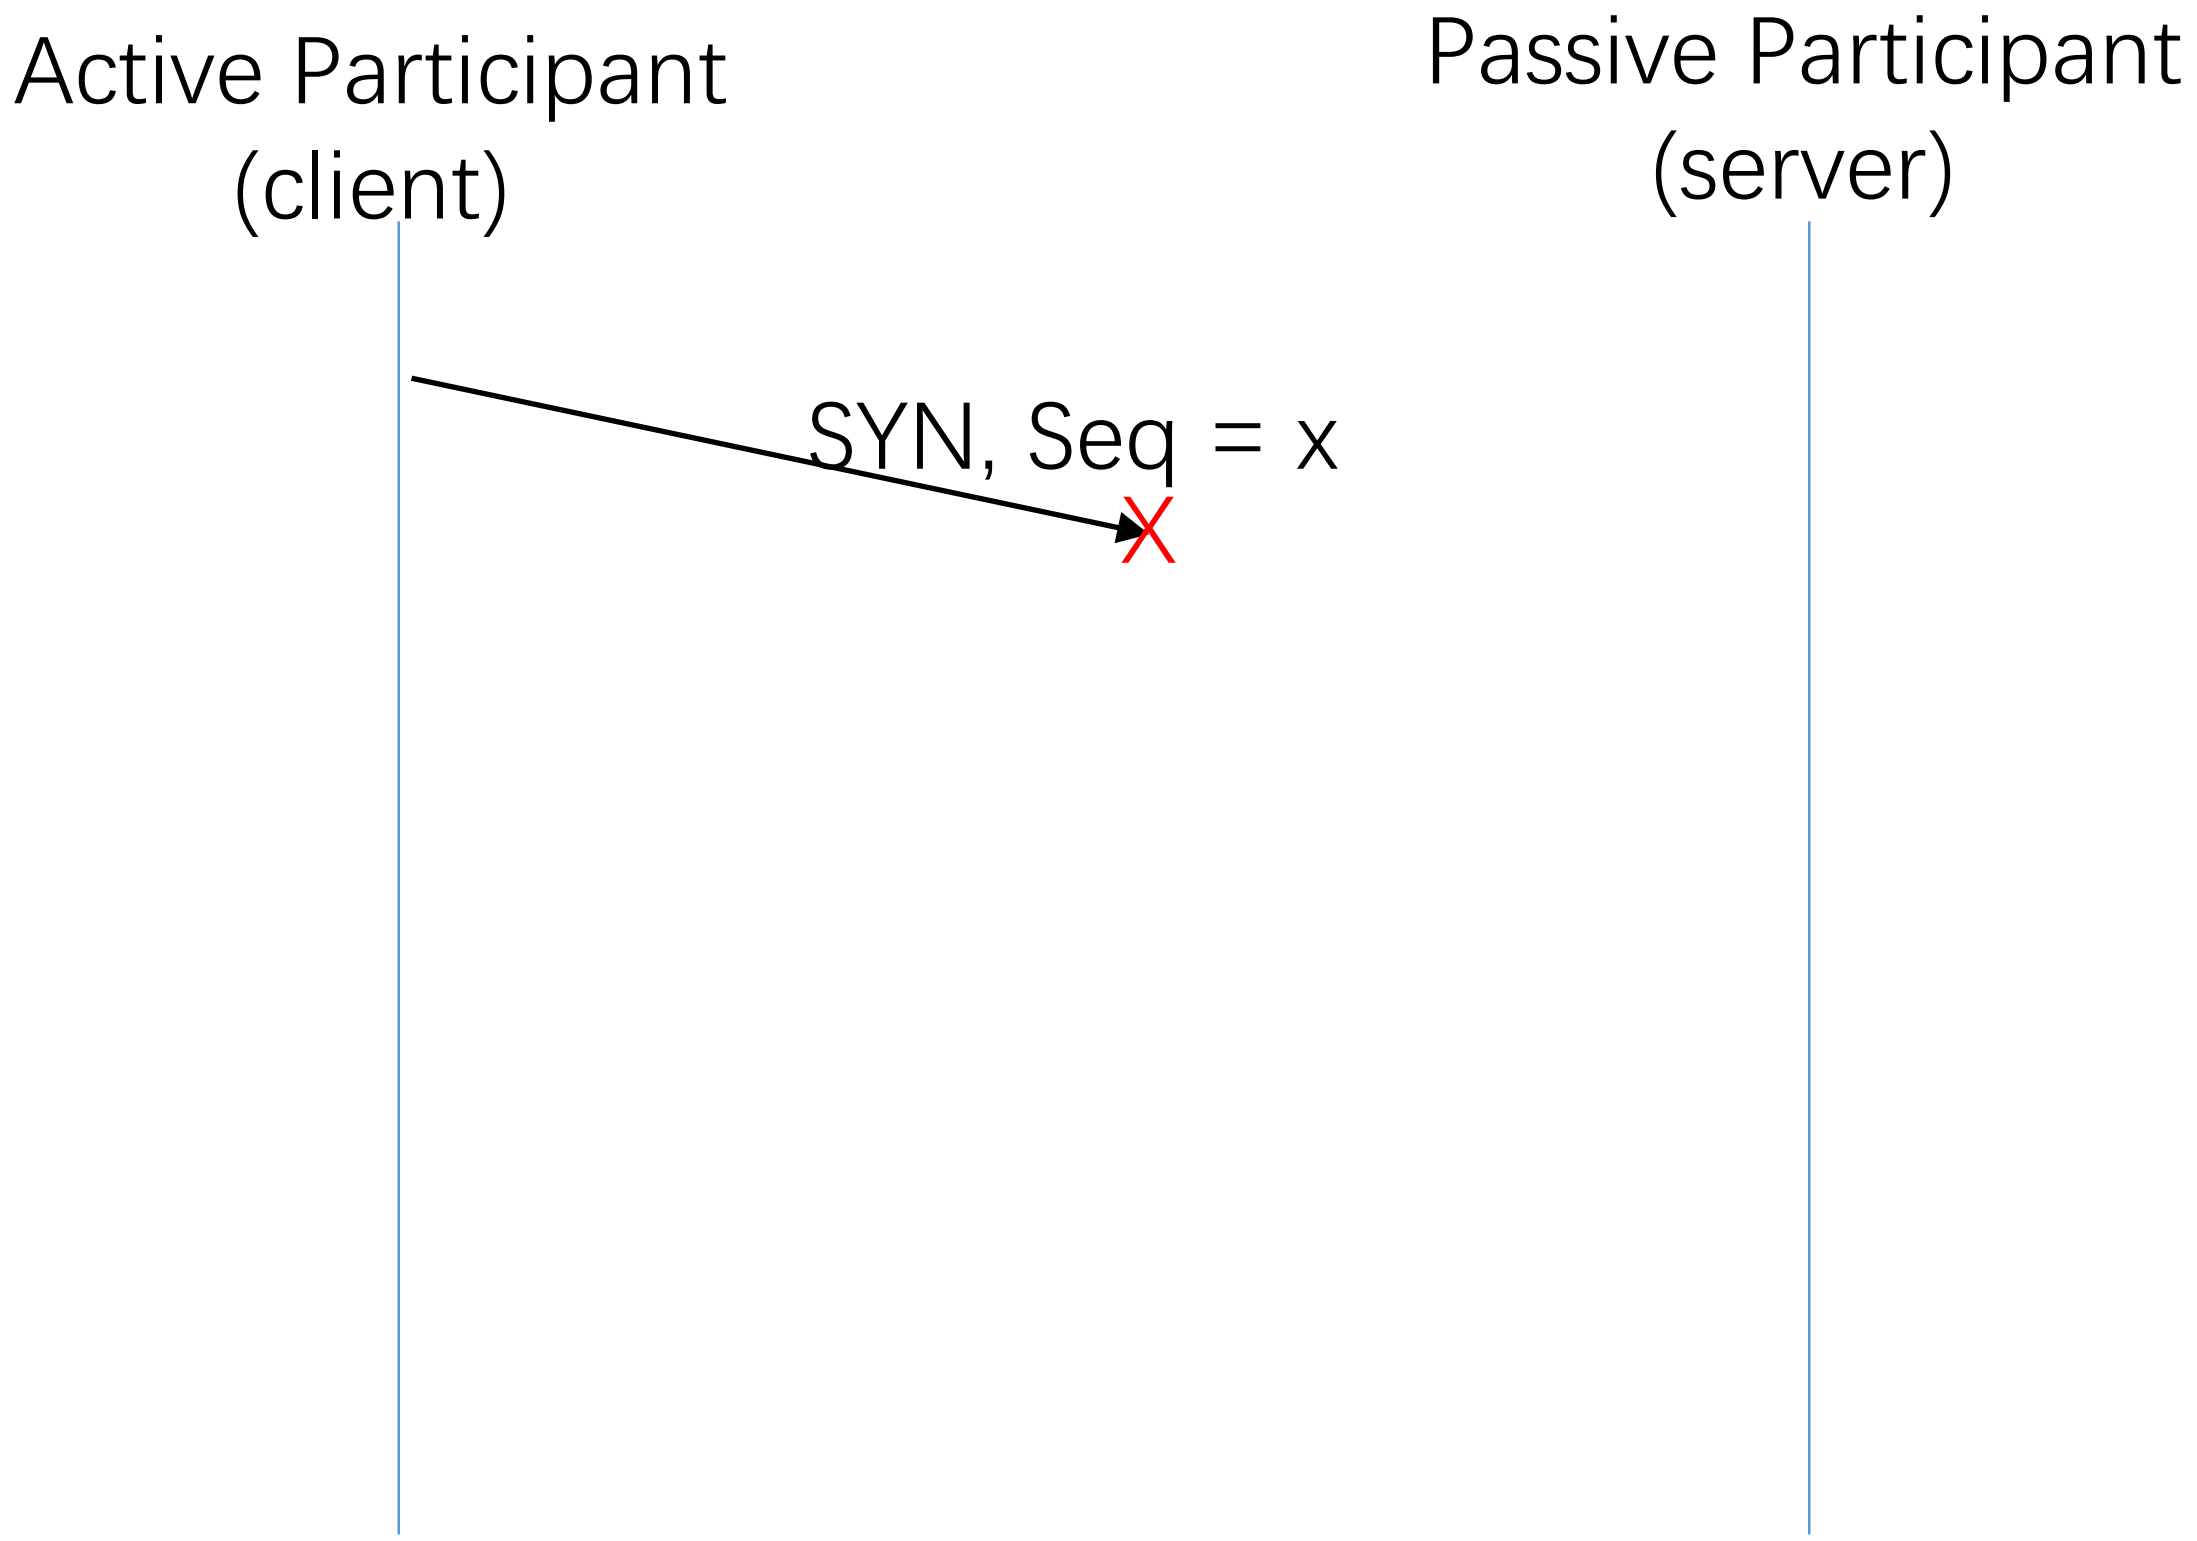

Connection Establishment

- Three-way Handshake
  - SYN+ACK loss
    - Server retransmits, until receive ACK from client

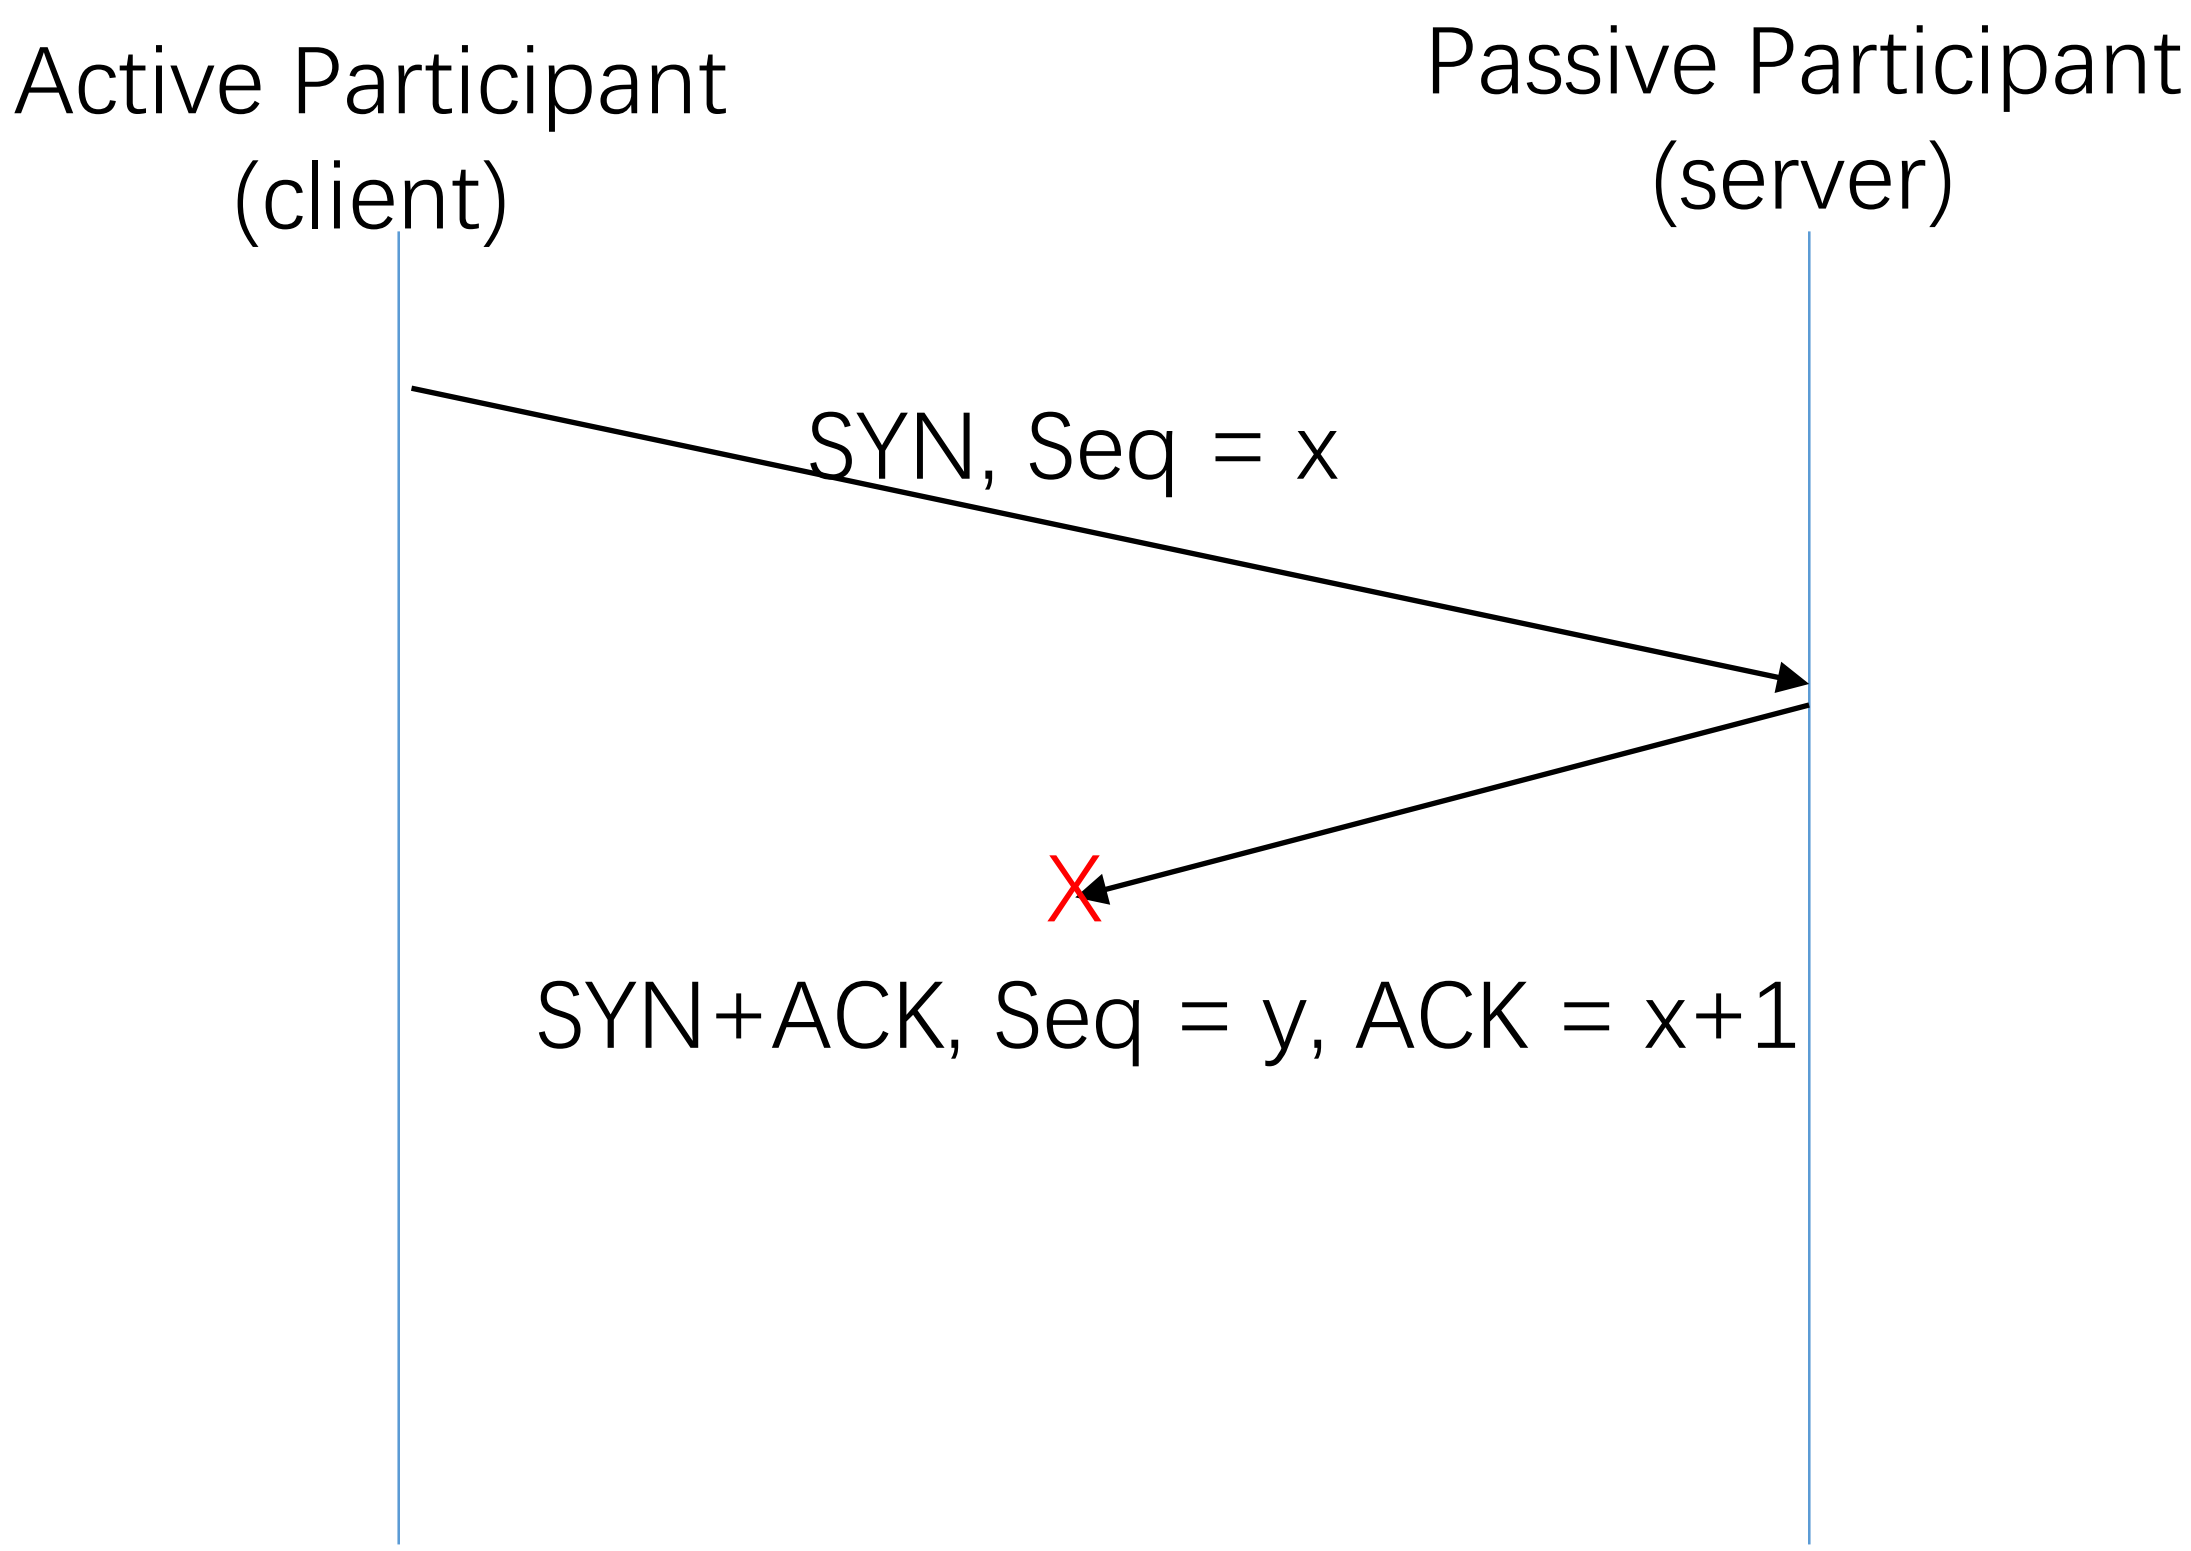

CS 120 LEC 16

Connection Establishment

- Three-way Handshake
  - Client ACK loss
    - Server retransmits SYN+ACK, until receive ACK from client
    - or Client transmits DATA+ACK, server treats it as ACK

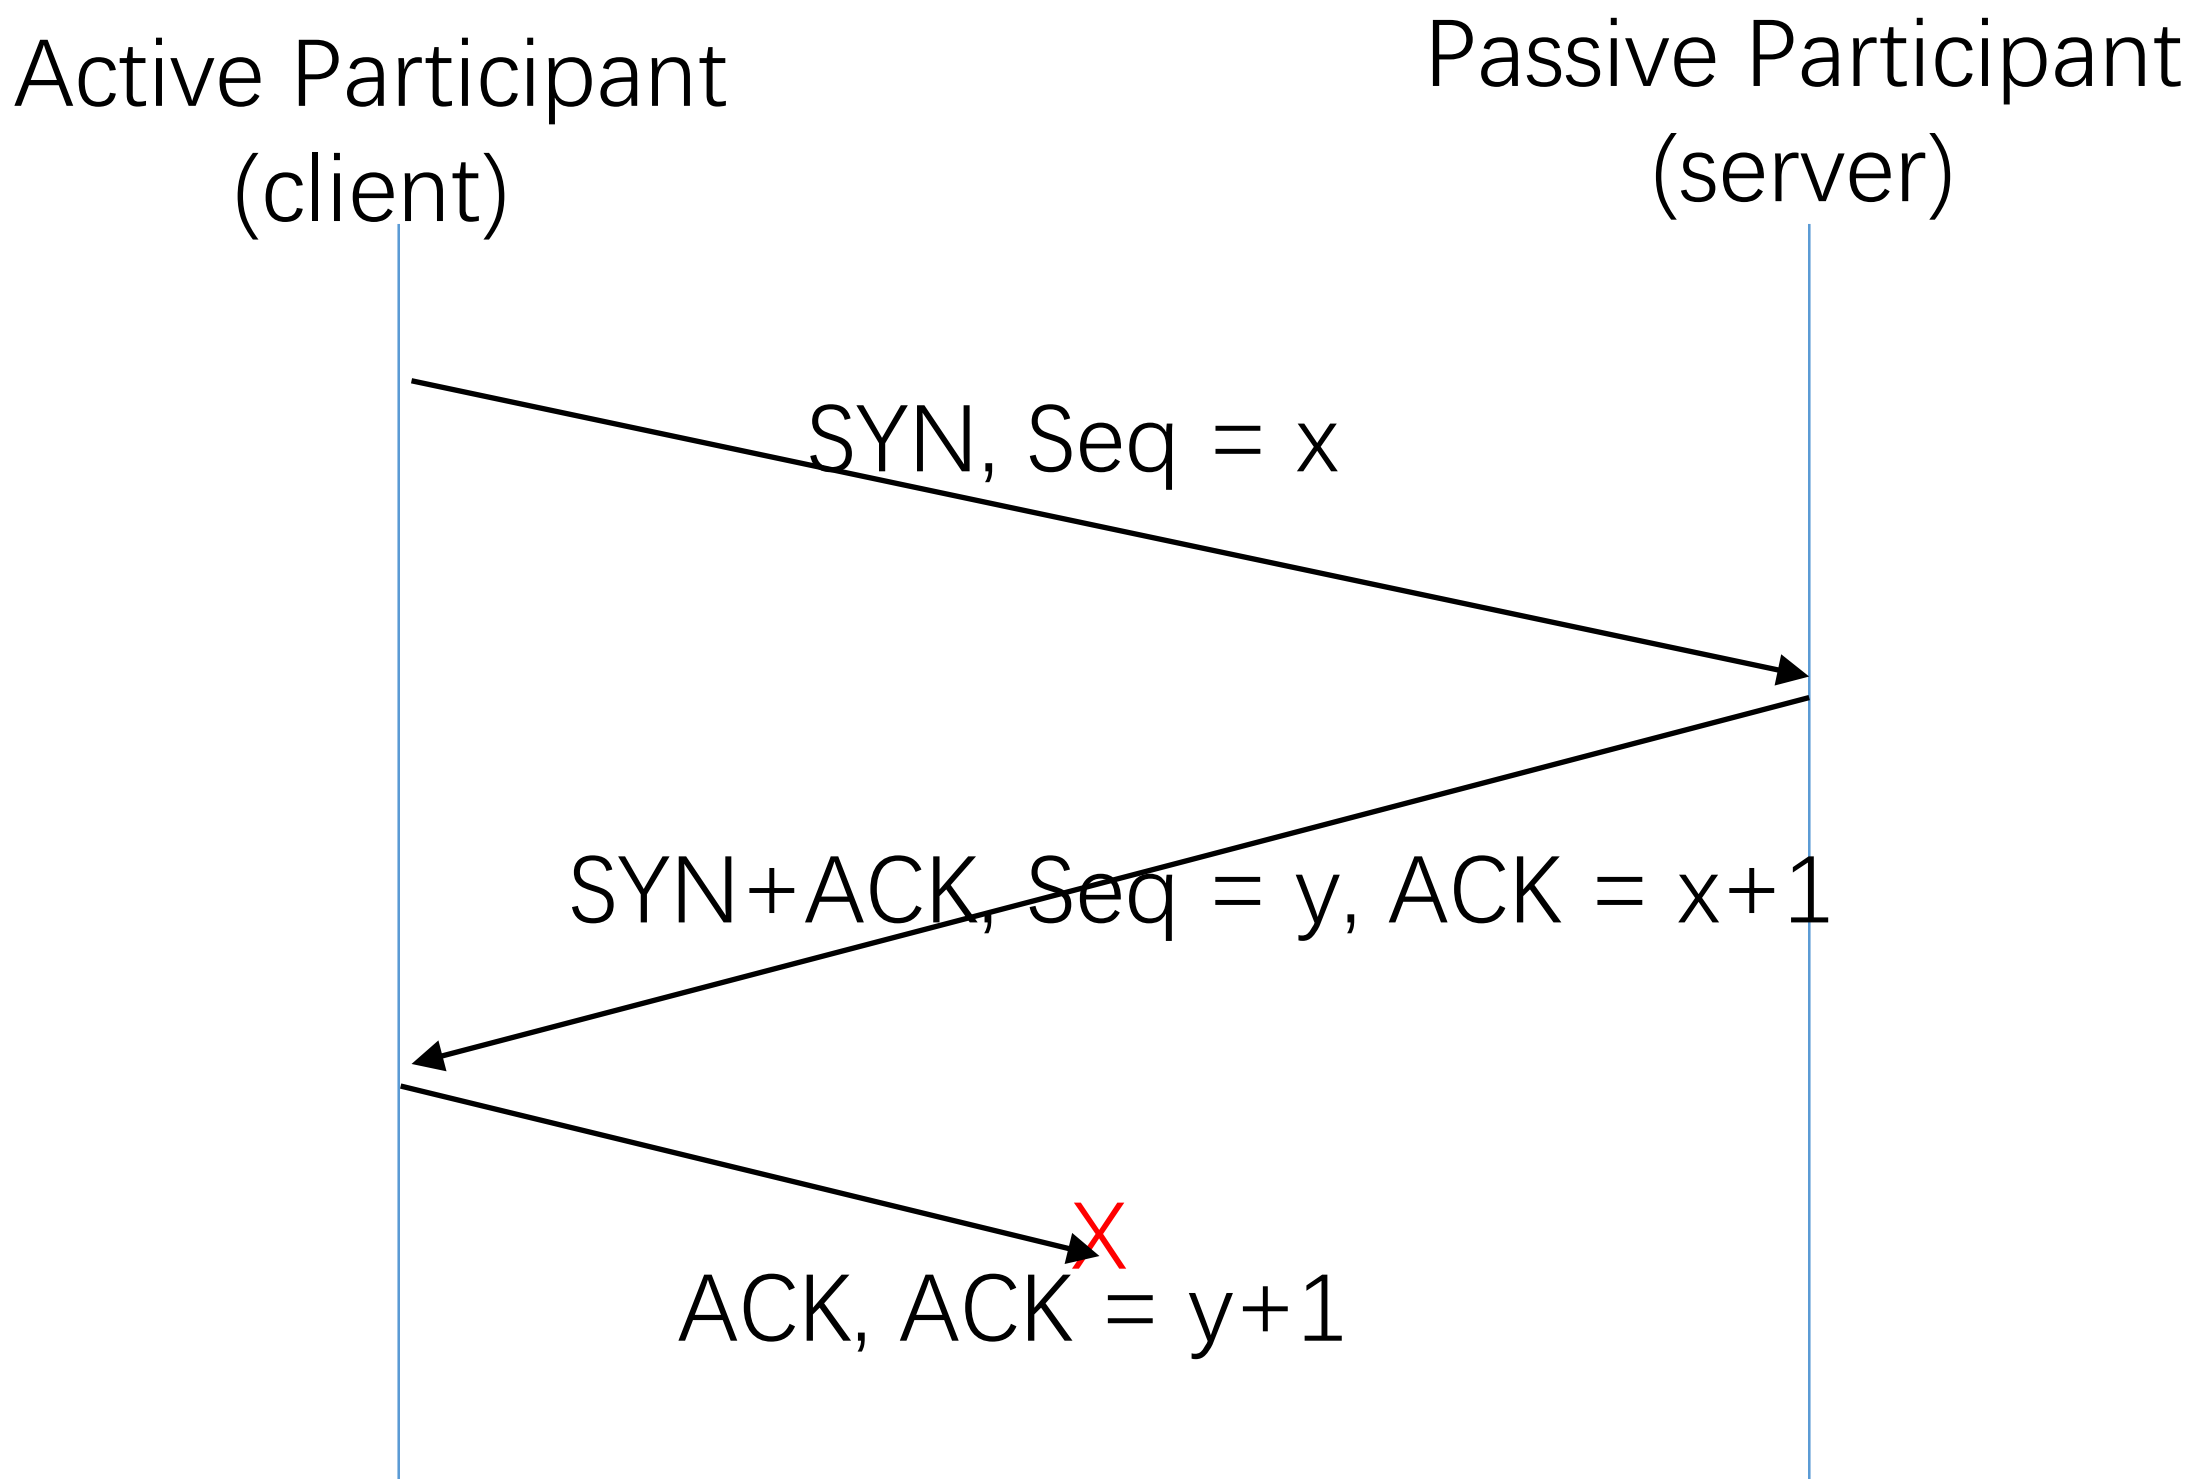

TCP State-transition Diagram

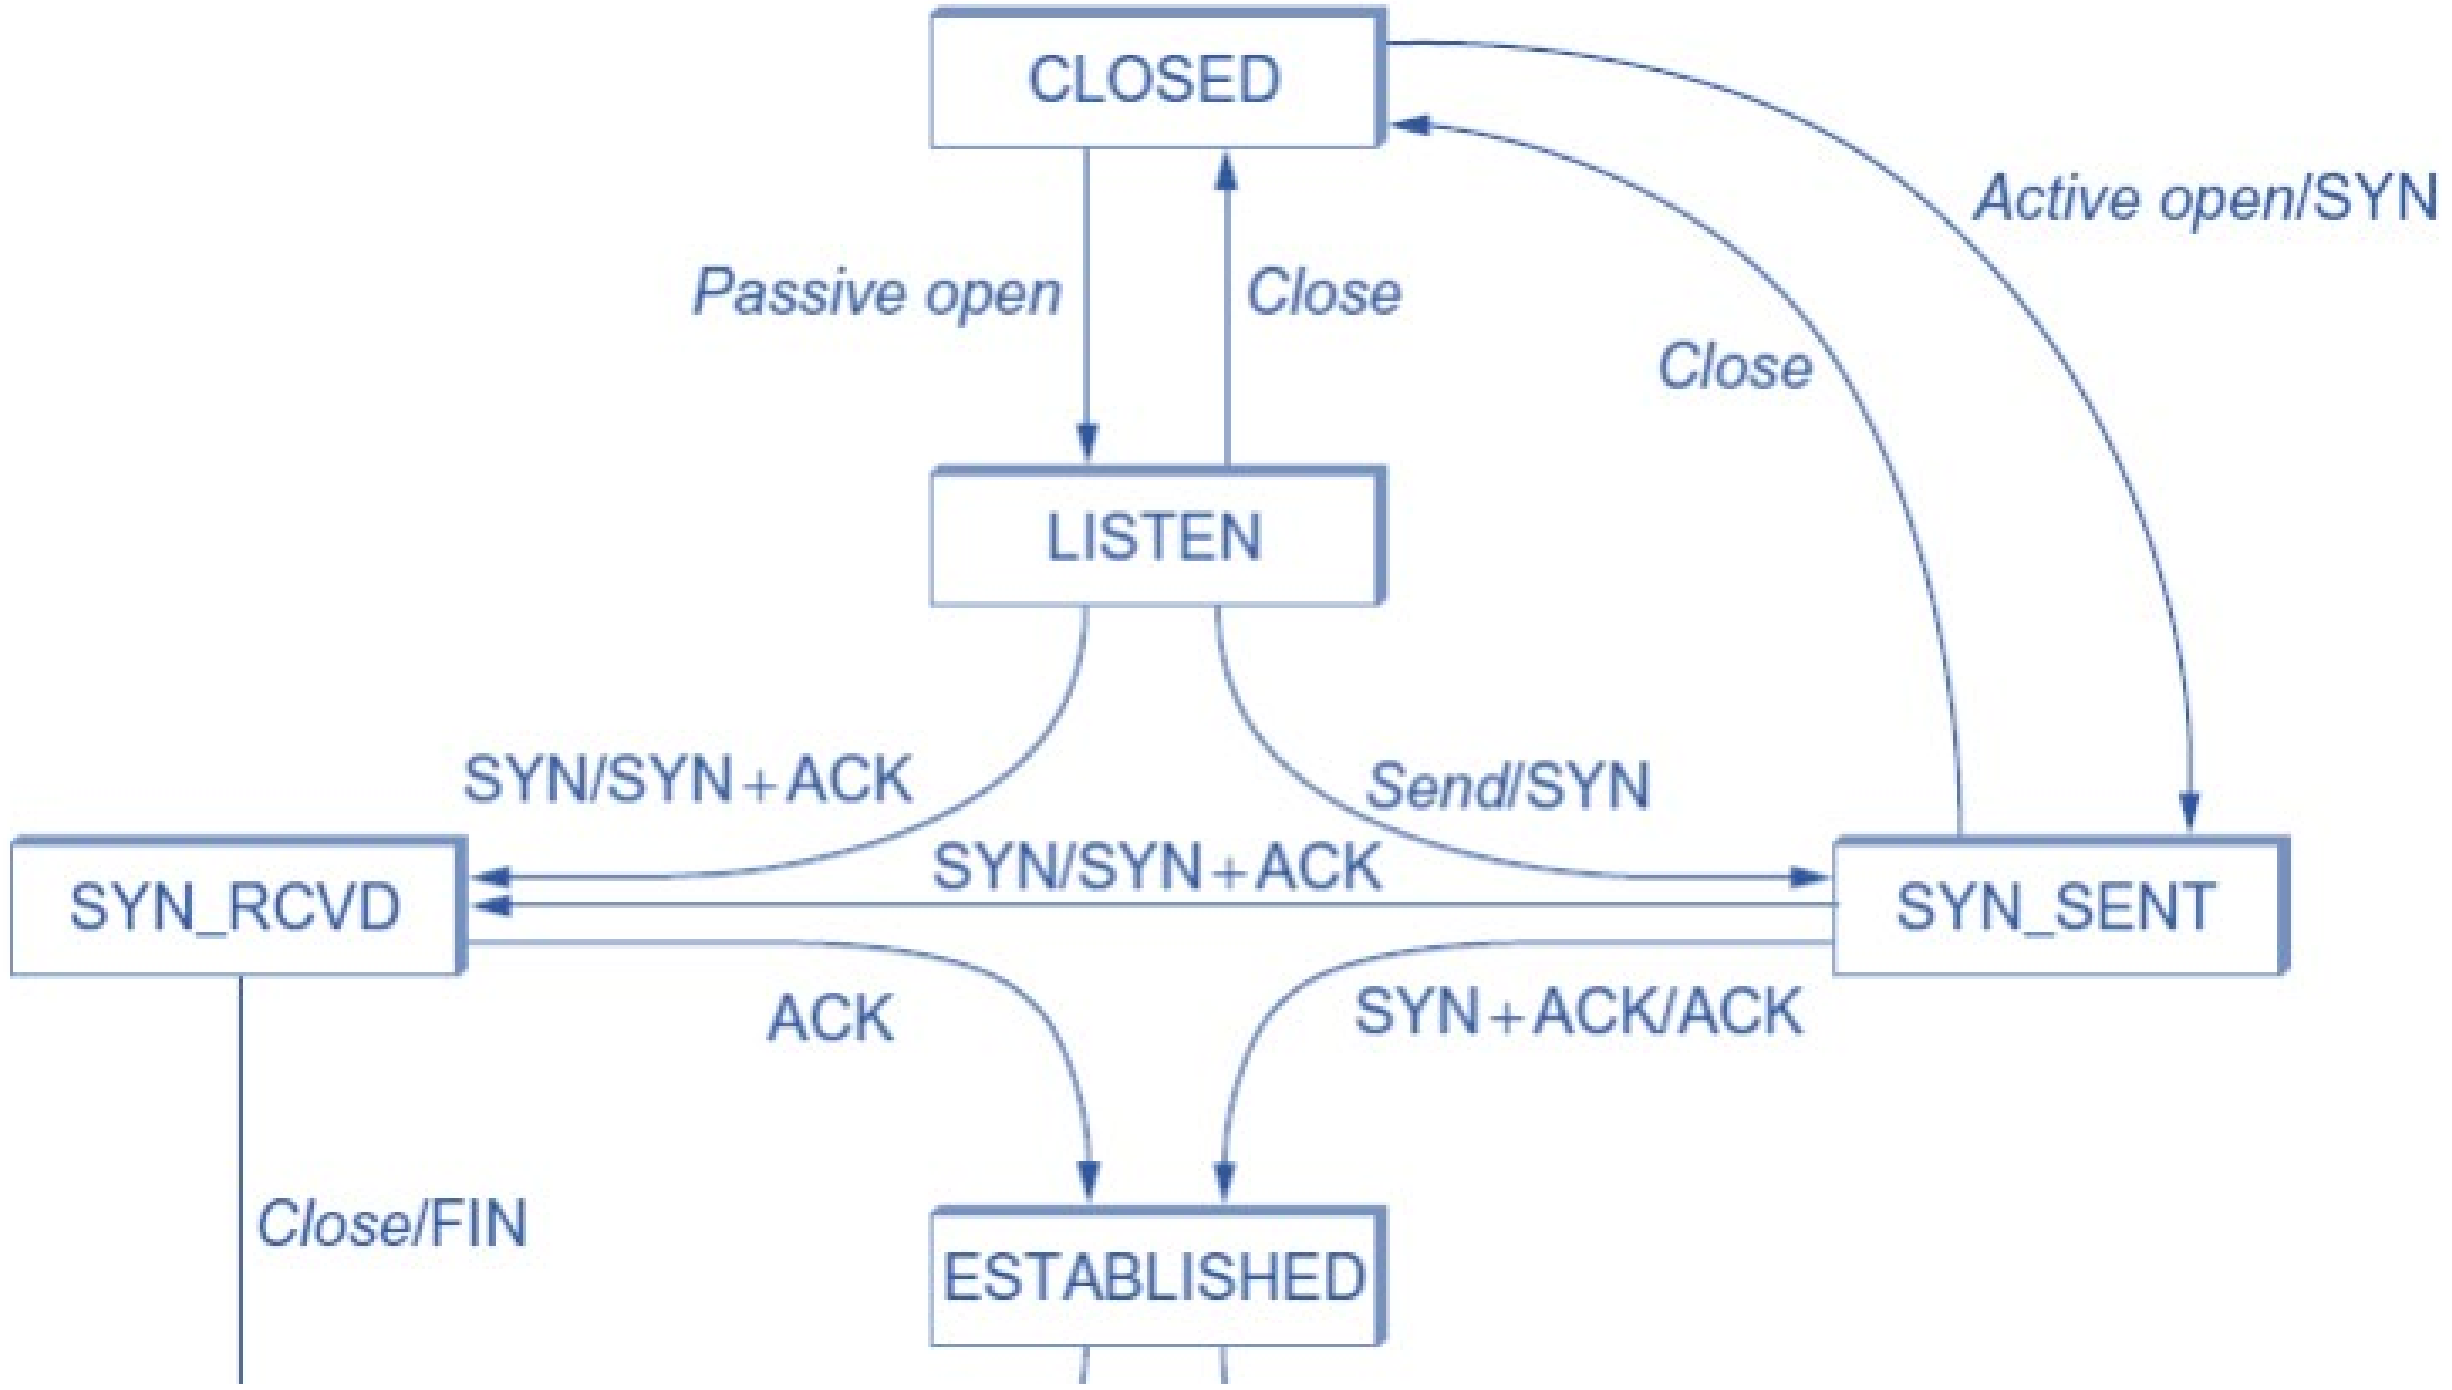

Connection Termination

- Four-way Handshake
  - To release resource
  - Can be asymmetric
    - e.g.: Server are transmitting to client; Clients has nothing to transmit, it closes the connection, releases transmission queue

Connection Termination

- Four-way Handshake

Use to prevent retransmitted FIN (due to ACK loss) from terminating new connections

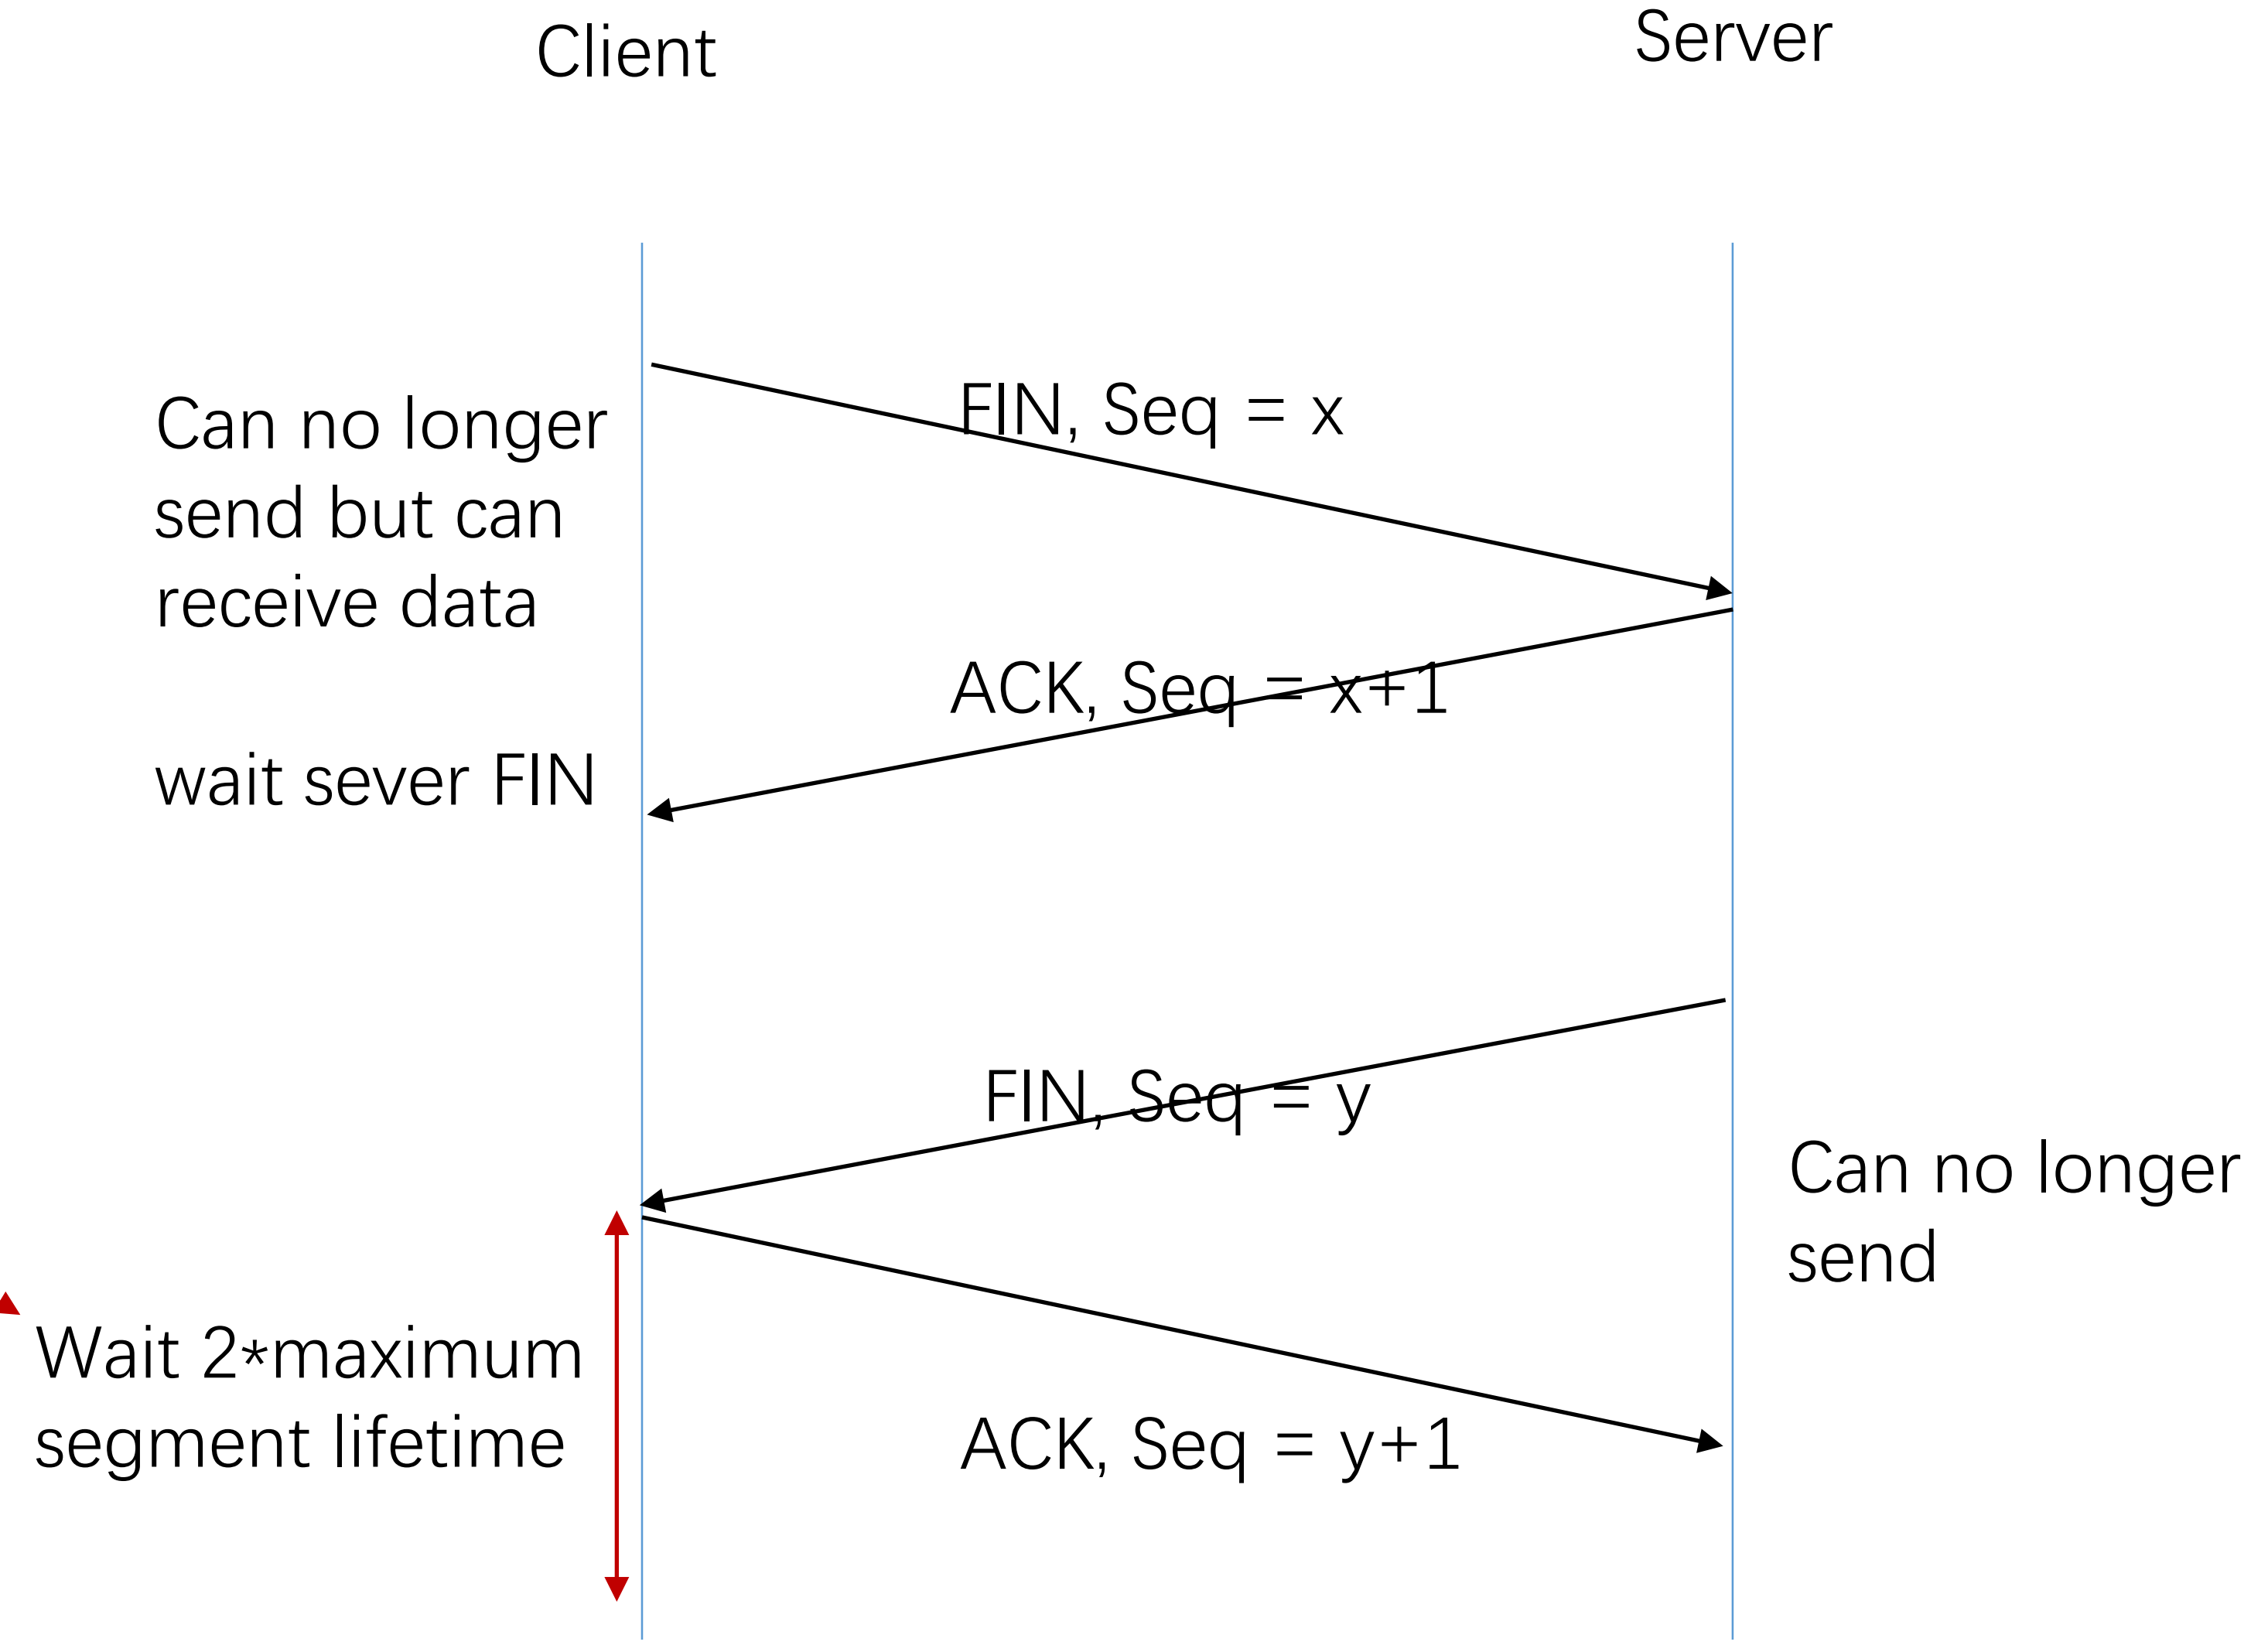

Connection Termination

- Four-way Handshake

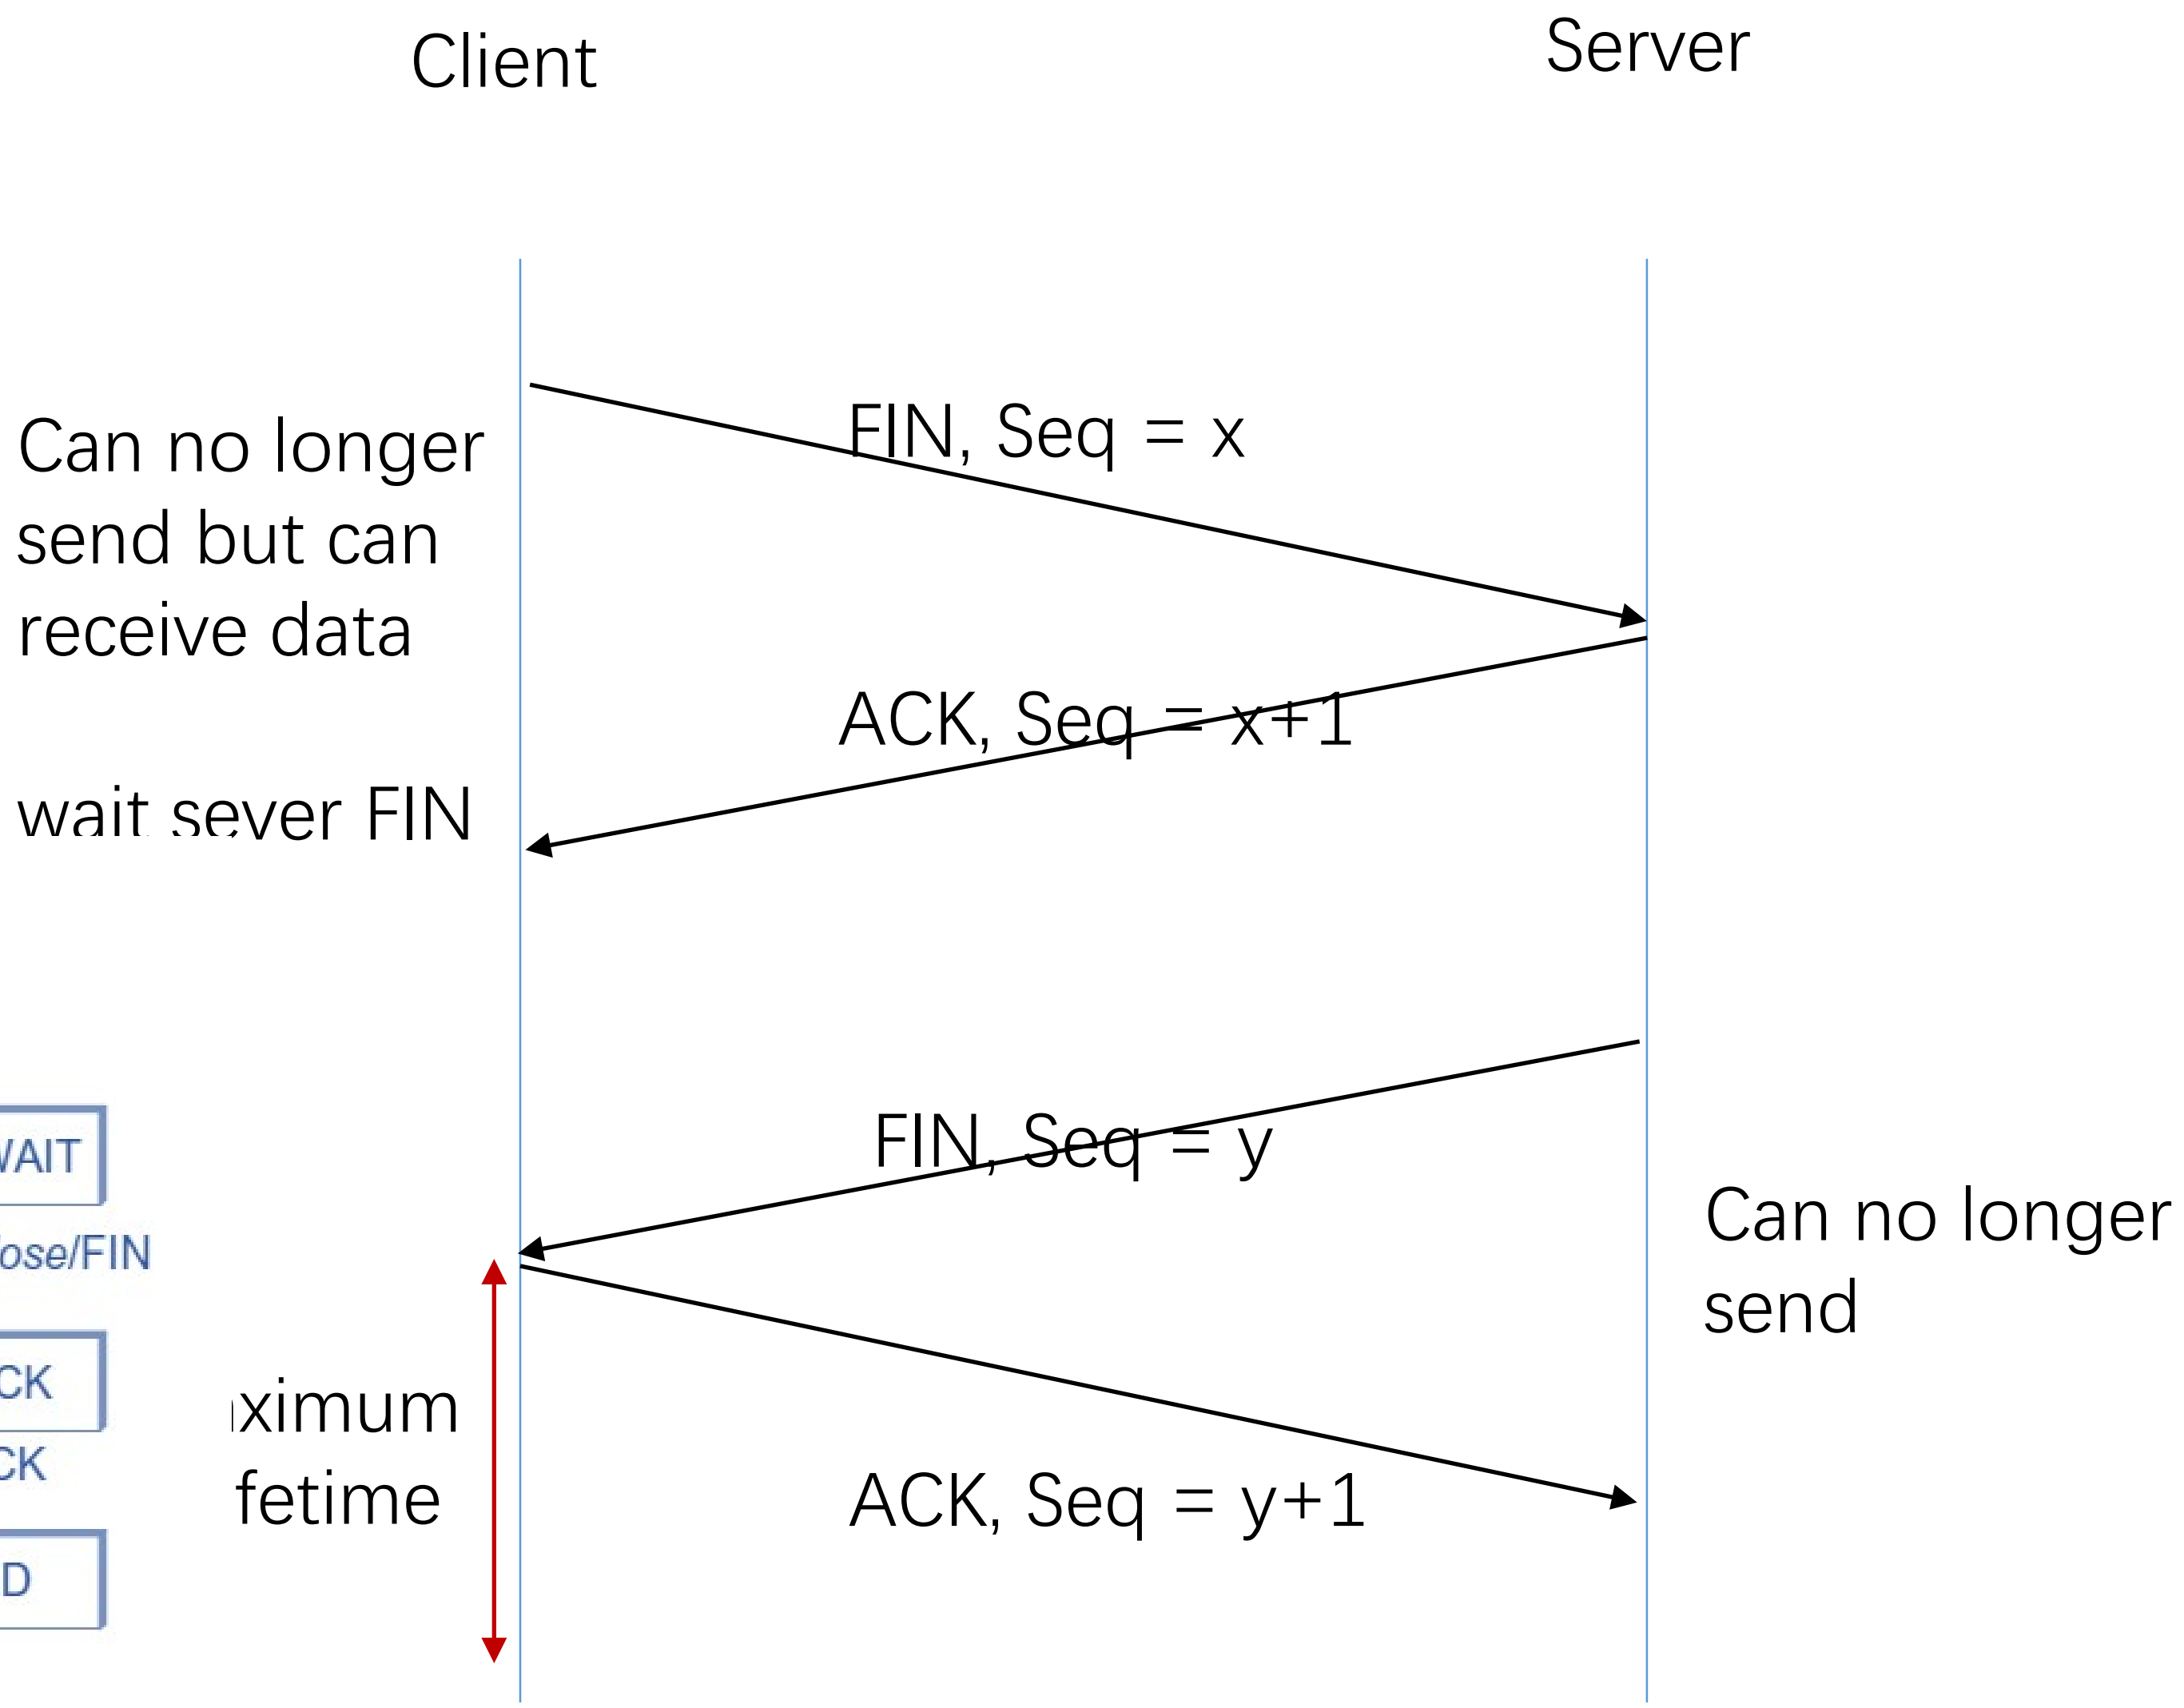

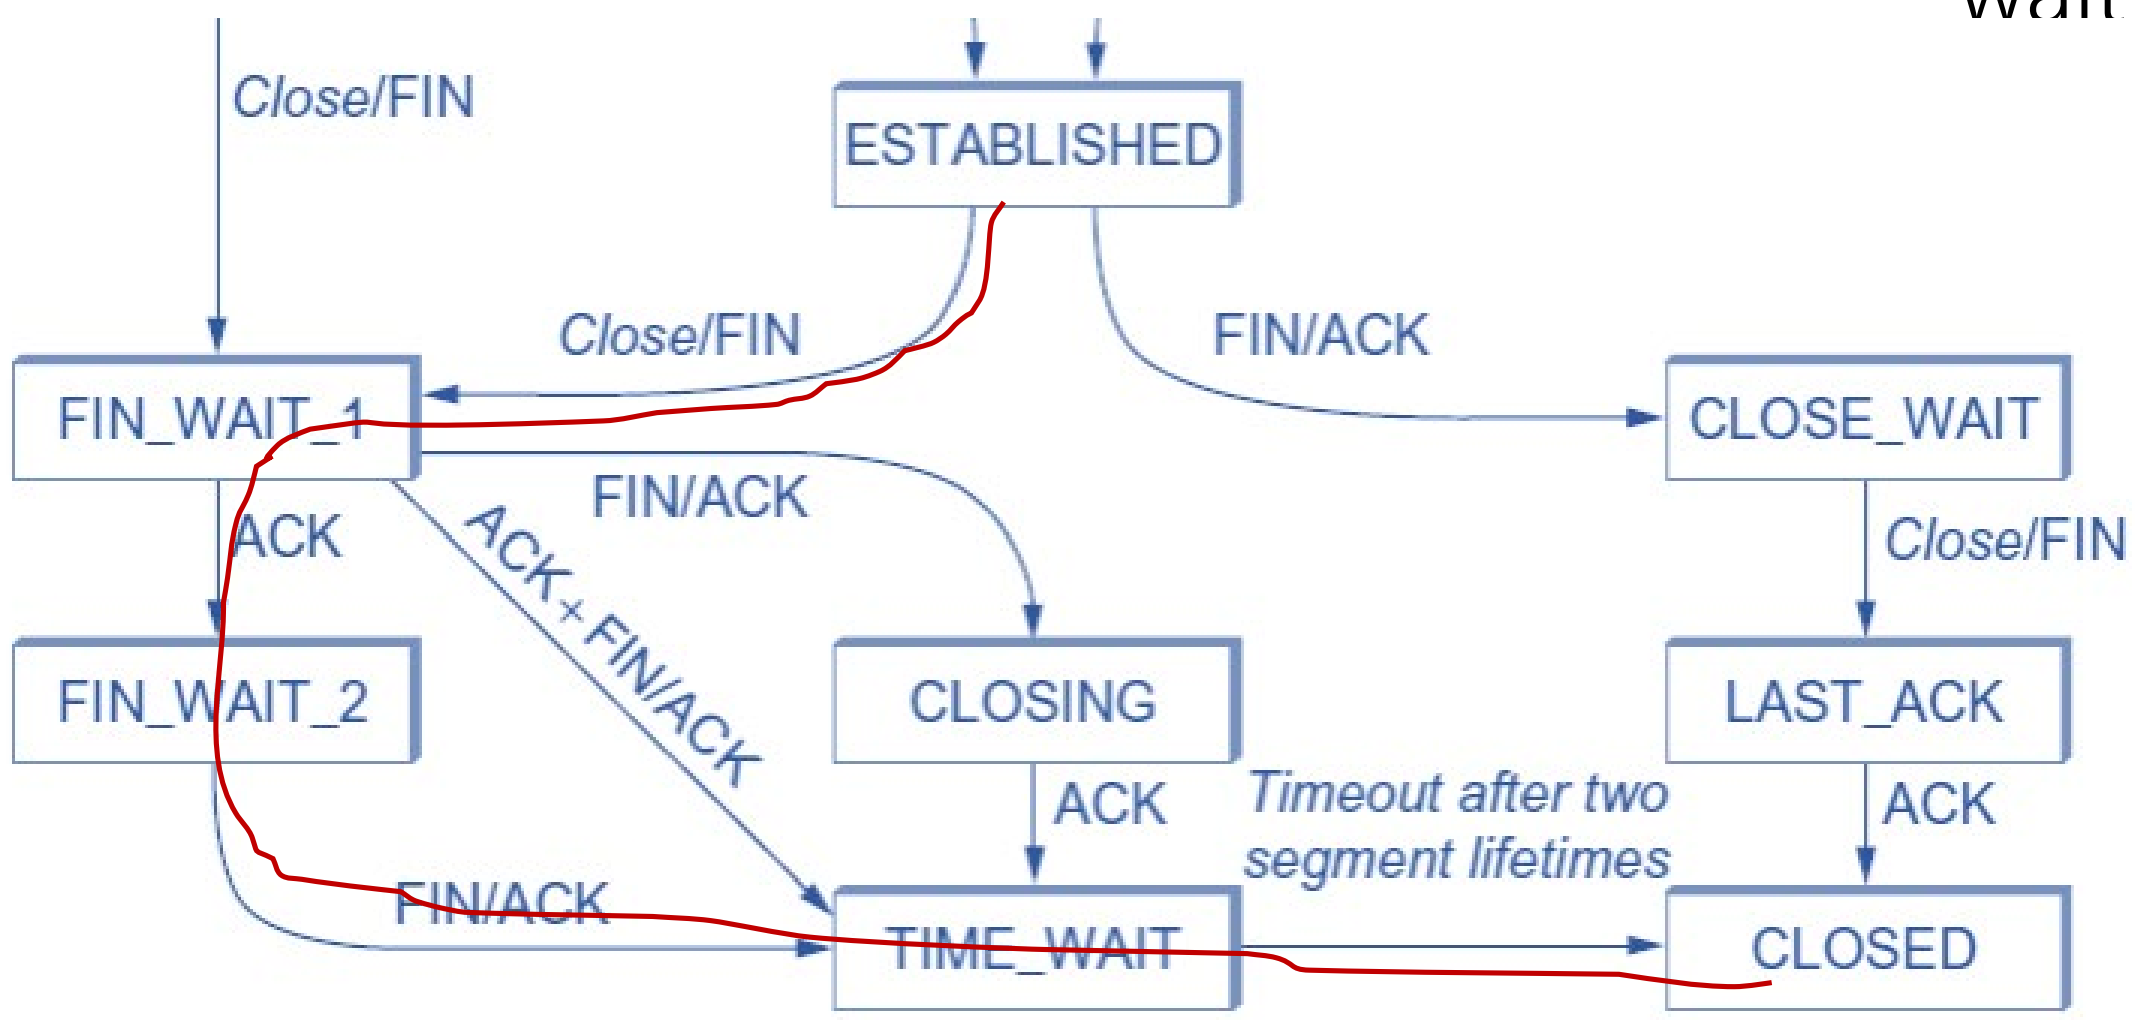

Connection Termination

- Case 2:

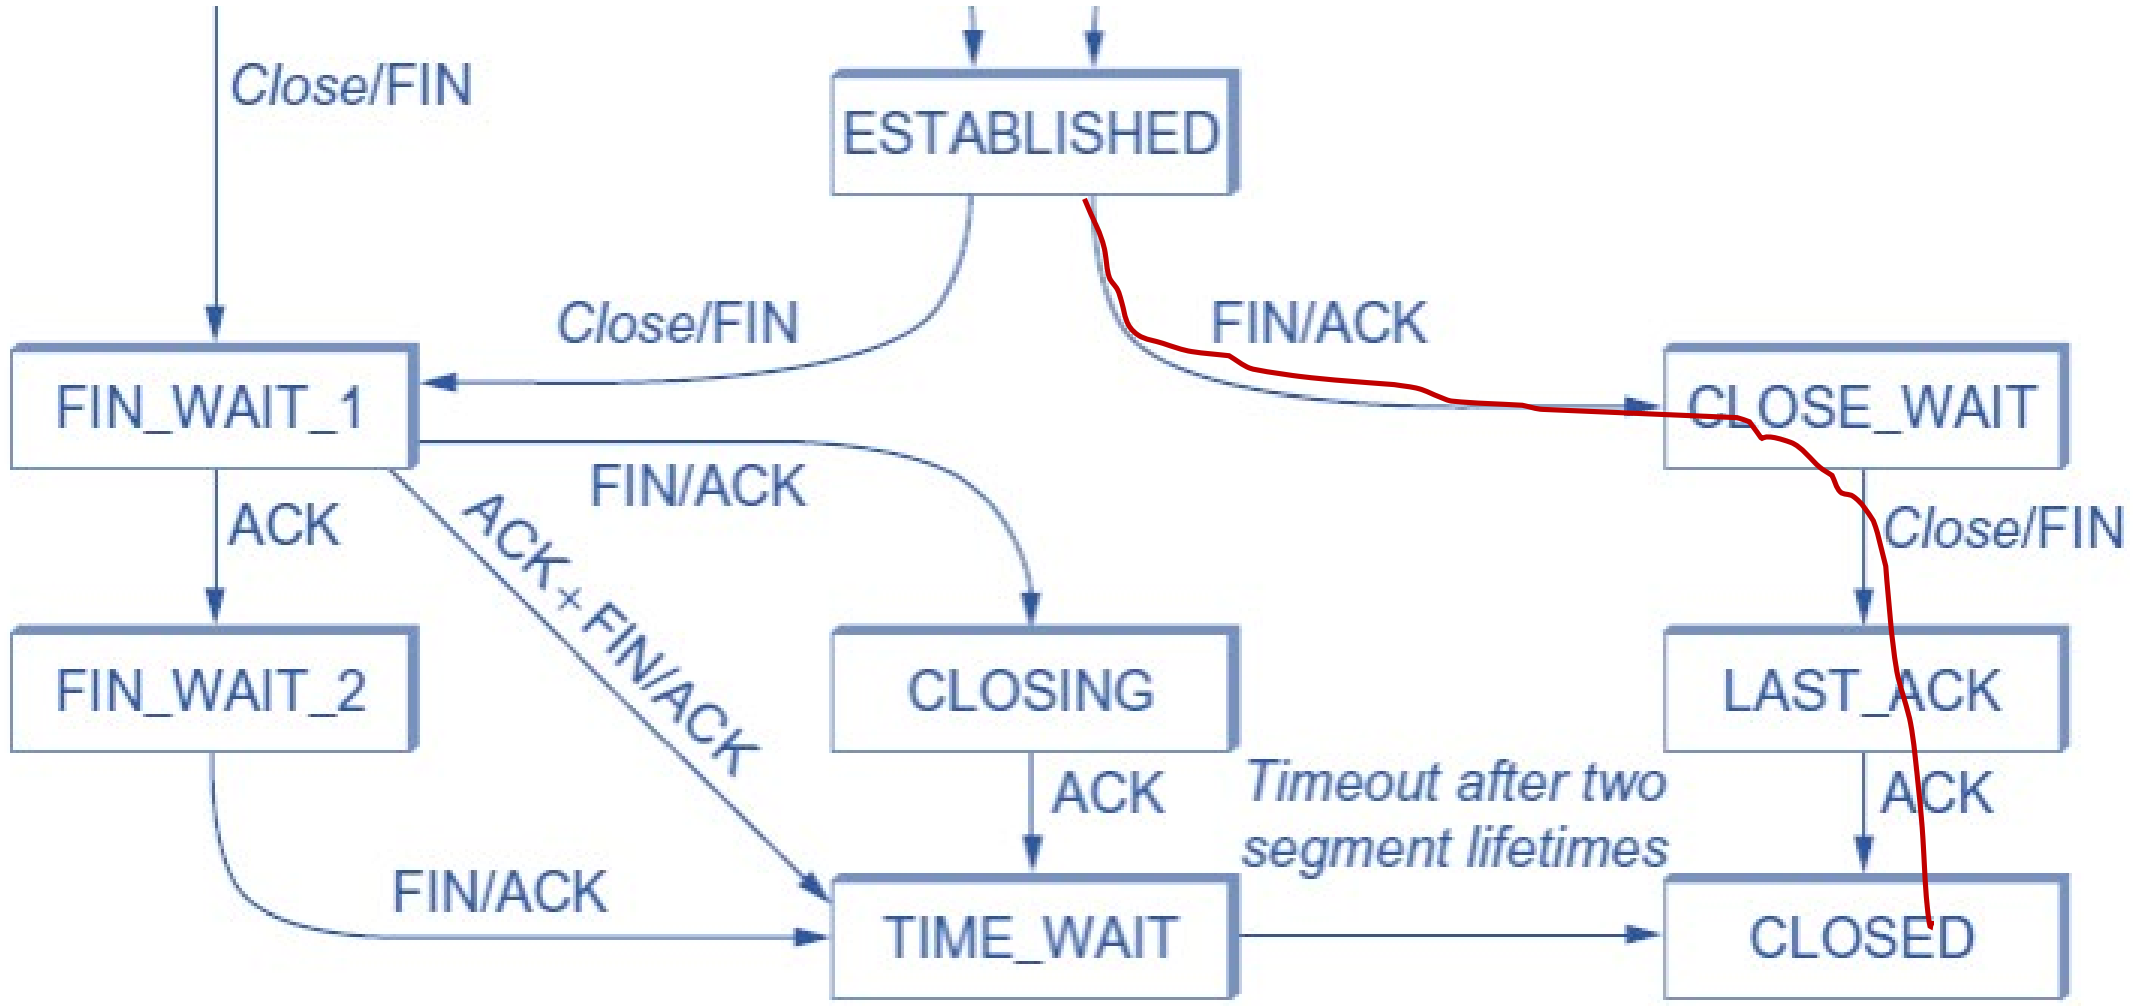

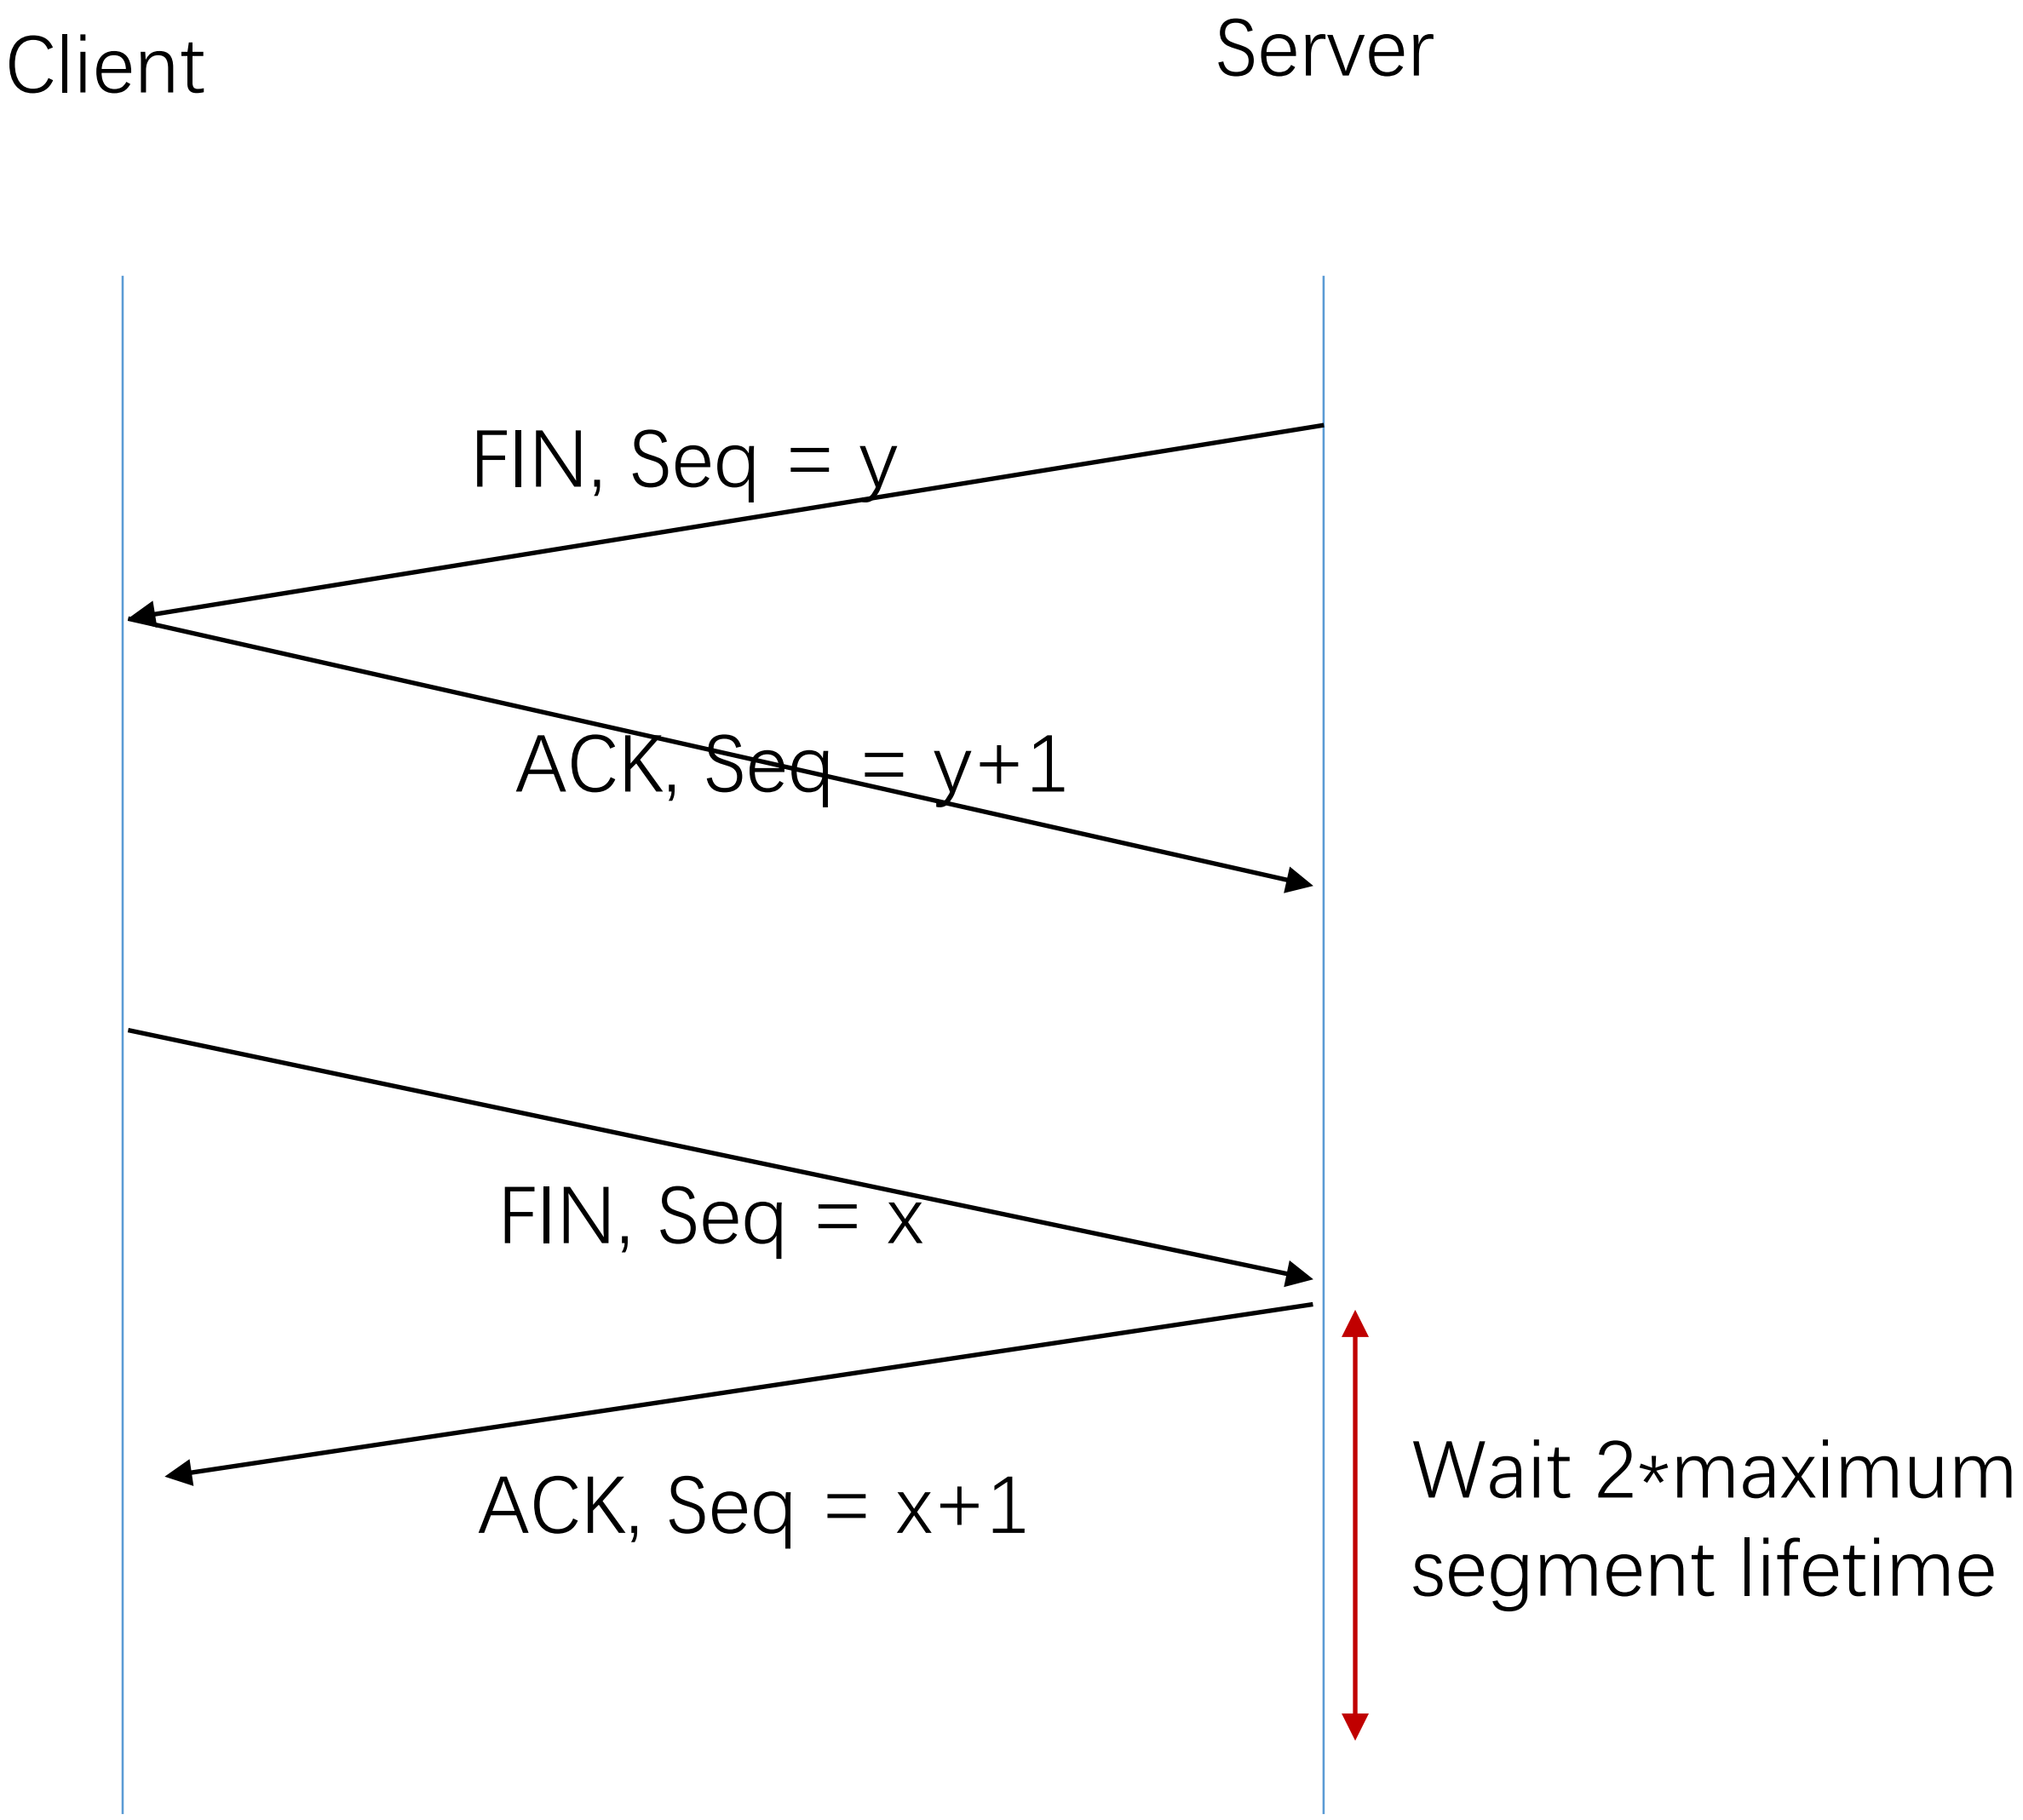

Connection Termination

- Case 3:

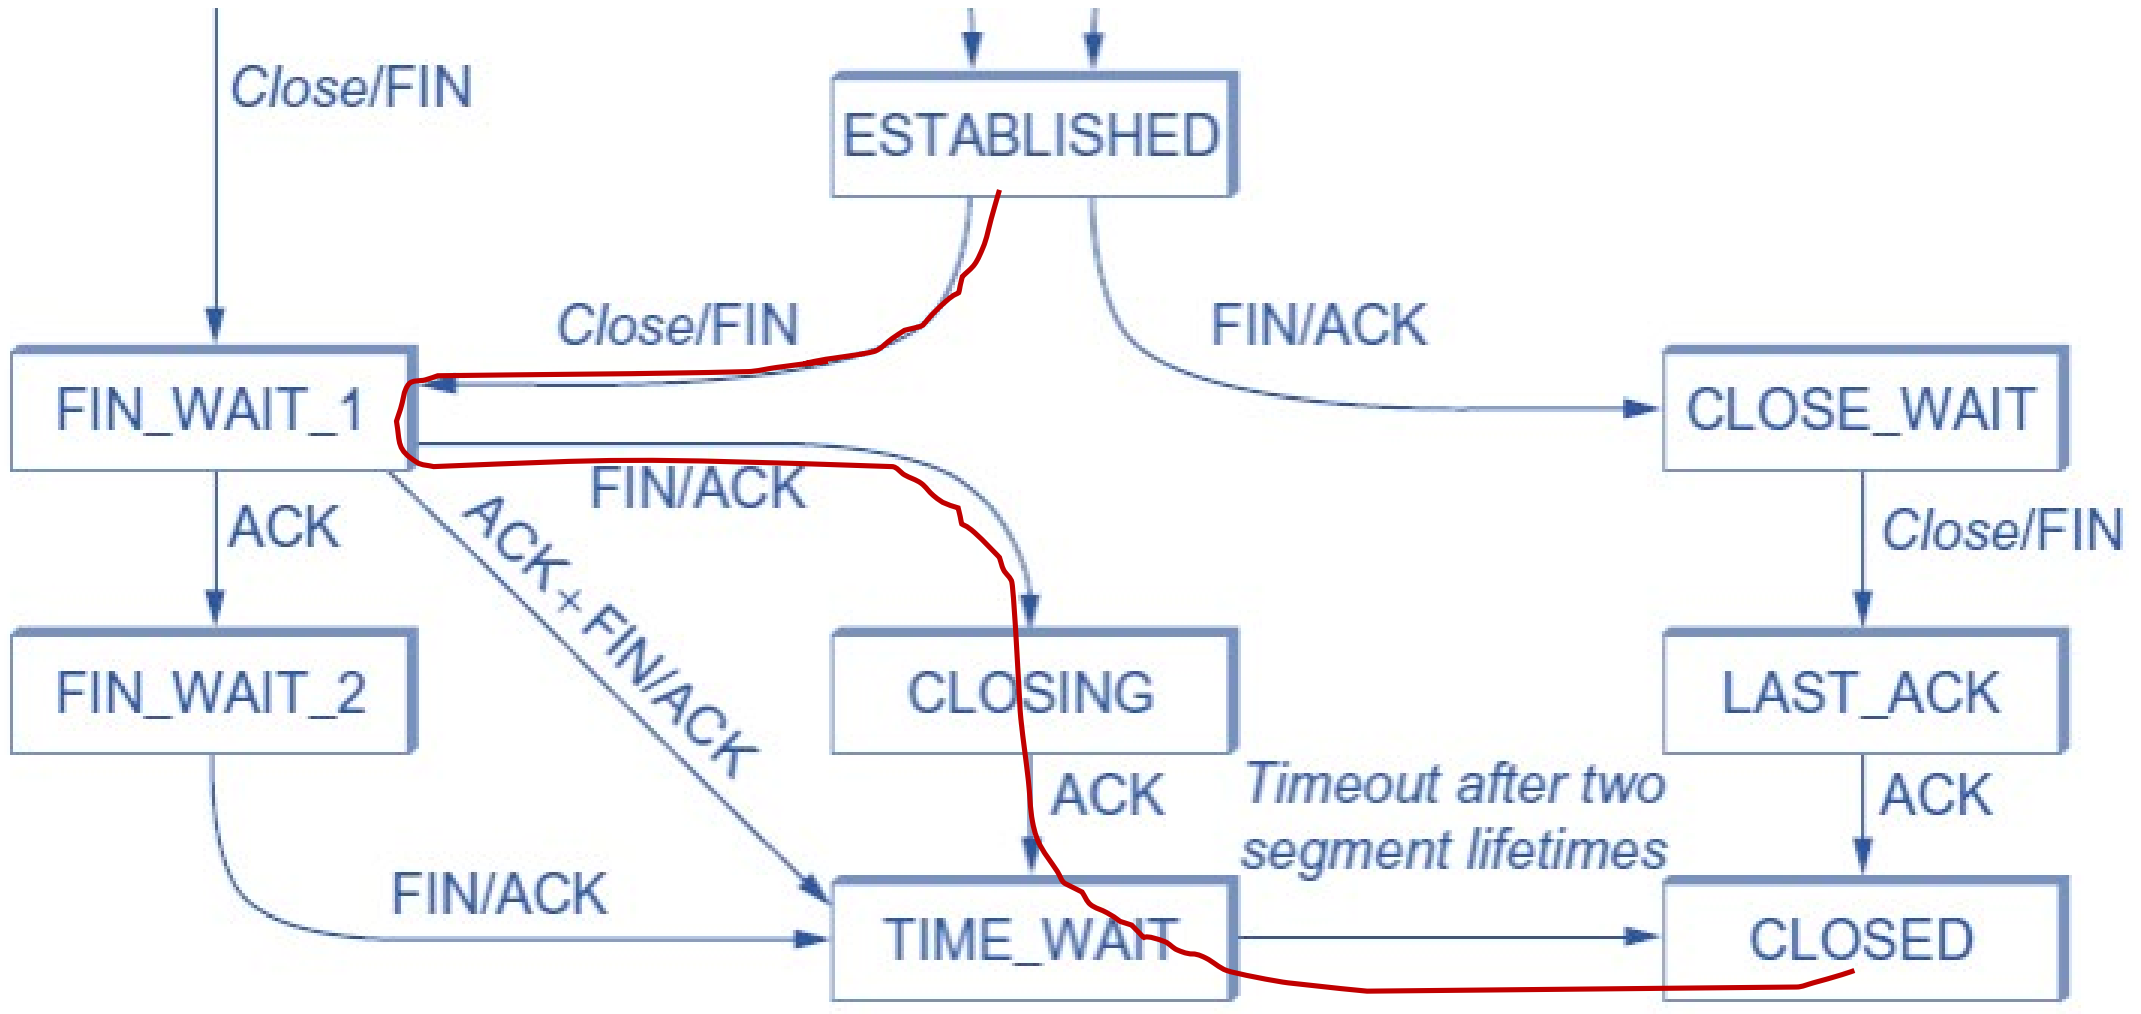

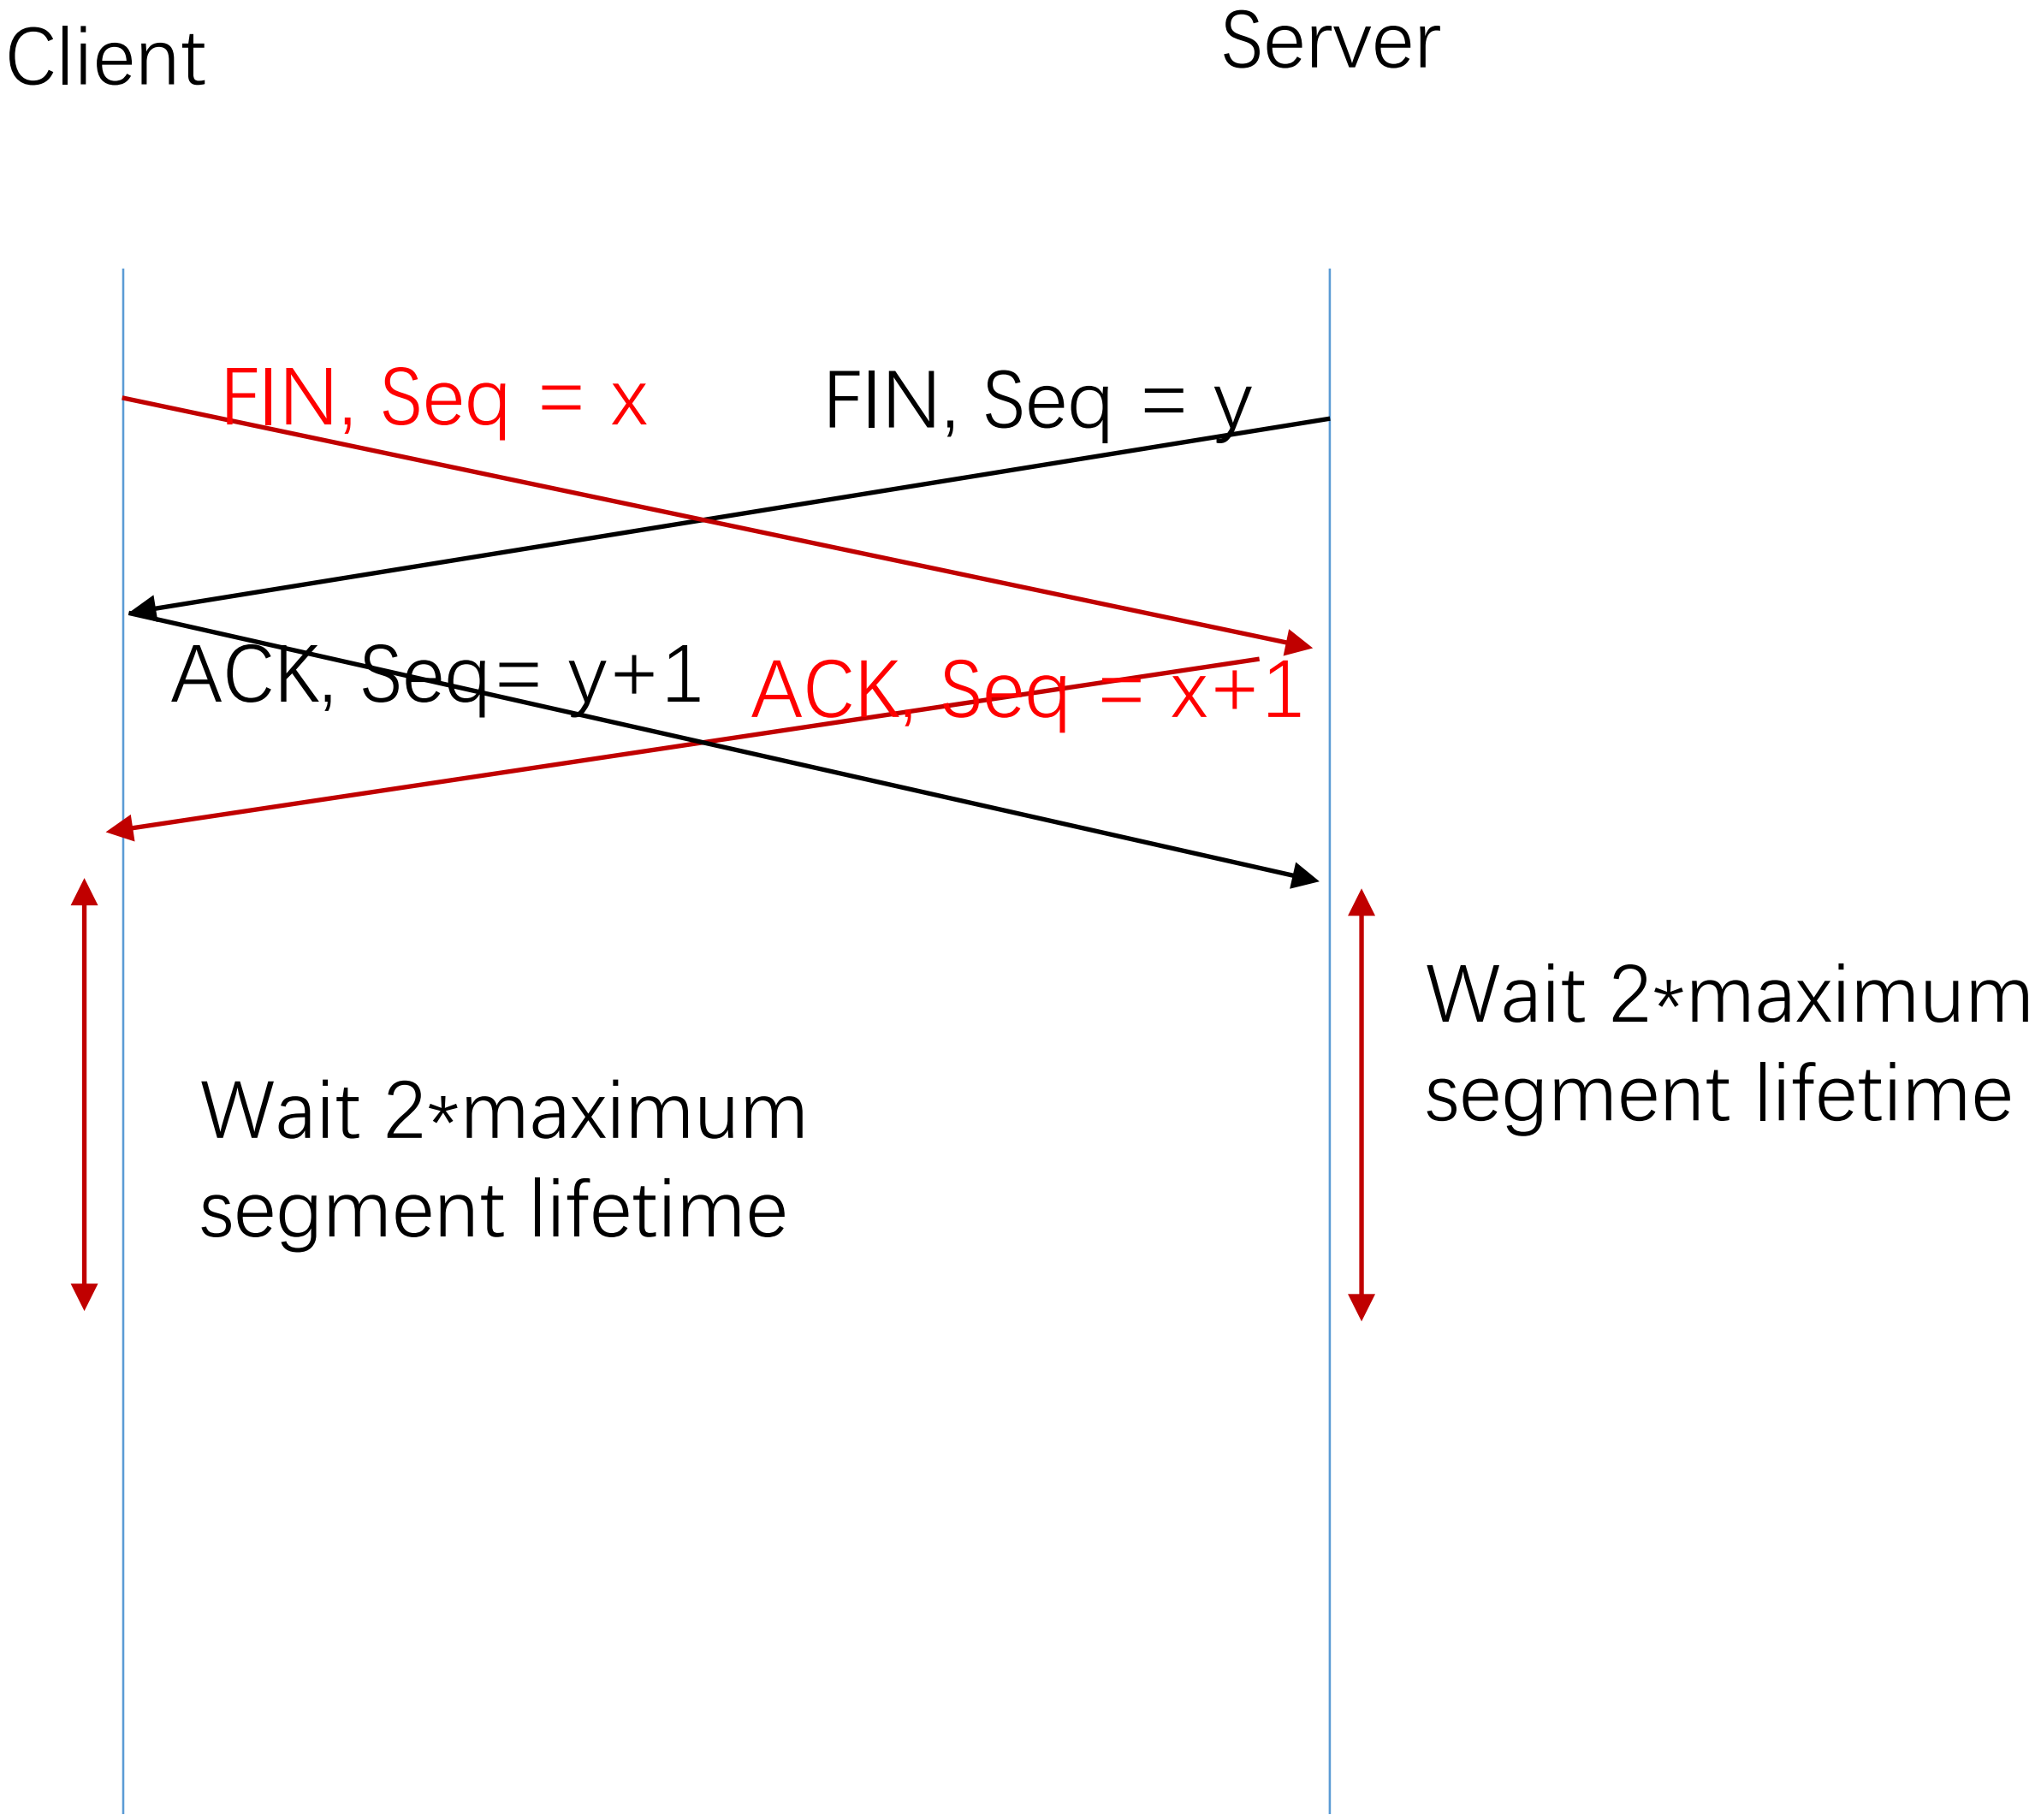

Connection Termination

- Case 4:

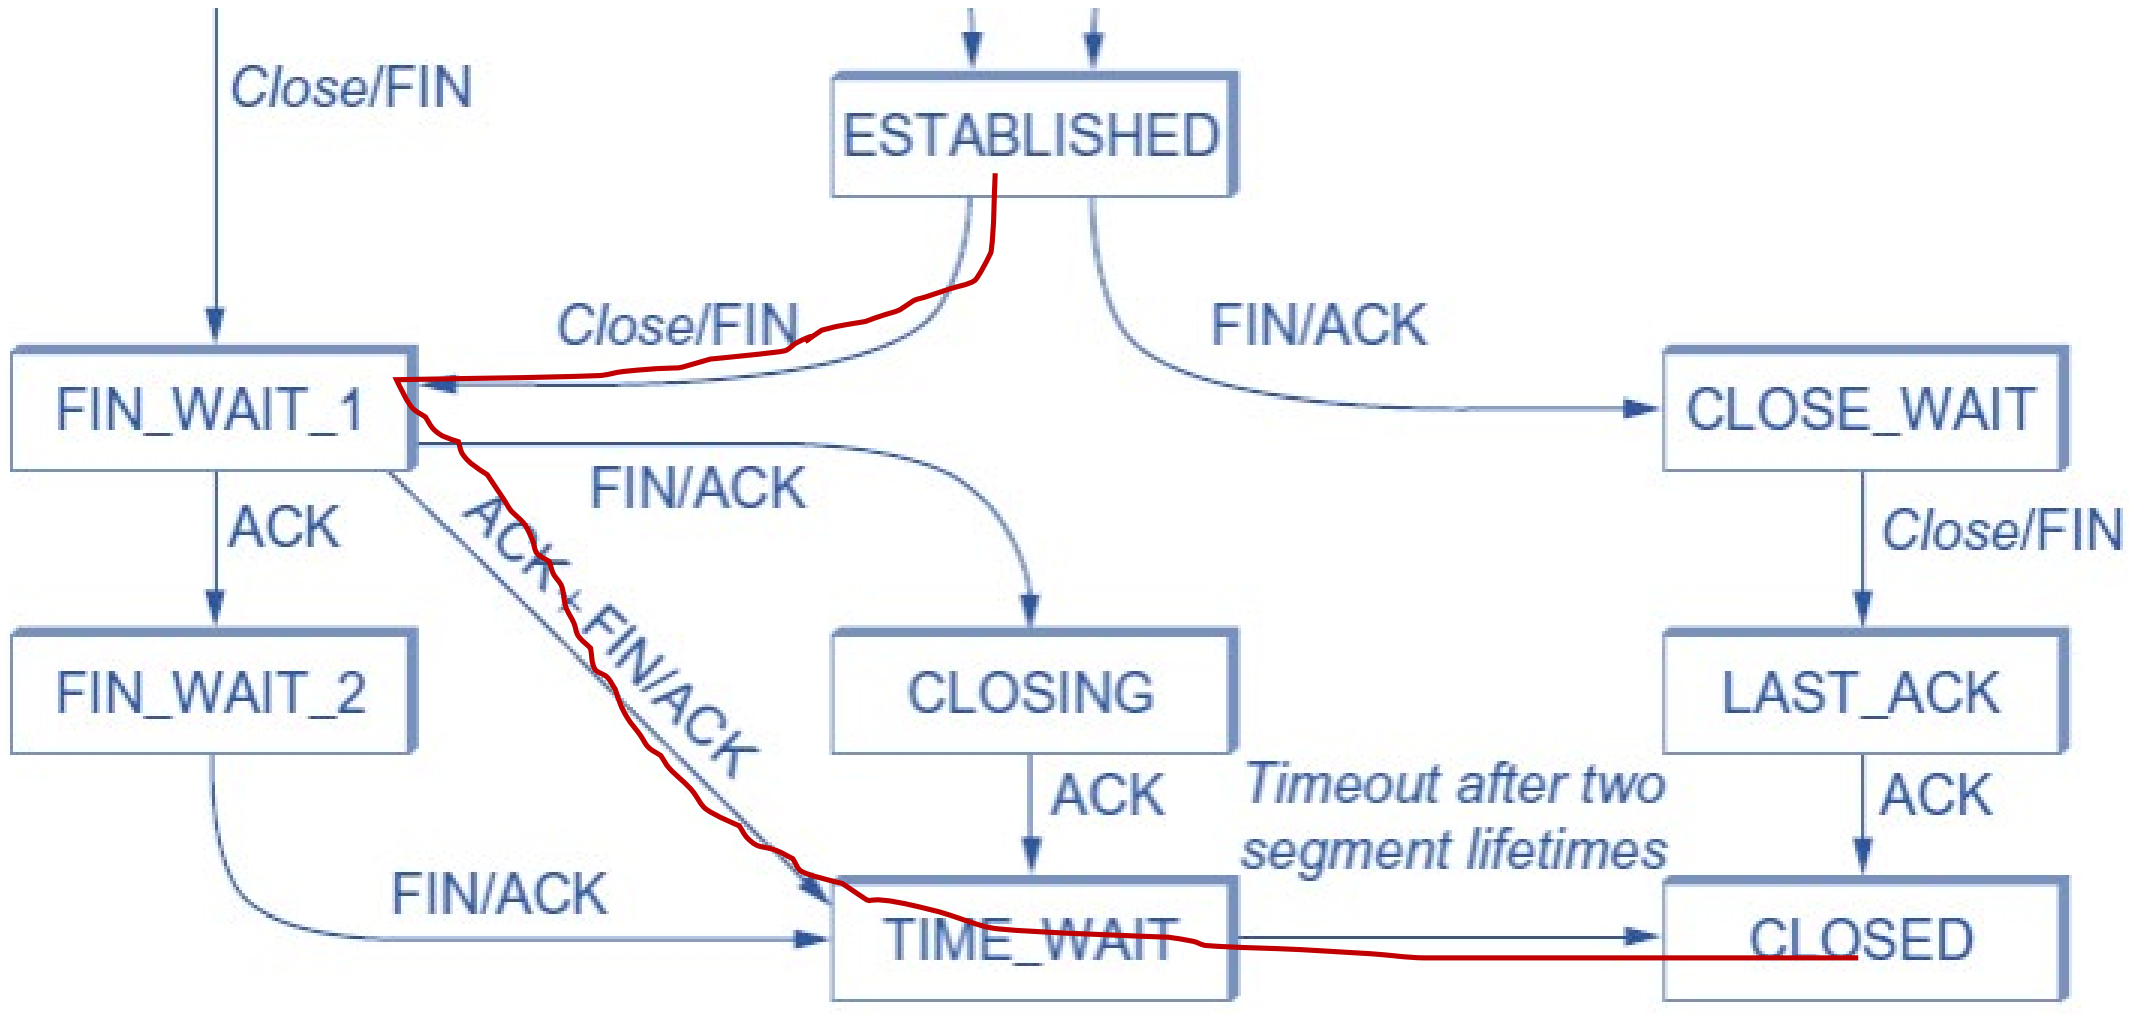

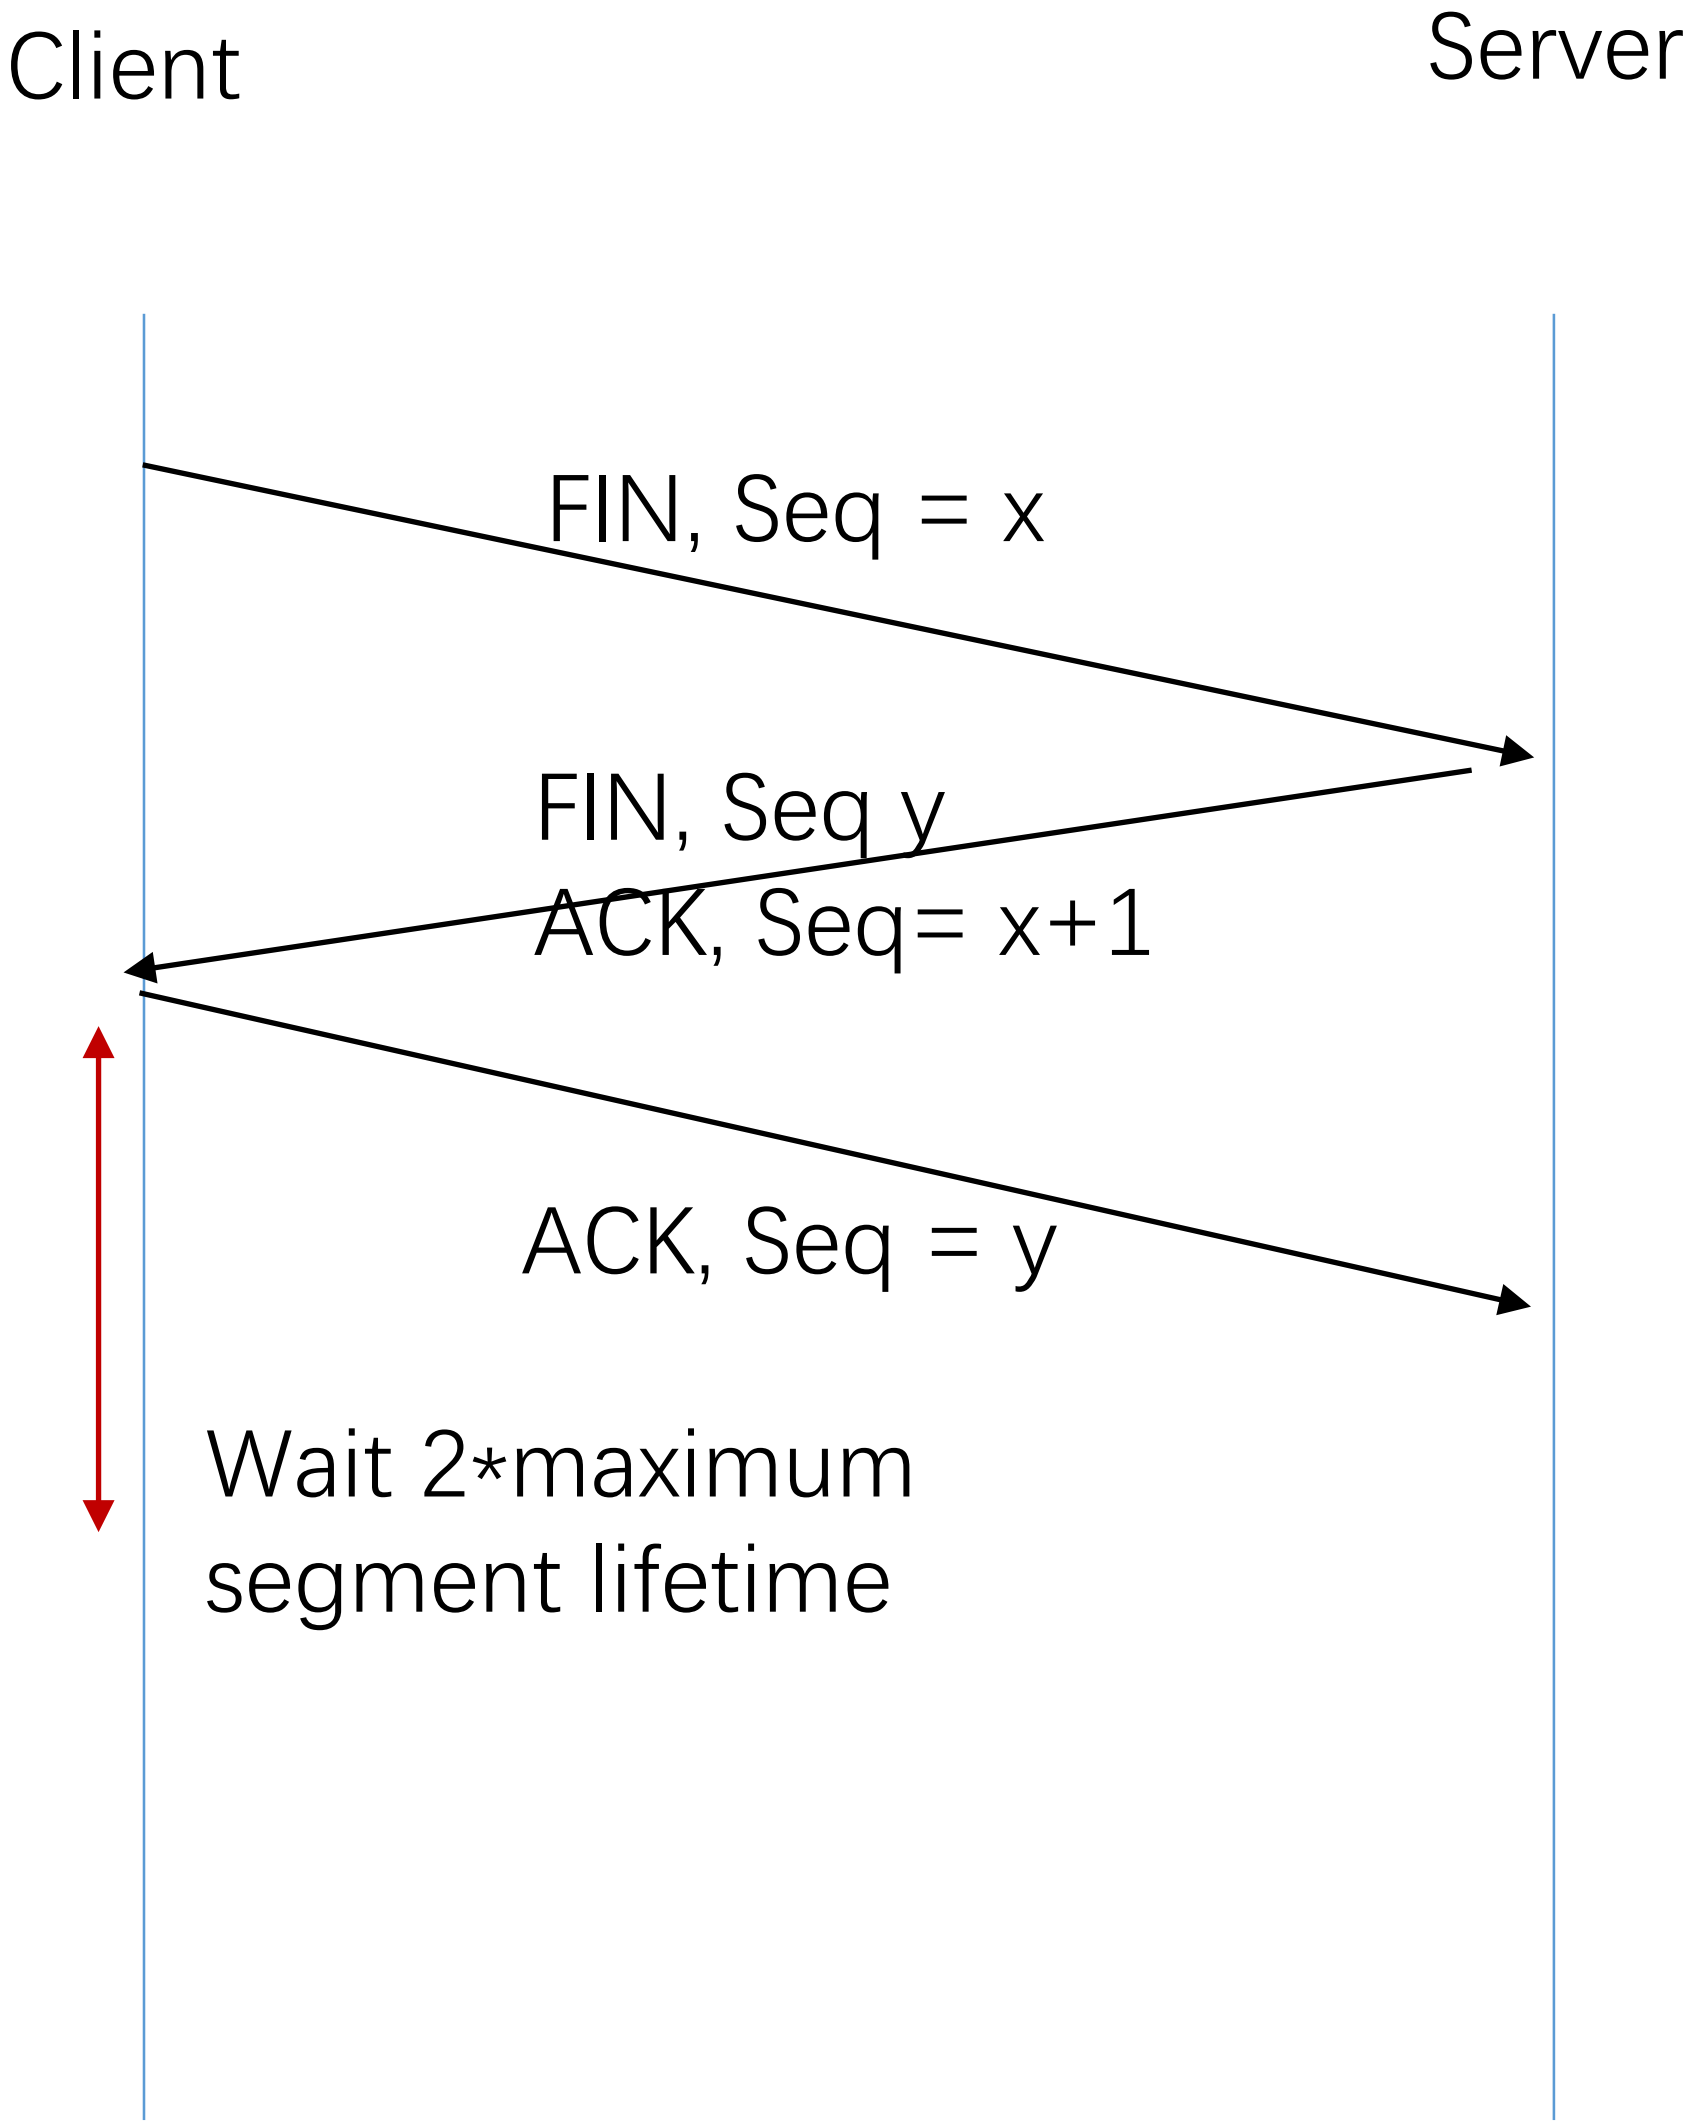

TCP State-transition Diagram

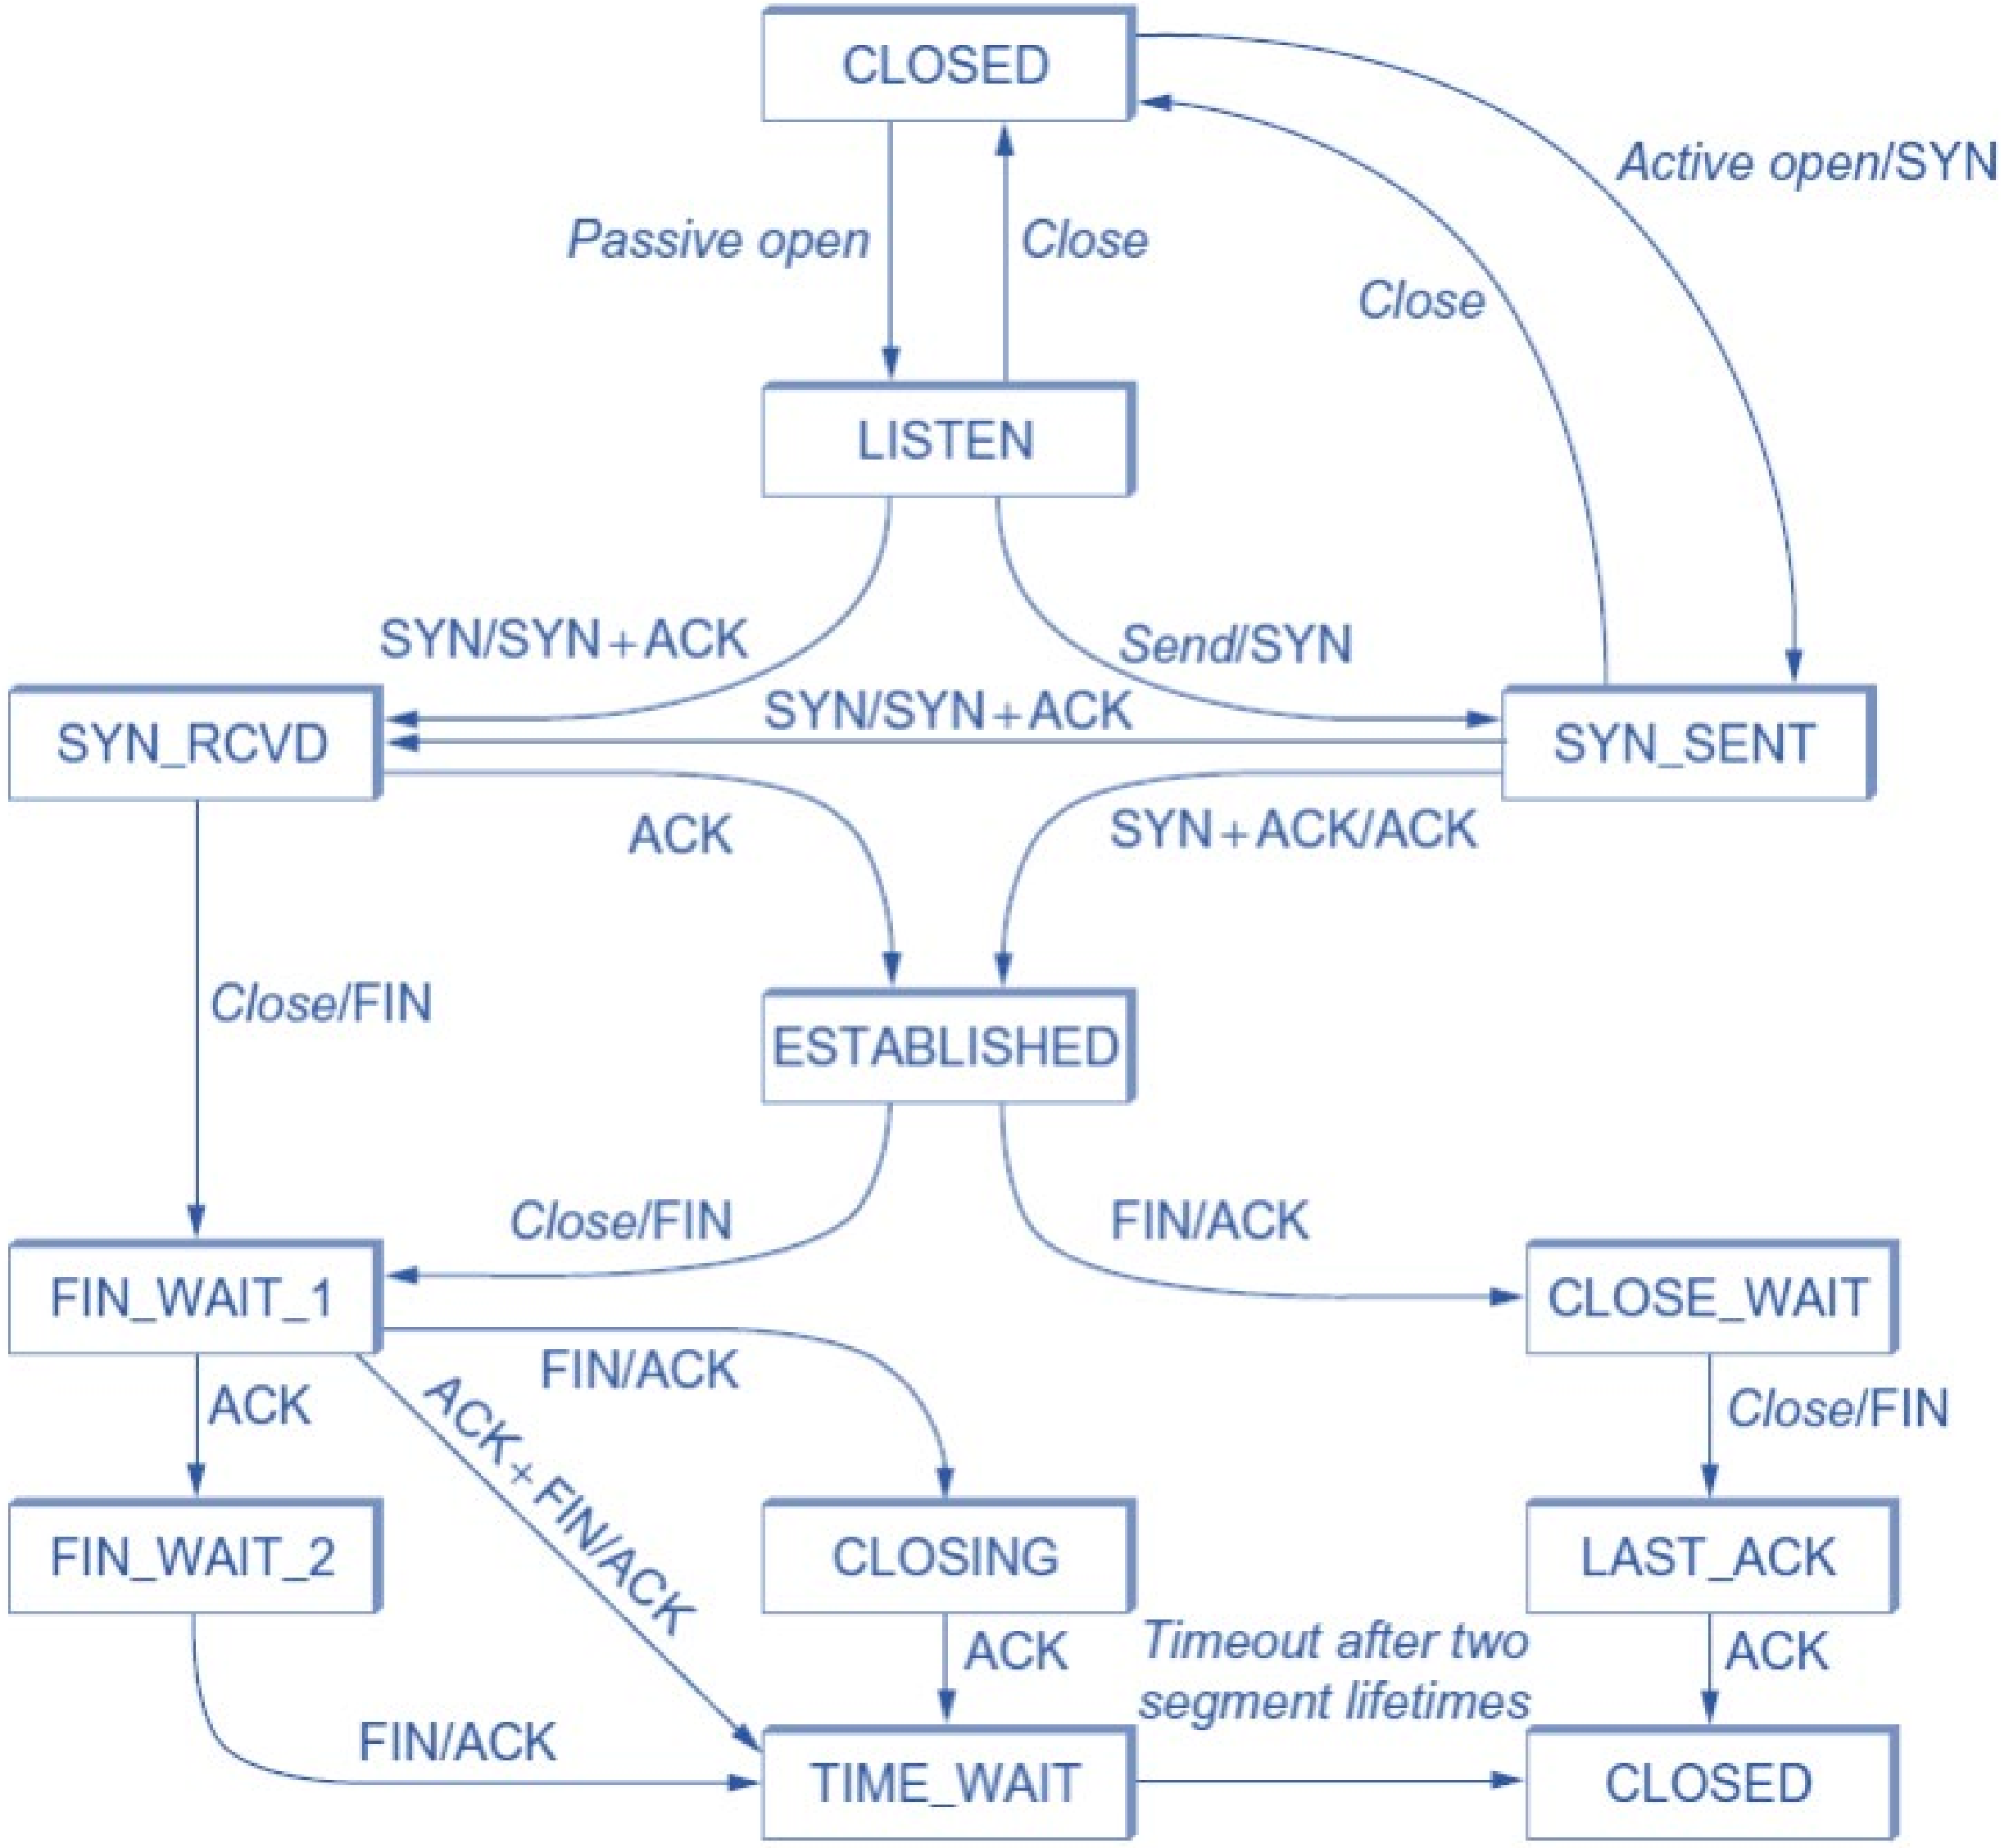

Why Random Seq Number

Reference

- Textbook 5.1 5.2