Wall Mount Computer Station
WMCS

How can we improve our assembly instructions?
Your comments and suggestions are important to us.
Please e-mail us at: support@versatables.com.

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061

LIFETIME WARRANTY
Lifetime Warranty

Quantity Discounts
Quantity Discounts

Buy American Act Compliant
Assembled in USA

Fast Shipping

Support:
Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

Wall Mount Computer Station

50mm Furniture Bolt Qty:4	**8mm Phillips Machine Screw** Qty:4	**1/4 - 20 Phillips Head Bolt** Qty:4
LCD Holder Qty:1	**4mm & 8mm Allen Wrench** Qty:1	**Upright Pole** Qty:1
Zip Tie & Curly Tie Qty:5		
Keyboard Platform Qty:1	**Keyboard Bracket** Qty:1	**Upright Pole Bracket** Qty:2
Toggler Qty:6		
10 -32 Carriage Bolt Qty:4	**3/8 - 16 x 1" Socket Head Bolt** Qty:4	**L Panels** Qty:2
Clamp Bushing Qty:4		
12 SS Washer Qty:4	**10/32 Thumb Nut** Qty:4	**CPU Holder Mount Bracket** Qty:2
Clamp Qty:2	**1" 7/8 Velcro Pads 2 Velcro Loops 2Velcro Hooks** Qty:4	

Additional Tools Required

Drill & 1/2" Drill Bit	**Phillips Screw Driver**

LIFETIME WARRANTY — Lifetime Warranty

QUANTITY Discounts — Quantity Discounts

Buy American Act Compliant — Assembled in USA

Fast Shipping

Step 1 — Install Tithogglers

Toggler

Qty:3

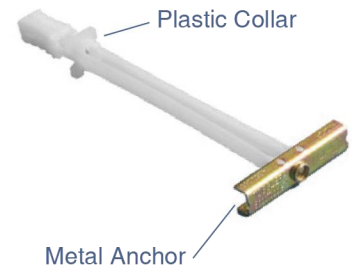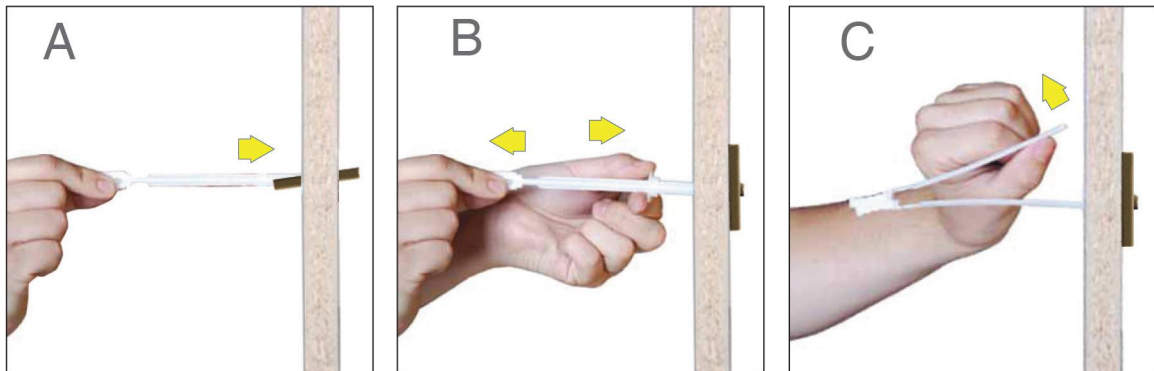Drill &1/2" Bit

A: Drill a 1/2" hole. Slide Metal Anchor of Toggler through hole. Minimum clearance behind wall is 1-7/8".

B: Pull end of Toggler until Metal Anchor is flush against inside of wall. Push Plastic Collar into wall to lock in place.

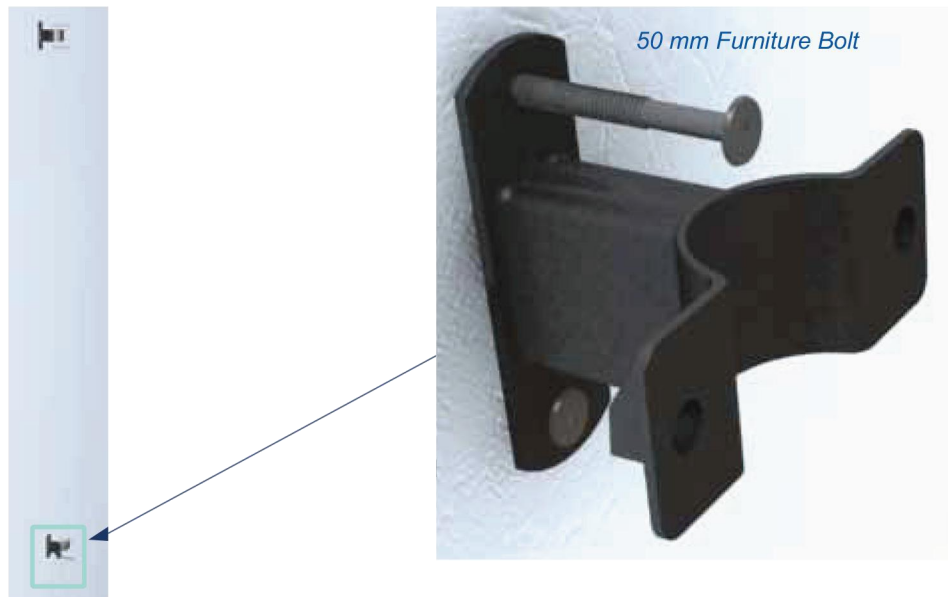C: Snap exposed material off, flush with Plastic Collar.

Plastic Collar

Metal Anchor

NOTE: Extra Toggle Bolts are provided

A

B

C

Step 2 — Upright Pole Brackets

Attach Upright Pole Brackets to the wall using (4) four 50mm Furniture Bolts.

50mm Furniture Bolts

Qty:3

50 mm Furniture Bolt

LIFETIME WARRANTY
Lifetime Warranty

Quantity Discounts
Quantity Discounts

Buy American Act Compliant
Assembled in USA

Fast Shipping

Step ③ — Upright Pole

Secure Bottom Pole Holder using (2) 3/8 - 16 x 1" Socket Head Bolts.

3/8 -16 x 1"
Socket Head Bolt

Qty:2

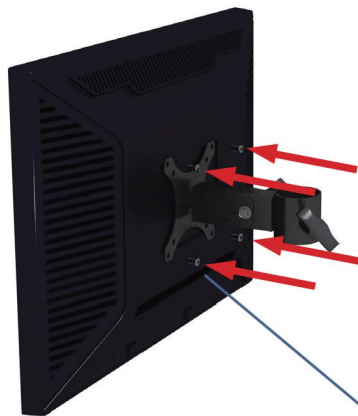3/8 -16 x 1" Socket
Head Bolt

Step ④ — LCD Monitor

Attach LCD Monitor using (4) 8mm Phillips Machine Screws.
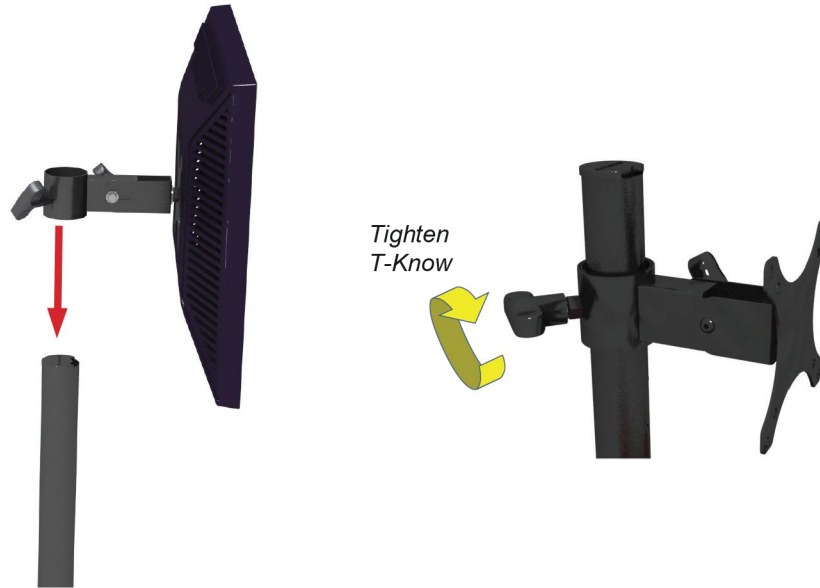
8mm Phillips
Machine Screw

Qty:4

8mm Phillips
Machine Screw

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061

LIFETIME WARRANTY
Lifetime Warranty

Quantity Discounts
Quantity Discounts

Buy American Act Compliant
Assembled in USA

Fast Shipping

Support:
Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

Step 5 ————————————————————————————— LCD Bracket

Slide LCD Bracket.

Tighten T-Know

Step 6 ————————————————————————————— Upright Pole

Secure Top Pole Holder using (2) 3/8 - 16 x 1" Socket Head Bolts.

3/8 -16 x 1"
Socket Head Bolt

Qty:2

3/8 -16 x 1" Socket
Head Bolt

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061

LIFETIME WARRANTY
Lifetime Warranty

Quantity Discounts
Quantity Discounts

Buy American Act Compliant
Assembled in USA

Fast Shipping

Support:
Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

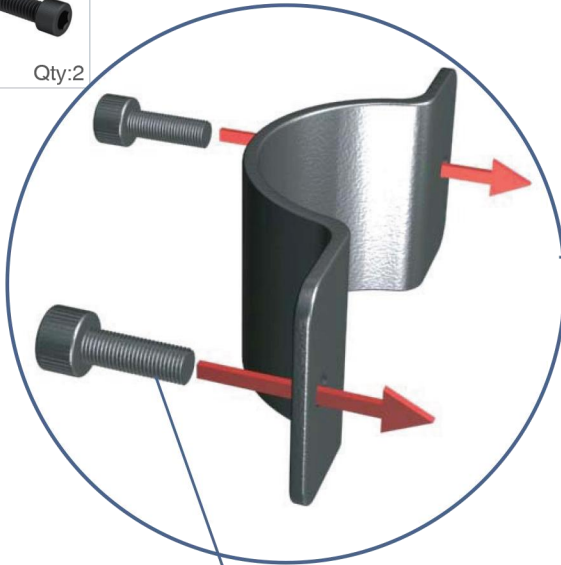## Step 7   Keyboard Bracket

Attach Keyboard Bracket to Pole at the desired height/side using (1) Clamp Bracket and (2) 3/8-16 x 1" Socket Head Bolts.

3/8 -16 x 1"
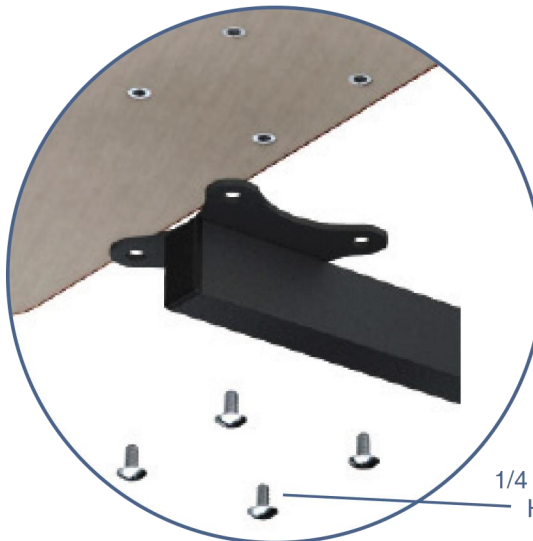Socket Head Bolt

Qty:2

3/8 -16 x 1" Socket
Head Bolt

Step 8   Keyboard Platform

Attach the Keyboard Platform to Keyboard Bracket using (4) 1/4-20 Phillips Head Bolts.

1/4-20 Phillips
Head Bolt

Qty:

1/4 - 20 Phillips
Head Bolt

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061

LIFETIME WARRANTY
Lifetime Warranty

Quantity Discounts
Quantity Discounts

Buy American Act · Compliant
Assembled in USA

Fast Shipping

Support:
Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

DCPU Holder Configurations

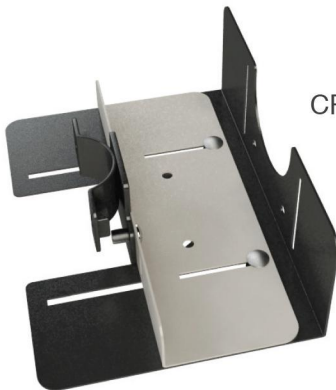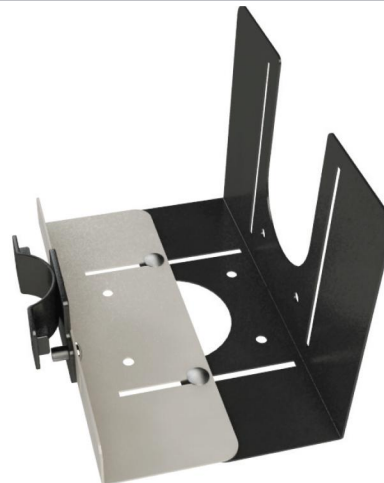There are three possible configurations.
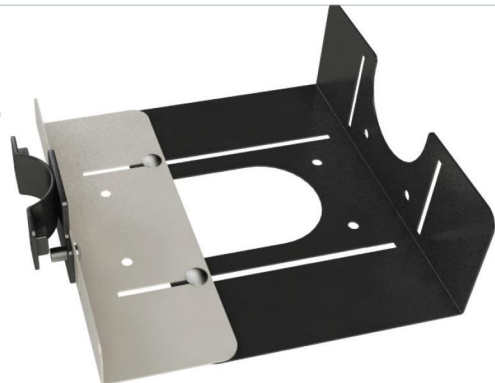NOTE: L pieces are shown in two colors to help you differenciate their placement.

Short Side Setup:
CPU width is 1.3" to 4"

Long Side Setup:
CPU width is 4" to 6"
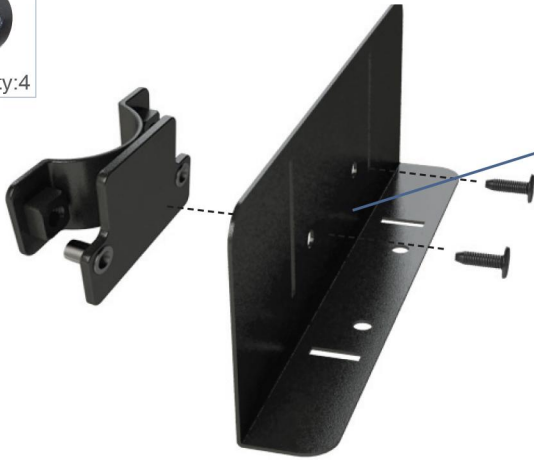

Longest Side Setup:
CPU width is 6" to 11.250"

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061

LIFETIME WARRANTY — Lifetime Warranty

Quantity Discounts — Quantity Discounts

Buy American Act · Compliant — Assembled in USA

Fast Shipping

Support:
Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

Step 9 — Attach CPU Bracket to the required L Panel.
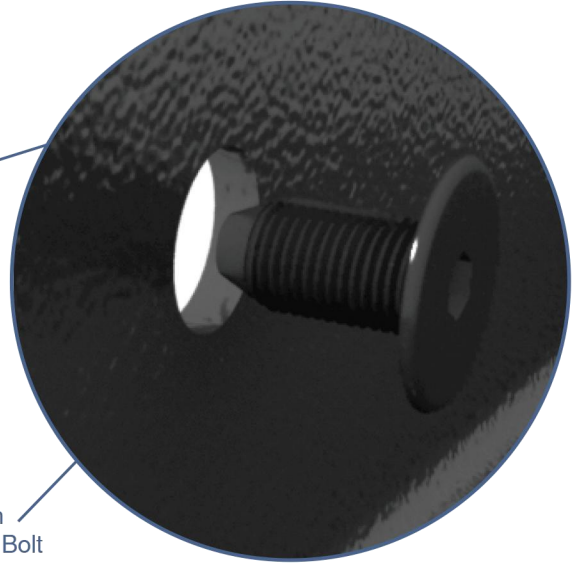
Use (4) 20mm Furniture Bolts

20mm Furniture Bolt

Qty:4

20mm Furniture Bolt

Step 10 — Secure Second L Panel.

Use (4)10-32 x 3/8 Carrige Bolts, (4) 10/32 Thumb Nuts and (4) 12 SS Washers.
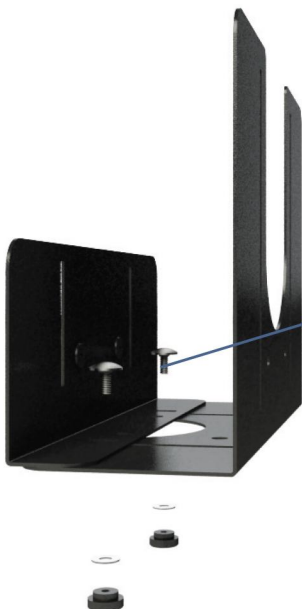
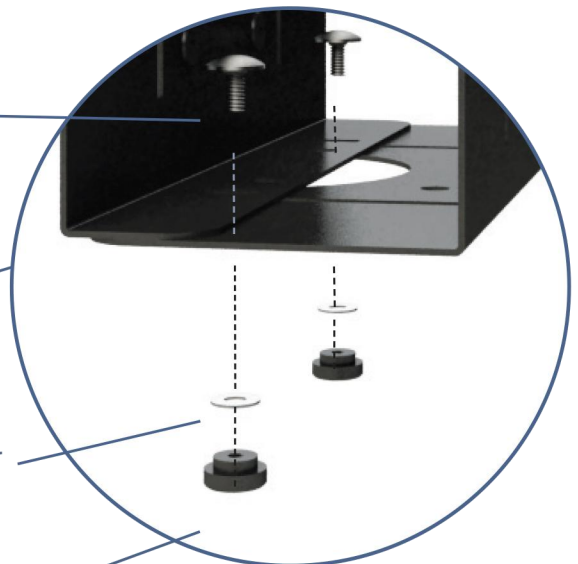10/32 x 3/8 Carriage Bolt

Qty:4

10/32 Thumb Nut

Qty:4

12 SS Washer

Qty:4

10/32 x 3/8 Carriage Bolt

12SS Washer

10/32 Thumb Nut

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061

LIFETIME WARRANTY
Lifetime Warranty

QUANTITY Discounts
Quantity Discounts

Buy American Act Compliant
Assembled in USA

Fast Shipping

Support:
Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

Step **11** ───────────────── Attach CPU Holder At the desired Height.

Use (4) Clamps and (4) 3/8-16 x 1" Socke Head Bolts.

Clamp

Qty:4

**3/8 -16 x 1"
Socket Head Bolt**
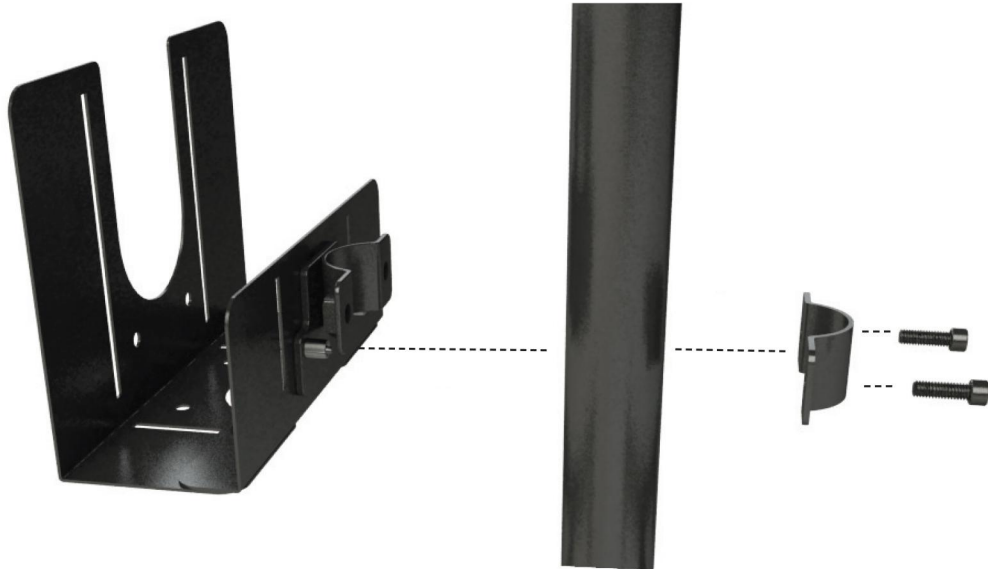
Qty:4

Step **12** ───────────────── Attach Velcro Pads to both your CPU and CPU Holder.

Once in place, adjust Holder and tighten
Thumb Nuts to keep CPU secure.

Velcro Pads

Qty:4

Velcro

Velcro

How can we improve our assembly instructions?
Your comments and suggestions are important to us.
Please e-mail us at: support@versatables.com.

LIFETIME WARRANTY — Lifetime Warranty

Quantity Discounts — Quantity Discounts

Buy American Act Compliant — Assembled in USA

Fast Shipping

Support:
Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com