

## Downview Table DVT 36", 48", 60" & 72"


## Assembly Instructions



How can we improve our assembly instructions?  
Your comments and suggestions are important to us.  
Please e-mail us at: [support@versatables.com](mailto:support@versatables.com).

## Downview Table

<p>50mm Furniture Bolt</p>  <p>Qty:4</p>	<p>20mm Furniture Bolt</p>  <p>Qty:20</p>	<p>3/8" Wrench</p>  <p>Qty:1</p>	<p>8mm LCD Flat Screen Mounting Screw</p>  <p>Qty:4 for 36" &amp; 48" Qty:8 for 60" &amp; 72"</p>	<p>10/24 x 1/2 Carriage Bolt</p>  <p>Qty:4 for 36" &amp; 48" Qty:8 for 60" &amp; 72"</p>
<p>Caster &amp; Caster with Lock</p>  <p><b>OPTIONAL</b> Qty:2</p>	<p>4mm Allen Wrench</p>  <p>Qty:1</p>	<p>Leveler / Glider</p>  <p>Qty:4</p>	<p>Zip Tie &amp; Curly Tie</p>  <p>Qty:5</p>	
<p>10/24 Lock Nuts 10 Nylon Washer</p>  <p>Qty:4 for 36" &amp; 48" Qty:8 for 60" &amp; 72"</p>	<p>1" 7/8 Velcro Pads 2 Velcro Loops 2 Velcro Hooks</p>  <p>Qty:4</p>	<p>Glass</p>  <p>Qty:1 for 36" &amp; 48" Qty:2 for 60" &amp; 72"</p>	<p>Top Shelf Platform 36", 48", 60" or 72" Wide</p>  <p>Qty:1</p>	
<p>Side Frame (L &amp; R)</p>  <p>Qty:2</p>	<p>Cross Support</p>  <p>Qty:1</p>	<p>Cable Management Tray</p>  <p>Qty:1</p>	<p>Kick Panel</p>  <p>Qty:1</p>	
	<p>Pivot Arm</p>  <p>Qty:1 for 36" &amp; 48" Qty:2 for 60" &amp; 72"</p>		<p>Kick Panel Extension L &amp; R</p>  <p>Qty:2</p>	<p>Keyboard Tray</p>  <p>Qty:1 for 36" &amp; 48" Qty:2 for 60" &amp; 72"</p>
<p>Cable Management Clip</p>  <p>Qty:3 for 36" &amp; 48" Qty:6 for 60" &amp; 72"</p>	<p>VGA Extender</p>  <p>Qty:1 for 36" &amp; 48" Qty:2 for 60" &amp; 72"</p>	<p>USB Extender</p>  <p>Qty:2 for 36" &amp; 48" Qty:4 for 60" &amp; 72"</p>	<p>LCD Holder</p>  <p>Qty:1 for 36" &amp; 48" Qty:2 for 60" &amp; 72"</p>	<p>ECPU Holder</p>  <p>Qty:1 for 36" &amp; 48" Qty:2 for 60" &amp; 72"</p>

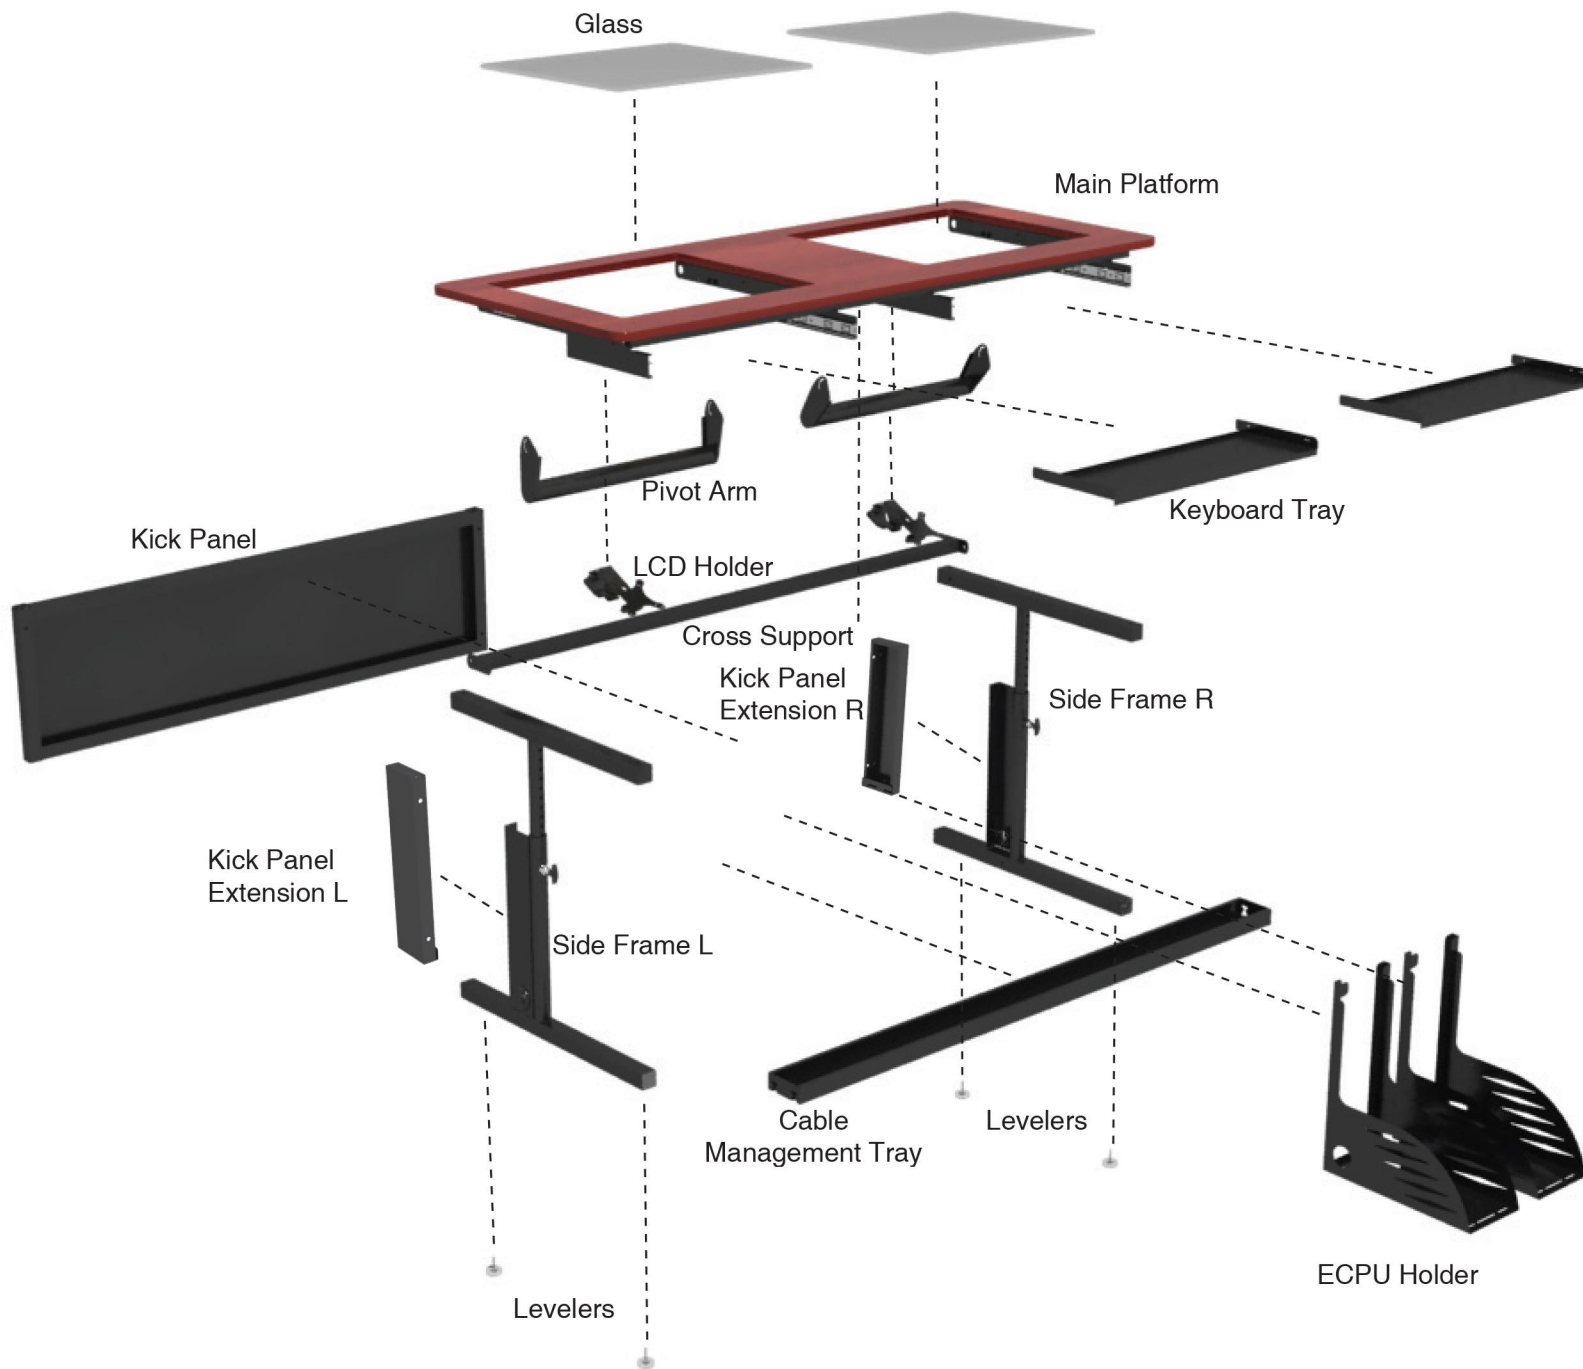

### Step 1


#### Insert Levelers

Insert Levelers into Side Frames.

Leveling Glide



Qty:4

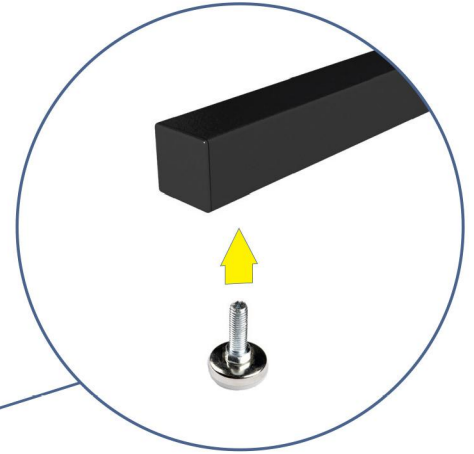

### Step 2



#### Kick Panel Extensions

Attach Left and Right Kick Panel Extensions using (2) 20mm Furniture Bolts on each .

20mm  
Furniture Bolt



Qty:4

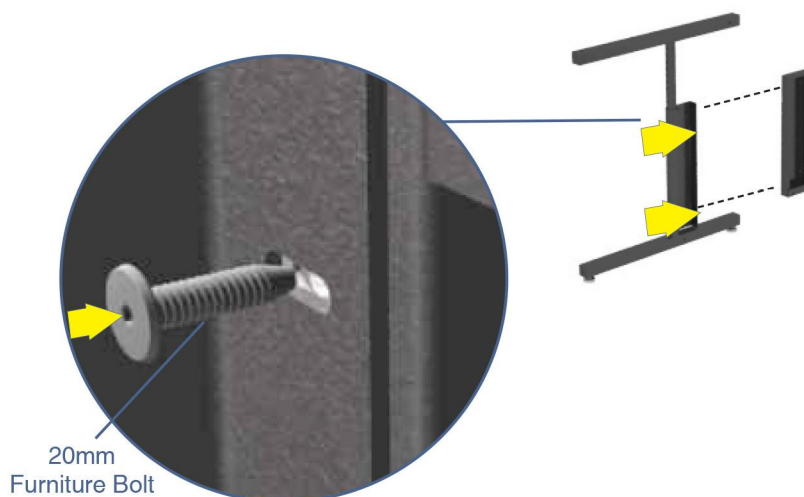



### Step 3


### Attach Cable Management Tray

20mm  
Furniture Bolt



Qty:4

Attach Cable Management Tray to Kick Panel Extensions using (2) 20mm Furniture Bolts on each side. Insert Bolts half way through the Kick Panel Extensions then drop the Cable Management Tray.

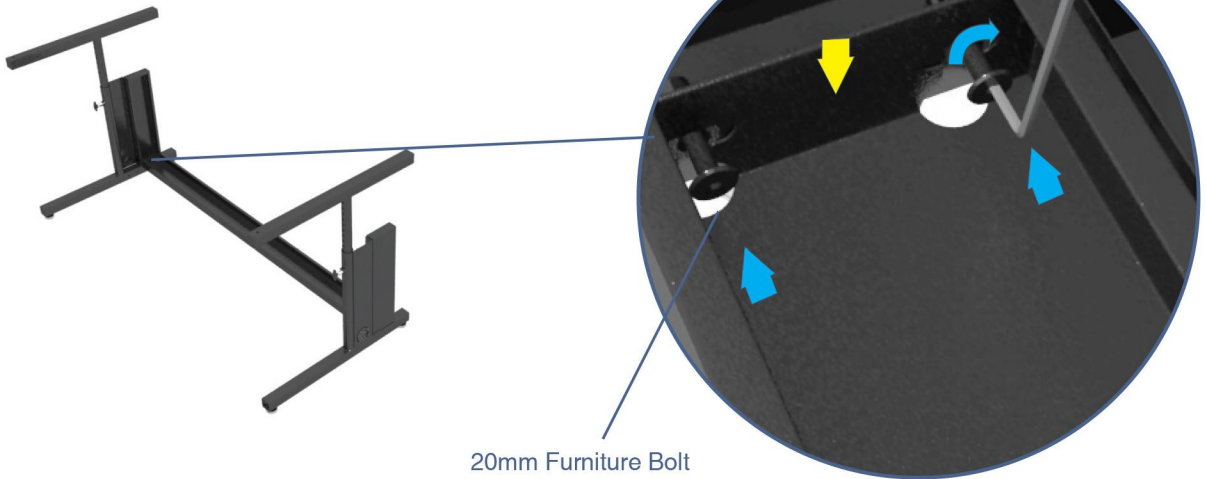

### Step 4


### Attach Kick Panel

20mm Furniture  
Bolt



Qty:4

Attach Kick Panel down to Side Frames using (4) 20mm Furniture Bolts.

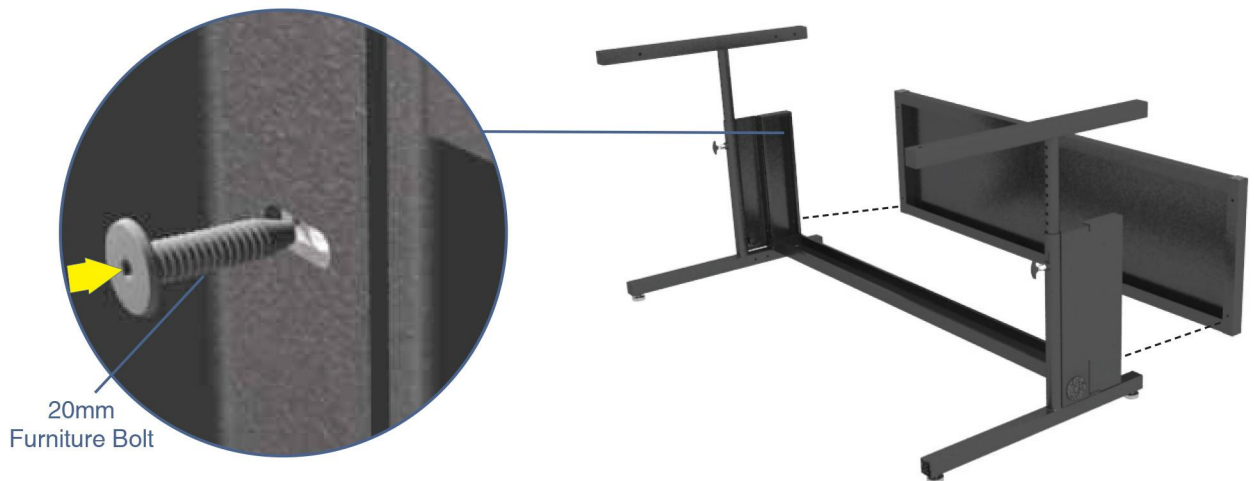

### Step 5


### Attach Cross Support

Attach Cross Support to Frames using (2) 20mm Furniture Bolts on each side.


20mm  
Furniture Bolt



Qty:4

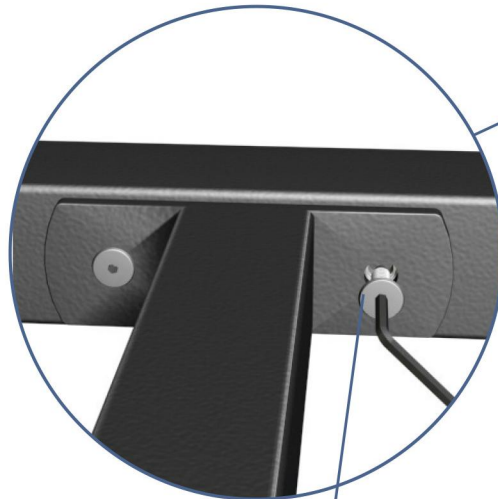

20mm  
Furniture Bolt

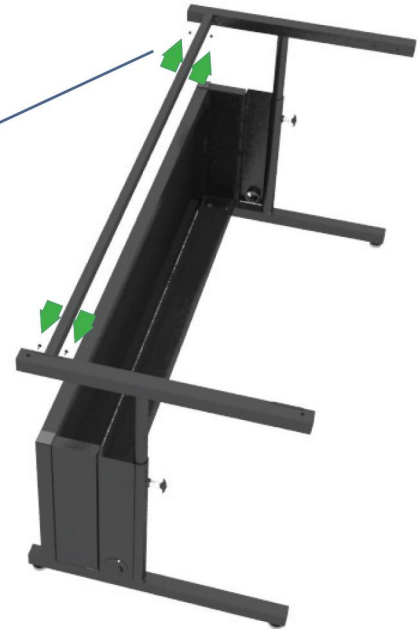

### Step 6

### Attach Pivot Arm

Attach Pivot Arm using (8) 10/24 x 1/2 Carriage Bolts, (8) 10/24 Lock Nuts and (8) 10 Nylon Washers. Do not fully tighten until monitor is installed and placed in desired location.

10/24 x 1/2  
Carriage Bolt



Qty:4 for 36" & 48"  
Qty:8 for 60" & 72"

10/24  
Lock Nut




Qty:4 for 36" & 48"  
Qty:8 for 60" & 72"

10  
Nylon Washer




Qty:4 for 36" & 48"  
Qty:8 for 60" & 72"

10/24 x 1/2  
Carriage Bolt

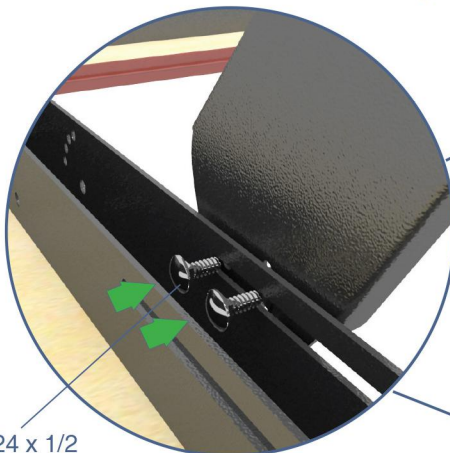


10  
Nylon Washer

10/24  
Lock Nut

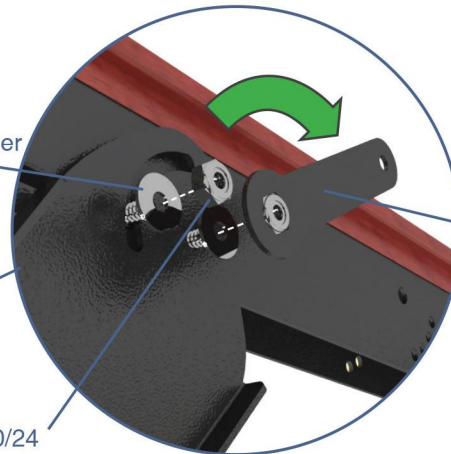

Wrench

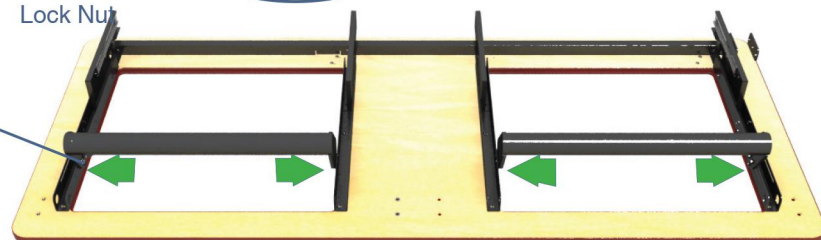

### Step 7

### Attach LCD Holder

Attach LCD Holder using (4) 3/8 - 16 x 1" Socket Head Bolt, (2) Clamps and (4) T Knobs on each LCD holder.

T Knob



Qty:2

3/8-1/6 x 1"

Socket Head Bolt





Qty:2

3/8 - 1/6 1"

Socket Head Bolt

T-Knob

LCD HOLDER

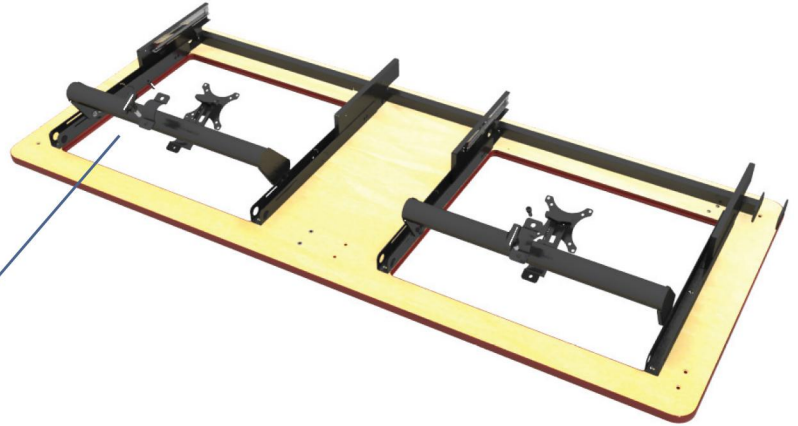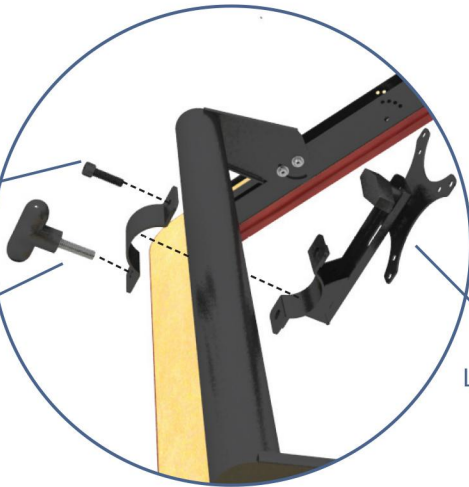

### Step 8

### Flip over Main Surface

Flip over Main Surface and place it on the Frame.





### Step 9

### Attach Cross Beam and Main Platform

Attach Cross Beam to Frame using (2) 20mm Furniture Bolts on each side. Attach Main Platform to Frame using (2) 50mm Furniture Bolts on each side.

50mm Furniture Bolts




Qty:4


20mm Furniture Bolt




Qty:4



20mm Furniture Bolt



50mm Furniture Bolt

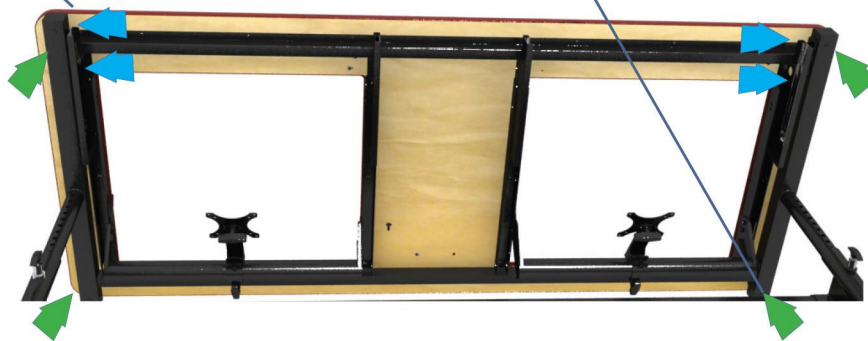

### Step 10

### Slide in Keyboard Trays

Slide in Keyboard Trays.





### Step 11


### Attach LCD Monitor

8mm Phillips  
Machine Screw





Qty: 4


Attach Monitor using (4) 8mm Phillips Machine Screws on each LCD monitor.

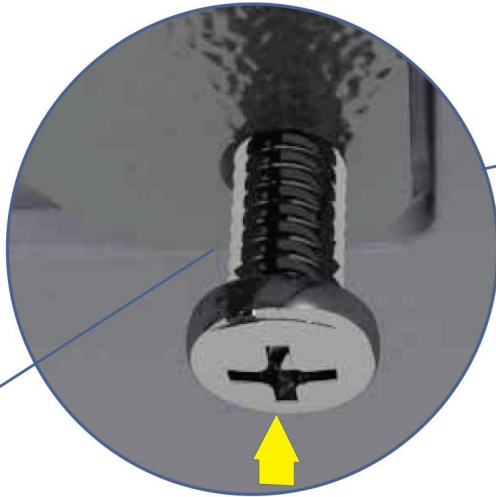

8mm Phillips  
Machine Screw

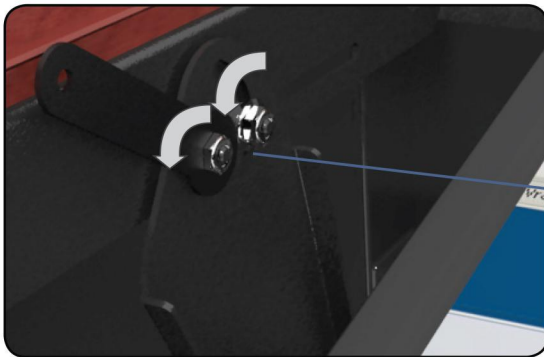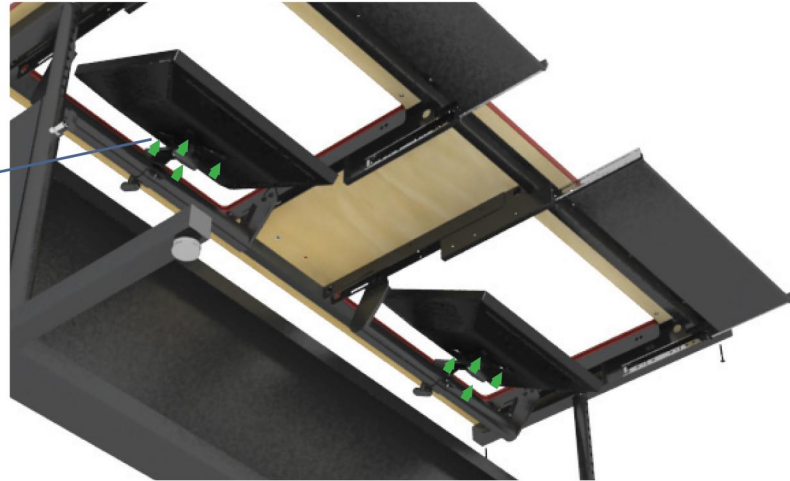

Loose 10/24 Lock Nuts to adjust the desired monitor angle. Then tighten back once the monitor position is set.

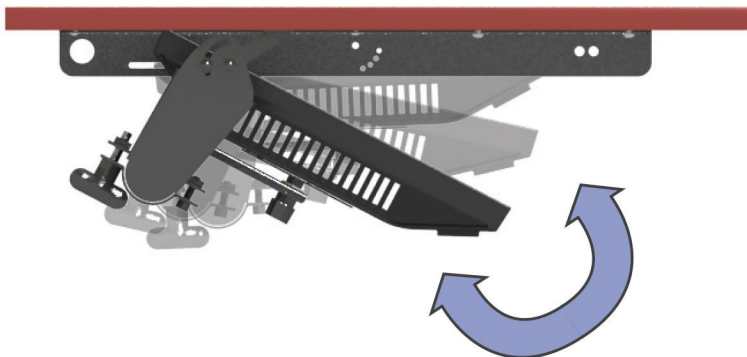


### Step 12

### Wire Management Clips


Cable  
Management  
Clip



Insert Wire Management Clips to Channels on surface and run cables and extenders through for a cleaner look.

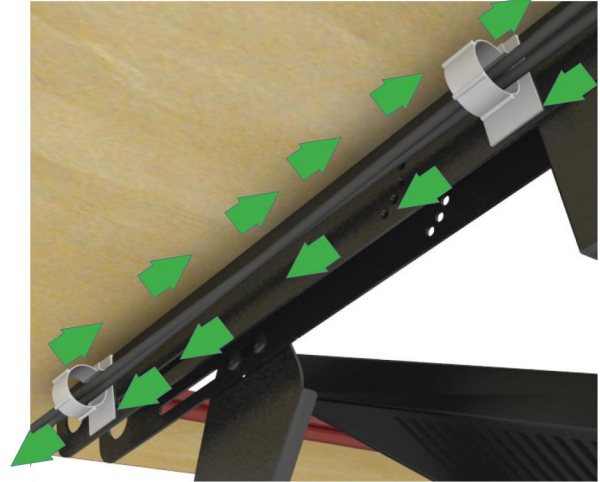

Qty:3 for 36" & 48"  
Qty:6 for 60" & 72"



### Step 13

### Place Glasses

Glass



Place Glasses.



Qty:1 for 36" & 48"  
Qty:2 for 60" & 72"

### Step 14

### ECPU Holder Assembly

Place ECPU Holder. Tack into top channel and lay on Cable Management tray.



How can we improve our assembly instructions?  
Your comments and suggestions are important to us.  
Please e-mail us at: [support@versatables.com](mailto:support@versatables.com).