SIEMENS

Installation Instructions
Model PS-5A
Power Supply

OPERATION

The Model PS-5A from Siemens Industry, Inc., is a power supply that can be used with the MOI-1/7. Input power for the PS-5A is compatible with the MXL Voice system.

INSTALLATION

(Refer to Figure 1 on reverse side)

1. The PS-5A mounts to a System 3 rail assembly. Select the location along the rail that provides the easiest connection of the PS-5A to the MOI-1/7.
2. Cables are supplied with the MOI-1/-7 for connection to the MOI-1/7. Refer to Figure 1 for cable connections.
3. Connect the input power to the PS-5A at TB1-2 and TB1-3 on the module. This is a 24V input obtained from the system power supply. See Figure 1 for the list of acceptable power sources.

For additional information on the MXL/MXLV System, refer to the MXL/MXLV Manual, P/N 315-092036.

ELECTRICAL RATINGS

Input: 18 to 31 VDC, 300mA max
J1: 24V feed through 250mA max
Output: J2 and J3: 5 VDC, 1A max
(Total current on J2 and J3)

Active 5VDC Module Current*	0mA
Active 24VDC Module Current*	10mA
Standby 24VDC Module Current	10mA

*Does not include any current drawn by modules or devices powered by the PS-5A.

Siemens Industry, Inc.
Building Technologies Division
Florham Park, NJ

P/N 315-092367-10

Siemens Building Technologies, Ltd.
Fire Safety & Security Products
2 Kenview Boulevard
Brampton, Ontario
L6T 5E4 Canada

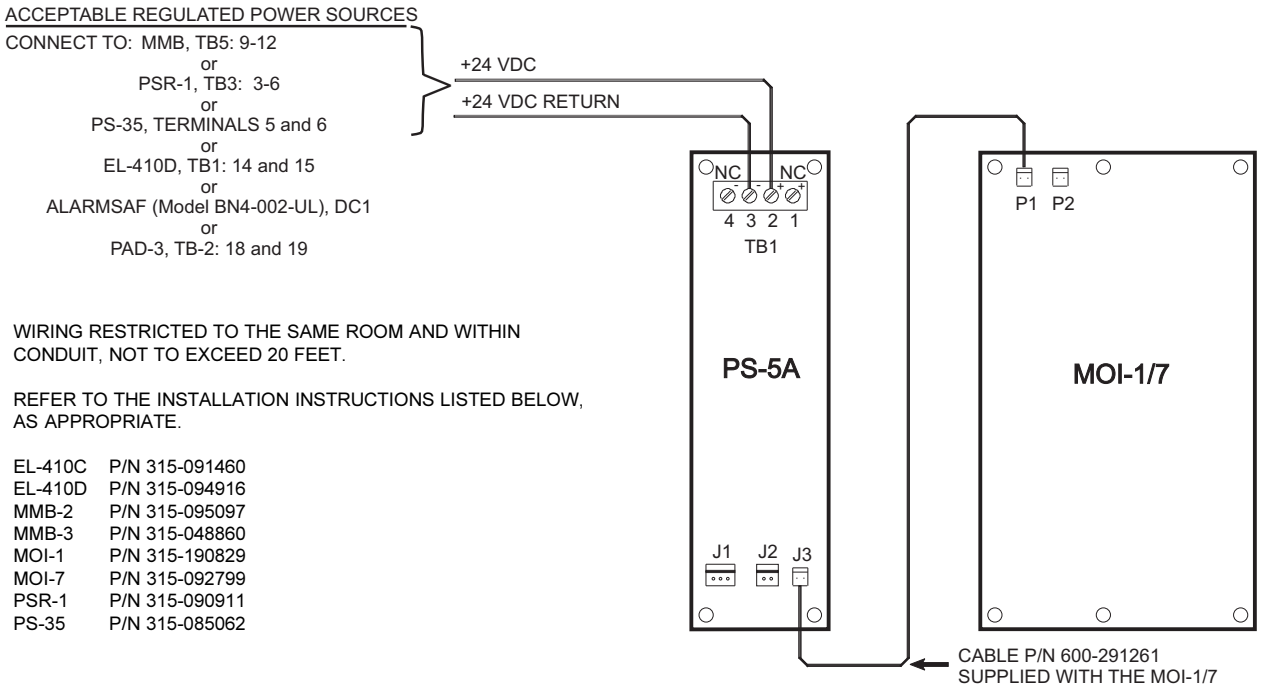

Figure 1
Connecting the PS-5A

Siemens Industry, Inc.
Building Technologies Division
Florham Park, NJ

P/N 315-092367-10

Siemens Building Technologies, Ltd.
Fire Safety & Security Products
2 Kenview Boulevard
Brampton, Ontario
L6T 5E4 Canada