


BP - Access System Retrofit Panel

CCTV | Security System | Elevator Control | Intercom | Multi Site | Mobile Credentials | Facility Automation | Mobile App | On-Premise | Cloud | Video Directory Intercom | QR Code Reader

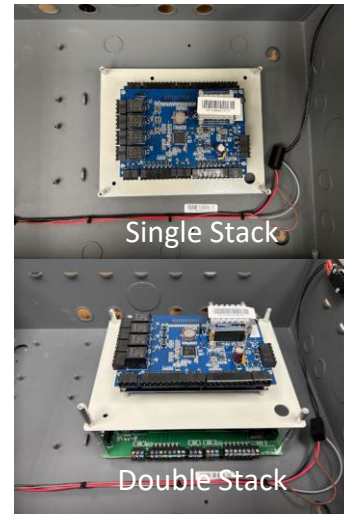

Uniquely designed for retrofit applications. Remove the PCB, leaving can and wiring in place.

Part: BP-2D / BP-4D

Features

- Backplane is pre-configured with mounting holes for the following panels:
 - Linear E3 - S2 (50 / 5000)
 - TruPortal - KT400
- Supports “Single” or “Double” stacking of panels in retrofit housing
- Each module functions as a Server, Expansion panel or Elevator
- e3 version – restoral of database from legacy system to the retrofit system.
- Includes Mobile App and Credentials
- Embedded Linux operating system
- 2 Door
 - 2 / 4 Readers (In/Out)
 - 4 / 8 Relays (Lock/Aux)
 - 6 / 12 Inputs (REX, DPS, Aux) Global
- 4 Door
 - 4 / 8 Readers (In/Out)
 - 4 / 8 Relays (Lock/Aux)
 - 6 / 12 Inputs (REX, DPS, Aux) Global
- 5-Year hardware warranty

Technical Specification

Model	BP-2D / BP-4D
Processor	Quad Core Cortex, 1.2 GHz
Memory	8Gig NAND Non-volatile, USB backup option
Operating System	Embedded Linux
Transactions	> 60 per second
System Power Requirements	12VDC@2.5A 2 Door or 12VDC@5A for 4 Door
Operating Temperature	50°F to 95°F (10°C to 35°C)
Ethernet	10 / 100 Base Auto sense
Standby Power Requirement	400mA @ 12V
Readers (Wiegand & OSDP 2.2 Compliant)	4 / 8 Total, One In & One Out Reader for Each Door
Reader Power	300mA @ 12V Max per Reader
Request to Exit (REX) Inputs	2 / 4 Total, One for Each Door
Door Position (status) Inputs	2 / 4 Total, One for Each Door
Auxiliary Input	2 / 4 Total, General Purpose
Tamper Digital Input	Yes
Power Fault Digital Input	Yes
Door Lock Outputs	2 / 4 Form C Relay, 24V @ 2.0A
Auxiliary Outputs	2 / 4 Form C Relay, 24V @ 2.0A

CCTV | Security System | Elevator Control | Intercom | Multi Site | Mobile Credentials | Facility Automation | Mobile App | On-Premise | Cloud | Video Directory Intercom | QR Code Reader