9.21

(b)

Solution. Using Euler's relation, we can write

$$x(t) = \left(e^{-4t} - \frac{j}{2}e^{-(5-5j)t} + \frac{j}{2}e^{-(5+5j)t}\right)u(t).$$

Then the Laplace transform of $x(t)$ can be expressed as

$$X(s) = \int_{-\infty}^{\infty} e^{-4t}u(t)\,\mathrm{d}t - \frac{j}{2}\int_{-\infty}^{\infty} e^{-(5-5j)t}u(t)\,\mathrm{d}t + \frac{j}{2}\int_{-\infty}^{\infty} e^{-(5+5j)t}u(t)\,\mathrm{d}t.$$

Each of these integrals represents a Laplace transform of the type encountered in Example 9.1. It follows that

$$\begin{aligned} e^{4t}u(t) &\overset{\mathcal{L}}{\longleftrightarrow} \frac{1}{s+4}, && \mathcal{Re}\{s\} > -4, \\ e^{-(5-5j)t}u(t) &\overset{\mathcal{L}}{\longleftrightarrow} \frac{1}{s-5+5j}, && \mathcal{Re}\{s\} > -5, \\ e^{-(5+5j)t}u(t) &\overset{\mathcal{L}}{\longleftrightarrow} \frac{1}{s-5-5j}, && \mathcal{Re}\{s\} > -5. \end{aligned}$$

For all three Laplace transforms to converge simultaneously, we must have $\mathcal{Re}\{s\} > -4$. Consequently, the Laplace transform of $x(t)$ is

$$X(s) = \frac{1}{s+4} - \frac{j}{2(s-5+5j)} + \frac{j}{2(s-5-5j)}, \qquad \mathcal{Re}\{s\} > -4.$$

(i)

Solution.

$$x(t) = \delta(t) + u(t) \overset{\mathcal{L}}{\longleftrightarrow} X(s) = 1 + \frac{1}{s}, \qquad \mathcal{Re}\{s\} > 0.$$

(j)

Solution. Note that $\delta(3t) + u(3t) = \delta(t) + u(t)$. Therefore, the Laplace transform is the same as the result of the previous part.

9.22

(e)

Solution. Let

$$X(s) = \frac{s+1}{s^2+5s+6} = \frac{2}{s+3} - \frac{1}{s+2}.$$

From the given ROC, we know that $x(t)$ must be a two-sided signal. Therefore,

$$x(t) = 2e^{-3t}u(t) + e^{-2t}u(-t), \qquad \mathcal{Re}\{s\} > -2.$$

9.23

The four pole-zero plots shown may have the following possible ROCs:

- Plot 1: $\mathcal{Re}\{s\} < -2$ or $-2 < \mathcal{Re}\{s\} < 2$ or $2 < \mathcal{Re}\{s\}$.
- Plot 2: $\mathcal{Re}\{s\} < -2$ or $-2 < \mathcal{Re}\{s\}$.
- Plot 3: $\mathcal{Re}\{s\} < 2$ or $2 < \mathcal{Re}\{s\}$.
- Plot 4: The entire s-plane.

Let R denote the ROC of the Laplace transform $X(s)$ of the signal $x(t)$.

(1)

Solution. From table 9.1, we know that

$$x(t)e^{-3t} \overset{\mathcal{L}}{\longleftrightarrow} X(s+3).$$

The ROC R_1 of this new Laplace transform is R shifted to the left by 3. Since $x(t)e^{-3t}$ is absolutely integrable, R_1 must contain the $j\omega$ axis.

- For plot 1, this is possible only if R was $2 < \mathcal{Re}\{s\}$.
- For plot 2, this is possible only if R was $-2 < \mathcal{Re}\{s\}$.
- For plot 3, this is possible only if R was $2 < \mathcal{Re}\{s\}$.
- For plot 4, R is the entire s-plane.

9.25

(c)

Solution. Let σ denote the pole of $X(s)$. Then

$$\|X(j\omega)\|^2 = \frac{1}{\omega^2 + \sigma^2},$$

as shown in the figure below.

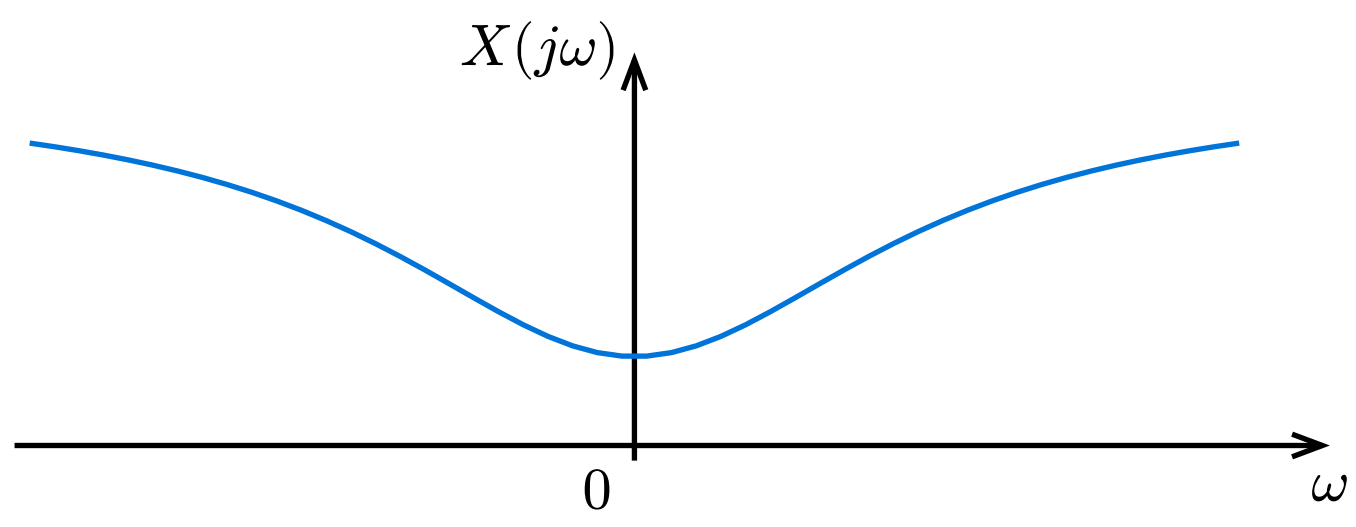

9.26

Solution. From table 9.1, we know that

$$Y(s) = e^{-2s}X_1(s) \cdot e^{-3s}X_2(-s) = \frac{e^{-5s}}{6 + s - s^2}.$$

9.31

Solution.

9.35

9.40