

PROJECT-1

AIM:- Configuration of route redistribution between RIP and OSPF routing protocols using Cisco Packet Tracer.

● **STEPS :**

- **Router1 with RIP**
- **Router2 with OSPF**
- **Router0 as the Redistribution Router** (connecting RIP and OSPF)


1. Assign IP Addresses to Each Device

On PC0 (Connected to Router1)

1. Open **PC0** in Packet Tracer.
2. Go to **Desktop > IP Configuration**.
3. Assign:
 - **IP Address:** 192.168.1.1
 - **Subnet Mask:** 255.255.255.0
 - **Default Gateway:** 192.168.1.2

On PC1 (Connected to Router2)

1. Open **PC1** in Packet Tracer.
2. Go to **Desktop > IP Configuration**.
3. Assign:
 - **IP Address:** 192.168.4.1
 - **Subnet Mask:** 255.255.255.0
 - **Default Gateway:** 192.168.4.2

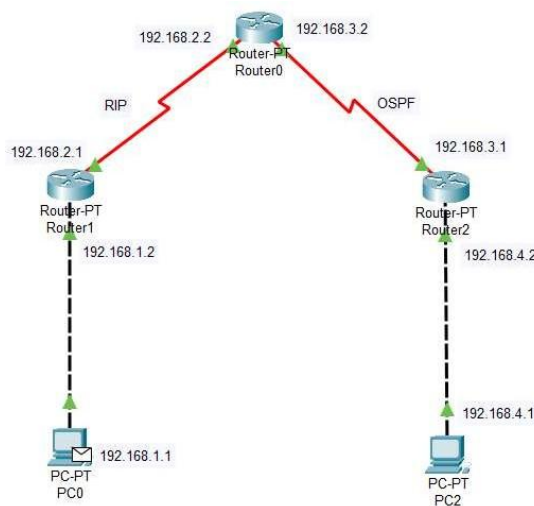

2. Configure Router Interfaces

Each router has multiple interfaces connecting to different networks. Configure them with the correct IP addresses.

On Router1

```
enable
configure terminal
interface FastEthernet0/0
ip address 192.168.1.2 255.255.255.0
no shutdown
exit
interface Serial0/0/0
ip address 192.168.2.1 255.255.255.0
no shutdown
exit
```

On Router0

```
enable
configure terminal
interface Serial0/0/0
ip address 192.168.2.2 255.255.255.0
no shutdown
exit
interface Serial0/0/1
ip address 192.168.3.2 255.255.255.0
no shutdown
exit
```

On Router2

```
enable
configure terminal
interface FastEthernet0/0
ip address 192.168.4.2 255.255.255.0
no shutdown
exit
interface Serial0/0/0
ip address 192.168.3.1 255.255.255.0
no shutdown
exit
```

3. Configure RIP on Router1

Since **Router1** is using **RIP**, enable it and advertise the connected networks.

```
enable
configure terminal
router rip
version 2
network 192.168.1.0
network 192.168.2.0
no auto-summary
exit
```

4. Configure OSPF on Router2

Since **Router2** is using **OSPF**, enable it and advertise the connected networks.

```
enable
configure terminal
router ospf 1
network 192.168.3.0 0.0.0.255 area 0
network 192.168.4.0 0.0.0.255 area 0
exit
```

5. Configure Redistribution on Router0

Since **Router0** connects both RIP and OSPF networks, it will act as the **redistribution router**.

```
enable
configure terminal
router rip
version 2
network 192.168.2.0
no auto-summary
exit

router ospf 1
network 192.168.3.0 0.0.0.255 area 0
exit

router ospf 1
redistribute rip metric 1 subnets
exit

router rip
redistribute ospf 1 metric 1
exit
```

6. Verify Configuration

Check Routing Tables

Run the following commands to confirm routes are learned correctly:

On **Router1**:

```
show ip route rip
```

On **Router2**:

```
show ip route ospf
```

On **Router0**:

```
show ip route
```

You should see both **RIP and OSPF routes** in the table.


Check Neighbor Relationships

On **Router0**, verify OSPF neighbors:

```
show ip ospf neighbor
```

On **Router1**, verify RIP updates:

```
debug ip rip
```

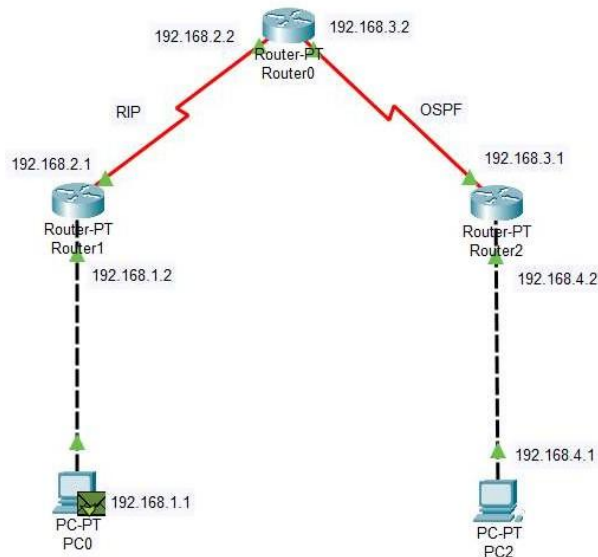

7. Test Connectivity

From **PC0 (192.168.1.1)**:

```
ping 192.168.4.1
```

From **PC1 (192.168.4.1)**:

```
ping 192.168.1.1
```

If both pings succeed, route redistribution is working correctly.

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.4.1

Pinging 192.168.4.1 with 32 bytes of data:

Reply from 192.168.4.1: bytes=32 time=8ms TTL=125
Reply from 192.168.4.1: bytes=32 time=9ms TTL=125
Reply from 192.168.4.1: bytes=32 time=8ms TTL=125
Reply from 192.168.4.1: bytes=32 time=8ms TTL=125

Ping statistics for 192.168.4.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 8ms, Maximum = 9ms, Average = 8ms
```