


39 GREAT JONES — SCREENING ROOM

SHEET 1 of 4 — AV EQUIPMENT PLACEMENT

Speakers · projector · screen · sources · cable runs from rack

Rev: v212 | 2026-05-28
Imperial · Cycles render · 7.2 system
Canton · Rythmik · Denon · Hisense
DRAWN AT MODEL SCALE — verify in field

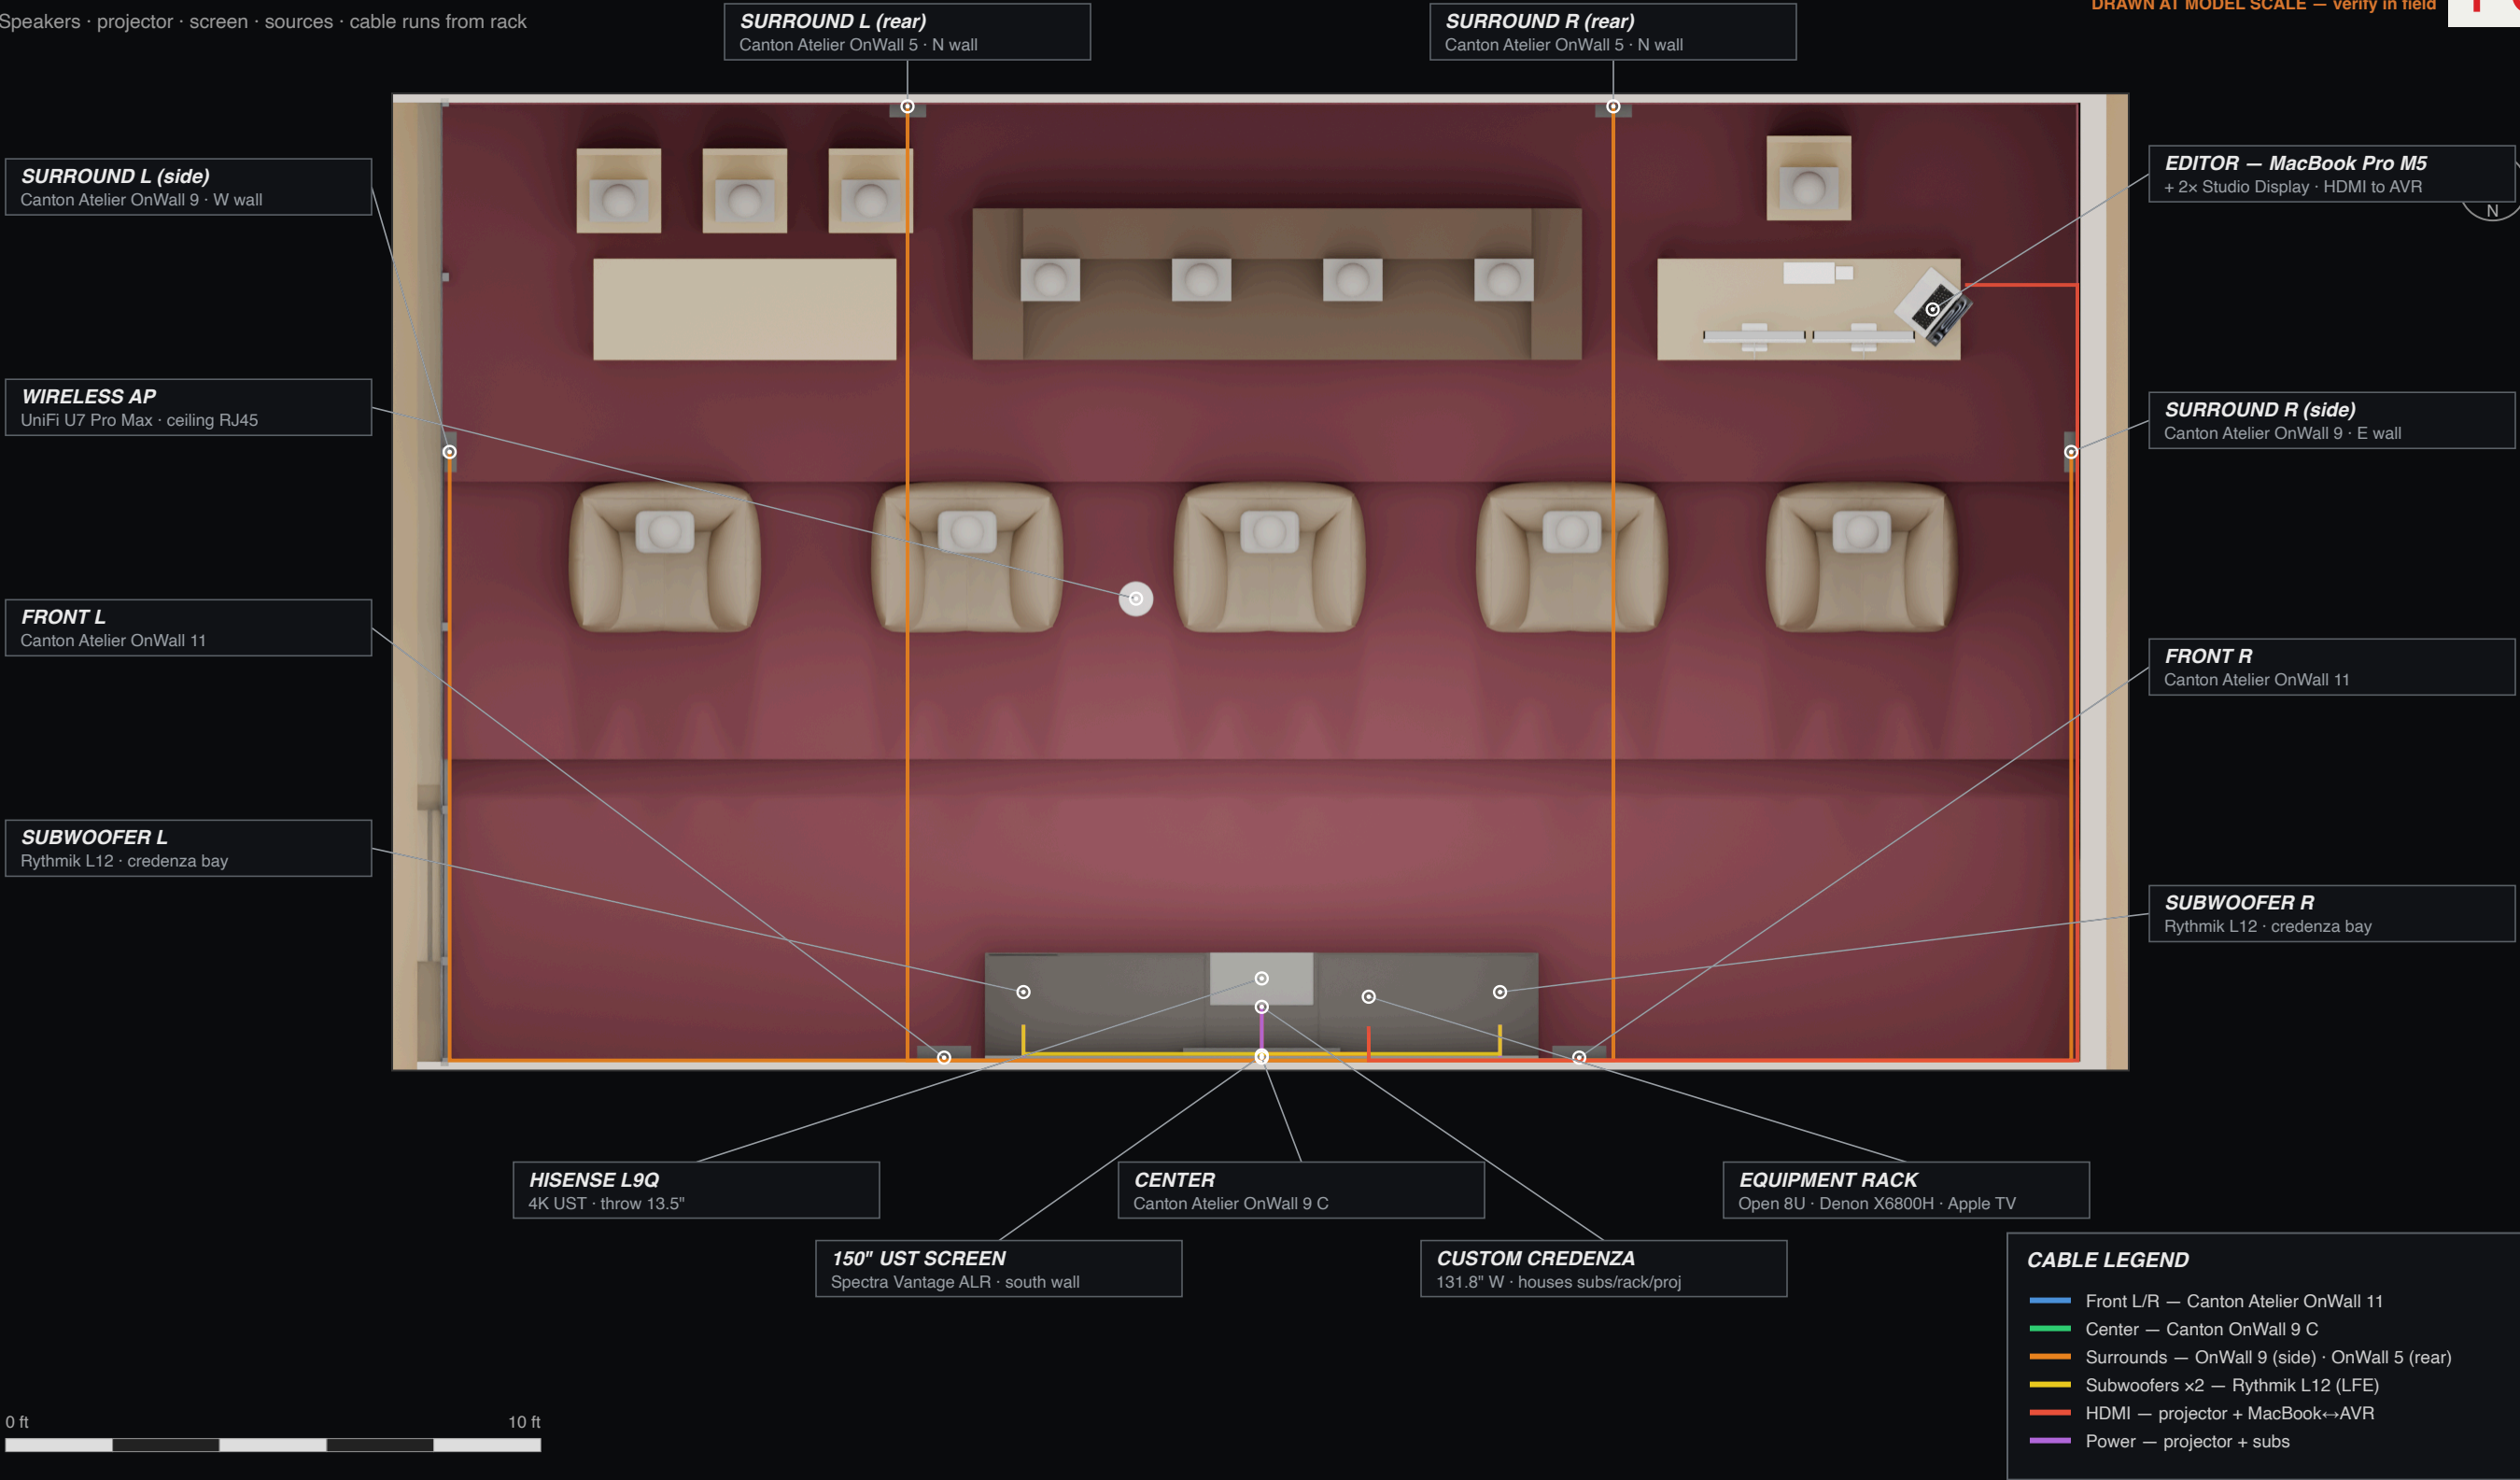


39 GREAT JONES — SCREENING ROOM

SHEET 2 of 4 — ROOM HERO VIEW

Perspective render — listening position looking at the screen wall

Rev: v212 | 2026-05-28
Imperial · 7.2 system

DRAWN AT MODEL SCALE — verify in field

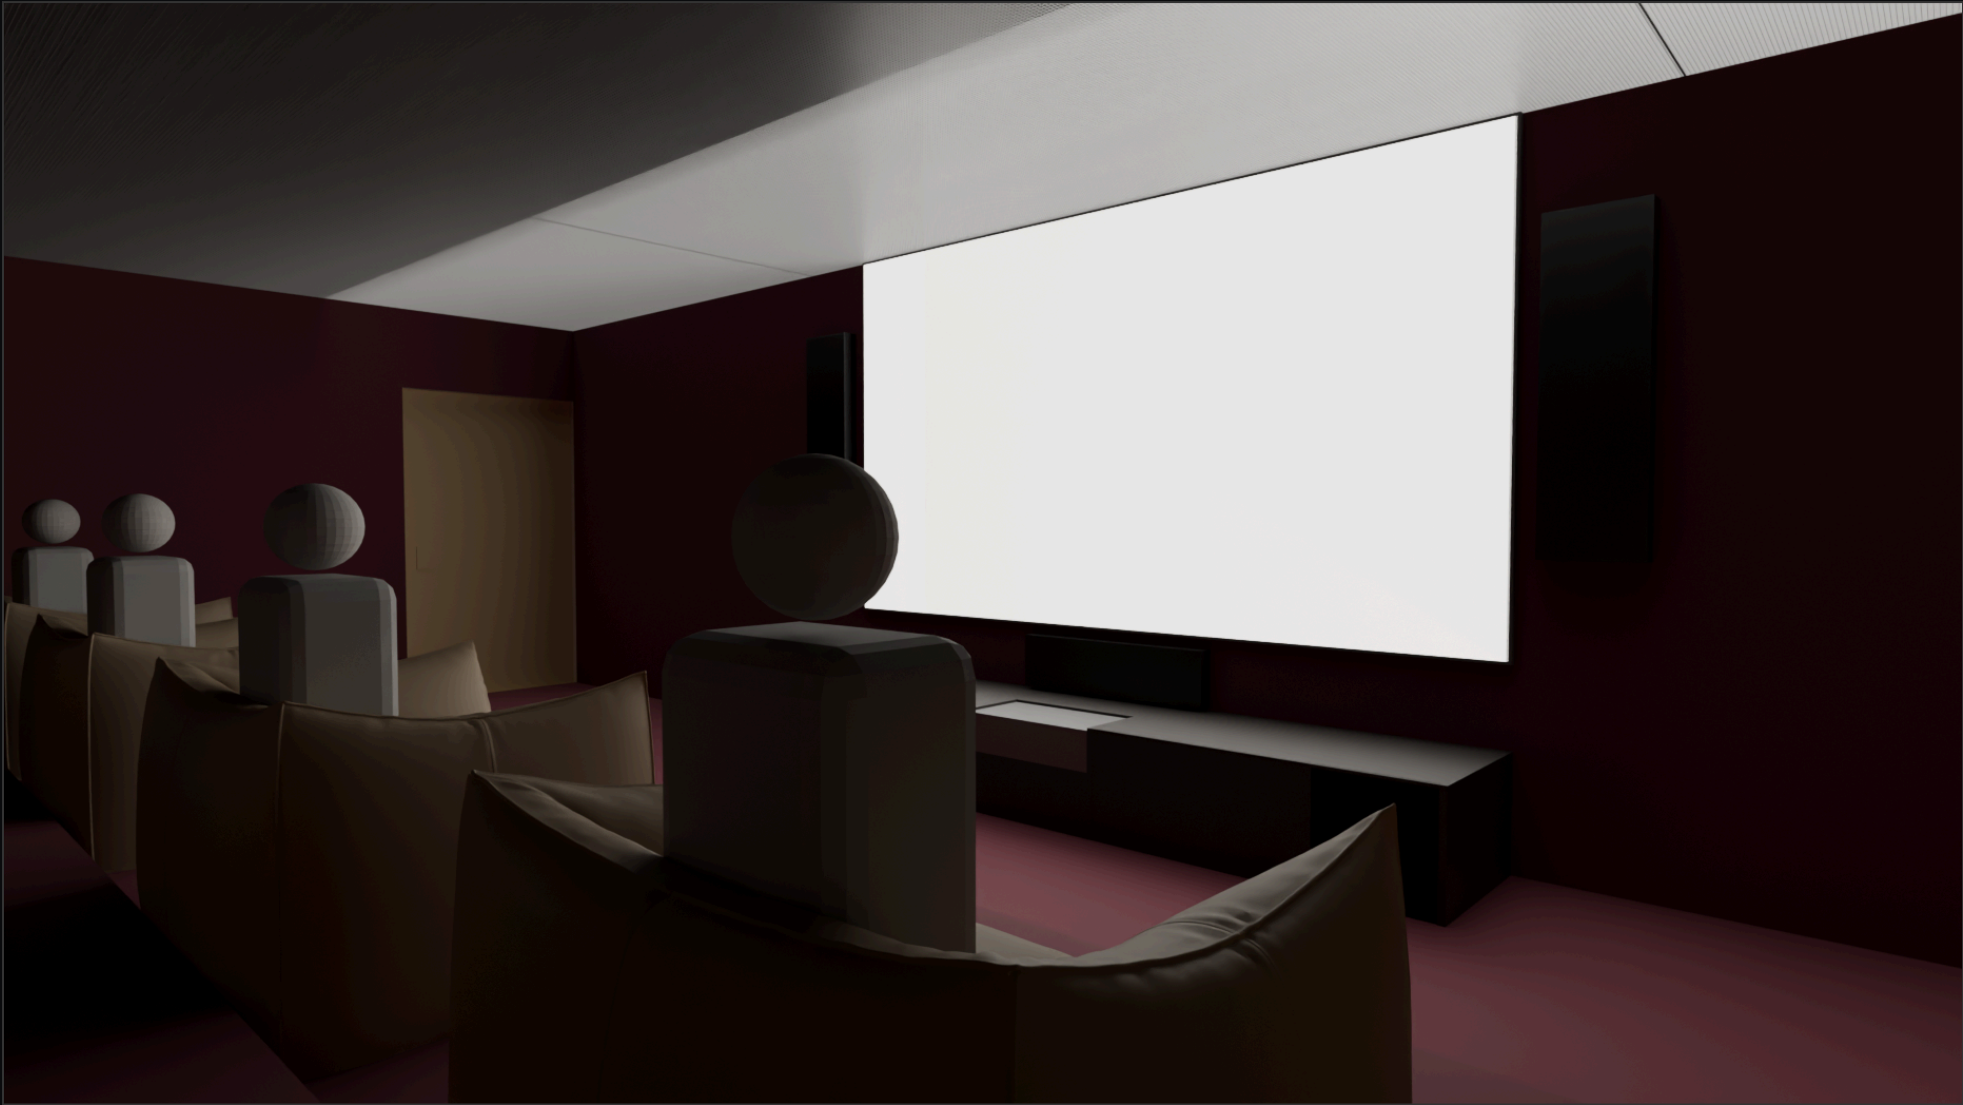

VISIBLE IN VIEW

Screen	Spectra Vantage 150" UST ALR/CLR fixed-frame
Front L/R	Canton Atelier OnWall 11 — flanking screen
Center	Canton Atelier OnWall 9 C — below screen
Subwoofers	2x Rythmik L12 — credenza bays (behind grille)
Projector	Hisense L9Q UST — credenza center well
Credenza	Custom 131.8" — fabric bays + doors + well
Rack	Open 8U — Denon AVR-X6800H, Apple TV 4K
Seating	Front sofa + tiered lounge chairs

REFERENCE HEIGHTS & NOTES

- Ceiling 8'-9" · 0.5" aluminum egg-crate
- Screen: btm 30.45" · top 104.0" · center 67.2" AFF
- Front L/R/C centers on screen mid-line (67.2")
- Surrounds: tweeter 76" AFF (side + rear)
- Subs sealed front-firing, ~1" behind grille
- Projector deck 11.06" AFF · 13.5" off wall
- Editor MacBook Pro M5 → AVR via HDMI (VID-2)
- System 7.2 — calibrate with miniDSP UMIK-1

39 GREAT JONES — SCREENING ROOM


SHEET 3 of 4 — SCREEN-WALL ELEVATION · RACK · SIGNAL FLOW

South (screen) wall interior elevation — West (L) to East (R), heights AFF


Rev: v212 | 2026-05-28

Imperial · 7.2 system

DRAWN AT MODEL SCALE — verify in field

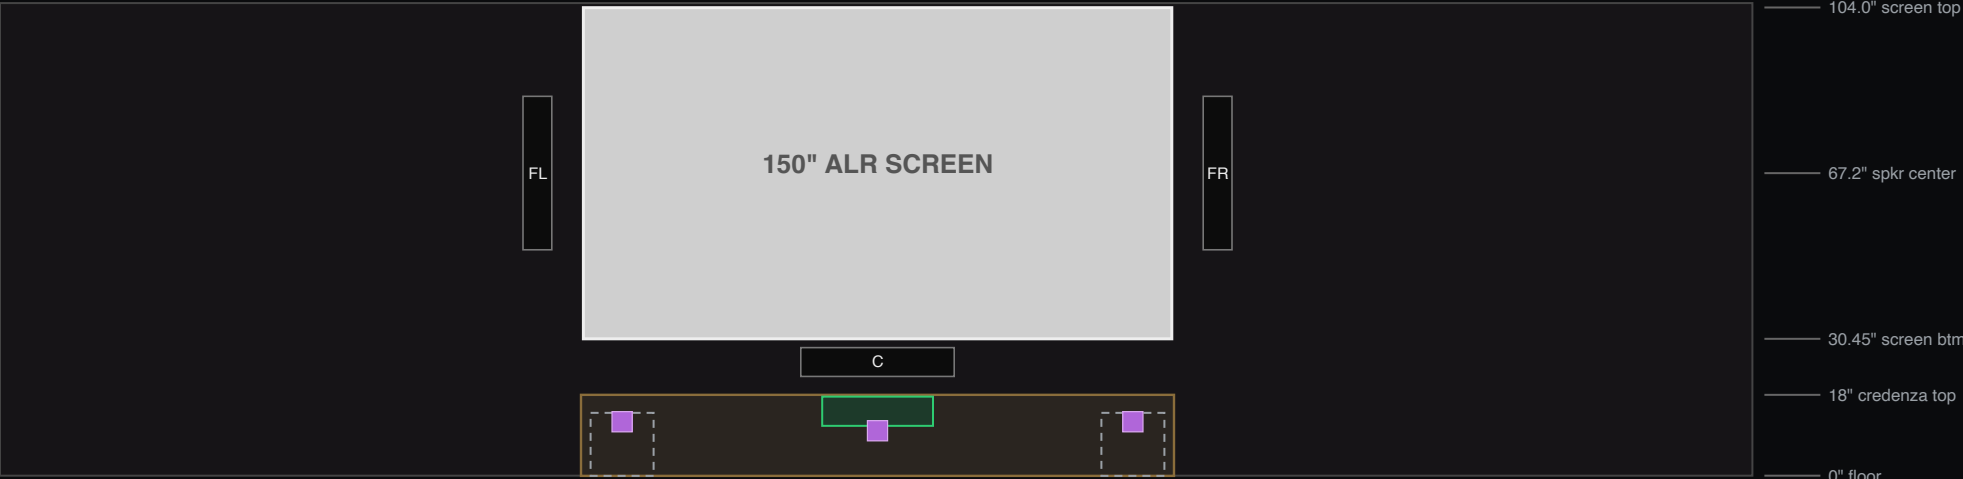

RACK ELEVATION — 8U OPEN, shelf-mount

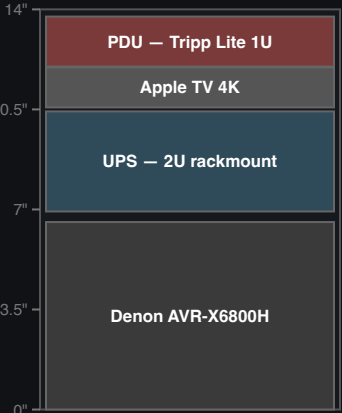

AVR 6.6" (~4U) shelf-unit → 2U UPS → 8U rack now full (consider 12U for airflow).

SIGNAL FLOW

- Sources: Apple TV 4K + MacBook Pro M5 (editor) → Denon AVR-X6800H HDMI inputs
- AVR 7.2 processing → HDMI OUT (Monitor 1) → Hisense L9Q [VID-1]
- MacBook Pro M5 (editor desk, NE) → AVR HDMI input [VID-2 · 55 ft · active/optical]
- AVR amp outputs → 7× Canton Atelier speakers [SPK-1...7]
- AVR SW1 / SW2 pre-outs → 2× Rythmik L12 subs [SUB-1/2]
- Wireless AP (UniFi U7 Pro Max) → ceiling RJ45 → house network switch [NET-1]
- Power: dedicated 20A → rack UPS → PDU → AVR/Apple TV; sub + projector whips to back-panel receptacles
- Post-install: Dirac Live + Dirac Bass Control room correction (UMIK-1)

39 GREAT JONES — SCREENING ROOM

SHEET 4 of 4 — EQUIPMENT & CABLE LIST

Equipment list · speaker placement · cable run

Rev: v212 | 2026-05-28

Imperial · 7.2 system



DRAWN AT MODEL SCALE — verify in field

EQUIPMENT LIST

#	Item	Model	Qty	Location	Mounting
1	Projection screen	Spectra Vantage 150" UST ALR/CLR	1	South wall, centered	Top 104"/btm 30.45" AFF
2	UST projector	Hisense L9Q 4K laser	1	Credenza center well	Deck 11.06" · 13.5" off wall
3–4	Front L / R	Canton Atelier OnWall 11	2	S wall flanking screen	Vertical, ctr 67.2" AFF
5	Center	Canton Atelier OnWall 9 C	1	S wall below screen	Horizontal, top 28.2" AFF
6–7	Surrounds (side)	Canton Atelier OnWall 9	2	Side walls @ y=12.6	Vertical, ctr 76" AFF
8–9	Surrounds (rear)	Canton Atelier OnWall 5	2	North wall	Vertical, ctr 76" AFF
10–11	Subwoofers	Rythmik L12 sealed front-firing	2	Credenza outer bays	Floor, 1" behind grille
12	AV receiver	Denon AVR-X6800H (11.4ch)	1	Open rack — base shelf	Shelf unit, 6.6" H
13	Streamer	Apple TV 4K	1	Open rack — shelf	On vented shelf
14	Wireless AP	Ubiquiti UniFi U7 Pro Max	1	Ceiling x=19.3 y=9.7	Existing · ceiling RJ45
15	Equipment rack	Open 4-post 8U	1	Credenza east bay	Floor in cabinet
16	Credenza	Custom millwork 131.8" W	1	South wall full width	Floor; 18" H
17	Editor workstation	MacBook Pro M5 + 2× Studio Display	1	Editor desk (NE)	On desk · HDMI to AVR
18–20	Receptacles	Duplex × 3	3	Credenza back panel	~10–12" AFF
21	UPS	Rackmount UPS 2U (~1500VA)	1	Open rack — above AVR	2U · line-interactive
22	Rack PDU	Tripp Lite PDUMV15 (1U, 12-outlet)	1	Credenza rack	1U · UPS → PDU → devices

Coordinates = object centers in room feet (origin SW). 7.2 layout — no Atmos height channels (4 spare amp ch).

SPEAKER PLACEMENT

Ch	Speaker	X ft	Y ft	Ctr AFF
L	Front L	15.45	0.58	67"
R	Front R	28.05	0.58	67"
C	Center	21.75	0.58	23"
Lss	Surround L side	5.64	12.59	76"
Rss	Surround R side	37.81	12.59	76"
Lrs	Surround back L	14.72	19.44	76"
Rrs	Surround back R	28.73	19.44	76"
SW1	Subwoofer L	17.02	1.88	7"
SW2	Subwoofer R	26.48	1.88	7"

CABLE RUN

Tag	From	To	Cable	Path	Order*
SPK-1	Front L	AVR amp out	Speaker 14 AWG	21.1 ft	30 ft
SPK-2	Front R	AVR amp out	Speaker 14 AWG	16.9 ft	25 ft
SPK-3	Center	AVR amp out	Speaker 14 AWG	18.3 ft	30 ft
SPK-4	Surround L side	AVR amp out	Speaker 14 AWG	39.9 ft	50 ft
SPK-5	Surround R side	AVR amp out	Speaker 14 AWG	35.6 ft	45 ft
SPK-6	Surround back L	AVR amp out	Speaker 14 AWG	37.6 ft	50 ft
SPK-7	Surround back R	AVR amp out	Speaker 14 AWG	33.3 ft	45 ft
SUB-1	Subwoofer L	AVR SW1 pre-out	Shielded RCA/LFE	6.9 ft	12 ft
SUB-2	Subwoofer R	AVR SW2 pre-out	Shielded RCA/LFE	2.6 ft	6 ft
VID-1	Projector	AVR HDMI OUT	HDMI 2.1 / HDBaseT	4.2 ft	8 ft
VID-2	MacBook Pro (#17)	AVR HDMI input	Active/optical HDMI	44.8 ft	55 ft
PWR-1	Projector	Outlet #18	120V whip	1.4 ft	5 ft
PWR-2	Subwoofer L	Outlet #19	120V whip	1.1 ft	5 ft
PWR-3	Subwoofer R	Outlet #20	120V whip	1.1 ft	5 ft
NET-1	Wireless AP	Ceiling RJ45 → house switch	Cat6 PoE	backbone	existing

*Path ×1.15 + 4 ft term/loop. Speaker wire ≈ 275 cut-ft total → one 500 ft spool (250 ft short). Subs: 12 ft + 6 ft shielded RCA. VID-2 >25 ft → active/optical HDMI. Surround-L feed concealed in west-wall mullion — cable up the aluminum mullion to the ceiling plenum.