

Alien Thunder

SOURCE: github.com/jorisesch/moduleur

Noise cracks over a low, metallic oscillator rumble, then decays through a slowly moving resonant filter like thunder from an unfamiliar atmosphere.

BRAIN: Le Controlleur | VERSION: v1.4 (target; confirm installed) | MODE: Sequencer

LAYOUT: three-knobs-two-buttons

X/Y/Z are upper knobs left to right; A/B are lower buttons. Press A to run.
X: 15% (about 87 BPM); keep above minimum because minimum selects external sync.
Z: 35% randomness for changing gaps. Y and both pitch CV outputs are unused; PULSE supplies 20 ms gates.

SOUND

A noise impact decays over low oscillators. Audio-rate FM adds a metallic undertone and slow filter motion changes its apparent distance. Cutoff at 60% was confirmed; other values are starting points.

SETUP

Make the five numbered connections. Six dashed routes are built in; the headphone lead is separate. Select Sequencer mode, keep X above minimum, press A, and begin with output volume low.
VCO 2's middle output must produce noise. If it produces a sub-oscillator, its internal selector is configured for SUB.

PLAY

Decay controls the body and release the distant tail. Brain tempo/randomness set storm spacing; cutoff controls distance; LFO RATE adds atmospheric motion.

VARIATIONS

Remove cable 5 for natural thunder. Mixer 3 controls crack versus rumble. Raise resonance cautiously for a pitched sci-fi ring.

NORMALLED WIRING

N1-N6 retain the built-in oscillator-to-mixer, mixer-to-filter, filter-to-VCA 1, ENV 1-to-control, and VCA 1-to-output chain. Cables add noise, gate, two filter modulations, and FM. Mixer IN4 is silenced.

COMPLETE CONNECTION LIST

- 1 VCO 2 NOISE > Mixer IN3
- 2 Brain PULSE > ENV/VCA 1 GATE
- 3 ENV/VCA 1 ENV > Filter CV1
- 4 LFO TRIANGLE > Filter CV2
- 5 VCO 1 OUT > VCO 2 FM
- 6 OUTPUT OUT > Stereo headphones
- N1 VCO 1 OUT > Mixer IN1 [internal normal]
- N2 VCO 2 OUT > Mixer IN2 [internal normal]
- N3 Mixer OUT > Filter LP [internal normal]
- N4 Filter OUT > ENV/VCA 1 IN [internal normal]
- N5 ENV/VCA 1 ENV > ENV/VCA 1 CONTROL [internal normal]
- N6 ENV/VCA 1 OUT > OUTPUT IN [internal normal]

CRITICAL STARTING POSITIONS

- VCO1 / wave: SAW; octave: 15%; fine: 48%
- VCO2 / wave: SAW; octave: 22%; fine: 56%
- MIXER / level1: 25%; level2: 30%; level3: 65%; level4: 0%; unused; main: 50%
- FILTER / resonance: 45%; cutoff: 60%; cv1: 70%; cv2: 58%
- ENV1 / attack: minimum; decay: 65%; sustain: 0%; release: 75%
- LFO / rate: 8%; amount: 70%
- OUTPUT / volume: 8%; low; drive: 20%
- BRAIN / x: 15%; z: 35%


CONTROLS NOT AFFECTING THIS PATCH

- VCO1 / width: Saw selected; pulse width does not affect this waveform.
- VCO2 / width: Saw selected; pulse width does not affect this waveform.
- MIXER / gain4: Mixer input 4 is unused and its level is zero.; threshold: No signal enters sidechain input 4, so compression is inactive.
- BRAIN / y: Octave range affects unused pitch CV outputs, not PULSE.


Sources / attribution

Firmware: [upstream/le-controlleur/SEQUENCER.md](#) (target download v1.4; installed version unconfirmed)
Instrument and modules: [shmoergh.com/guides/moduleur-user-guide/](#); [upstream/moduleur/modules/](#)
Default wiring and background: [upstream/moduleur/modules/08-default-patch/schematics/default-patch.pdf](#); [shmoergh.com/content/files/2026/02/moduleur-patch-sheet.pdf](#)
Official background: Shmoergh. Patch notes and overlay are community-authored.


OSCILLATOR

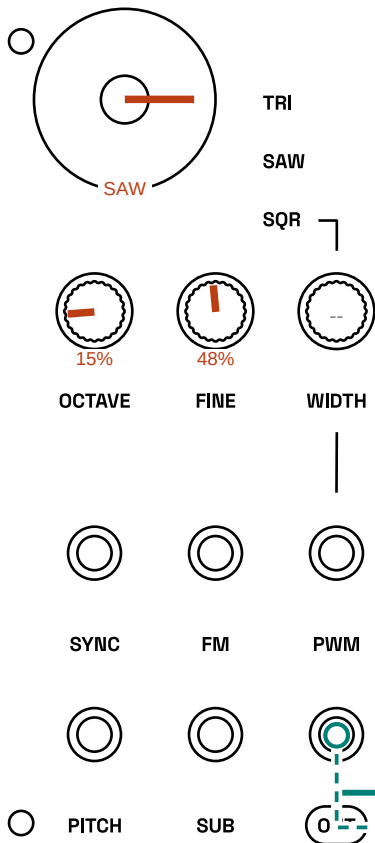


OSCILLATOR

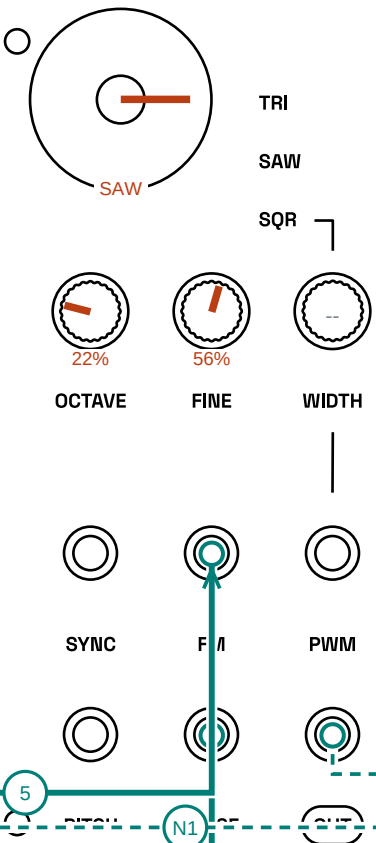


MIXER & SIDECHAIN

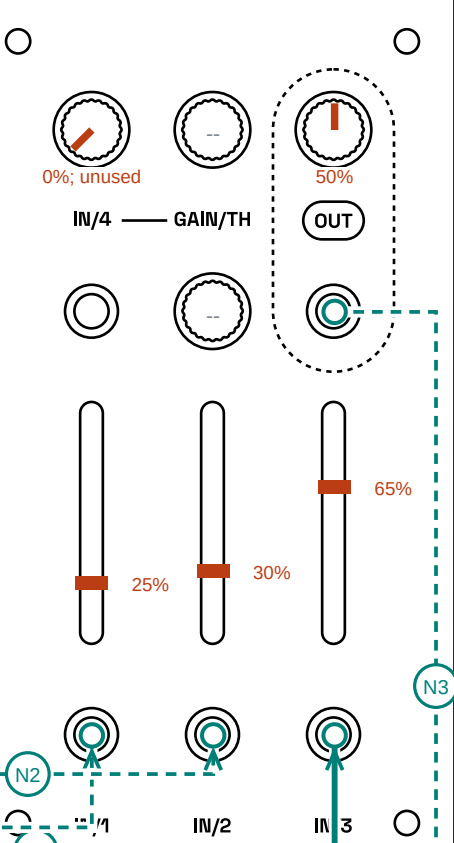


FILTER

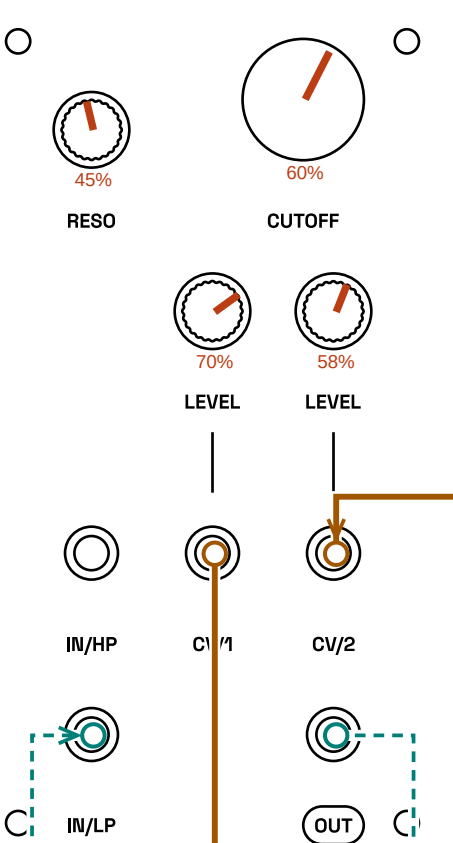


ENVELOPE & VCA

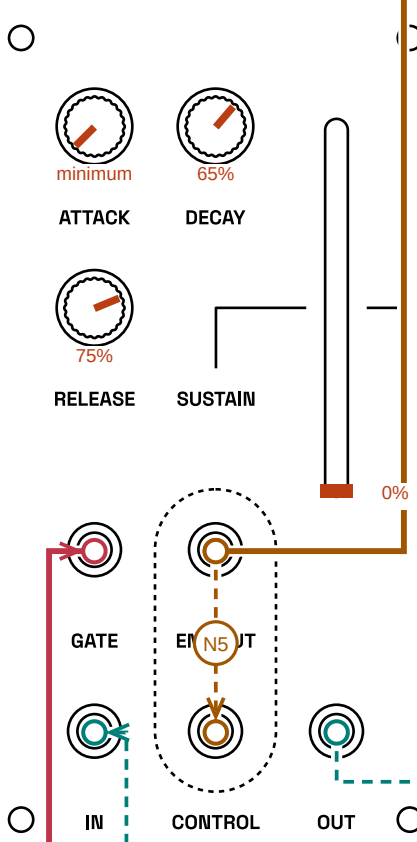


ENVELOPE & VCA

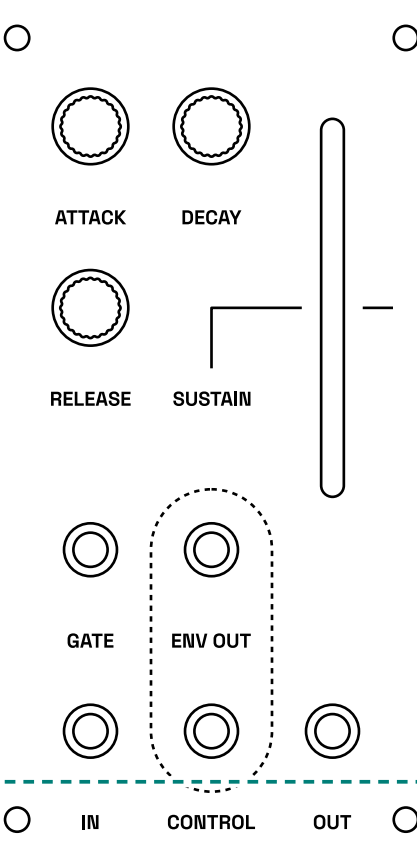

CRUSH

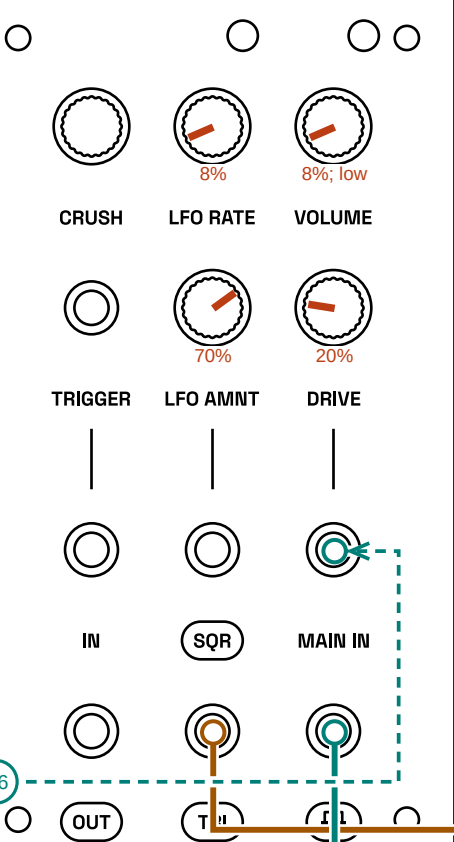

BRAIN

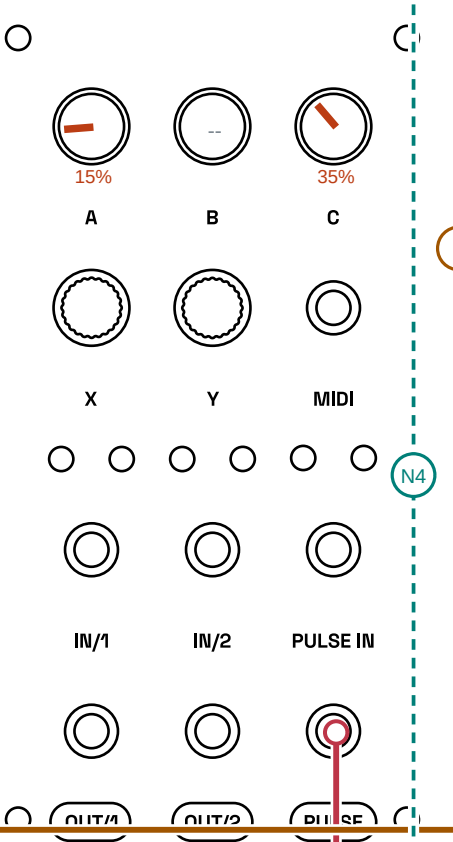

Stereo headphones

PATCH KEY

AUDIO PITCH CV MOD CV GATE/TRIG

MIDI

MODULEUR ANALOG SYNTHESIZER

Orange control marks = critical. -- = irrelevant (reasons on page 1).
Positions are physical starting points. Cable IDs and firmware settings: page 1.