60W Moving Head Light

LED Beam with Halo Effect







USER MANUAL

KEEP THIS MANUAL FOR FUTURE NEEDS

Thank you for your visit. We believe that our excellent products and services will satisfy you. For your safety, please read this user manual carefully before installing the device.

For proper installation, operation and maintenance of lighting safety. We recommend that installation and operation be carried out by certified technicians and that instructions be followed strictly.

⚠ CAUTION!

Keep this device away from rain and moisture!



Unplug mains lead before opening the housing.

Every person involved with the installation, operation, and maintenance of this device has to:

- Be qualified
- Follow carefully the instructions in this manual

1. INTRODUCTION

Thank you for having chosen this professional moving head.

You will see you have acquired a powerful and versatile device.

Unpack the device. Inside the carton box you should find:

1. One power cable
2. One user manual
3. One pcs lights
4. One pcs DMX cable
5. One pcs bow mount and 2 pcs Screws Install the bottom of the light

Please check carefully that there is no damage caused by transportation. Should there be any, please consult your dealer and don’t install this device.

2. MOUNTING AND INSTALLATION

2.1. Cautions:

For added protection, install fixtures outside walkways, seating areas, or areas where unauthorized persons may come into contact with fixtures.

Before mounting the luminaire to any surface, ensure that the mounting area can withstand a minimum point load of 10 times the weight of the unit.

Clamp installations must always be secured using secondary safety accessories such as appropriate safety cables.

Never stand directly beneath the unit when installing, removing or servicing the light fixture from the ceiling or when setting it up on a flat, level surface. Make sure the fixture is at least 0.5m (1.5ft) away from any flammable objects (decorations, etc.)



2.2. Mounting points:

Overhead installation requires extensive experience, including calculation of working load limits, in-depth knowledge of the installation materials used and regular safety inspections of all installation materials and fixtures. If you lack these qualifications,

Do not attempt to install it yourself, improper installation may result in personal injury.

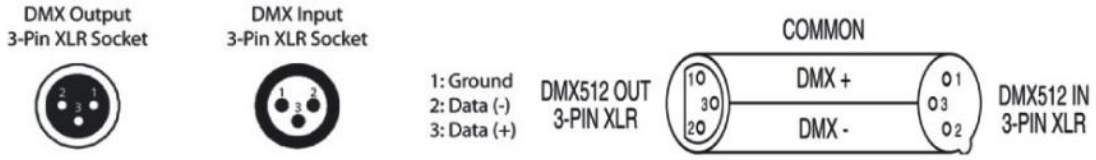
Be sure to complete all fitting and installation procedures before connecting the mains power cord to a suitable wall outlet.

2.3. Installation Bracket Kit Description:

			
Shows the bow mount Add the screws to fix it after installation	Displays the hook mounts	Make sure your hook is installed properly	Confirm your hook is successfully fixed to truss.

2.4. DMX-512 control connection

Connect the supplied XLR cable to the 3-pin XLR female output of the controller and the other end to the 3-pin XLR male input of the moving head. You can chain multiple moving heads together via a serial link. The required cable should be a two-conductor shielded cable with XLR input and output connectors. Please refer to the picture below.



3. TECHNICAL PARAMETERS

1) Voltage:AC110-240V 50/60 Hz
2) Power consumption :100W
3) LED Source: ①60W RGBW 4in1 Osram LED with Halo Effect
   ②12LED SMD 5050 RGB 3in1
4) Strobe: 15 Flashes per second (any color)
5) DMX channel:16/30channels
6) Movement: Pan: 540° ,Tilt: 180°
7) Control mode:Auto, Sound, DMX, Master/Slave
8) Display: 4-button LED display
9) Dimmer: 0-100% with regulated constant color control
10) Beam angle: 4°
11) N.W: 2.8KG
12) G.W:3.2 KG
13) Packing size: 29*19*21cm

4. MENU FUNCTION

Addr	A001-A512	512 Adress Set
CHnd	16CH	16CH Set
	30CH	30CH Set
SLnd	Auto	Auto running
	Soun	Sound running
	SL 1	DMX mode
	SL 2	Slave mode
ID	ID00-ID15	ID Setting
SHnd	SH 0	Effect 0
	SH 1	Effect 1
	SH 2	Effect 2
	SH 3	Effect 3
SEnS	0-99	Sound Sensitivity adjustment
bLAnd	bLAc	NO 512 signal
	Auto	NO 512 Auto
	Soun	NO 512 Soun
	HoLd	No DMX 512 signal Keep the last DMX console state
LEd	OFF	5s off the display
	ON	Display is on
dISP	no	Display reverse
	YES	Show positive
rPAN	no	X Motor forward
	YES	X Motor reversal
rTiL	no	Y Motor forward
	YES	Y Motor reversal
REST	YES	System reset

MAST Automatic mode	bLnd
(1)Press "MENU" to find "SLnd" (2)Then press the "ENTER" button (3)Then press the "UP"or"DOWN" button SL 2=Slave Mode SL 1=DMX 512 Mode Soun= Sound control mode Auto=Auto mode Then press the "ENTER" button twice. Back to the main menu	(1)Press MENU to find bLnd (2)Then press the "ENTER" button (3)Then press the "UP"or"DOWN" button bLAc=Without the 512 signal, return to zero Auto=Without the 512 signal, Auto mode Soun=Without the 512 signal, Sound mode HLOd =No DMX 512 signal Keep the last DMX console state.
SEnS	**Effect**
(1)Press "MENU" to find "SEnS" (2)Then press the "ENTER" button (3)Then press the "UP"or"DOWN" button 0-99=Adjust the sensitivity of sound	(1)Press "MENU"to find "SHnd" (2)Then press the "ENTER" button (3)Then press the "UP" or "DOWN" button SH 0 = Effect 0 (Recommend) SH 1 = Effect 1 SH 2 = Effect 2 SH 3 = Effect 3

5. DMX CHANNELS

- 16 DMX CHANNELS

Channel	Function	Instruction
1	X operation	0-255
2	X Fine-tune	0-255
3	Y operation	0-255
4	Y fine-tuning	0-255
5	X operating speed	0-255
6	Dimming	0-255
7	Strobe	0-255
8	Red	0-255
9	Green	0-255
10	Blue	0-255
11	White	0-255
12	Colour Auto	0-255
13	Motor Auto	0-255
14	0-255	Circle 5050 LED Color selection,Auto effect
15	Auto	0-255
16	Reset	250-255（5s）

➢ 30 DMX CHANNELS

Channel	Function	Instruction
1	X operation	0-255
2	X Fine-tune	0-255
3	Y operation	0-255
4	Y fine-tuning	0-255
5	X operating speed	0-255
6	Dimming	0-255
7	Strobe	0-255
8	Red	0-255
9	Green	0-255
10	Blue	0-255
11	White	0-255
12	Circle Red 1	0-255
13	Circle Green 1	0-255
14	Circle Blue 1	0-255
15	Circle Red 2	0-255
16	Circle Green 2	0-255
17	Circle Blue 2	0-255
18	Circle Red 3	0-255
19	Circle Green 3	0-255
20	Circle Blue 3	0-255
21	Circle Red 4	0-255
22	Circle Green 4	0-255
23	Circle Blue 4	0-255
24	Circle Red 5	0-255
25	Circle Green 5	0-255
26	Circle Blue 5	0-255
27	Circle Red 6	0-255
28	Circle Green 6	0-255
29	Circle Blue 6	0-255
30	Reset	250-255（5s）

This product can get the best effect when paired with a fog machine!