






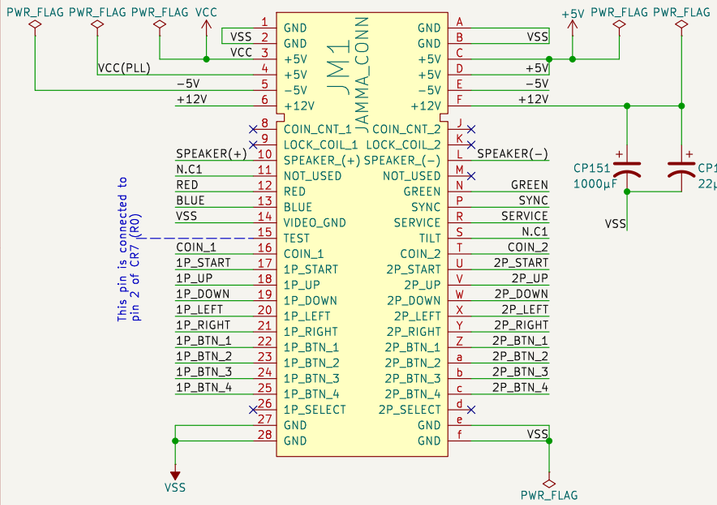


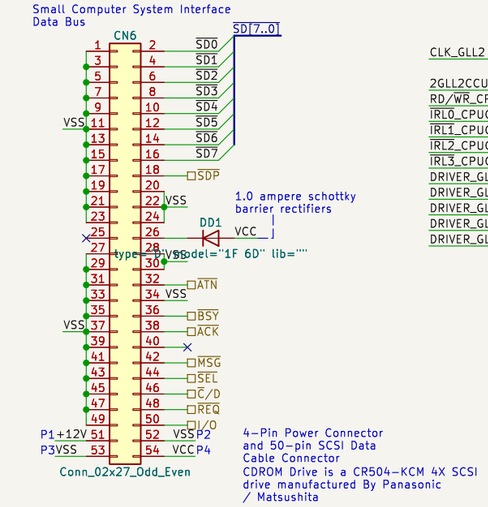


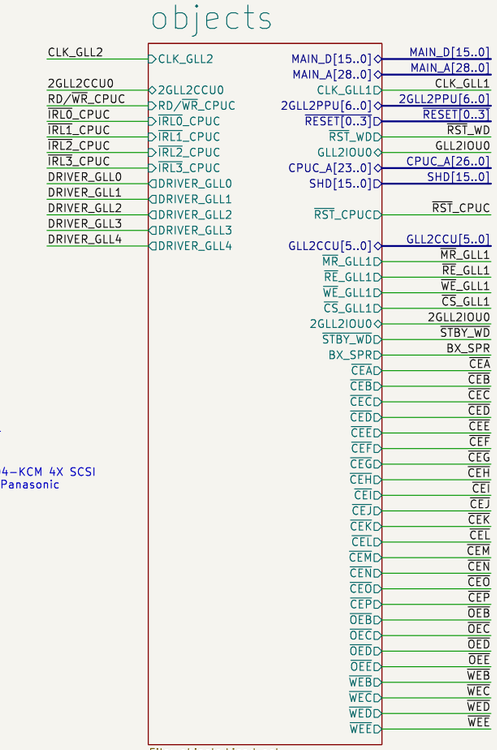


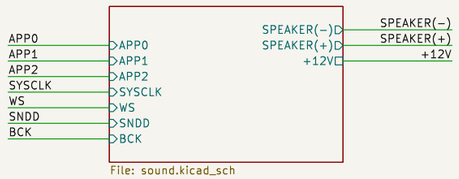


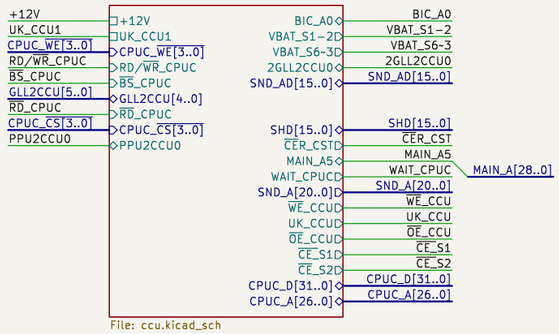


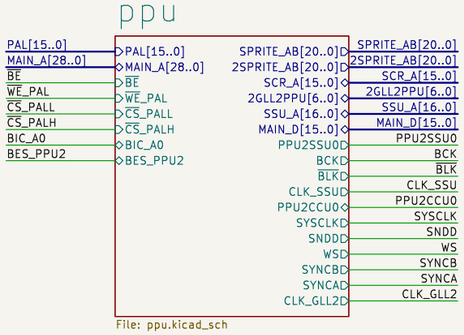


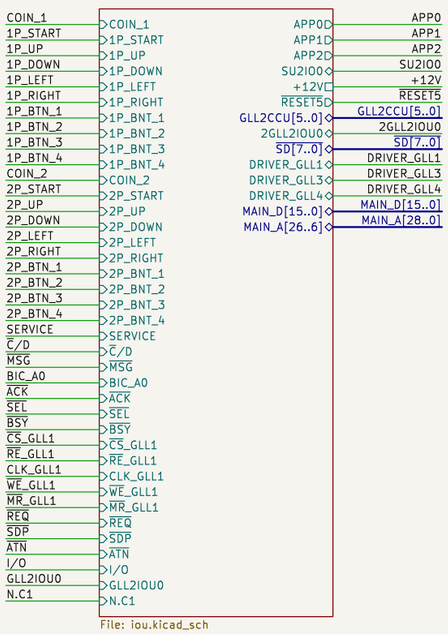


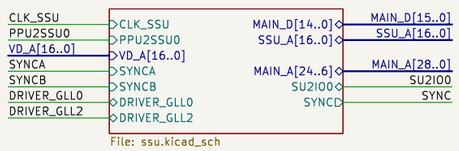


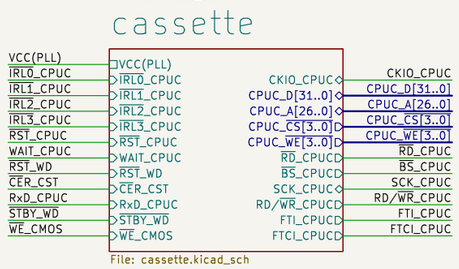

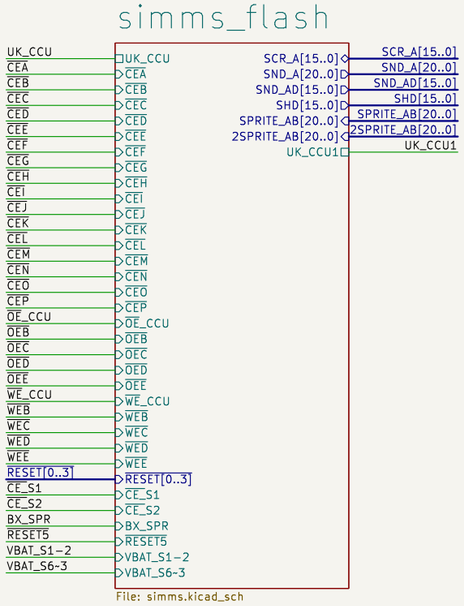

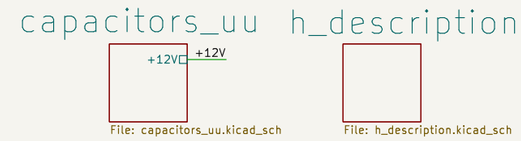

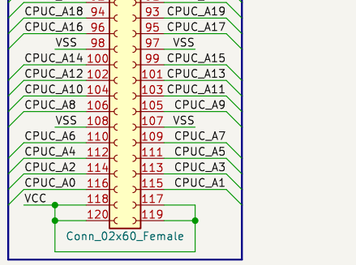




14/10/22−30/01/23
JOTEGO
JOTEGO
Sheet: /
File: cps3.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 1/23

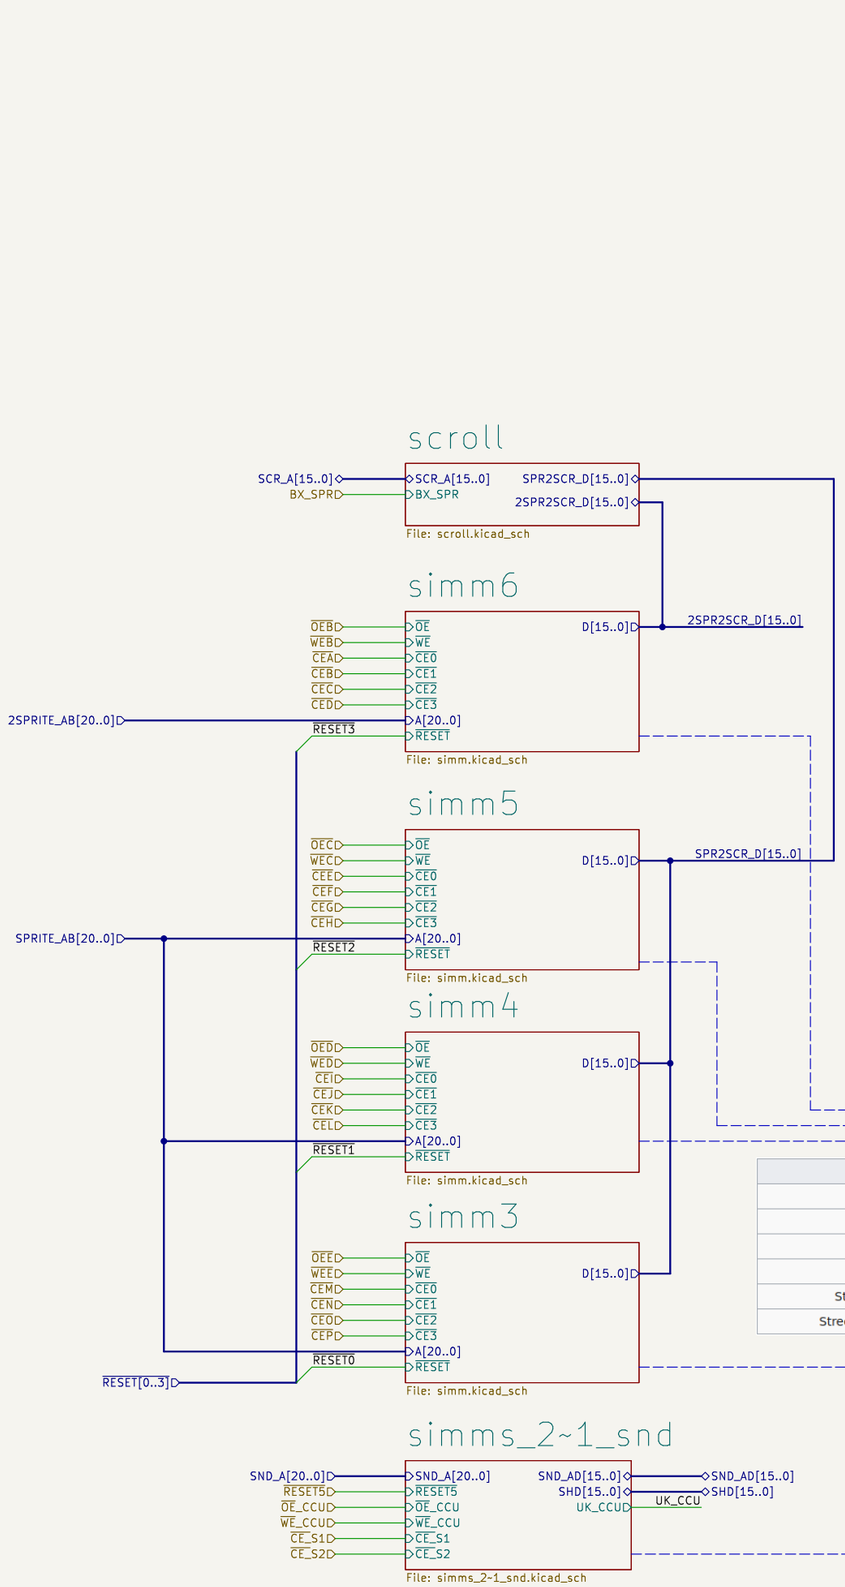

Juego	Ranura 1	Ranura 2	Ranura 3	Ranura 4	Ranura 5	Ranura 6
Warzard / Red Earth	64MBit		128MBit	128MBit	32MBit o 128MBit	
Street Fighter III: New Generation	64MBit		128MBit	128MBit	32MBit o 128MBit	
JoJo's Venture	64MBit	64MBit	128MBit	128MBit	32MBit o 128MBit	
JoJo's Bizarre Adventure	64MBit	64MBit	128MBit	128MBit	128MBit	
Street Fighter III: 2nd Impact Giant Attack	64MBit	64MBit	128MBit	128MBit	128MBit	
Street Fighter III: 3rd Strike Fight for the Future	64MBit	64MBit	128MBit	128MBit	128MBit	128MBit

14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /simms_flash/
File: simms.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 2/23

F11
DL-2929-IOU
INPUT OUTPUT UNIT
I/O controller.

BUS INTERFACE CONTROLLER

BA
R77 330
R76 105
XTAL3 3.6864MHz
CP CP0
CP CP1
VSS
GLL2IOU0
R84 101

CRE438-60CR9
K_H24
K_H22
K_H20
K_H18

CRE438-60CR8
K_H16
K_H14
2P_BTN5
KH_2P_BTN4

CRE438-60 CR10
KH_1P_BTN4
1P_BTN5
1P_BTN6
K_H13

CRE438-60CR1
2P_BNT_4
2P_BNT_3
2P_BNT_2
2P_BNT_1

CRE438-60CR2
2P_RIGHT
2P_LEFT
2P_DOWN
2P_UP

CRE438-60CR3
1P_BNT_4
1P_BNT_3
1P_BNT_2
1P_BNT_1

CRE438-60CR4
1P_RIGHT
1P_LEFT
1P_DOWN
1P_UP

CRE438-60CR5
K_H12
K_H11
1P_STARTO
2P_STARTO

CRE438-60CR6
K_H10
2P_BTN6
COIN_2
COIN_1

CRE438-60 CR11
K_H30
K_H29

CRE438-60 CR7
This pin is connected to pin 15 of the jamma (N.C)
N.C1
SERVICE

SW1
GP1
TEST
SW_MEC_5G
VSS

VCC
GLL2IOU0
XTAL_3.6864MHz
UK
K_H24
K_H22
K_H20
K_H18
K_H16
K_H14
2P_BTN5
KH_2P_BTN4
KH_1P_BTN4
1P_BTN5
1P_BTN6
K_H13
2P_BTN4
2P_BTN3
2P_BTN2
2P_BTN1
2P_RIGHT
2P_LEFT
2P_DOWN
2P_UP
1P_BTN4
1P_BTN3
1P_BTN2
1P_BTN1
1P_RIGHT
1P_LEFT
1P_DOWN
1P_UP
K_H12
K_H11
1P_STAR
2P_STAR
K_H10
2P_BTN6
COIN_2
COIN_1
K_H29
K_H30
N.C_JAMMA
N.C1_JAMMA
SERVICE
DRIVER_GLL1
DRIVER_GLL3
DRIVER_GLL4
VSS

Application mode 0 APP0
DAC SND Application mode 1 APP1
Application mode 2 APP2
MAIN_D[15..0]
MAIN_A[26..6]
DARLINGTON SINK DRIVER
SIMMS 1 y 2
2GLL2IOU0
RESET5
GLL2CCU5
1DSD_I4
1DSD_I3
1DSD_I2
1DSD_I1
2DSD_I4
2DSD_I3
2GLL2IOU0
RESET5
GLL2CCU5
GLL2CCU[5..0]

CLK_GLL1
R105 330
I/OD
BIC_AOD
R106 472
CS_GLL1
WE_GLL1
RE_GLL1
SDP
MR_GLL1
ATN
ACK
REQ
Am33C93A
BUS INTERFACE CONTROLLER
Address Latch Enable
K14
MAIN_D[7..0]
Processor Data Bus
SD[7..0]
Small Computer System Interface Data Bus
R108 301
R107 221

RN24 RN25 RN22 RN23 RN26 RN27 RN28 RN29
221
331

Capcom Kick Button Harness Connector
CN1
Conn_01x34_Male

4CH HIGH-CURRENT DARLINGTON SINK DRIVER
TD62064 C12
TD62064 C11
FB13 FB14 FB
Ferrite Bead
FB18 FB16 FB17 FB15
+12V

64/128/256 words of 16 bits each.
According to programming
AT93C46-10SC
3 WIRE SERIAL
EEPROMs

R2
R_Network08
RN1 303
A14
CLL2_0 CLL2_1 CLL2_2 CLL2_3
PHOTOCOUPLER
A13
NR1 103Ω
1. Anode
2. Cathode
15. Emitter
16. Collector

FB7 FB8 FB9 FB10 F_Small
CP124 10µF
CP125 47µF

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /iou/
File: iou.kicad_sch
Title: CP SYSTEM III
Size: A3 | Date: 14/10/22 | **Rev: José Tejada G.**
KiCad E.D.A. 8.0.9 | Id: 3/23

PWR_FLAG

VCC

VSS

14.3181667MHz

Philips TDA1306T Noise Shaping Filter DAC (SOIC24).
The clock (on pin 12) measures
14.3181667MHz (42.9545/3)

CU383-69K

D6

Bus-exchange switch
10 BIT

BCK
SNDD
APP0
APP2
WS
SYSCLK
APP1
BX
BE

RN3
620

RN2
620

TDA1306T

Noise shaping Filter
Multi-bit DAC

CLKS2
CLKS1
BCK
WS
DATA
SYSCLK
APPL
APP0
APP1
APP2
APP3
TEST1
TEST2
VDDA
VDDD
VDDO
VSSA
VSSD
VSSO
FILTCR
VOR
FILTCL
VOL
VREF

C5
DAC

CP153 22µF
CP154 22µF
CP155 22µF

VD3
VD-BAV99
CATHODE
ANODE

R42
472

Q8
ZR

R43
101

BE

C143
102J

C144
102J

CP123
10µF

R38
7.3kΩ
R37
4.7kΩ
R35
4.7kΩ
R34
7.3kΩ

LM833N
A4B
Opamp_Dual

CP131
22µF
CP132
22µF
CP135
22µF
CP134
22µF

R_POT_5PINS
RV1

Opamp_Dual
A4A

R20
1.8kΩ
R19
1kΩ
R3
100Ω
CP138
22µF
CP133
22µF

0.003Ω
EXC2
R_Shunt_US

J2
AudioJack2

RS2
100kΩ

R27
9kΩ

CP137
22µF

A5B
LM833N
Opamp_Dual

R17
2.3kΩ
R18
2.3kΩ

CP143
3.3µF

TA8201AK B3
IN
NF
R.F
OUT1
OUT2

R4
5.6kΩ
CP139
33µF
CP140
220µF

R9
0.3Ω
R8
0.3Ω
CP145
154J
CP146
154J

FB6
F_Small
FB5
F_Small

SPEAKER(+) Speaker
SPEAKER(-)

LS1

HS1
Heatsink_Pad_2Pin

Opamp_Dual
A5A

R22
1.8kΩ
R21
1kΩ
CP130
22µF

R11
100Ω
CP136
22µF
R1
100kΩ

0.003Ω
EXC1
R_Shunt_US

J1
AudioJack2

Optional RCA Left/Right Audio Out Connectors

R28
9kΩ

+12V

FB1
F_Small
FB2
F_Small

R12
24Ω

QB6
Q_NPN_CBE
QA6
Q_NPN_CBE

CP148
22µF
CP149
22µF
CP147
22µF
CP150
22µF

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /sound/
File: sound.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 4/23

G2

DL-2729_PPU

Picture Processing Unit

SD10-505

Main graphics chip.

Color Palette

Bus Exchange Switch

Row address strobe

SPRITE ADDRESS BUS
*Buffer Line Driver

SCROLL ADDRESS BUS

Output enable

Write enable

Upper column address strobe

Lower column address strobe

system clock 256fs or 384fs

Synchronization Supply Unit*?

Buffer Frame Memory Data Bus

There is no certainty that it is Data Bus

Buffer Frame Memory Address Bus

There is no certainty that it is Address Bus

CU383-69K

Bus-exchange switch 10 BIT

MB814260-70PJ

FAST PAGE MODE DYNAMIC RAM CMOS 256K X 16 BIT

File: memories_fb.kicad_sch

File: buffer_line_driver.kicad_sch

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /ppu/
File: ppu.kicad_sch
Title: CP SYSTEM III
Size: A3 | Date: 14/10/22 | **Rev: José Tejada G.**
KiCad E.D.A. 8.0.9 | Id: 5/23




14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /capacitors_uu/
File: capacitors_uu.kicad_sch


Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 6/23


GRAPHIC LAYER LAYOUT 1

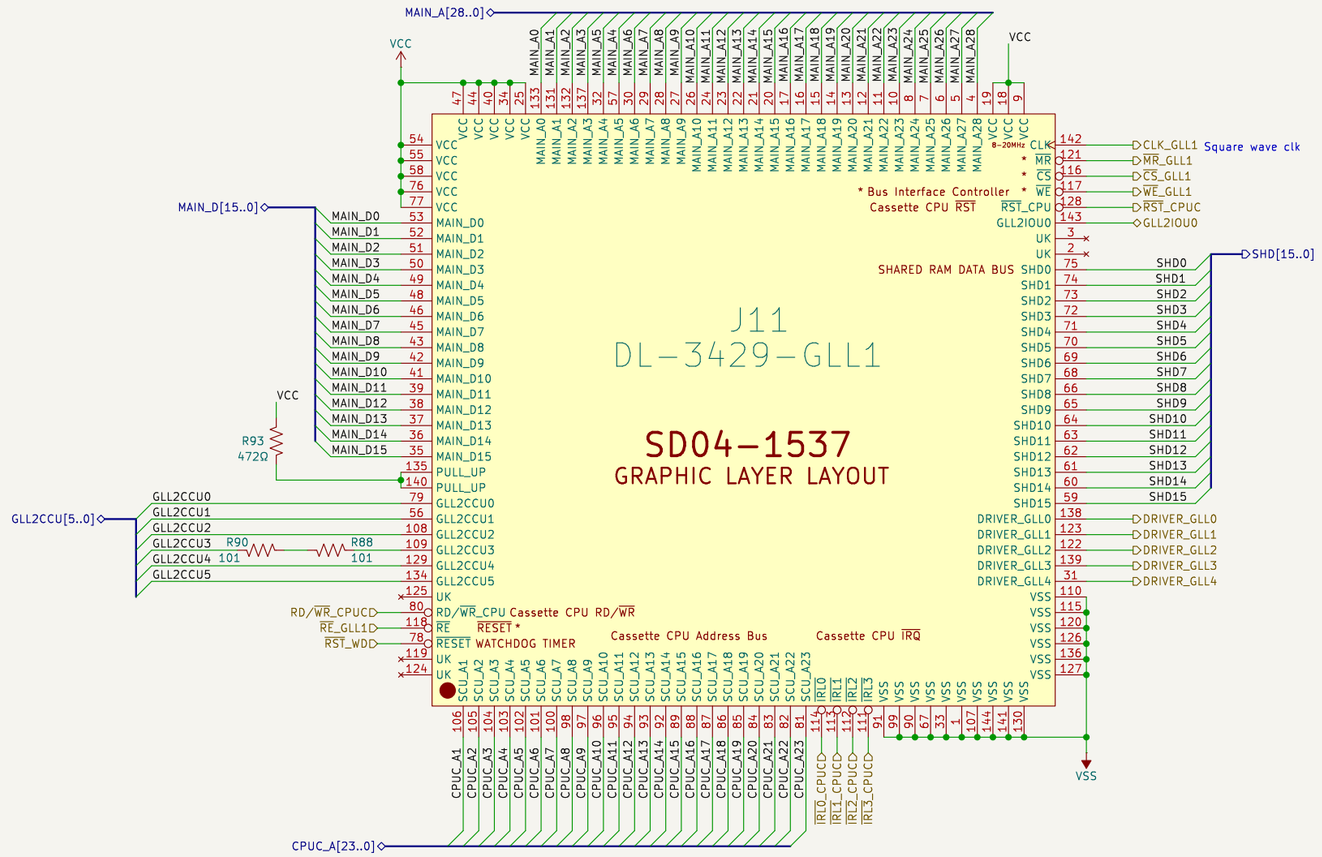


GRAPHIC LAYER LAYOUT 2

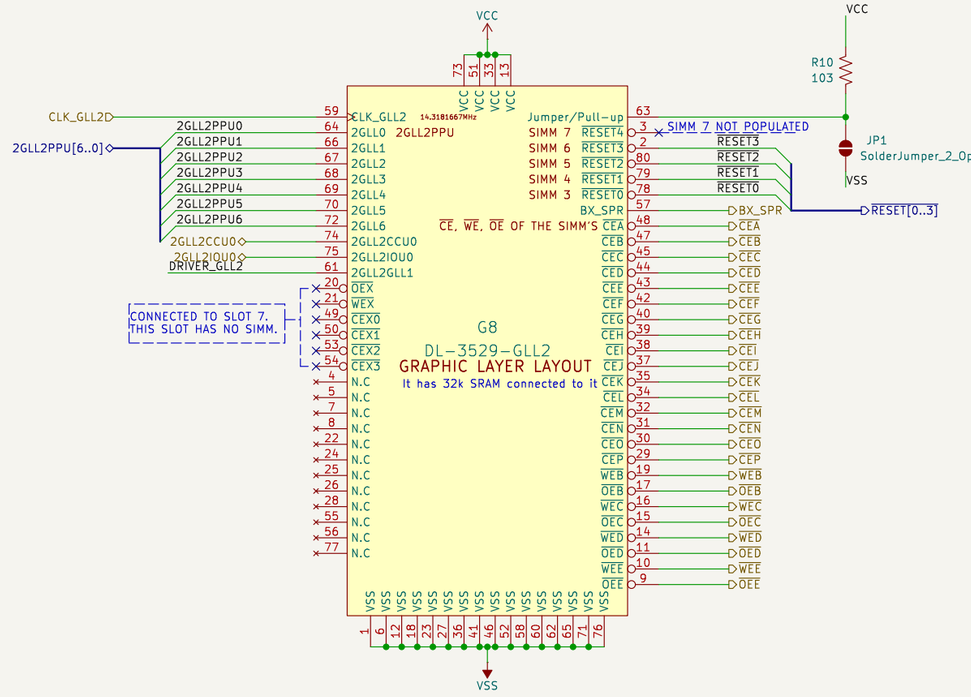


WATCHDOG TIMER

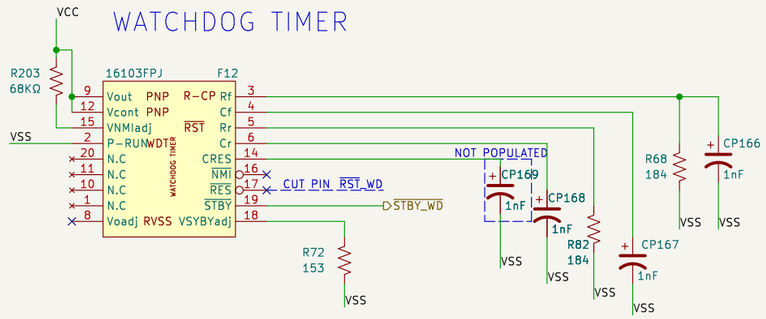

14/10/22-30/01/23	
JOTEGO	
JOTEGO	
Sheet: /objects/	
File: objects.kicad_sch	
Title: CP SYSTEM III	
Size: A3	Date: 14/10/22
KiCad E.D.A. 8.0.9	**Rev: José Tejada G.**
	Id: 7/23

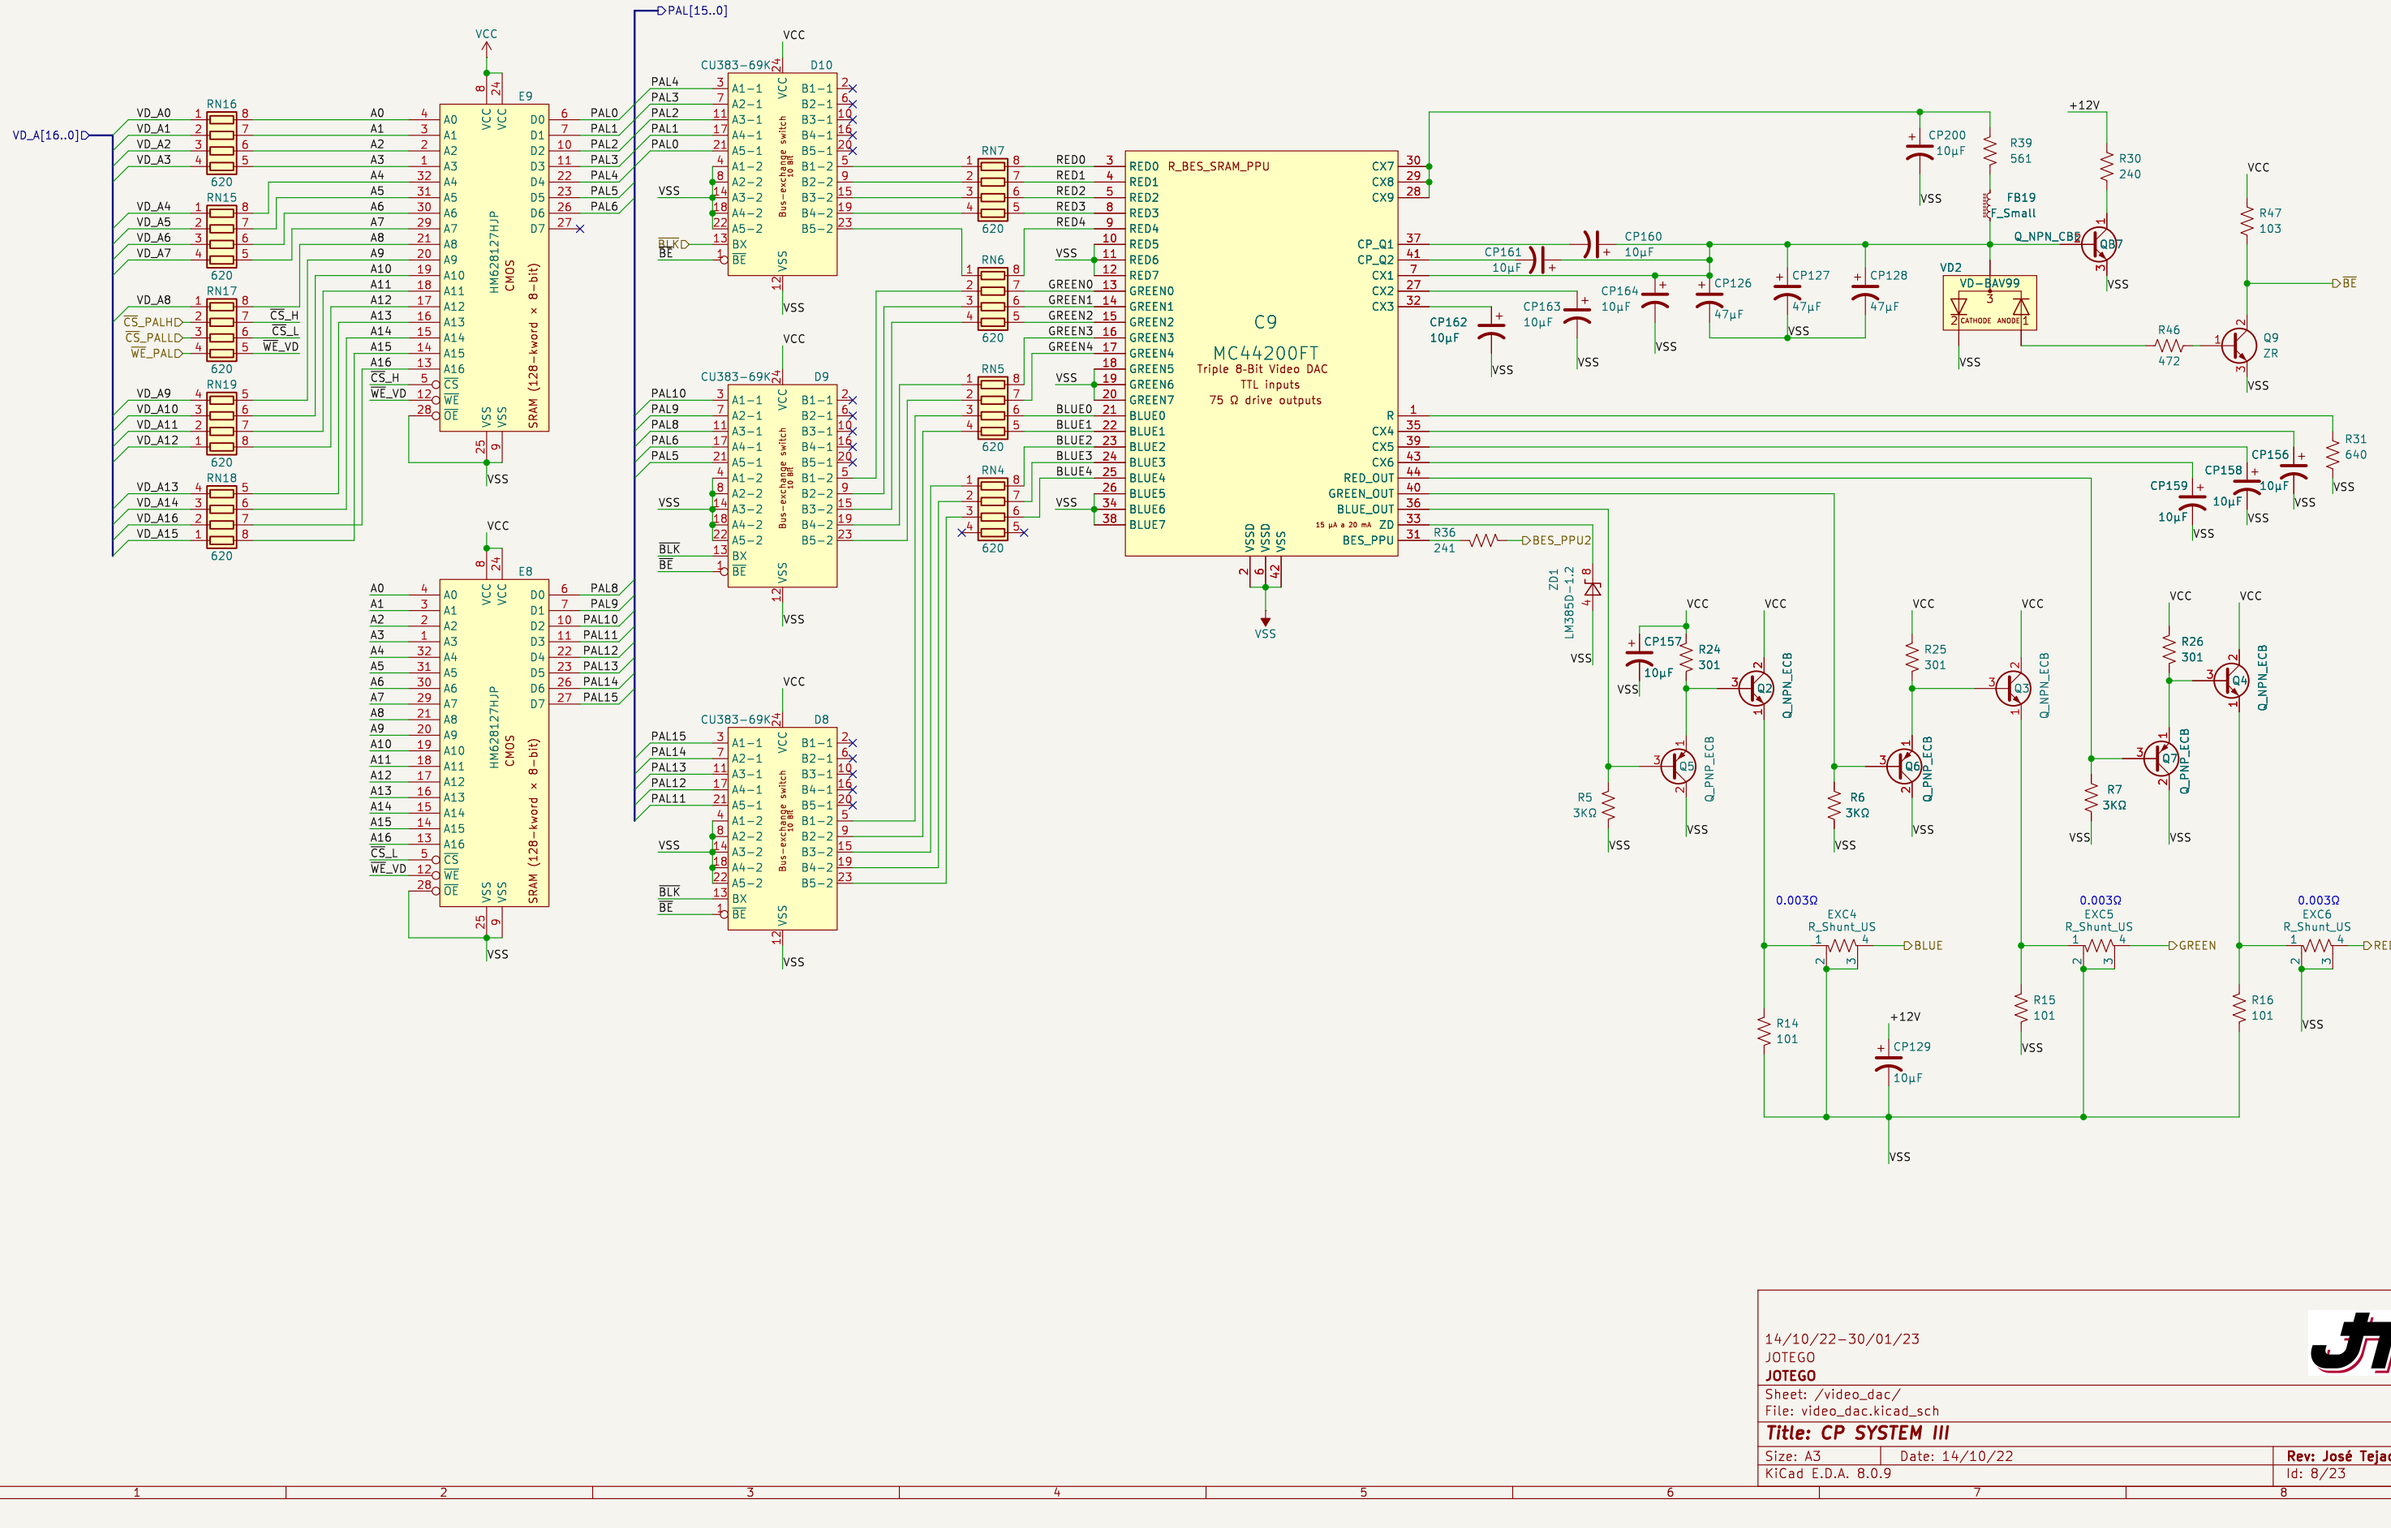
VD_A[16..0]
PAL[15..0]
RN16
RN15
RN17
RN19
RN18
620
VD_A0
VD_A1
VD_A2
VD_A3
VD_A4
VD_A5
VD_A6
VD_A7
VD_A8
VD_A9
VD_A10
VD_A11
VD_A12
VD_A13
VD_A14
VD_A15
VD_A16
CS_PALH
CS_PALL
WE_PALD
CS_H
CS_L
WE_VD
E9
E8
HM628127HJP
CMOS
SRAM (128-kword x 8-bit)
D10
D9
D8
CU383-69K
Bus-exchange switch
10 BIT
RN7
RN6
RN5
RN4
C9
MC44200FT
Triple 8-Bit Video DAC
TTL inputs
75 Ω drive outputs
R_BES_SRAM_PPU
BES_PPU
BES_PPU2
R36
241
ZD1
LM385D-1.2
CP157
10µF
R24
301
R5
3KΩ
R25
301
R6
3KΩ
R26
301
R7
3KΩ
Q_NPN_ECB
Q_PNP_ECB
Q2
Q3
Q4
Q5
Q6
Q7
0.003Ω
EXC4
EXC5
EXC6
R_Shunt_US
BLUE
GREEN
RED
R14
101
R15
101
R16
101
CP129
CP200
R39
561
FB19
F_Small
R30
240
+12V
CP160
CP161
CP162
CP163
CP164
CP126
CP127
CP128
VD2
VD-BAV99
CATHODE
ANODE
R46
472
Q9
ZR
R47
103
BE
CP156
CP158
CP159
R31
640
VCC
VSS
14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /video_dac/
File: video_dac.kicad_sch
Title: CP SYSTEM III
Size: A3
Date: 14/10/22
KiCad E.D.A. 8.0.9
Rev: José Tejada G.
Id: 8/23

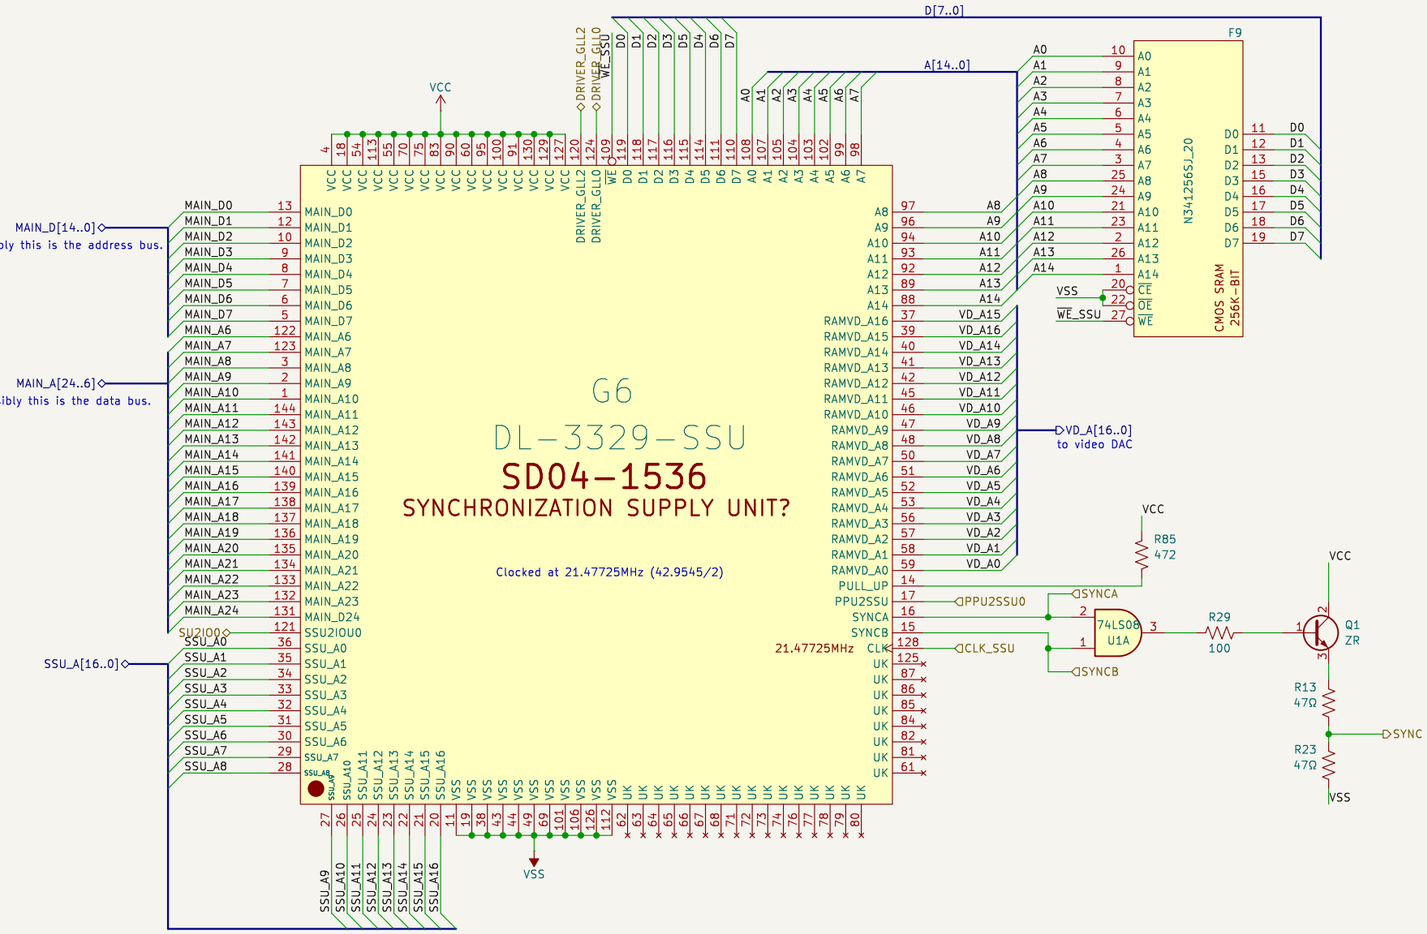

14/10/22-30/01/23	
JOTEGO	
JOTEGO	
Sheet: /ssu/	
File: ssu.kicad_sch	
Title: CP SYSTEM III	
Size: A3	Date: 14/10/22
KiCad E.D.A. 8.0.9	Id: 9/23
	Rev: José Tejada G.

J13
DL-2829-CCU
COMMUNICATION CONTROL UNIT?

Cassette CPU RD
Cassette CPU CS
Cassette CPU Address Bus
*ENABLING SIMMS MEMORIES - S1 Y 2
*SOUND RAM SIMMS ADDRESS BUS
CASSETTE RAM CE
* VOLTAGE MONITOR
* SOUND RAM SIMMS DATA BUS
SHARED RAM DATA BUS
Cassette CPU Data Bus
ONLY CONNECTED TO PIN52 OF THE FEMALE SLOT

Shared RAM

MB8114260-70PJ
FAST PAGE MODE DYNAMIC RAM CMOS 256K X 16 BIT

VMON_XXN VOLTAGE DETECTOR

INCIERTO

14/10/22-30/01/23	
JOTEGO	
JOTEGO	
Sheet: /ccu/	
File: ccu.kicad_sch	
Title: CP SYSTEM III	
Size: A3	Date: 14/10/22
KiCad E.D.A. 8.0.9	Id: 10/23
	Rev: José Tejada G.

No device mounted
there is only the footprint

CP189 X
CP190 X
BT1 Battery
V.D2 N.C CT VD-BD5xExx VCC VOUT RESET VSS
STANDBY
V.D1 N.C CT VD-BD5xExx VCC VOUT RESET VSS
BD53E42
TRIP POINT 4,2V
RST_WD
RST_CPUC
CP187 1µF
CP188 1µF
CP185 47µF
CP186 1µF
CP205 101
RR6 103
RR3 103
RR19 X
NOT POPULATED
CP177 X
NOT POPULATED
Capacitor connection terminal for output delay time
T4D 7400
T4C 7400
VCC
VSS
DA1 B3 61t
Small Signal Zener Diode?
regulador de voltaje?
CP194 1µF
pending review here
pending review here
pending review here
CP176 1µF

REDUCED INSTRUCTION SET COMPUTER

CPUC_D[31..0]
VCC(PLL)
VCC
+5V
RR24 103
RR23 103
RR22 103
RR21 103
RR20 103
IRL0_CPUC
IRL1_CPUC
IRL2_CPUC
IRL3_CPUC
CKIO_CPUC

X1 Crystal 6.25SC6L
RR2 105
CP175 1µF
CP174 1µF
CP195 1µF
CP196 1µF

CASSETTE MALE CONNECTOR
CPUC_D[31..0]
CPUC_A[26..0]
CNN5
OE_CMOS WE_CMOS
Vpp CER_CST
BYTE RST_CMOS
CPUC_D31 CPUC_D30
CPUC_D29 CPUC_D28
CPUC_D27 CPUC_D26
CPUC_D25 CPUC_D24
VSS VSS
CPUC_D23 CPUC_D22
CPUC_D21 CPUC_D20
CPUC_D19 CPUC_D18
CPUC_D17 CPUC_D16
VSS VSS
CPUC_D15 CPUC_D14
CPUC_D13 CPUC_D12
CPUC_D11 CPUC_D10
CPUC_D9 CPUC_D8
VSS VSS
CPUC_D7 CPUC_D6
CPUC_D5 CPUC_D4
CPUC_D3 CPUC_D2
CPUC_D1 CPUC_D0
VSS VSS
IRL0_CPUC IRL1_CPUC
IRL2_CPUC IRL3_CPUC
VSS RST_WD
RST_CPUC
STBY_WD VSS
VSS CKIO_CPUC
SCK_CPUC VSS
FTCI_CPUC RxD_CPUC
WAIT_CPUC FTI_CPUC
VSS RD_CPUC
CPUC_WE0 VSS
CPUC_WE2 CPUC_WE1
VSS CPUC_WE3
RD/WR_CPUC VSS
VSS BS_CPUC
CPUC_CS3 VSS
CPUC_CS1 CPUC_CS2
CPUC_A26 CPUC_CS0
VSS CPUC_A25
CPUC_A22 CPUC_A23
CPUC_A20 CPUC_A21
CPUC_A18 CPUC_A19
CPUC_A16 CPUC_A17
VSS VSS
CPUC_A14 CPUC_A15
CPUC_A12 CPUC_A13
CPUC_A10 CPUC_A11
CPUC_A8 CPUC_A9
VSS VSS
CPUC_A6 CPUC_A7
CPUC_A4 CPUC_A5
CPUC_A2 CPUC_A3
CPUC_A0 CPUC_A1
VCC
Conn_02x60_Male

CPUC_D11 CPUC_D12 CPUC_D13 CPUC_D14 CPUC_D15 CPUC_D16 CPUC_D17 CPUC_D18 CPUC_D19 CPUC_D20 CPUC_D21 CPUC_D22 CPUC_D23 CPUC_D24 CPUC_D25 CPUC_D26 CPUC_D27 CPUC_D28 CPUC_D29 CPUC_D30 CPUC_D31
CPUC_A0 CPUC_A1 CPUC_A2 CPUC_A3 CPUC_A4 CPUC_A5 CPUC_A6 CPUC_A7 CPUC_A8 CPUC_A9 CPUC_A10 CPUC_A11 CPUC_A12 CPUC_A13 CPUC_A14 CPUC_A15 CPUC_A16 CPUC_A17 CPUC_A18 CPUC_A19 CPUC_A20 CPUC_A21 CPUC_A22 CPUC_A23 CPUC_A24 CPUC_A25 CPUC_A26

HD6417604F28_SH2
(SCU) System Control Unit?
SLAVE?
SCU3
CPU

Phase Locked Loop(PLL)
*External interrupt source input
***Nonmaskable interrupt request
**Interrupt vector fetch cycle
Clock pause request input CKPREQ/CKM
Clock pause acknowledge output CKPACK
Operating mode pin
External capacitance pin for PLL
Serial clock input/output
Serial data output
Serial data input
Free-running timer clock input
Free-running timer input
Free-running timer output
Watchdog timer output WDTOVF
Bus request in slave mode, bus grant in master mode BREQ/BGR
Bus acknowledge in slave mode, bus request in master mode BACK/BRLS
Hardware wait request WAIT
Synchronous DRAM clock enable control CKE
Read pulse RD
Least significant byte selection signal for memory CASLL/DQMLL/WE0
Third byte selection signal for memory CASHH/DQMUU/WE1
Second byte selection signal for memory CASHH/DQMUU/WE2
Most significant byte selection signal for memory CASHH/DQMUU/WE3
CAS for synchronous DRAM, OE for pseudo-SRAM CAS/OE
RAS for DRAM and synchronous DRAM, CE for pseudo-SRAM RAS/CE
Read/write RD/WR
BS
Chip select CS3 CS2 CS1
* DMAC request
** DMAC acknowledge


MD5 MD4 MD3 MD2 MD1 MD0 SCK TxD RxD FTCI FTI FTOA FTOB NC
MD VSS VSS VSS
RR16 302
RR17 302
SCK_CPUC
RxD_CPUC
FTCI_CPUC
FTI_CPUC
RR11 472
RR12 472
RR13 472
RR14 472
CP191 1µF
CP192 1µF
WAIT
T1B 7400
WAIT_CPUC
CE_FRAM
RR15 472
CPUC_WE[3..0]
CPUC_CS[3..0]
RR9 472
RR10 472
BS_CPUC
RD/WR_CPUC

memories_scu
CPUC_A[26..0]
CER_CSTD
WAIT_CPUC
CPUC_CS1
CPUC_WE0
Vpp
WE_CMOS
RST_CMOS
BYTE
OE_CMOS
WAIT_CPUC
CE_FRAM
CPUC_D[31..0]

pending review here
T4B 7400
STBY_WD
MD
RR5 473
RR4 103
CP178 1µF
RR7 104
CP206 1µF
VCC(PLL)
RR18 301
CP193 1µF
RR8 102
QQ2 AEY
QQ1 BR39
BREAKDOWN?

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /cassette/
File: cassette.kicad_sch
Title: CP SYSTEM III
Size: A3 | Date: 14/10/22 | **Rev: José Tejada G.**
KiCad E.D.A. 8.0.9 | Id: 11/23

SIMM CONNECTOR

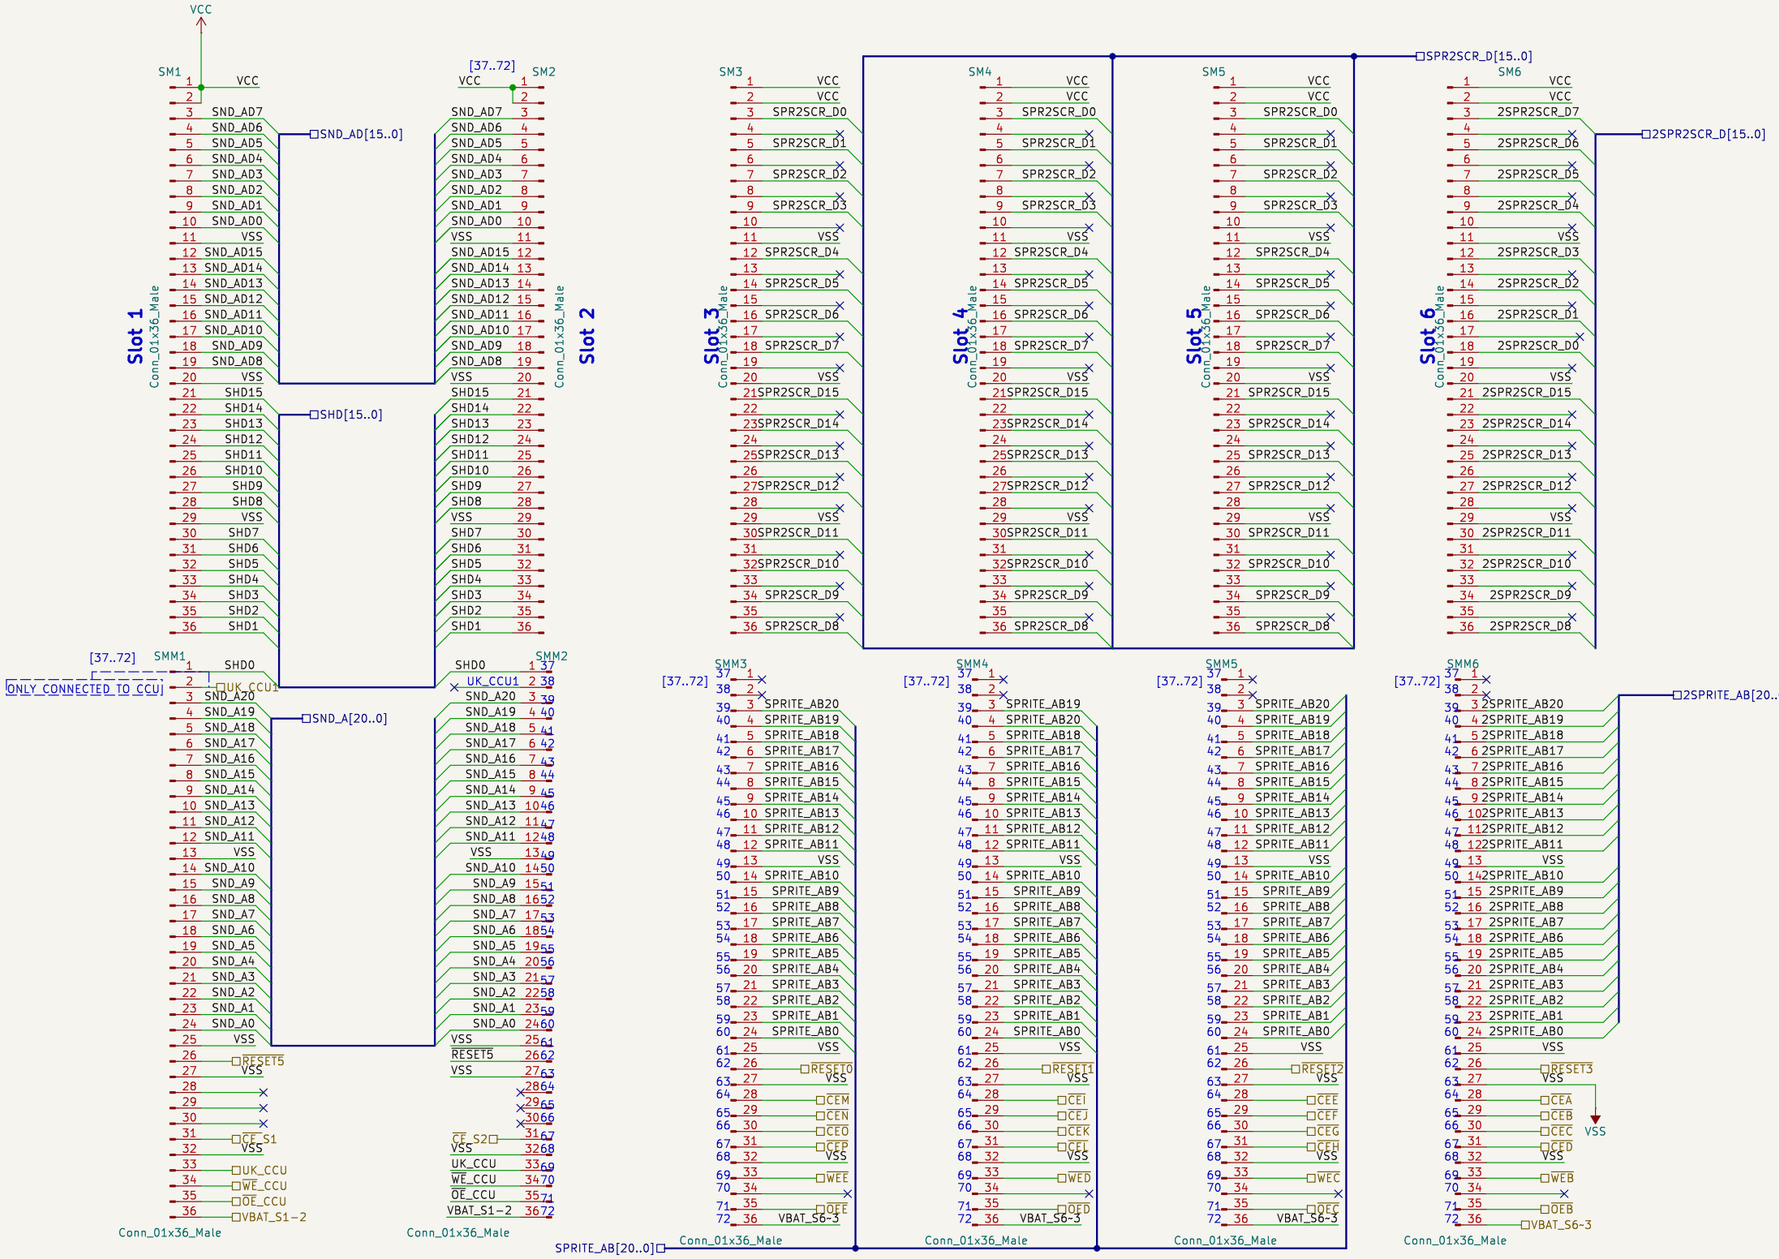

14/10/22-30/01/23		
JOTEGO		
JOTEGO		
Sheet: /simms_flash/simm_connector/		
File: simm_connector.kicad_sch		
Title: CP SYSTEM III		
Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 12/23

Simm 2

Simm 1

SND_A[20..0]

SND_AD[15..0]

SHD[15..0]

UK_CCU

KA10 KA12 KA14 KA13

KB10 KB12 KB14 KB13


29F016-90PFTN

Flash memory CMOS 16M (2Mx8) BIT

14/10/22-30/01/23	
JOTEGO	
JOTEGO	
Sheet: /simms_flash/simms_2-1_snd/	
File: simms_2-1_snd.kicad_sch	
Title: CP SYSTEM III	
Size: A3	Date: 14/10/22
KiCad E.D.A. 8.0.9	Id: 13/23


Rev: José Tejada G.

Simm

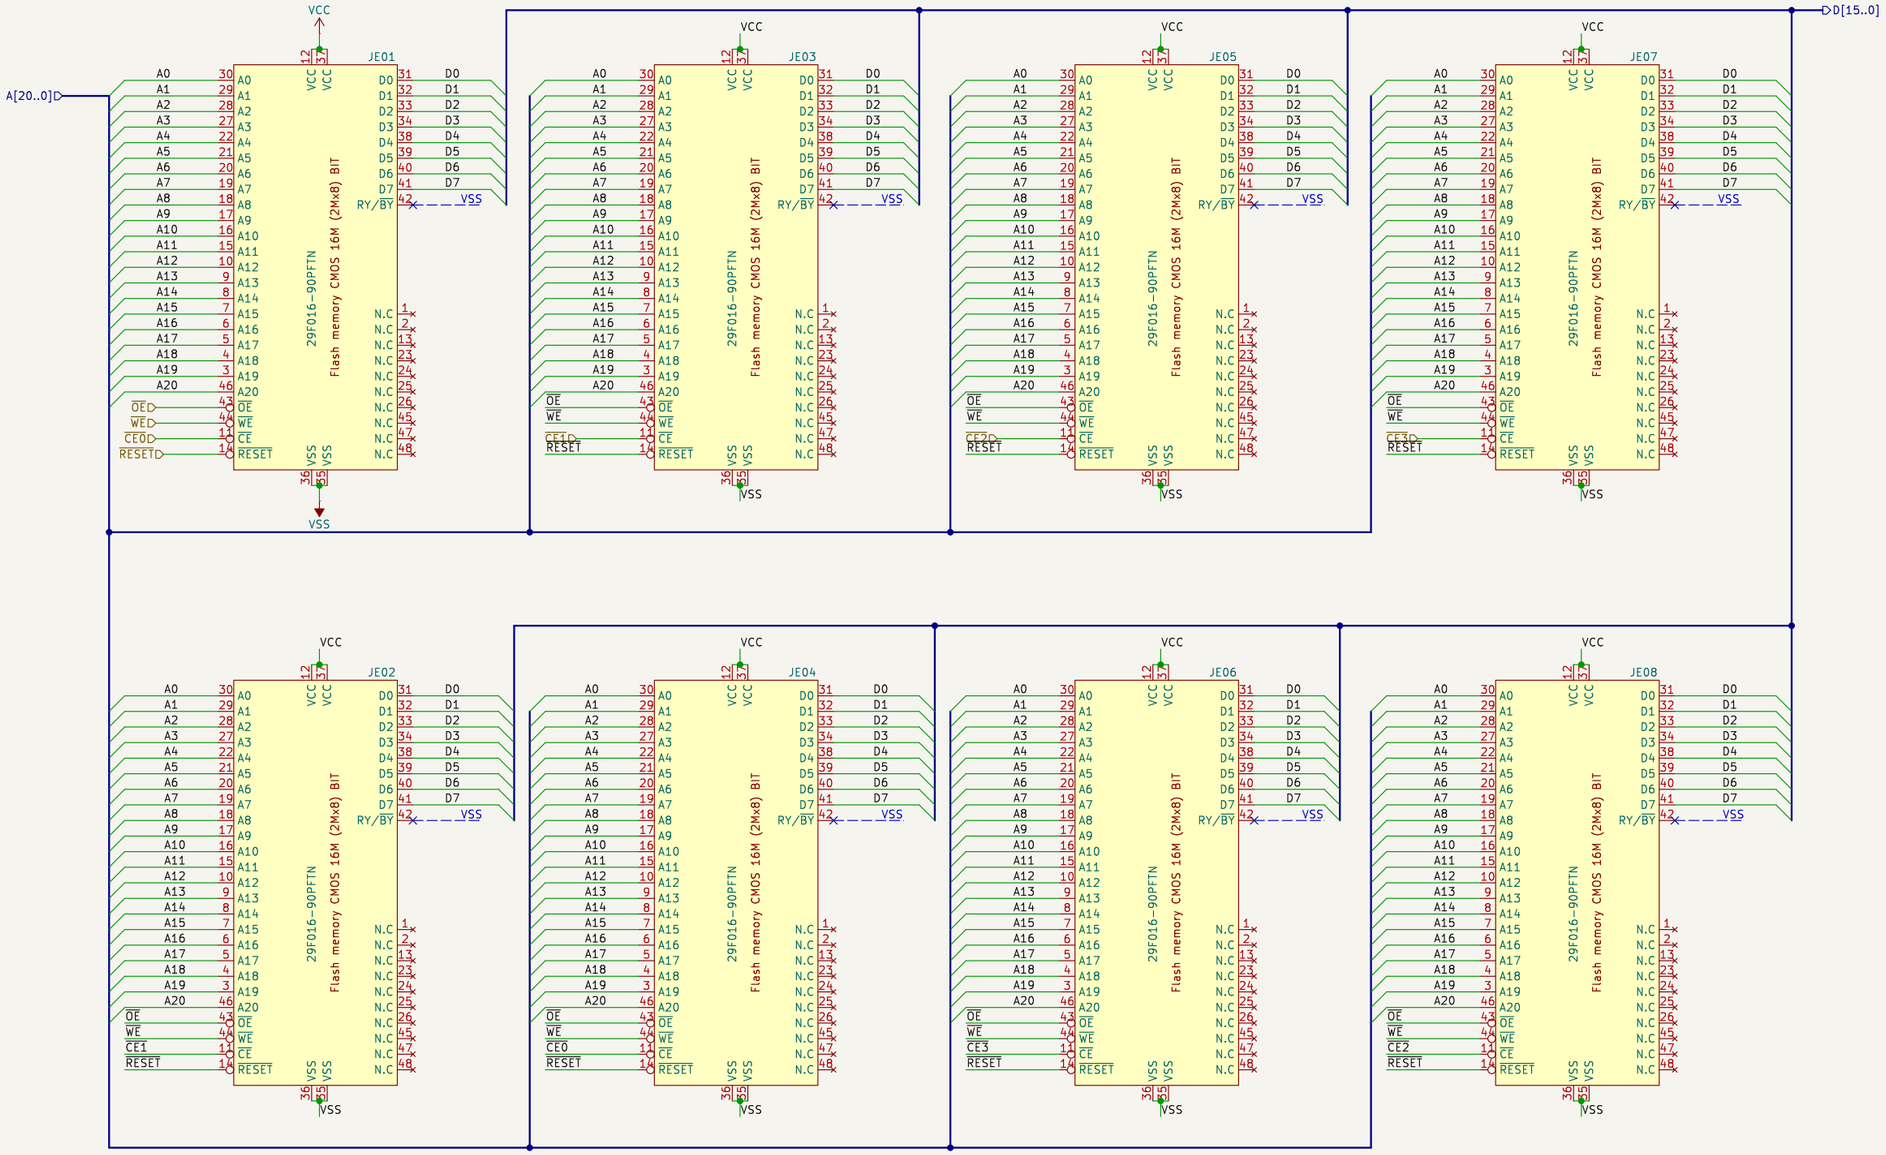


14/10/22-30/01/23		
JOTEGO		
JOTEGO		
Sheet: /simms_flash/simm3/		
File: simm.kicad_sch		
Title: CP SYSTEM III		
Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 14/23

Simm

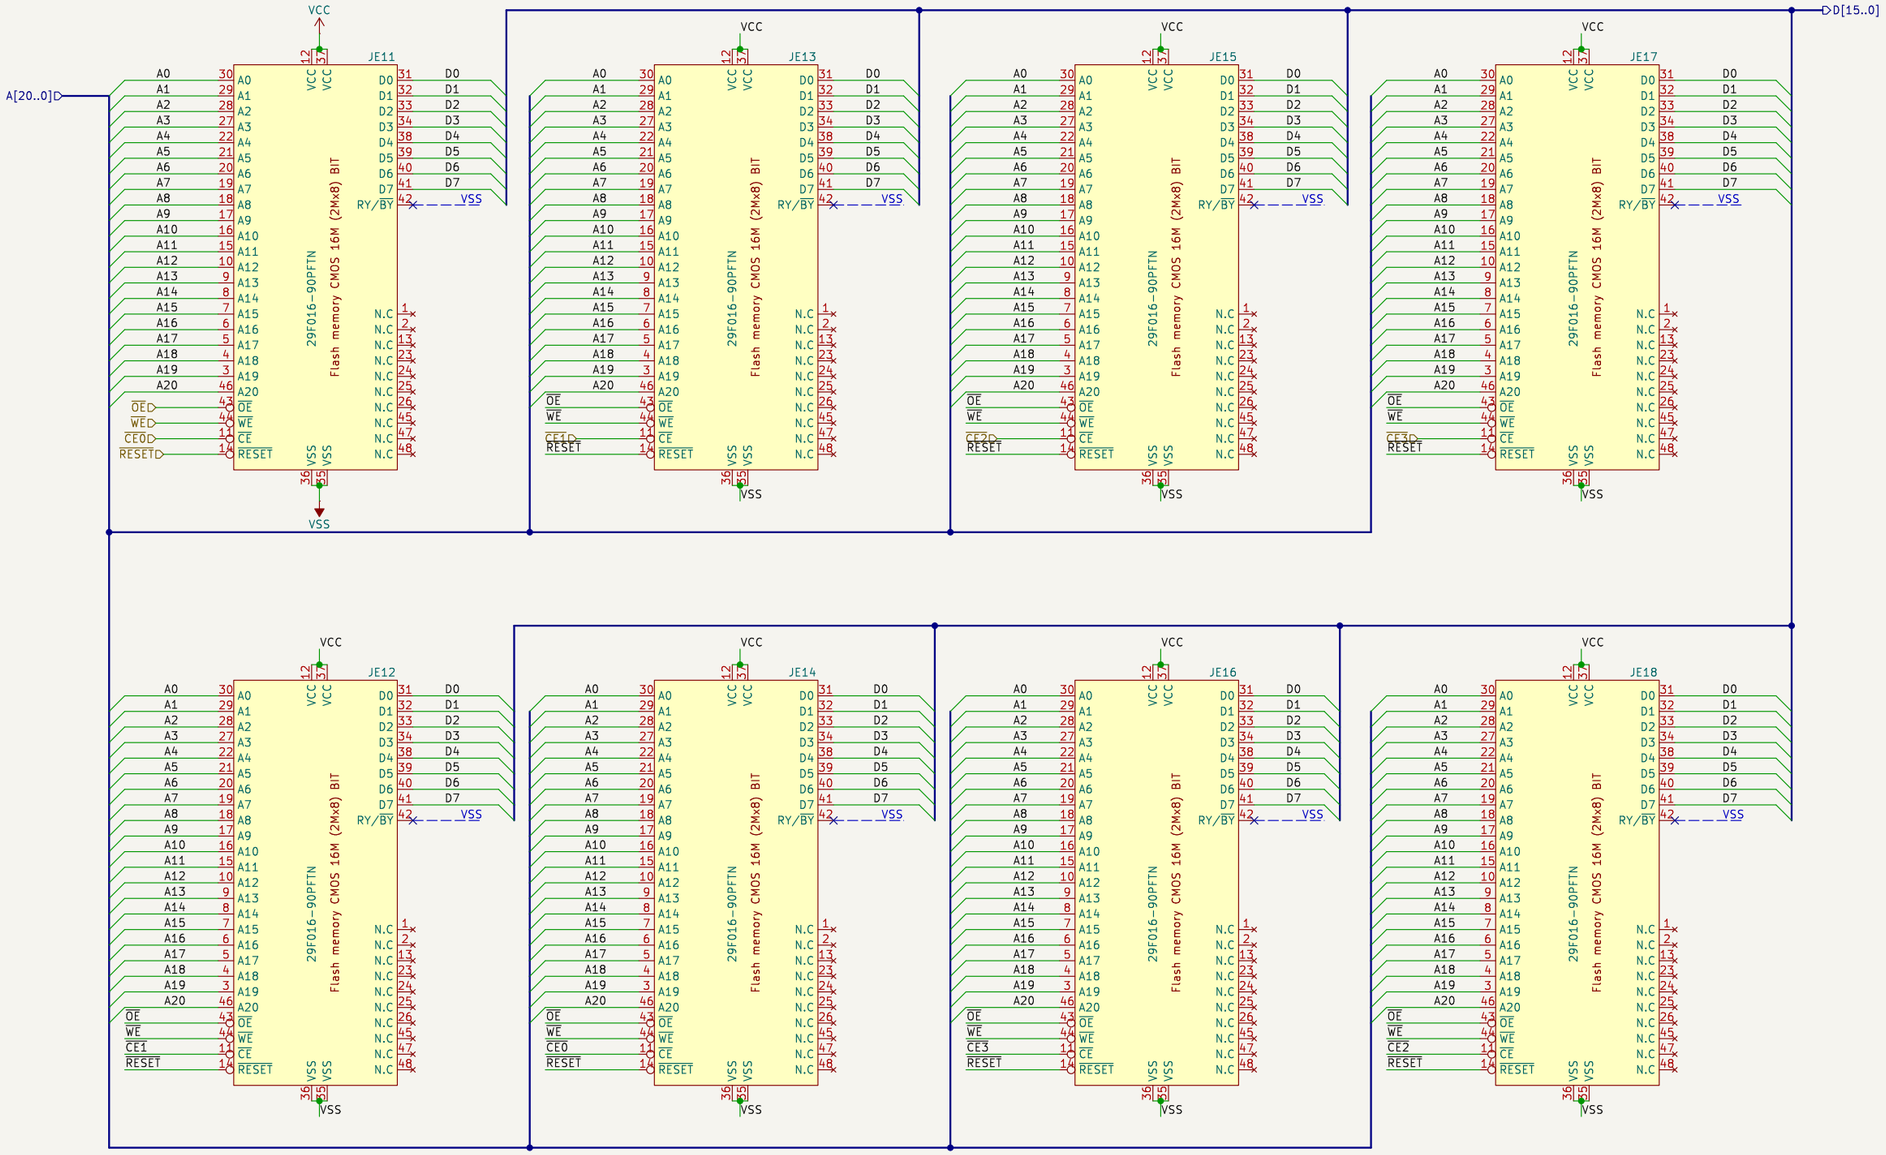


14/10/22-30/01/23		
JOTEGO		
JOTEGO		
Sheet: /simms_flash/simm4/		
File: simm.kicad_sch		
Title: CP SYSTEM III		
Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 15/23

Simm

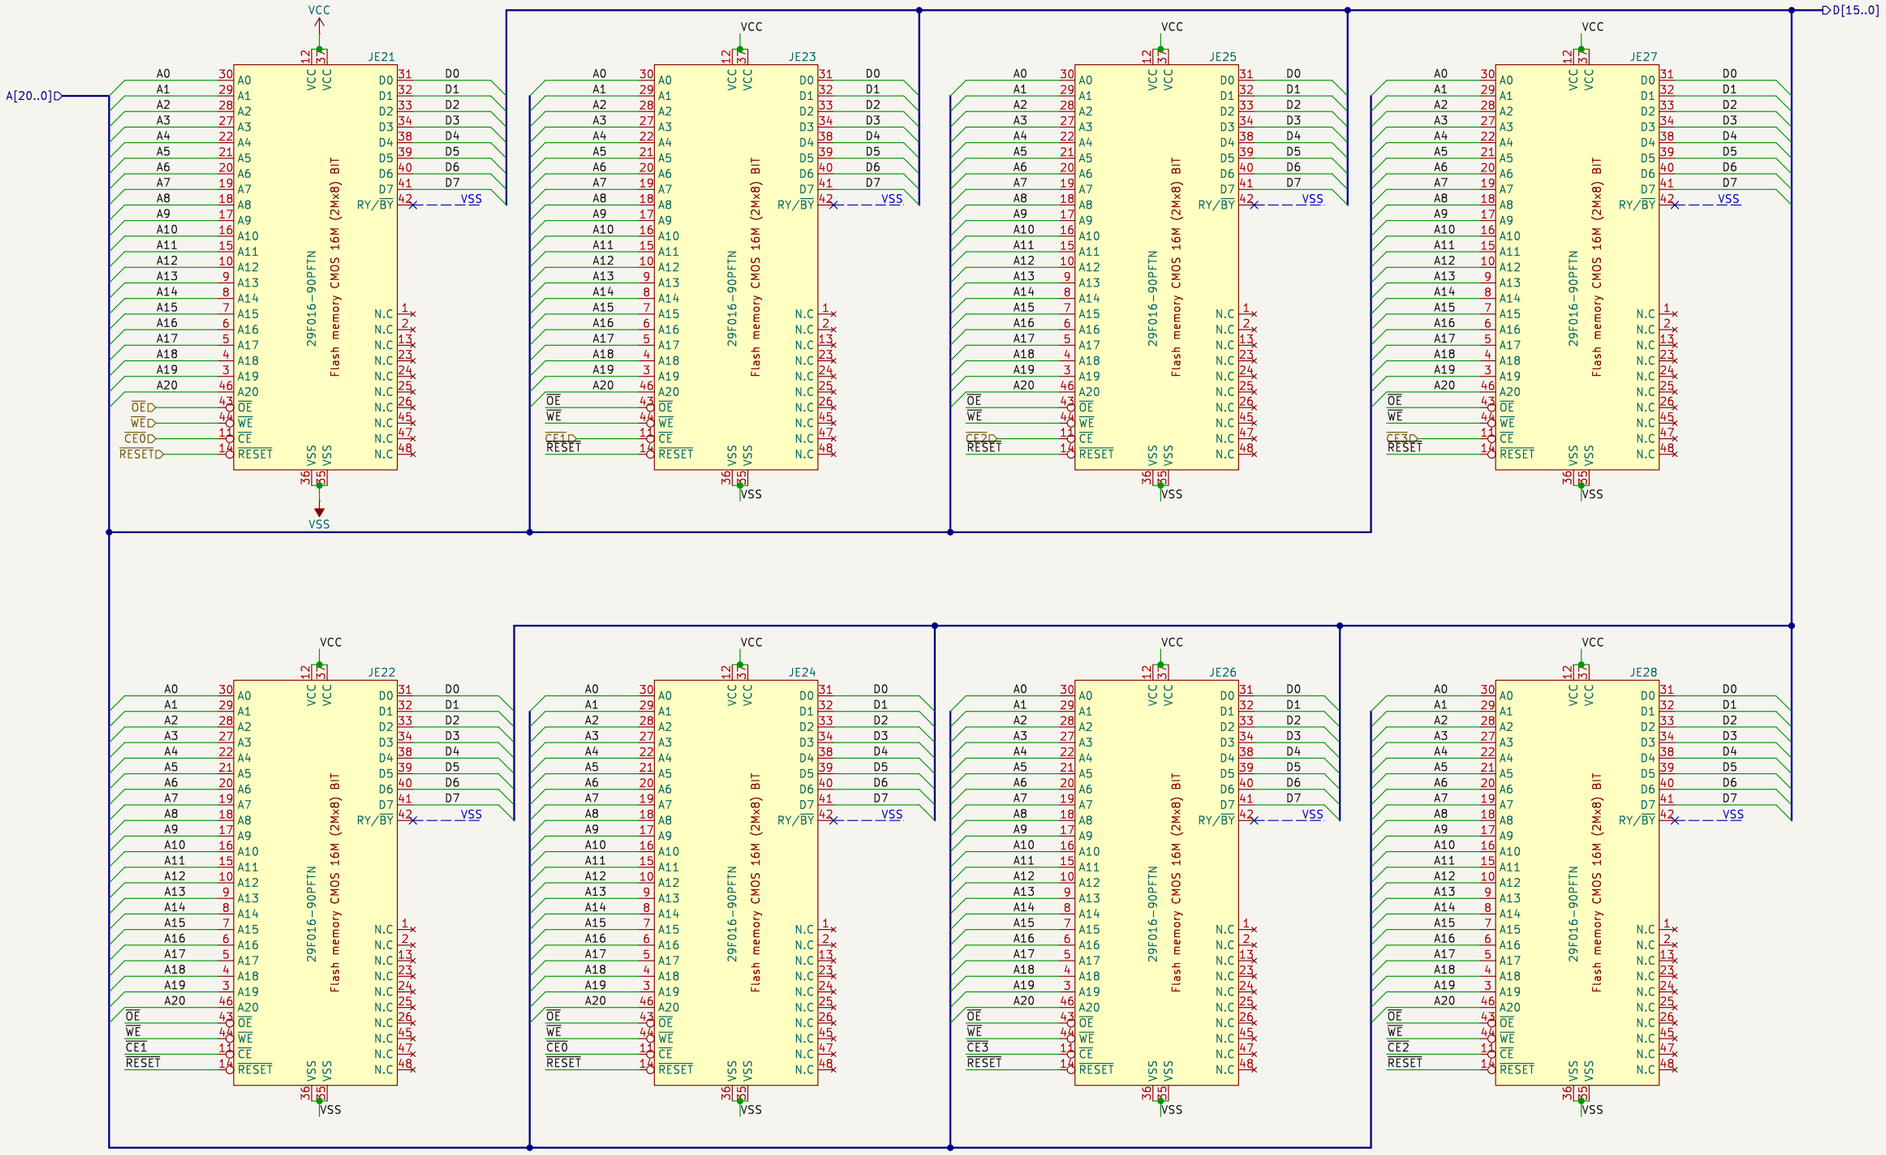


14/10/22–30/01/23		
JOTEGO		
JOTEGO		
Sheet: /simms_flash/simm5/		
File: simm.kicad_sch		
Title: CP SYSTEM III		
Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 16/23

Simm

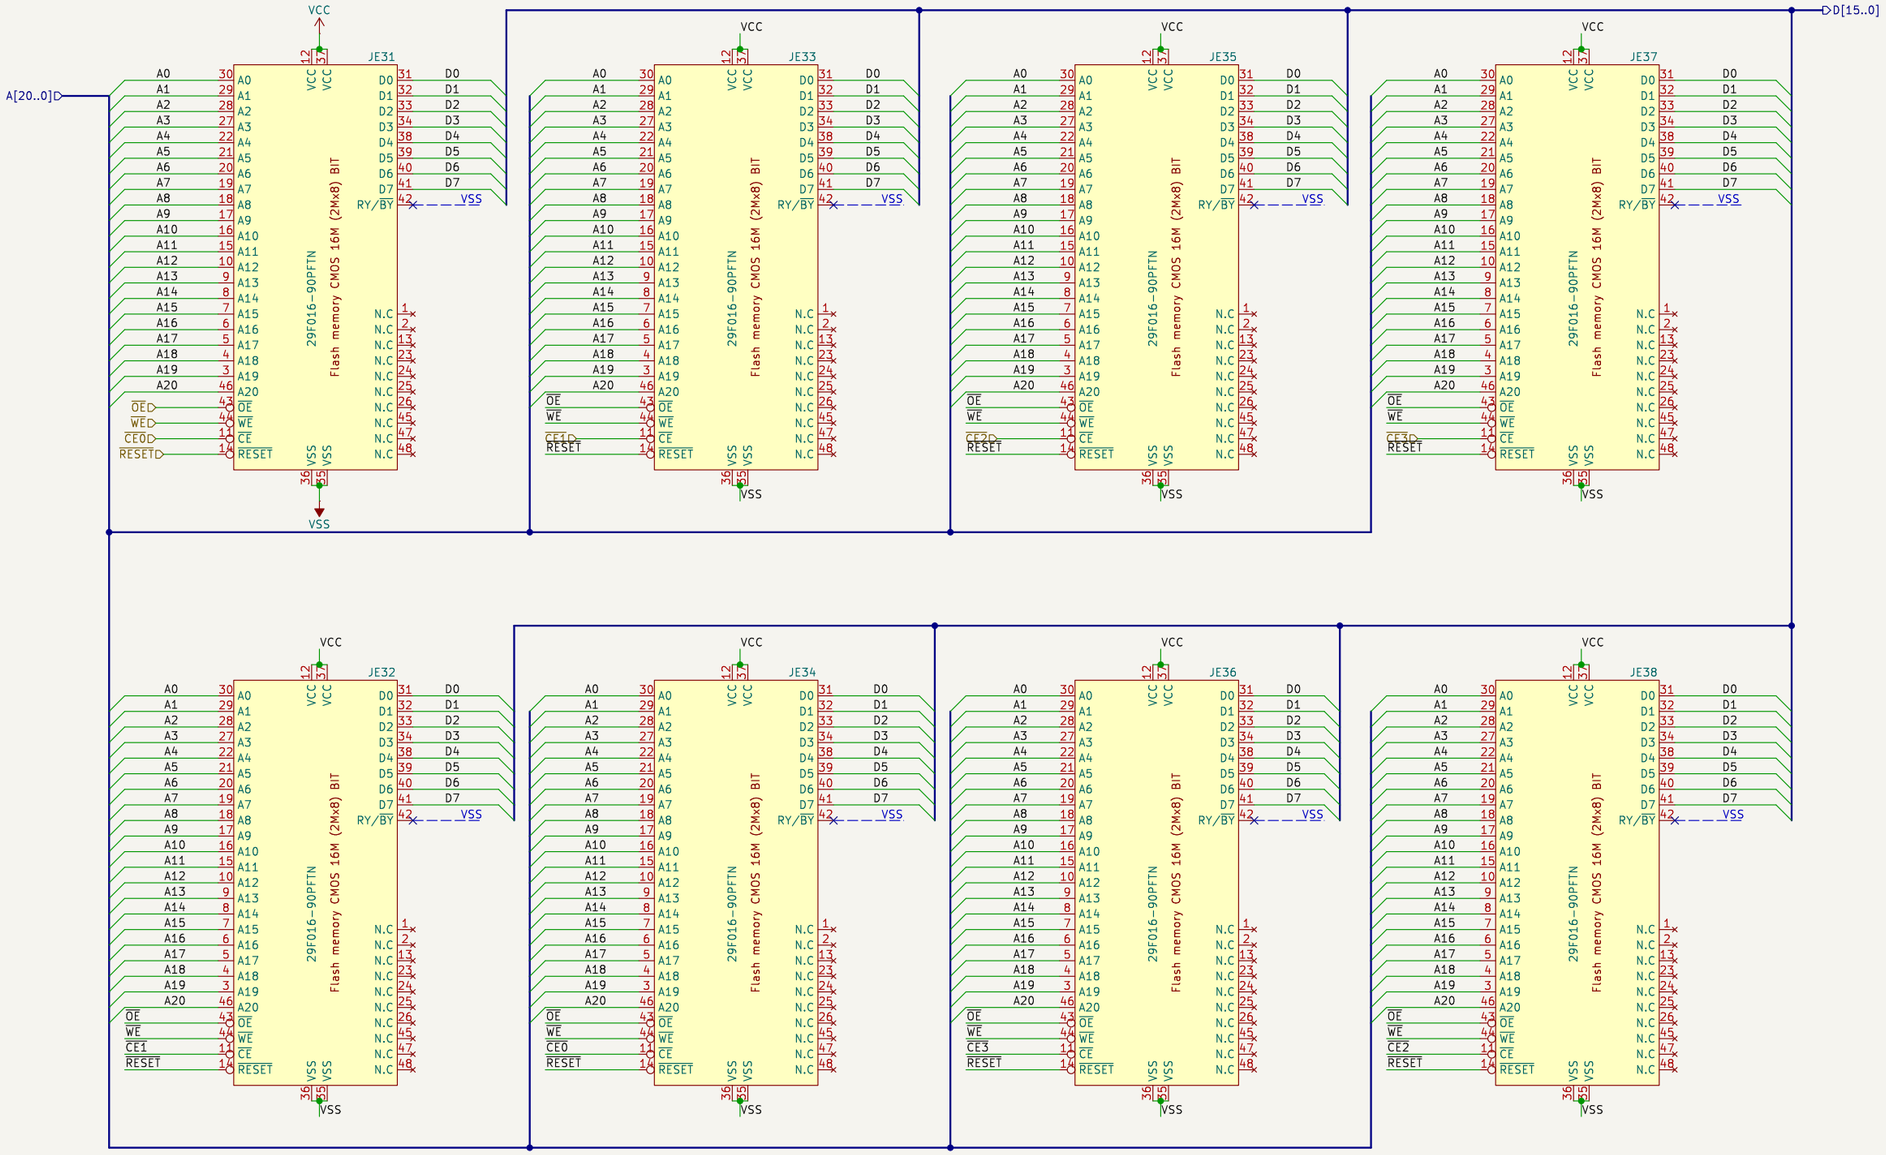

14/10/22-30/01/23		
JOTEGO		
JOTEGO		
Sheet: /simms_flash/simm6/		
File: simm.kicad_sch		
Title: CP SYSTEM III		
Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 17/23


Slot Female

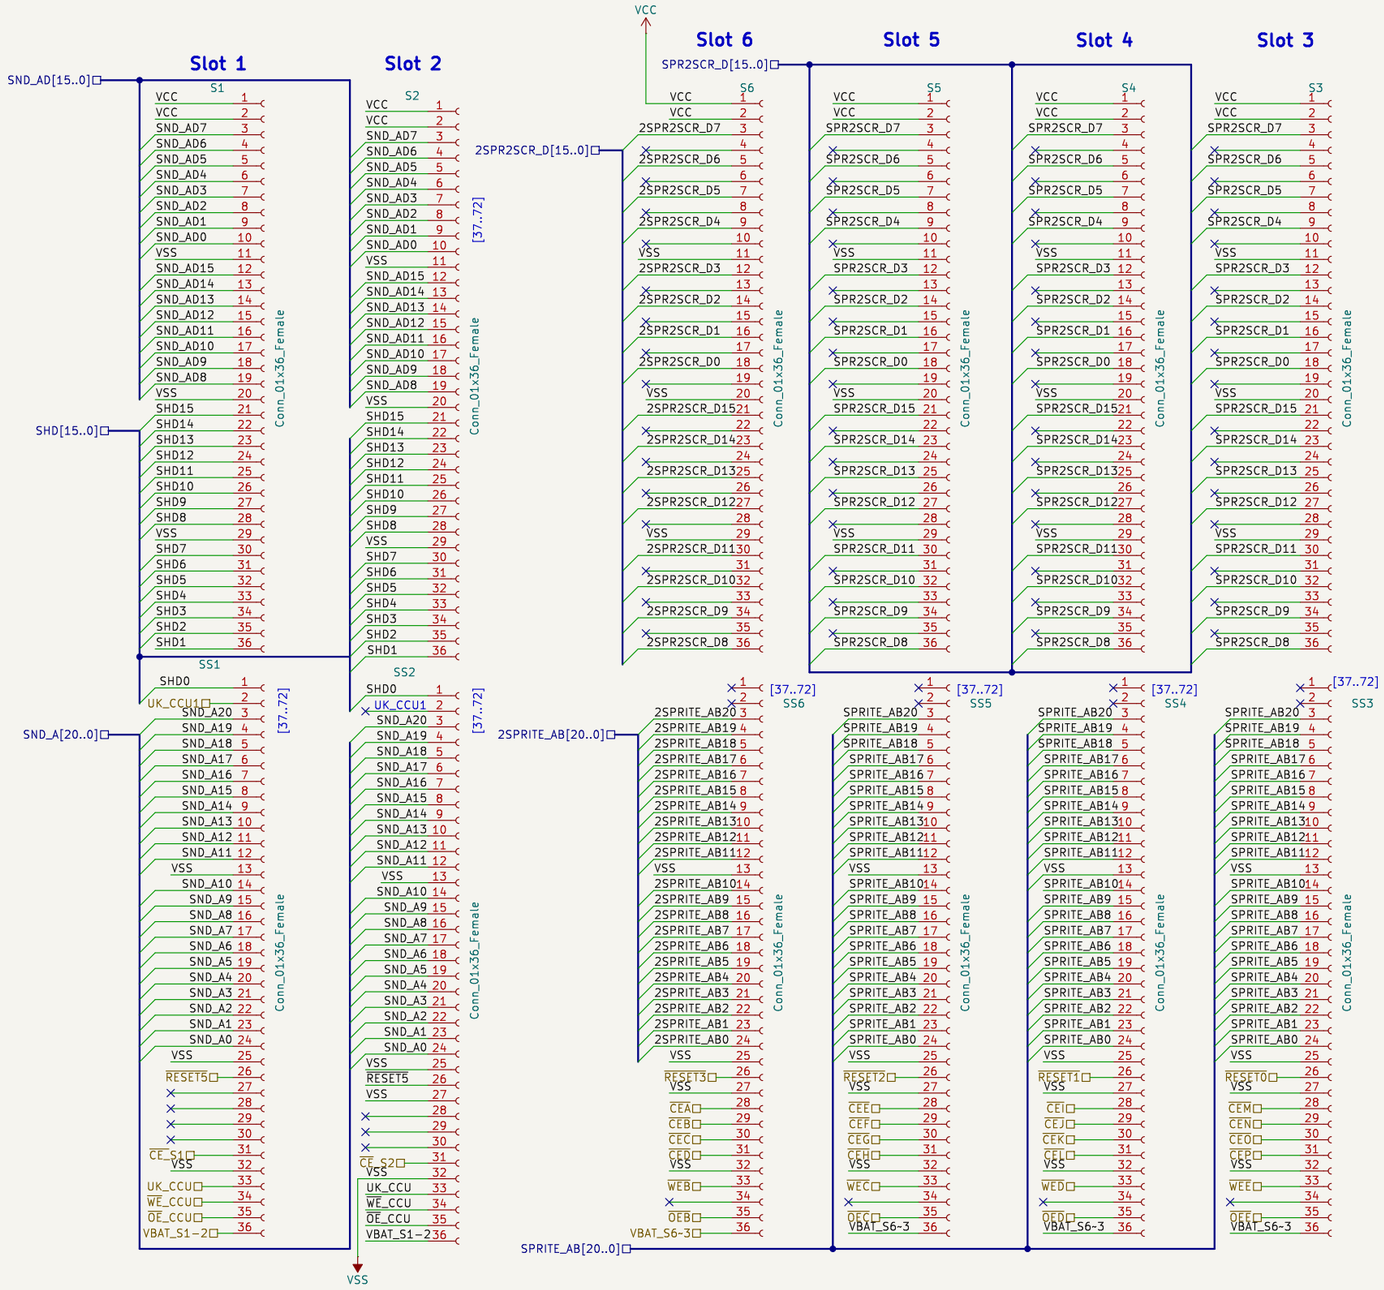

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /simms_flash/slots_female/
File: slots_females.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 18/23

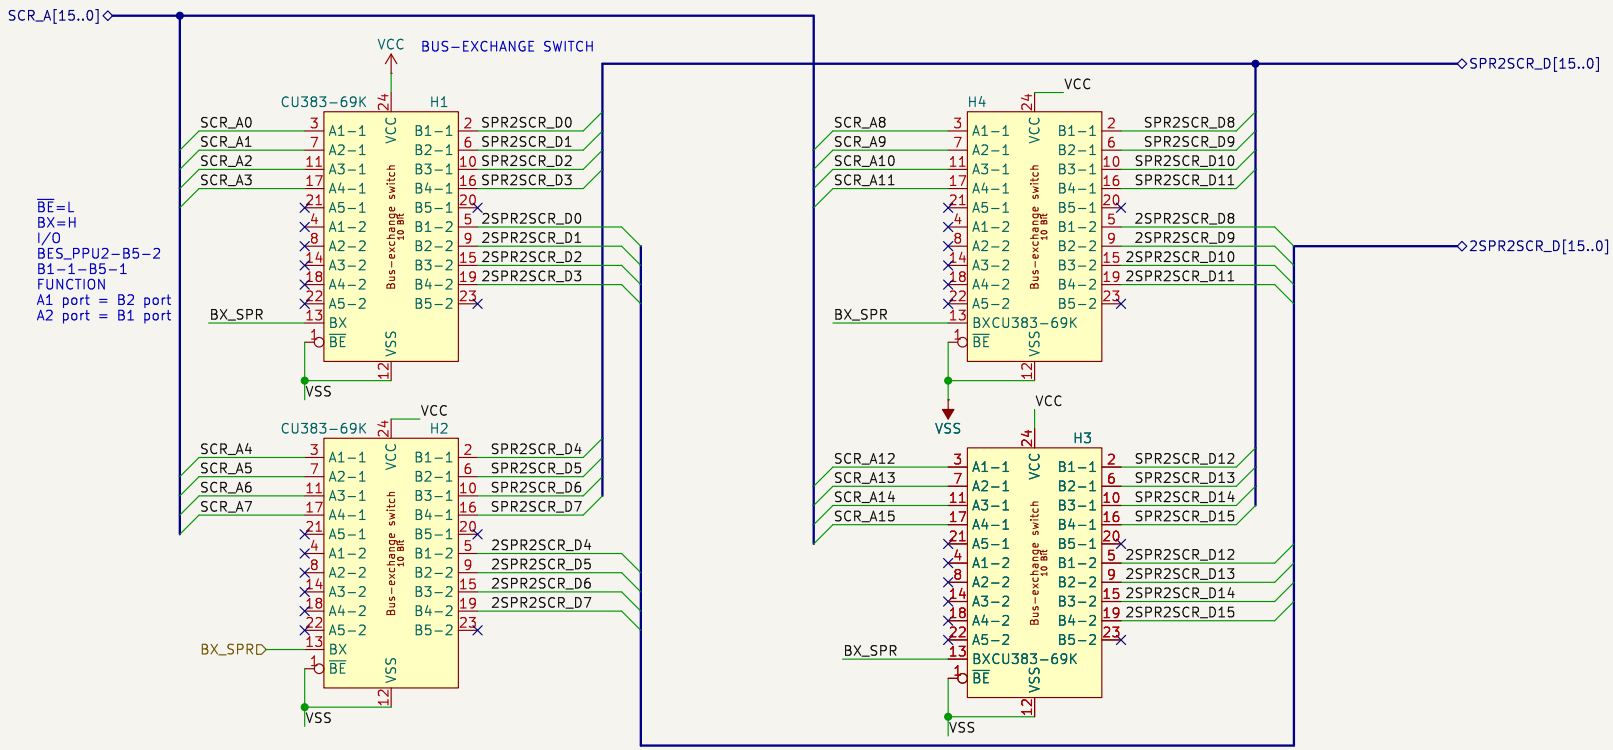


14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /simms_flash/scroll/
File: scroll.kicad_sch

Title: CP SYSTEM III

Size: A4	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 19/23

MEMORIES FRAME BUFFER

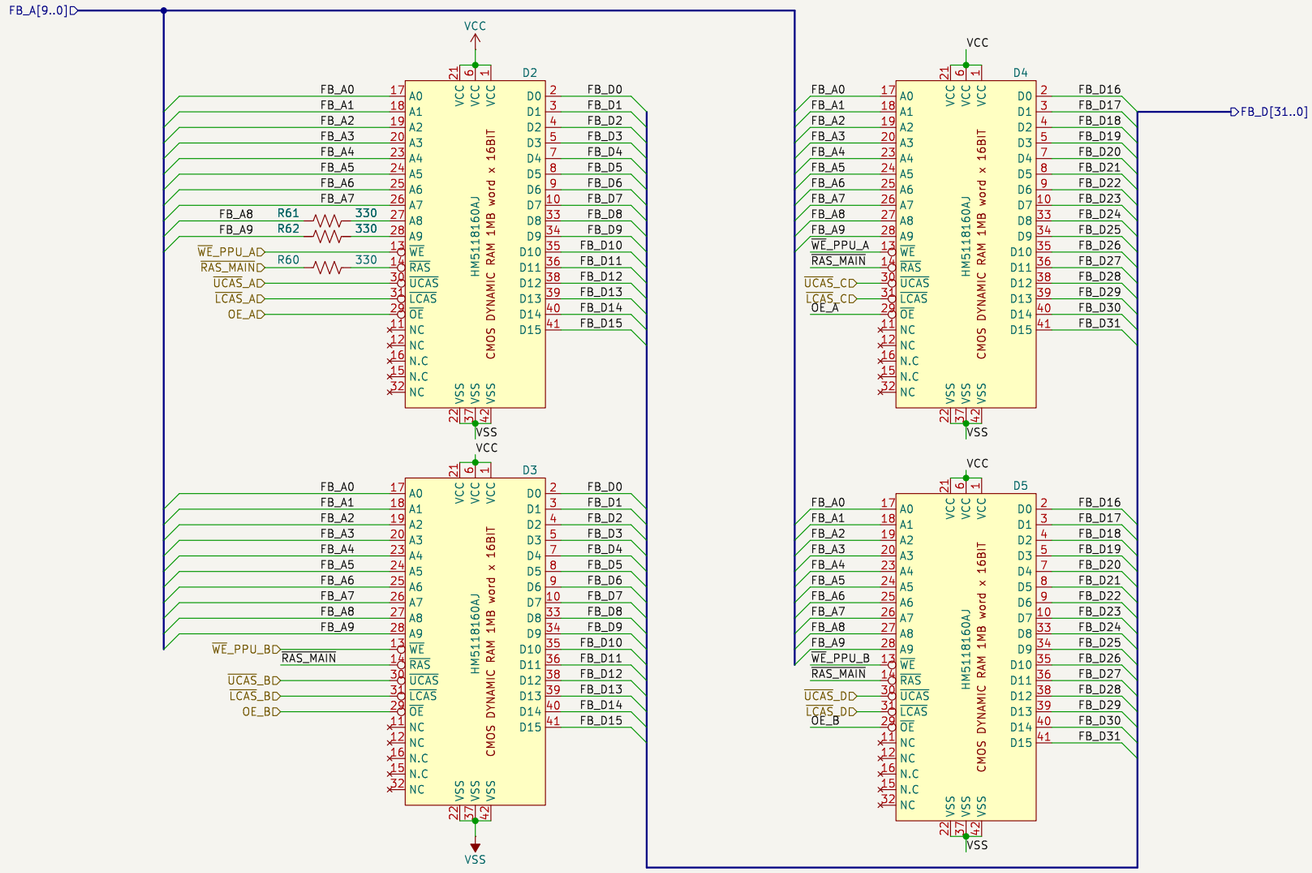


14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /ppu/memories_fb/
File: memories_fb.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 20/23

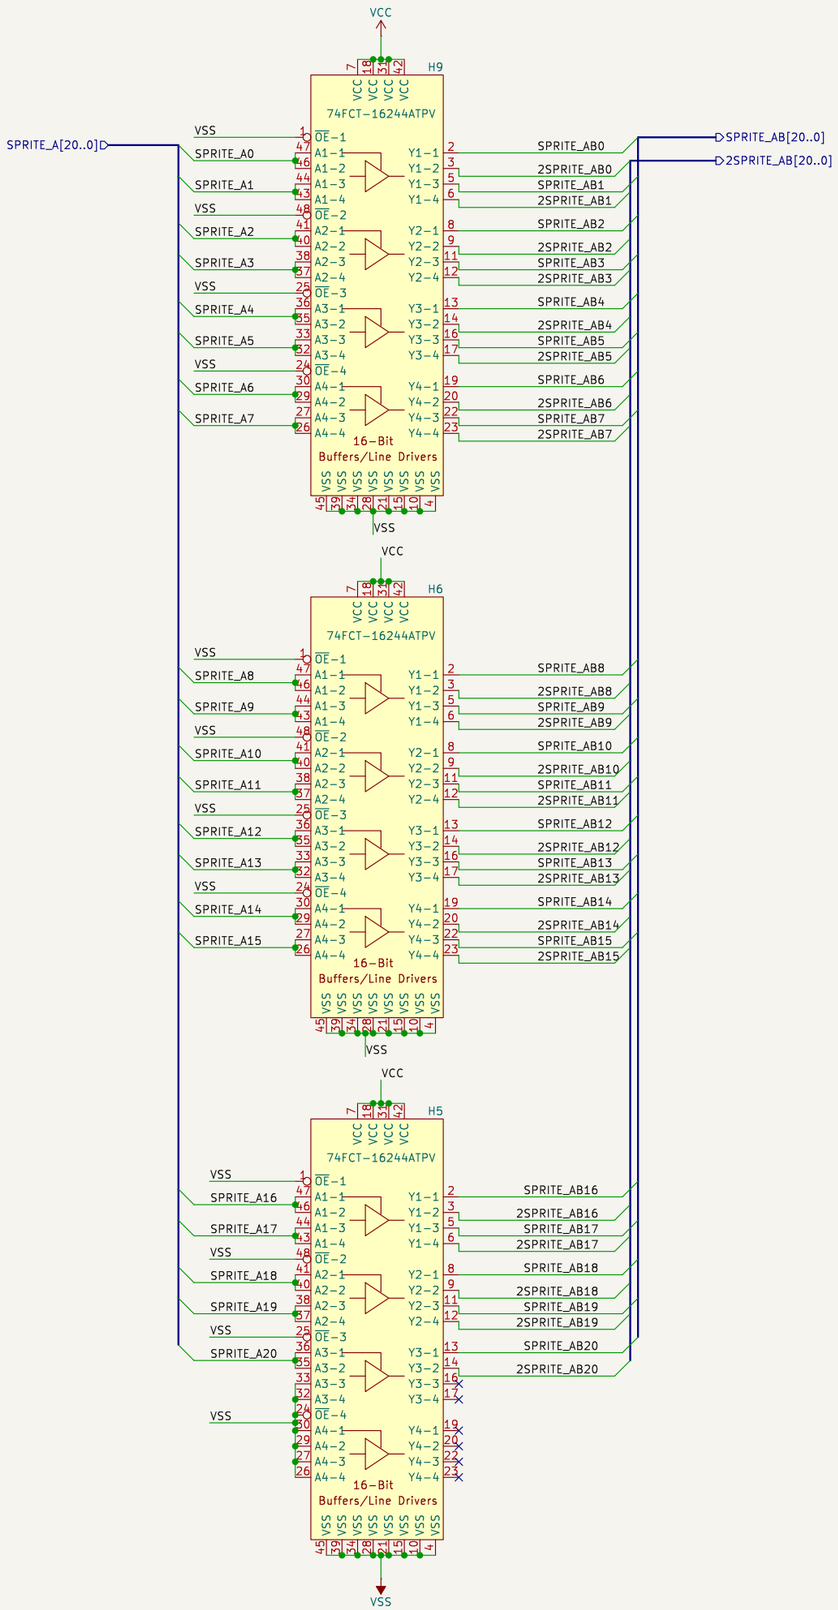

14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /ppu/buffer_line_driver/
File: buffer_line_driver.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 21/23

NOT POPULATED

This device does not support the 10% VPP option at extended temperatures, as it is in the commercial data sheet.
There is a table that specifies a tolerance of 5% VPP only.

Z5

SMART 3 ADVANCED BOOT BLOCK
28F400-200BX/BL
FLASH MEMORY FAMILY
Peak to Peak Voltage
4MB (256Kb x 16bits) 8MB (512Kb x 16bits) 16MB (1024Kb x 16bits)
DI/O_A_MUX
Selects 8-bit or 16-bit Mode

Vpp	1	Vpp	D0	15	CPUC_D0
	2	DU	D1	17	CPUC_D1
	3	N.C	D2	19	CPUC_D2
CPUC_A1	11	A0	D3	21	CPUC_D3
CPUC_A2	10	A1	D4	24	CPUC_D4
CPUC_A3	9	A2	D5	26	CPUC_D5
CPUC_A4	8	A3	D6	28	CPUC_D6
CPUC_A5	7	A4	D7	30	CPUC_D7
CPUC_A6	6	A5	D8	16	CPUC_D8
CPUC_A7	5	A6	D9	18	CPUC_D9
CPUC_A8	4	A7	D10	20	CPUC_D10
CPUC_A9	42	A8	D11	22	CPUC_D11
CPUC_A10	41	A9	D12	25	CPUC_D12
CPUC_A11	40	A10	D13	27	CPUC_D13
CPUC_A12	39	A11	D14	29	CPUC_D14
CPUC_A13	38	A12	DI/O_A_MUX D15/A-1	31	CPUC_A0
CPUC_A14	37	A13			
CPUC_A15	36	A14			
CPUC_A16	35	A15			
CPUC_A17	34	A16			
CPUC_A18	12	A17			
OE_CMOS	14	CE			
WE_CMOS	43	OE			
RST_CMOS	44	WE			
BYTE	33	RP			
		BYTE			
		VSS			
		VSS			

VCC
23
VSS
13
32

CPUC_A[26..0]
CPUC_D[31..0]

WAIT_CPUC
7400 T1A
WAIT_CPUC
CP179 10µF
VCC
VSS
37

Z2

29F400TA-90PF
CMOS FLASH MEMORY
4MB (512Kb x 8bits)
READY/BUSY STATUS _O
5 Volt Sector Erase

CPUC_A1	25	A0	D0	29	CPUC_D0
CPUC_A2	24	A1	D1	31	CPUC_D1
CPUC_A3	23	A2	D2	33	CPUC_D2
CPUC_A4	22	A3	D3	35	CPUC_D3
CPUC_A5	21	A4	D4	38	CPUC_D4
CPUC_A6	20	A5	D5	40	CPUC_D5
CPUC_A7	19	A6	D6	42	CPUC_D6
CPUC_A8	18	A7	D7	44	CPUC_D7
CPUC_A9	8	A8	D8	30	CPUC_D8
CPUC_A10	7	A9	D9	32	CPUC_D9
CPUC_A11	6	A10	D10	34	CPUC_D10
CPUC_A12	5	A11	D11	36	CPUC_D11
CPUC_A13	4	A12	D12	39	CPUC_D12
CPUC_A14	3	A13	D13	41	CPUC_D13
CPUC_A15	2	A14	D14	43	CPUC_D14
CPUC_A16	1	A15	DI/O_A_MUX D15/A-1	45	CPUC_A0
CPUC_A17	48	A16	RY/BY	15	
CPUC_A18	17	A17	N.C	16	
WE_CMOS	11	WE	N.C	14	
RST_CMOS	12	RESET	N.C	13	
	26	CE	N.C	10	
OE_CMOS	28	OE	N.C	9	
BYTE	47	BYTE			
		VSS			
		VSS			

VCC
CCP180 1µF
VSS
27
46

CONNECTED IN FEMALE SLOT:
WE_CMOS TO PULL UP
RST_CMOS TO VCC
OE_CMOS TO VSS
BYTE TO VSS

CER_CSTD
CER_CST
T1D 7400
CPUC_CS1
T1C 7400
CPUC_A24
CE_FRAM

FM1208S-250SC Z6

4096-BIT NONVOLATILE FERROELECTRIC RAM
Mode Control Input

CPUC_A1	8	A0	D0	9	CPUC_D0
CPUC_A2	7	A1	D1	10	CPUC_D1
CPUC_A3	6	A2	D2	11	CPUC_D2
CPUC_A4	5	A3	D3	13	CPUC_D3
CPUC_A5	4	A4	D4	14	CPUC_D4
CPUC_A6	3	A5	D5	15	CPUC_D5
CPUC_A7	2	A6	D6	16	CPUC_D6
CPUC_A8	1	A7	D7	17	CPUC_D7
CPUC_A9	23	A8	N.C	19	
	18	CE			
VSS	20	OE			
CPUC_WEO	21	WE			
NOT CONECTED?	22	D/NV			

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /cassette/memories_scu/
File: memories_scu.kicad_sch
Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 22/23

HARDWARE DESCRIPTION

Main CPU : Main CPU: Hitachi HD6417099 (SH-2) at 25 MHz
Storage : SCSI CD Rom, RAM and Flash ROM.
RAM : SIMMs on the left will physically hold 16M of data each (each has 8x 16M Flash ROMs, there's 4 SIMMs plugged in on this board). The SIMMs on the right will physically hold 8M each (there's 4 Flash ROMs on each board and there are 2 SIMMs plugged in)
OSC : 60MHz. 42.9545MHz, XTAL :3.6864MHz

**Sound chip: 16-channel 8-bit sample player, stereo*
**Maximum color palette: 16 million shades[5]*
**Maximum number of colors on screen: 32,768[6] (15-bit colour, 555 RGB)*
**Palette size: 131,072 pens*
**Colors per tile (backgrounds / sprites): 64 (6 bits per pixel) or 256 (8 bits per pixel), selectable*
**Colors per tile (text overlay): 16 (4 bits per pixel)*
**Maximum number of objects: 1024, with hardware scaling[6]*
**Scroll faces: 4 regular + 1 text overlay 'score screen' layer*
**Scroll features: Horizontal & vertical scrolling, linescroll, linezoom[6]*
**Framebuffer zooming*
**Color blending effects*
**Hardware RLE decompression of 6 bpp and 8 bpp graphics through DMA*
**Resolution, pixels: 384×224 (standard mode) / 496×224 (widescreen mode)*

KNOWN CP SYSTEM III (CPS3) GAME LIST

All six games are developed by Capcom and are all head-to-head fighting games in a list of games that appears to be as small as the CP System Dash library.

English title	Release date	Japanese title
Red Earth	1996-11-21	*War-Zard* (ウォーザード)
Street Fighter III: New Generation	1997-02-04	*Street Fighter III* (ストリートファイターIII)
Street Fighter III 2nd Impact: Giant Attack	1997-09-30	*Street Fighter III 2nd Impact* (ストリートファイターIII 2nd Impact)
JoJo's Bizarre Adventure	1998-12-02	*JoJo no Kimyō na Bōken* (ジョジョの奇妙な冒険)
Street Fighter III 3rd Strike: Fight for the Future	1999-05-12	*Street Fighter III 3rd Strike* (ストリートファイターIII 3rd Strike)
JoJo's Bizarre Adventure: Heritage for the Future	1999-09-13	*JoJo no Kimyō na Bōken Mirai e no Isan* (ジョジョの奇妙な冒険 未来への遺産)

Font:
The Museum Arcade System 16

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /h_description/
File: h_description.kicad_sch
Title: CP SYSTEM III
Size: A3 | Date: 14/10/22 | **Rev: José Tejada G.**
KiCad E.D.A. 8.0.9 | Id: 23/23