




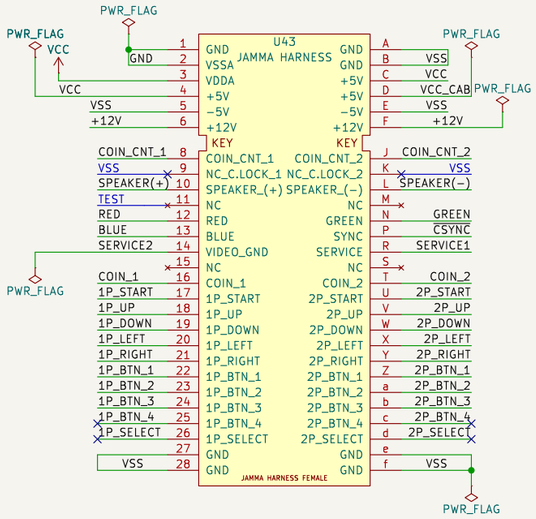


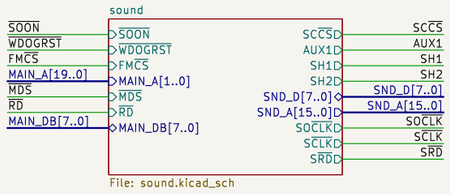


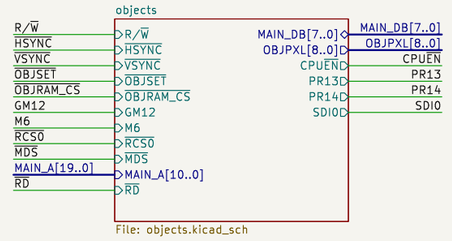


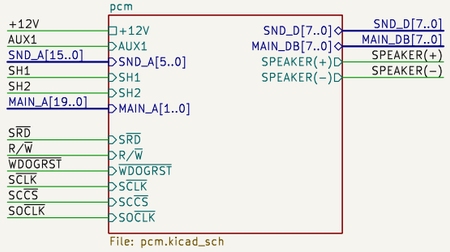


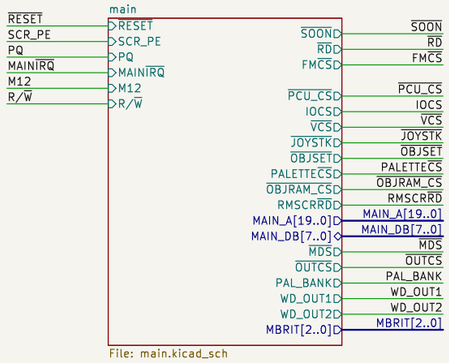

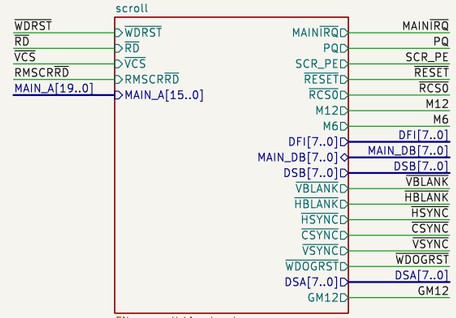

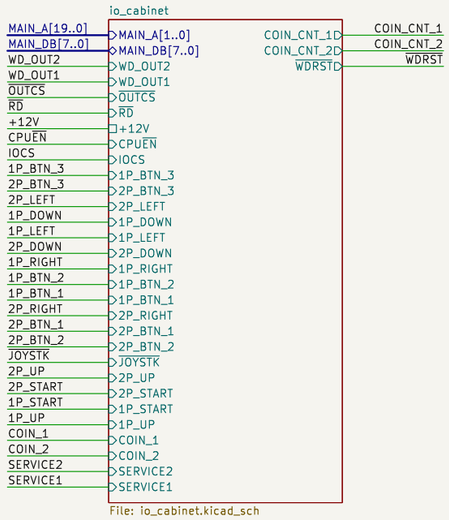



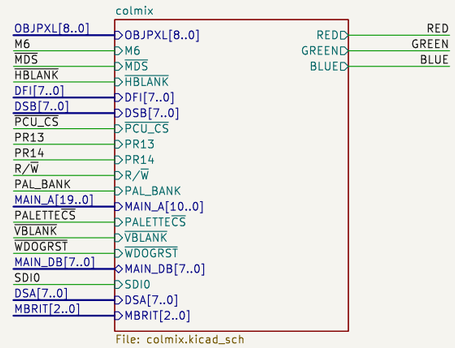

PWB352020B

JOTEGO
www.patreon.com/jotego
JOTEGO

Sheet: /
File: surprise_attack.kicad_sch

Title: Surprise Attack

Size: A3	Date: 2025-09-01	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 1/10

MAIN_D[7..0]

AS
SCR_PED
F19B 74LS74
F11C 74LS08
M12D
F19A 74LS74
PALETTECS
74LS08 F11B
DTAC
VCC
H22A 74LS74
VCS
M12
H21E 74LS04
M12
H21F 74LS04
MAINCLK

MAIN_DB[7..0]
MAIN_DB0
MAIN_DB1
MAIN_DB2
MAIN_DB3
MAIN_DB4
MAIN_DB5
MAIN_DB6
MAIN_DB7
H7 buffers 74LS245
A->B
CE
PROGCS2
PAGED
E16C 74LS00
R/W

F10 3-StateHexBuffers 74LS367
SCR_PE
PQ
RESET
PE
MPQ
MAINRST
VSS

4728 IAM
RA14 4.7kΩx8
Jp JP3
HALT
PE
DTAC
FIRQ
MAINRST
MAINNMI
MAINIRQ
MPQ
MAINCLK
MAIN_D0
MAIN_D1
MAIN_D2
MAIN_D3
MAIN_D4
MAIN_D5
MAIN_D6
MAIN_D7
H12 KONAMI 053248 CPU MAIN
R/W
AS
DS
MAIN_A0
MAIN_A1
MAIN_A2
MAIN_A3
MAIN_A4
MAIN_A5
MAIN_A6
MAIN_A7
MAIN_A8
MAIN_A9
MAIN_A10
MAIN_A11
MAIN_A12
MAIN_A13
MAIN_A14
MAIN_A15
MAIN_A16
MAIN_A17
MAIN_A18
MAIN_A19
MAIN_A20
MAIN_A21
MAIN_A22
MAIN_A23
NOT CONNECTED
TEST
R0
R1
R2
R3
R4
R5
R6
R7
R8
R9
VSS PWR_FLAG

MAIN_A[19..0]
F5 27C010
H5 27C010
GND
PGM
VPP
CE
OE
VCC
VSS
PROGCS1
PROGCS2

PAL2
PROG_A13= PAGED ? A15 : A13
PROG_A14= PAGED ? A16 : A14
PROG_A15= PAGED ? A17 : A15
PROG_A16= PAGED ? A18 : 0
PROGCS1 = A19 & PAGED
PROGCS2 = UNPAGED & (A19 | PAGED)

PAL2 PAL16L8 053887
MAIN_A15
MAIN_A14
MAIN_A13
MAIN_A19
MAIN_A18
MAIN_A17
MAIN_A16
PAGED
MAIN_A20
PROGCS1
PROGCS2
PROG_A16
PROG_A15
PROG_A14
PROG_A13

Floating (no driver)
verified on the PCB
while running the game
Constant 1.8V observed

MAIN_DB0
MAIN_DB1
MAIN_DB2
MAIN_DB3
MAIN_DB4
MAIN_DB5
MAIN_DB6
MAIN_DB7
D17 74LS273
WD_OUT1
WD_OUT2
RMSCRRD
MBRIT0
MBRIT1
MBRIT2
MBRIT[2..0]
RESET
F12A 74LS32
OUTCS
R/W

PAL3 PAL16L8 053888
AS
BANKR
MAIN_A15
MAIN_A14
MAIN_A13
MAIN_A12
MAIN_A11
MAIN_A10
BANK1
WRK
UNPAGED
NC
PAGED
WORKCS
OBJRAM_CS
PALETTECS
i6
i7
VSS

PAL3
o12 = i7 = 2000-2FFF when BANK1
2800-5FFF
6000-7FFF when BANKR
o13 = i6 = 3C00-3FFF
PAGED= 6000-7FFF when BANKR
8000-9FFF
PALETTE_CS= 0000-07FF when WRK
OBJRAM_CS= 2000-27FF when BANK1
WORKCS= 0000-07FF when WRK
0800-1FFF
UNPAGED= A000-FFFF (ROM PPAL)

AS 3 H21B 74LS04 4 AS

PAL1 PAL16L8 053884
RMSCRRD
MAIN_A9
MAIN_A8
MAIN_A7
MAIN_A6
MAIN_A5
MAIN_A4
FMCS
VCS
OBJSET
PCU_CS
MISC
IOCS
JOYSTK
GND PWR_FLAG

PAL1
JOYSTK 3F8C-3F8F
IO_CS 3F90-3F9F
MISC 3FC0-3FCF
PCU_CS 3FB0-3FBF
OBJSET 3FA0-3FAF
VCS= AS&!i7&(A8&A7&A9&AB+i6+A7)

74LS139 decoder
MAIN_A3
MAIN_A2
OUTCS
BANKCS
SOON
Connected to pin
17 of KONAMI 053260
(D8) in Parodius Da!

E17 MB8464A-10W-15W CMOS Static RAM 8K x 8 BITS
WORKCS
RD
R/W
F7B 74LS04

TEST HEADER
FOOTPRINT MAIN CPU
Conn_02x25_Counter_Clockwise
FP2
FP1
VCC
VSS

JOTEGO
www.patreon.com/jotego
JOTEGO

Sheet: /main/
File: main.kicad_sch

Title: Surprise Attack

Size: A3	Date: 2025-09-01	Rev: José Tejada G.
KiCad E.D.A. 8.0.9		Id: 2/10

RN4
SERVICE1
SERVICE2
COIN_1
COIN_2
KONAMI_005273
ISERVICE1
ISERVICE2
ICOIN_1
ICOIN_2
RN2
1P_START
2P_START
1P_UP
2P_UP
KONAMI_005273
I1P_START
I2P_START
I1P_UP
I2P_UP
RN3
1P_DOWN
2P_DOWN
1P_LEFT
2P_LEFT
KONAMI_005273
I1P_DOWN
I2P_DOWN
I1P_LEFT
I2P_LEFT
RN5
1P_RIGHT
2P_RIGHT
1P_BTN_1
2P_BTN_1
KONAMI_005273
I1P_RIGHT
I2P_RIGHT
I1P_BTN_1
I2P_BTN_1
RN1
1P_BTN_2
2P_BTN_2
1P_BTN_3
2P_BTN_3
KONAMI_005273
I1P_BTN_2
I2P_BTN_2
I1P_BTN_3
I2P_BTN_3
VCC
RA4
2228
2.2kΩX8
SW_DIPS_08
SW1
S15
S16
S17
VSS
C24
S10
ISERVICE1
I2P_START
I1P_START
JOYSTK
S11
ISERVICE2
I2P_UP
I1P_UP
JOYSTK
A0
A1
74LS253
MAIN_DB0
MAIN_DB1
C22
S12
ICOIN_1
I2P_DOWN
I1P_DOWN
JOYSTK
S13
ICOIN_2
I2P_LEFT
I1P_LEFT
JOYSTK
A0
A1
74LS253
MAIN_DB2
MAIN_DB3
VCC
RA2
2224
2.2kΩX4
SW_DIPS_04
SW3
VSS
C21
S14
I2P_RIGHT
I1P_RIGHT
JOYSTK
S15
I2P_BTN_1
I1P_BTN_1
JOYSTK
A0
A1
74LS253
MAIN_DB4
MAIN_DB5
MAIN_A[1..0]
MAIN_A0
MAIN_A1
F7E
74LS04
D21
S16
I2P_BTN_2
I1P_BTN_2
JOYSTK
S17
I2P_BTN_3
I1P_BTN_3
JOYSTK
A0
A1
74LS253
MAIN_DB6
MAIN_DB7
MAIN_DB[7..0]
RD
OUTCS
74LS32
F12B
VCC
EMI222M
C2
+12V
VSS
B17
CLK
VREF
RES
CT
VS
OUT1
OUT2
RESET
CNT2
CNT2
CNT1
CNT1
N.C
+5V
+12V
Master/RESET generation
for the whole system
and watchdog timer
KONAMI
051550
WDRST
COIN_CNT_2
COIN_CNT_1
VCC
JP7
Jp2 Open
WD_OUT1
WD_OUT2
USED IN THE GAME TMNT
Master /RESET generation for the
whole system and watchdog timer
coin counters handling.
C68
104
VSS
VCC
RA9
2228
2.2kΩX8
SW2
SW_DIPS_08
VSS
D22
CPUEN
VSS
IOCSD
A0
74LS257
quad
2-1 MUX
MAIN_DB0
MAIN_DB1
MAIN_DB3
MAIN_DB2
D24
VCC
VSS
A0
IOCS
74LS257
quad
2-1 MUX
MAIN_DB4
MAIN_DB5
MAIN_DB7
MAIN_DB6
VCC
R13
470Ω
R14
100Ω
NOT POPULATED
CN8
VSS
SVCN4P

JOTEGO
www.patreon.com/jotego
JOTEGO
Sheet: /io_cabinet/
File: io_cabinet.kicad_sch

Title: Surprise Attack

Size: A3	Date: 2025-09-01	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 3/10

NOT POPULATED

RA8 4kX8 · RA13 4kX8 · RA12 4kX8 · RA10 4kX8

GFXROMD0 GFXROMD1 GFXROMD2 GFXROMD3 GFXROMD4 GFXROMD5 GFXROMD6 GFXROMD7
GFXROMD8 GFXROMD9 GFXROMD10 GFXROMD11 GFXROMD12 GFXROMD13 GFXROMD14 GFXROMD15
GFXROMD16 GFXROMD17 GFXROMD18 GFXROMD19 GFXROMD20 GFXROMD21 GFXROMD22 GFXROMD23
GFXROMD24 GFXROMD25 GFXROMD26 GFXROMD27 GFXROMD28 GFXROMD29 GFXROMD30 GFXROMD31

GFXROMA[17..0]

CN7 — Connector_Generic_Conn_02x32_Odd_Even_First

K13 / K19 — 955D05-06-07-08 KONAMI MASK 4M - 16BIT — CMOS ROM — HN62414P

GFXROMD[31..0]

J15 KONAMI 051962 TILE DRAWING

DSA[7..0] SCRA

FIX — DFI[7..0]

LAYER A COLOR INDEX · GFX ROM DATA · LAYER A TRANSPARENCY · FIX LAYER TRANSPARENCY · FIX LAYER COLOR INDEX · CPU DATA TO READ GFX ROMs · LAYER B TRANSPARENCY · LAYER B COLOR INDEX · ATTRIBUTE CODE FROM 052109 · CPU ADDRESS · MAIN CLK · LAYER A H SCROLL · LAYER B H SCROLL · READ GFX ROM ENABLE · SOUND

MAIN_DB[7..0]

DSB[7..0] SCRB

C15C 74LS07 · 100Ω R20 · R18 470Ω · CSYNC

JP6 Jp_2_Bridged · JP5 Jp_2_Bridged

G22 XTAL_OSC 24MHz · CP1 104

74LS04 H21A · 74LS04 H21C

H22B 74LS74 — WDRST → WDOGRST

J20 KONAMI 052109 TILE MAP GENERATOR — 30 pins per side

MAIN_A[15..0]

LAYER A SCROLL X · LAYER B SCROLL X · TILE ATTRIBUTES · GFX ROM ADDRESS · VRAM ADDRESS · GFX ROM read · VRAM DATA · CPU DATA

SCRAMA[12..0]

H24 · J24 — MB8464A-10W-15W CMOS Static RAM 8K x 8 BITS

VD[15..0]

JOTEGO
www.patreon.com/jotego
JOTEGO

Sheet: /scroll/
File: scroll.kicad_sch

Title: Surprise Attack

Size: A3 | Date: 2025-09-01 | Rev: José Tejada G.
KiCad E.D.A. 8.0.9 | Id: 4/10

NOT POPULATED

MAIN_A[10..0]

OBJROMA[18..0]

VCC

RA1 4kX8 · RA11 4kX8 · RA5 4kX8 · RA3 4kX8

OBJROMD0 OBJROMD1 OBJROMD2 OBJROMD3 OBJROMD4 OBJROMD5 OBJROMD6 OBJROMD7 OBJROMD8 OBJROMD9 OBJROMD10 OBJROMD11 OBJROMD12 OBJROMD13 OBJROMD14 OBJROMD15 OBJROMD16 OBJROMD17 OBJROMD18 OBJROMD19 OBJROMD20 OBJROMD21 OBJROMD22 OBJROMD23 OBJROMD24 OBJROMD25 OBJROMD26 OBJROMD27 OBJROMD28 OBJROMD29 OBJROMD30 OBJROMD31

CN6 Conn_02x32 Row Letter First

OBJROMA10 OBJROMA11 OBJROMA12 OBJROMA13 OBJROMA14 OBJROMA15 OBJROMA16 OBJROMA17 OBJROMA18

OBJROMD16 OBJROMD17 OBJROMD18 OBJROMD19 OBJROMD20 OBJROMD21 OBJROMD22 OBJROMD23 OBJROMD24 OBJROMD25 OBJROMD26 OBJROMD27 OBJROMD28 OBJROMD29 OBJROMD30 OBJROMD31

OBJROMA0 OBJROMA1 OBJROMA2 OBJROMA3 OBJROMA4 OBJROMA5 OBJROMA6 OBJROMA7 OBJROMA8 OBJROMA9

OBJROMD0 OBJROMD1 OBJROMD2 OBJROMD3 OBJROMD4 OBJROMD5 OBJROMD6 OBJROMD7 OBJROMD8 OBJROMD9 OBJROMD10 OBJROMD11 OBJROMD12 OBJROMD13 OBJROMD14 OBJROMD15

R/W · F12C 74LS32 · OBJRAM_CS

ROM's MASK OF THE SPRITES

K2 955D05-06-07-08 KONAMI MASK 4M - 16BIT CMOS ROM HN62414P

K8 955D05-06-07-08 KONAMI MASK 4M - 16BIT CMOS ROM HN62414P

U41 KONAMI 053245 OBJECT GENERATOR

CPU · TEST · RESET · HSYNC · VSYNC · OBJSET · OBJCS · UDS · LDS · AD1 · AD2 · AD3 · AD4 · AD5 · AD6 · AD7 · AD8 · AD9 · AD10 · VSS · VCC · RD · GM12 · CM6 · M12 · M6 · CPUEN · NCPU · NC · CLK DS1962 · PAL · NAND

OBJECT ROM ADDRESS BUS · MAIN ADDRESS BUS · OBJECT RAM ADDRESS BUS · OBJECT RAM DATA BUS · RAMOBJ · ROE · WE1 · WE2 · GENERATOR TO DRAWING

MAIN_A0 MAIN_A1 MAIN_A2 MAIN_A3 MAIN_A4 MAIN_A5 MAIN_A6 MAIN_A7 MAIN_A8 MAIN_A9 MAIN_A10

ORAMA10 ORAMA9 ORAMA8 ORAMA7 ORAMA6 ORAMA5 ORAMA4 ORAMA3 ORAMA2 ORAMA1 ORAMA0

ORAMA[10..0]

HM6116P-3 I13 MCM2018 2kB RAM

ORAMA7 ORAMA6 ORAMA4 ORAMA2 ORAMA1 ORAMA0 ORAMA9 ORAMA10 ORAMA3 ORAMA5 ORAMA8 VSS

A0 A1 A2 A3 A4 A5 A6 A7 A8 A9 A10 CS OE WR D0 D1 D2 D3 D4 D5 D6 D7

OBJRAMD0 OBJRAMD1 OBJRAMD2 OBJRAMD3 OBJRAMD4 OBJRAMD5 OBJRAMD6 OBJRAMD7

OBJRAMD[7..0]

H14 74LS245 buffers A->B

MAIN_DB0 MAIN_DB1 MAIN_DB2 MAIN_DB3 MAIN_DB4 MAIN_DB5 MAIN_DB6 MAIN_DB7

MAIN_DB[7..0]

OBJRAMD0 OBJRAMD1 OBJRAMD2 OBJRAMD3 OBJRAMD4 OBJRAMD5 OBJRAMD6 OBJRAMD7

U42 KONAMI 053244 OBJECT DRAWING

MAIN · PRIORITY CONTROL UNIT · GENERATOR TO DRAWING

MAIN_A0 MAIN_A1 MAIN_A2 MAIN_A3 MAIN_DB7 MAIN_DB6 MAIN_DB5 MAIN_DB4 MAIN_DB3 MAIN_DB2 MAIN_DB1 MAIN_DB0 M6 GM12

HSYNC VSYNC RD RCS0 OBJSET MDS

VSS · VCC · TEST · BO1I · BO2I · BF1I · BF2I · BO1O · BO2O · BF1I · BF20 · AD1 · AD2 · AD3 · AD4 · MDB7 · MDB6 · MDB5 · MDB4 · MDB3 · MDB2 · MDB1 · MDB0 · M6 · M12 · CLAT · PL0 · PL1 · PL2 · PL3 · PL4 · PL5 · PL6 · SHADOW · HP0 · HP1 · HP2 · HP3 · HP4 · HP5 · HP6 · HP7 · HP8 · HP9 · HIT · ZLD · HRFP · BROK · BR0 · BR1 · BR2 · AROK · AR0 · AR1 · AR2 · OBOK · OBO11 · OBO10 · OBO9 · OBO8 · OBO7 · OBO6 · OBO5 · OBO4 · OBO3 · OBO2 · OBO1 · OBO0

OBJROMD0 OBJROMD1 OBJROMD2 OBJROMD3 OBJROMD4 OBJROMD5 OBJROMD6 OBJROMD7 OBJROMD8 OBJROMD9 OBJROMD10 OBJROMD11 OBJROMD12 OBJROMD13 OBJROMD14 OBJROMD15 OBJROMD16 OBJROMD17 OBJROMD18 OBJROMD19 OBJROMD20 OBJROMD21 OBJROMD22 OBJROMD23 OBJROMD24 OBJROMD25 OBJROMD26 OBJROMD27 OBJROMD28 OBJROMD29 OBJROMD30 OBJROMD31

SDIO · PR14 · PR13

OBJPXL8 OBJPXL7 OBJPXL6 OBJPXL5 OBJPXL4 OBJPXL3 OBJPXL2 OBJPXL1 OBJPXL0

OBJPXL[8..0]

OBJROMD[31..0]

HP[9..0] · PL[6..0] · BR[2..0] · AR[2..0]


OBJSET · RD · OBJRAM_RD · F13D 74LS32 · F11D 74LS08 · OBJRAM_CS · CPUEN · F13C 74LS32

JOTEGO
www.patreon.com/jotego
JOTEGO

Sheet: /objects/
File: objects.kicad_sch

Title: Surprise Attack

Size: A3	Date: 2025-09-01	**Rev: José Tejada**
KiCad E.D.A. 8.0.9		Id: 5/10

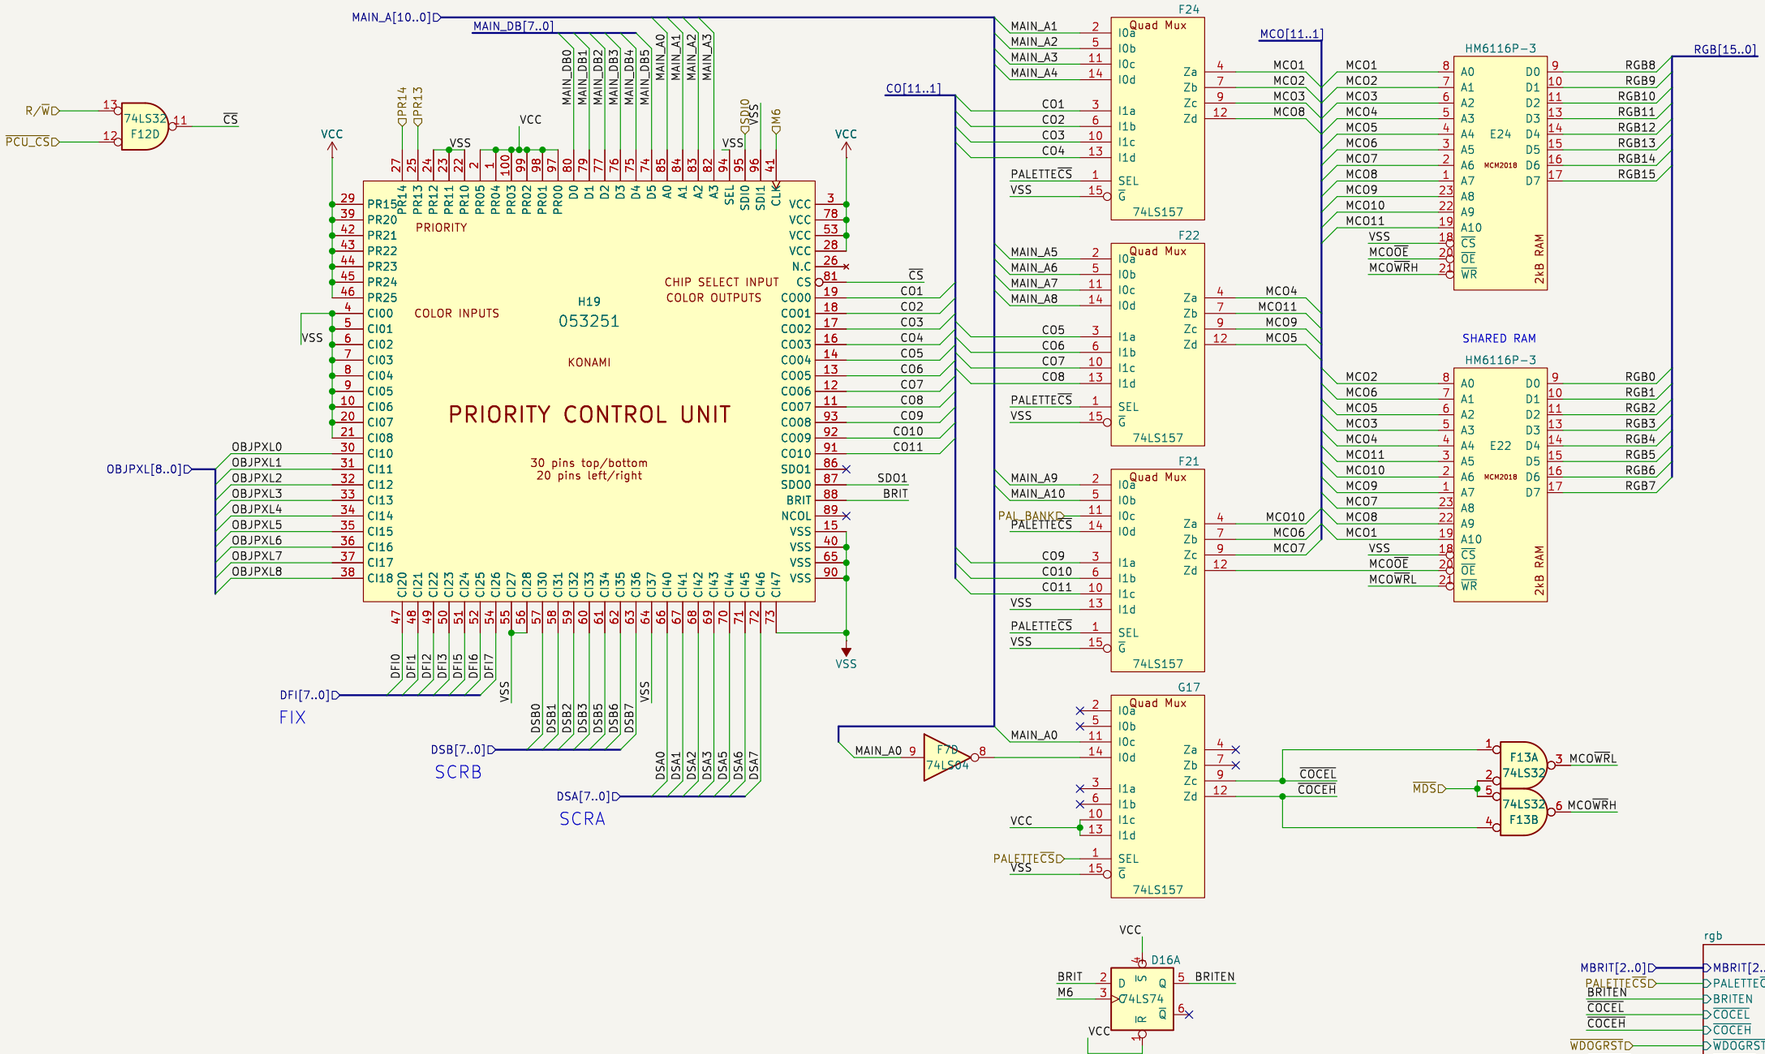

JOTEGO
www.patreon.com/jotego
JOTEGO

Sheet: /colmix/
File: colmix.kicad_sch

Title: Surprise Attack

Size: A3	Date: 2025-09-01	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 6/10

RGB[15..0]

MAIN_DB[7..0]

E21 — 74LS245 buffers (A->B)
MAIN_DB0 2
MAIN_DB1 3
MAIN_DB2 4
MAIN_DB3 5
MAIN_DB4 6
MAIN_DB5 7
MAIN_DB6 8
MAIN_DB7 9
PALETTECS 1
COCEL 19
RGB0 18
RGB1 17
RGB2 16
RGB3 15
RGB4 14
RGB5 13
RGB6 12
RGB7 11

E20 — 74LS245 buffers (A->B)
MAIN_DB0 2
MAIN_DB1 3
MAIN_DB2 4
MAIN_DB3 5
MAIN_DB4 6
MAIN_DB5 7
MAIN_DB6 8
MAIN_DB7 9
PALETTECS 1
COCEH 19
RGB8 18
RGB9 17
RGB10 16
RGB11 15
RGB12 14
RGB13 13
RGB14 12
RGB15 11

C14F 74LS07 — SDO1D 5 → 6 → M6D 11
VCC 1

D19 — 74LS273 flip flops
RGB0 3
RGB1 4
RGB2 7
RGB3 8
RGB4 13
RGB5 14
RGB6 17
SDO1D 18
M6D 11
VCC 1
Q0 2 G3
Q1 5 G4
Q2 6 B0
Q3 9 B1
Q4 12 B2
Q5 15 B3
Q6 16 B4
Q7 19 SHADOW

D20 — 74LS273 flip flops
RGB8 3
RGB9 4
RGB10 7
RGB11 8
RGB12 13
RGB13 14
RGB14 17
RGB15 18
M6D 11
VCC 1
Q0 2 R0
Q1 5 R1
Q2 6 R2
Q3 9 R3
Q4 12 R4
Q5 15 G0
Q6 16 G1
Q7 19 G2

F20 — 74LS164 High Speed 8-Bit Serial In Parallel-Out Shift Register
VBLANK 1
HBLANK 2
M6D 8
WDOGRST 9
A AND B
CLK
MR
Q0 3
Q1 4
Q2 5
Q3 6
Q4 10
Q5 11
Q6 12
Q7 13

USED IN THE GAME LETHAL ENFORCERS

S2 — KONAMI 052535 5-bit Video DAC
VCC
D4 2
D3* 3
D2* 4
D1* 5
D0* 6
BK* 7
AO RGB 8
VSS
GREEN

S1 — KONAMI 052535 5-bit Video DAC
VCC
D4 2
D3* 3
D2* 4
D1* 5
D0* 6
BK* 7
AO RGB 8
BLUE

S3 — KONAMI 052535 5-bit Video DAC
VCC
D4 2
D3* 3
D2* 4
D1* 5
D0* 6
BK* 7
AO RGB 8
RED

G4 3 — C17B 74LS07 4
G3 5 — C19C 74LS07 6
G2 13 — C20F 74LS07 12
G1 3 — C19B 74LS07 4
G0 9 — C17D 74LS07 8
13 — C15F 74LS07 12

B4 11 — C15E 74LS07 10
B3 9 — C15D 74LS07 8
B2 9 — C16D 74LS07 8
B1 11 — C16F 74LS07 10
B0 5 — C17C 74LS07 6

R4 11 — C20E 74LS07 10
R3 3 — C20B 74LS07 4
R2 5 — C20C 74LS07 6
R1 1 — C20A 74LS07 2
R0 9 — C20D 74LS07 8

C15A 74LS07 1 → 2
C15B 74LS07 3 → 4

SHADOW 3 — C16B 74LS07 4 — NOT POPULATED R21 N.M
MBRIT2 13 — C17F 74LS07 12 — NOT POPULATED R16 N.M

MBRIT1 13 — C19F 74LS07 12 — NOT POPULATED R25 N.M
MBRIT0 11 — E19E 74LS07 10 — NOT POPULATED R15 N.M

SHADOW 13 — C16F 74LS07 12 — NOT POPULATED R23 N.M
MBRIT2 11 — C17E 74LS07 10 — NOT POPULATED R26 N.M

MBRIT1 13 — 74LS00 E16D 11 — MBRIT1 — C19E 74LS07 10 — NOT POPULATED R24 N.M
MBRIT0 12 5 — 74LS00 E16B 6 — MBRIT0 — E19A 74LS07 2 — R22 N.M
BRITEND 4 1
MBRIT2 2 — 74LS00 E16A 3 — MBRIT2
MBRIT[2..0]

SHADOW 1 — C16A 74LS07 2 — NOT POPULATED R12 118Ω
MBRIT2 1 — C17A 74LS07 2 — NOT POPULATED R27 N.M


MBRIT1 1 — C19A 74LS07 2 — NOT POPULATED R19 N.M
MBRIT0 13 — E19F 74LS07 12 — NOT POPULATED R17 N.M

JOTEGO
www.patreon.com/jotego
JOTEGO

Sheet: /colmix/rgb/
File: rgb.kicad_sch

Title: Surprise Attack

Size: A3	Date: 2025-09-01	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 7/10

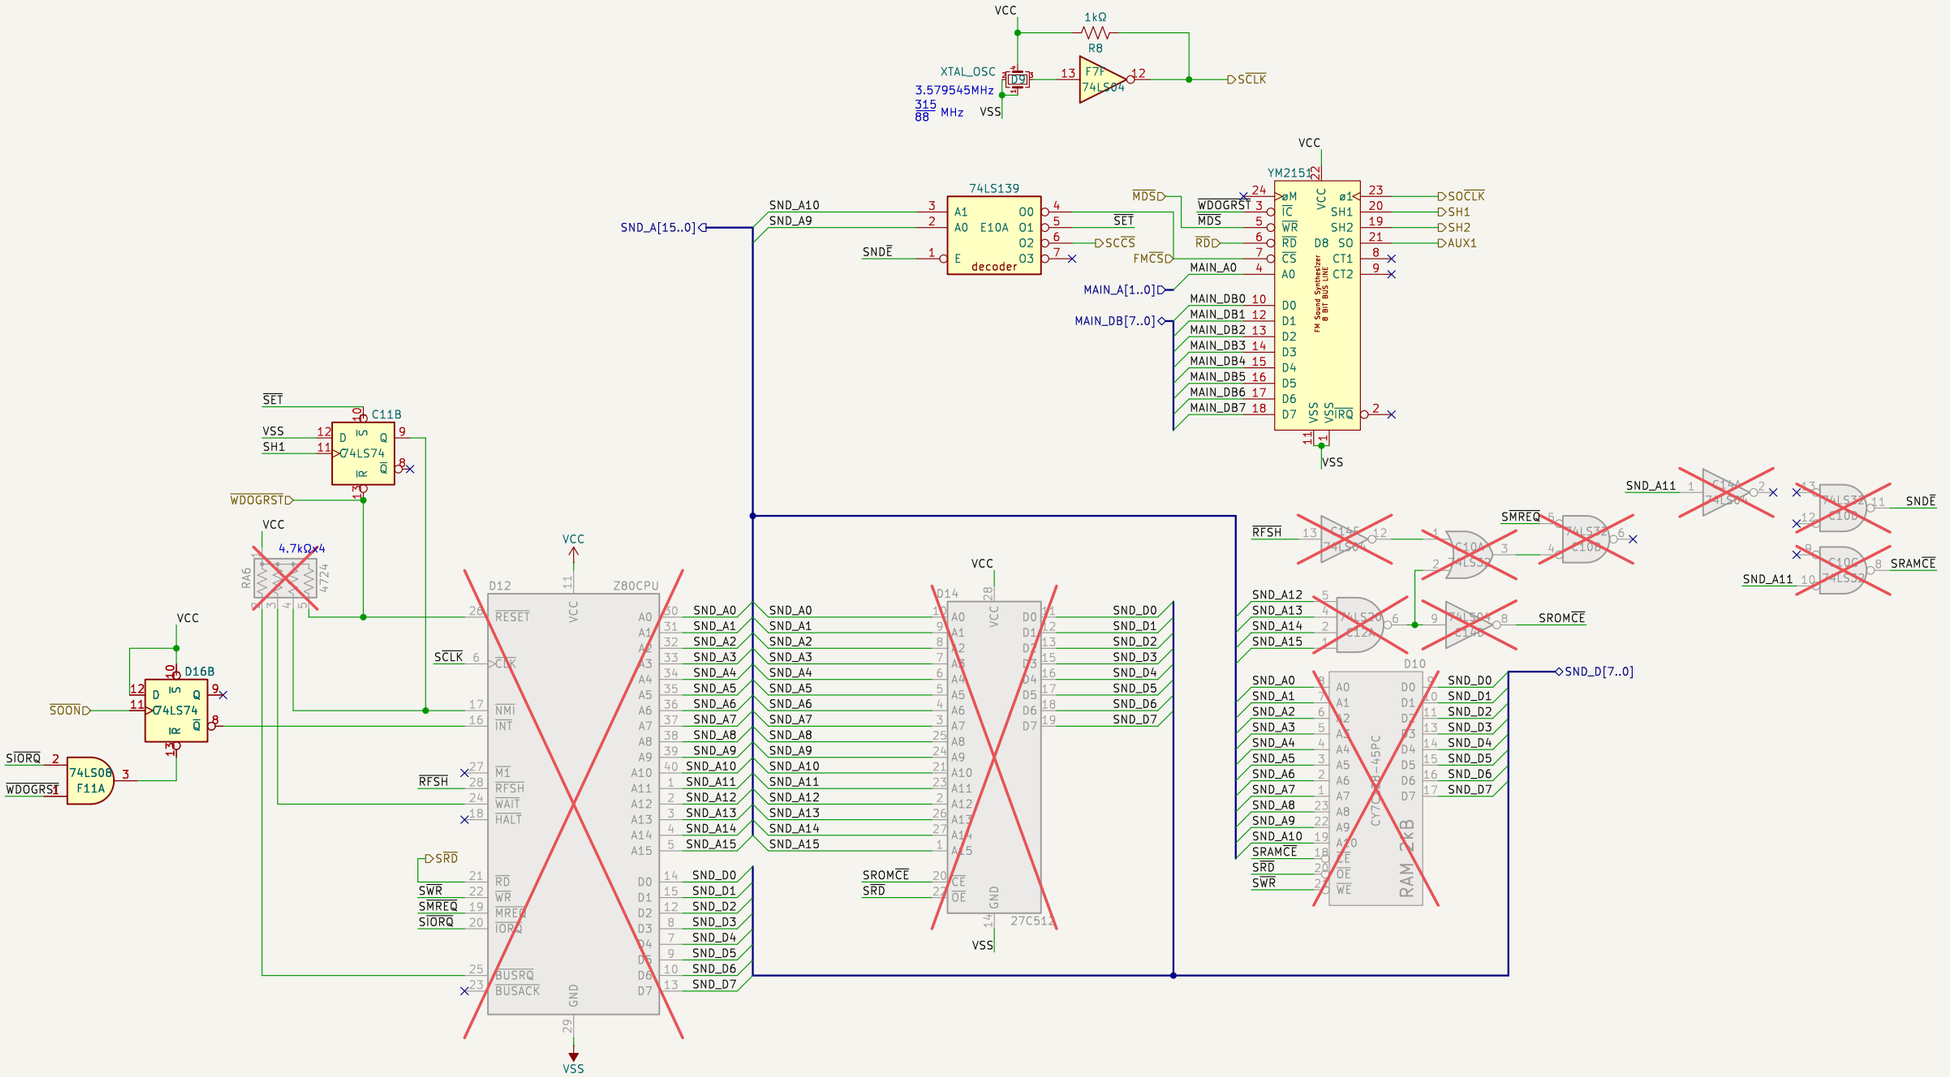

JOTEGO
www.patreon.com/jotego
JOTEGO

Sheet: /sound/
File: sound.kicad_sch

Title: Surprise Attack

Size: A3	Date: 2025-09-01	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 8/10

NOT POPULATED


RA[19..0]

Communication between the main CPU and the audio CPU.

RD[7..0]

Connected to pin 21 of alternate YM2151 footprint.

Connected to pin 7 of 74LS139 (E10) in Parodius Da!

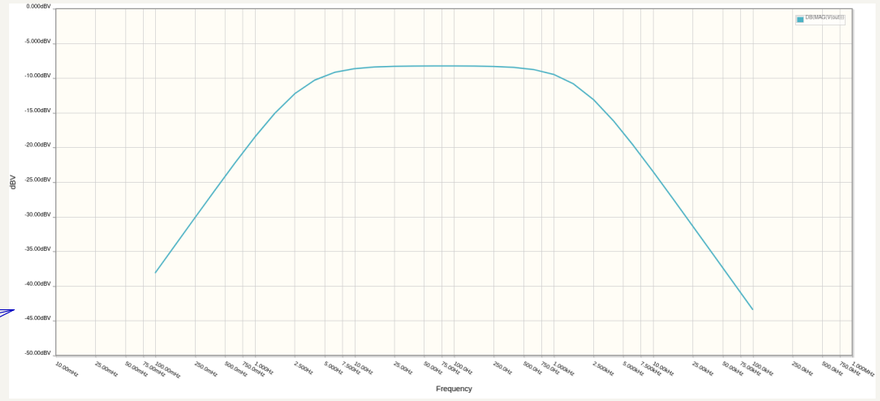


JOTEGO
www.patreon.com/jotego
JOTEGO

Sheet: /pcm/
File: pcm.kicad_sch

Title: Surprise Attack

Size: A3	Date: 2025-09-01	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 9/10

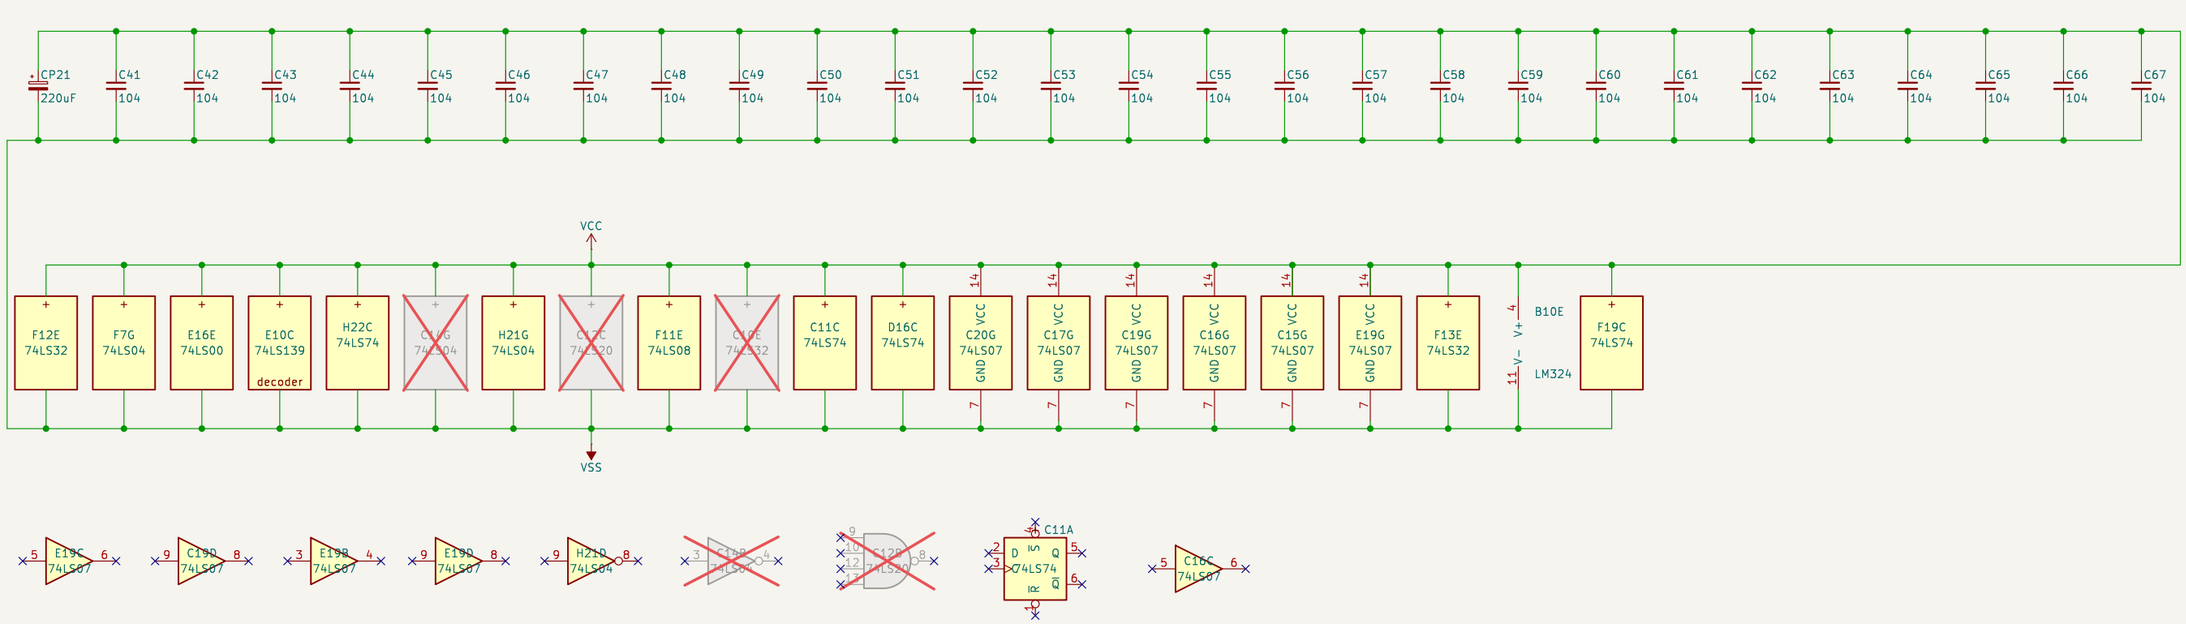

JOTEGO
www.patreon.com/jotego
JOTEGO

Sheet: /capacitors/
File: capacitors.kicad_sch

Title: Surprise Attack

Size: A3	Date: 2025-09-01	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.9		Id: 10/10