

OVERVIEW

The **PINIX TOB-1** is part of Sentrax's advanced PINIX portfolio of Bluetooth® Low Energy 5.x wearable beacon devices, designed for reliable real-time positioning, emergency response, and personnel safety across healthcare, industrial, enterprise, and high-security environments. With **BLE AoA support**, the **PINIX TOB-1** enables precise indoor positioning for efficient people location-monitoring applications.

The **PINIX TOB-1** features an integrated **SoS emergency button** for immediate assistance during critical situations. Powered by the Nordic nRF52 chipset, the device supports **iBeacon**, **Eddystone (UID, URL, TLM)**, and **S-Beacon** advertising protocols, ensuring seamless Bluetooth® IoT connectivity and interoperability.

Built for comfort, durability, and continuous operation, it features an IP67-rated enclosure, a replaceable coin-cell battery, and an integrated accelerometer, making it ideal for modern RTLS and IoT deployments.



BLUETOOTH RADIO

Type:

Bluetooth Low Energy 5.x

Advertisement:

- iBeacon
- Eddystone (UID & TLM)
- sBeacon (Sentrax Proprietary)

Advertisement Interval:

100ms to 1s

Frequency:

2.4GHz

Transmit Power:

+4 dBm to -12 dBm

Antenna Type:

PCB antenna, Omni-Directional

BATTERY

Battery type:

CR2032 x1, 220mAh, Replaceable

Battery Life:

(Advertisement Rate)	(Battery Life)
1000ms	6 months
500ms	4 months

SENSORS AND INTERFACES

3-axis Accelerometer
User Intractable Button
Indication LED

CERTIFICATIONS

FCC & CE

ENCLOSURE

Material:

ABS

Color:

White

Weight:

12g

Dimensions:

D36×11mm

Accessories:

Detachable wristband strap


Protection Class:

IP67

OPERATING ENVIRONMENT

Temperature Range	-20°C to +60°C
Operating Humidity	0% ~ 95%


SENTRAX DEVICE MANGER APP

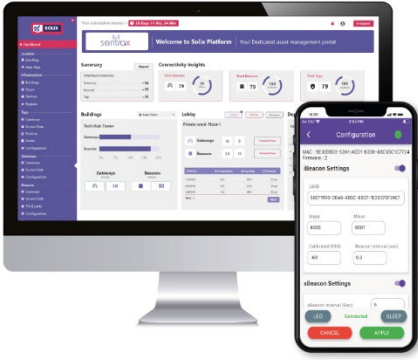

With the [Sentrax Device Manager \(SDM\)](#) Application user can scan for nearby configurable PINIX beacons, view their battery status and modify the settings. The configuration of beacons is a password protected with a four (4) digit user settable PIN.

As an added safety feature, the beacons can only be configured within a period of 15 minutes after installing the batteries or can be manually triggered into configuration mode by pressing the reset button on the Tag. However, this time duration can be increased through the settings to up to 3 weeks or forever.

MECHANICAL DRAWINGS

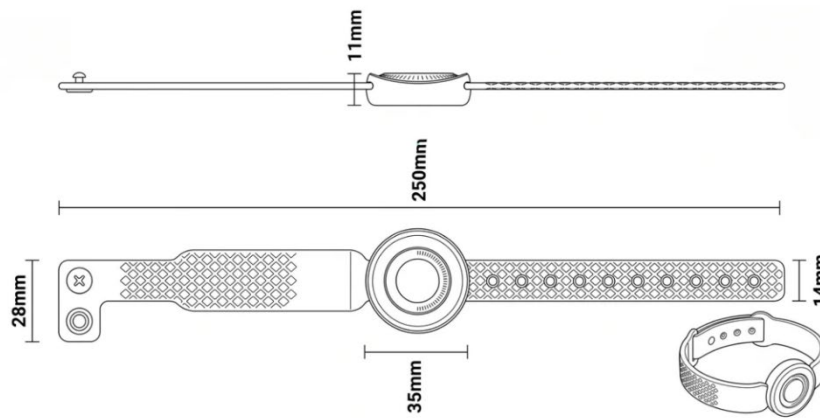

PINIX TOB-1 Tag Mechanical Drawings

APPLICATION AREAS

- Indoor localization,
- Emergency Rescue &
- Personnel Safety,
- Location-based services

CAUTION



- Risk of Explosion if battery is replaced by an incorrect type.
- Dispose of used batteries according to the instructions.

RECYCLING

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to the European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.

All product names, logos, and brands are property of their respective owners. All company, product and service names used in this datasheets are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.