



OVERVIEW

The PINIX line is a series of advanced Bluetooth Low Energy 5.x devices using standard RTLS tag technology. The PINIX TOK-1 is a Smart Badge BLE AoA Tag with a Temperature Sensor for person tracking, positioning, and temperature monitoring. It features an ultra-low power consumption chipset Nordic nRF52 series. The PINIX TOK-1 has a keychain/lanyard hole that can easily be attached to other objects and uses a commercially available replaceable button cell to power itself.

The PINIX TOK-1 comes with a downloadable SDK with an extensive library for easy integration into a wide range of location-based and navigation-based applications. It also includes a wide range tool facilitating optimal setup and installation.

BLUETOOTH RADIO

Type:

Bluetooth Low Energy 5.x

Advertisement:

- iBeacon
- Eddystone (UID & TLM)
- sBeacon (Sentrax Proprietary)

Advertisement Interval:

100ms to 10seconds

Frequency:

2.4GHz

Transmit Power:

+4dBm to -20 dBm

Antenna Type:

PCB antenna, Omni Directional

BATTERY

Battery type:

CR2032 x 1, 225mAh, Replaceable

Battery Life:

(Advertisement Rate)	(Battery Life)
500ms	4 Months
1000ms	6 Months

SENSORS AND INTERFACES

Motion sensing	3 Axis Accelerometer
Temperature	Internal Temperature Sensor
Button	1 user interact-able button
LED	3 LEDs (Blue, Red, and Green)

CERTIFICATIONS

CE, FCC

ENCLOSURE

Material:

ABS

Color:

White

Weight:

12g

Dimensions:

55.3 mm (L) x 38.6 (W) x 8.4 mm (H)

Accessories:

Key Ring


Protection Class:

IP65

OPERATING ENVIRONMENT

Temperature Range	-20°C to 60°C
Operating Humidity	90%



SENTRAX DEVICE MANAGER (SDM)

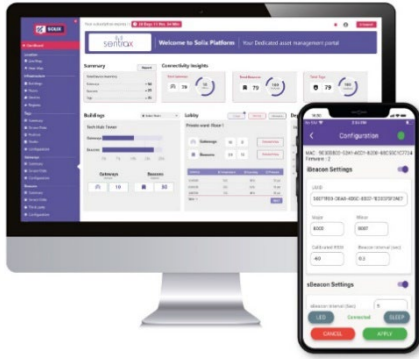

The [Sentrax Device Manager \(SDM\)](#) app allows you to manage PINIX beacons. You can discover nearby beacons, check their battery levels, view their current settings, and modify them with a protected 4-digit settable PIN.

For security, beacons can only be configured within 15 minutes of a new battery installation or by manually activating configuration mode. The configuration window can be extended to up to three weeks using advanced settings.

MECHANICAL DRAWINGS



APPLICATION AREAS

- Indoor localization
- Indoor navigation
- Location-based services
- Person Tracking

CAUTION



- Risk of explosion if the battery is replaced by an incorrect type.
- Dispose of used batteries according to the instructions
- Glue should be used to close the enclosure if opened by use

RECYCLING

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to the European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.

All product names, logos, and brands are the property of their respective owners. All company, product, and service names used in this datasheet are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.