



OVERVIEW

The PINIX line is a series of advanced Bluetooth Low Energy 5.1 devices using multi-standard beacon technology. The **PINIX TOW-1** is a **BLE Angle of Arrival (AoA)** Tag which is specially conceived for advanced business solutions using location-based and asset tracking-based applications. It features an ultra-low power consumption and long battery life. The **PINIX TOW-1** can be easily mounted on various surfaces and uses commercially available replaceable button cells.

The **PINIX TOW-1** comes with a downloadable SDK with an extensive library for easy integration into a wide range of location-based and indoor navigation-based applications. It also includes a wide range of tools facilitating optimal set-up and installation.

BLUETOOTH RADIO

Type:

Bluetooth Low Energy 5.1 (AoA)

Advertisement:

- iBeacon
- Eddystone (UID & TLM)
- sBeacon (Sentrax Proprietary)

Advertisement Interval:

100ms to 10seconds

Frequency:

2.4GHz

Transmit Power:

+4dBm to -20 dBm

Antenna Type:

Chip antenna, Omni Directional

BATTERY

Battery type:

CR2477 x 1, 1000mAh, Replaceable

CR2477 x 1, 2000mAh, Replaceable (Optional ¹⁾)

Battery Life:

(Advertisement Rate)	(Battery Life)
500ms	2 Year 4 months
1000ms	3 Years

SENSORS AND INTERFACES

Motion sensing	3 Axis Accelerometer
Button	1 user interact-able button
LED	1 Red LED

CERTIFICATIONS

CE**, FCC**

ENCLOSURE

Material:

ABS

Color:

Beige

Weight:

45g

Dimensions:

51mm x 51mm x 20mm

Accessories:

Double-sided tape, Mounting Screw

Protection Class:


IP65

OPERATING ENVIRONMENT

Temperature Range	-30°C to 85°C
Operating Humidity	90%

1. By incorporating an optional cell battery, the lifespan can be extended by 4 to 12 months, depending on the advertising frequency.
2. **Pending


SENTRAX DEVICE MANAGER

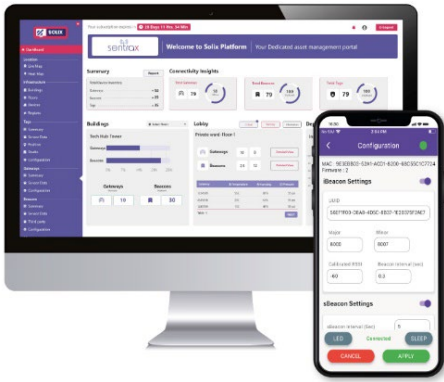

The [Sentrax Device Manager \(SDM\)](#) app allows you to manage PINIX beacons. You can discover nearby beacons, check their battery levels, view their current settings, and modify them with a protected 4-digit settable PIN.

For security, beacons can only be configured within 15 minutes of a new battery installation or by manually activating configuration mode. Using advanced settings, the configuration window can be extended to up to three weeks.

MECHANICAL DRAWINGS

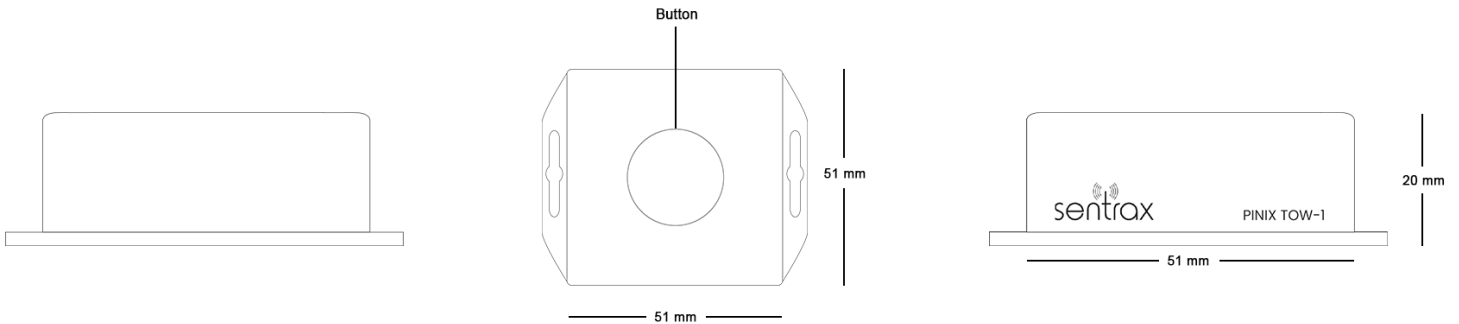

APPLICATION AREAS

- Indoor localization
- Indoor navigation
- Location-based services
- Asset & logistics tracking

CAUTION



- Risk of explosion if battery is replaced by an incorrect type.
- Dispose of used batteries according to the instructions
- Glue should be used to close the enclosure if opened by use

RECYCLING

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to the European directive 2012/19/EU to be recycled or dismantled to minimize its impact on the environment.

All product names, logos, and brands are the property of their respective owners. All company, product, and service names used in this datasheet are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

