

CSE 421
Lab 2 :Observing DNS and ARP in Packet Tracer

ID 18301273


Introduction:

Simulation mode in Packet Tracer captures all network traffic flowing through the entire network . You will observe the packets involved in DNS and ARP process. These two protocols are the helping protocols when a web page is requested using HTTP.

Objectives:

1. Explore how PT uses the OSI Model and TCP/IP Protocols.
 - Creating a Simple PDU (test packet)
 - Switching from Realtime to Simulation Mode
2. Examine a Web Request Packet Processing and Contents
 - Accessing the PDU Information Window, OSI Model View
 - Investigating the layers and addresses in the OSI Model View
 - Animations of packet Flow

Task 1: Observe the network topology shown.

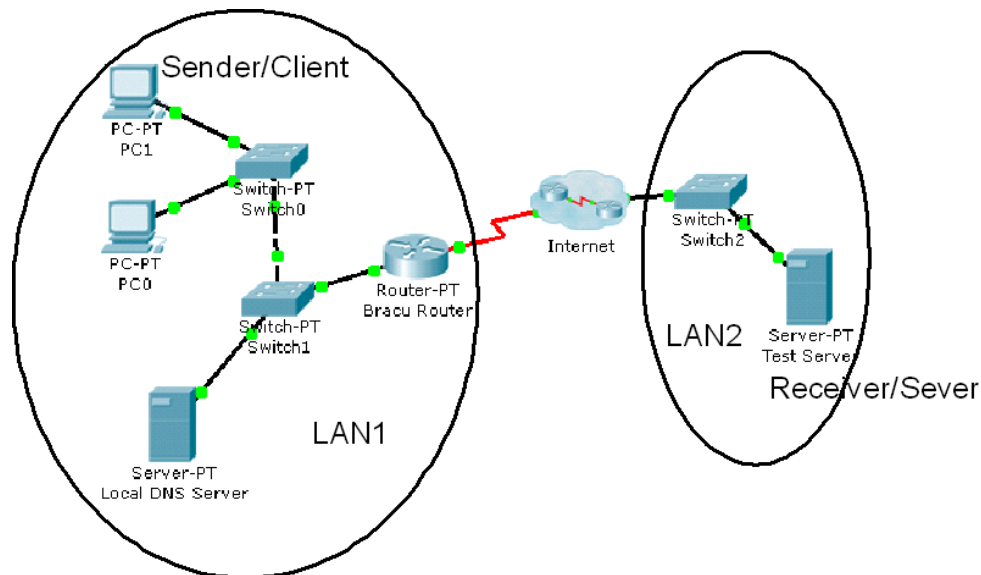

- **PC0, PC1** and the **Local DNS server, BRACU router** is part of a Local area network. BRACU router connects this LAN to the Internet through an ISP. The **Test server** shown is on another Local area network.
- You will access the web page www.test.com which is stored in the Test Web Server through PC1's web browser.
- To access this web page this activity will show you how and what packets are created and how the packets move through the network.
- For this activity we will only focus on DNS and ARP.

Task 1: Capture a web request using a URL from a PC.

Step 1 – Switching from Realtime to Simulation Mode

- In the far lower right of the PT interface is the toggle between Realtime and Simulation mode. PT always starts in realtime mode, in which networking protocols operate with realistic timings.



- In simulation mode, you can visually see the flow of packets when you send data from an application. A new window named “**Event List**” will appear. This window will show the packets (PDUs) as colored envelopes.

Step 2 – Run the simulation and capture the traffic.

- Click on the PC1. Click on the **Desktop** tab. Open the **Web Browser** from the **Desktop**.
- Write **www.test.com** into the browser. Clicking on **Go** will initiate a web server request. **Minimize** the PC1 Client window.
- Look at the Event List Window. Two packets appear in the **Event List**, a **DNS request** from **PC1** to the **Local DNS server** needed to resolve the URL “www.test.com” to the IP address of the Test server.
- Before the DNS request can be sent, we need to know the DNS Server's MAC address. So the 2nd PDU is the **ARP request** needed to resolve the IP address of the DNS server to its hardware MAC address.
- Now click the **Auto Capture / Play** button in the Event List Window to run the simulation and capture events.
- Sit tight and observe the packets flowing through the network.




- When the above message appears Click “View Previous Events”.
- Click on PC1. The web browser will now display a web page.
- Minimize the PC1 window again.


Step 3 – Examine the following captured traffic.

	Last Device	At Device	Type
1.	PC1	Switch 0	ARP
2.	Local DNS Server	Switch 1	ARP
3.	PC1	Switch 0	DNS
4.	Local DNS Server	Switch 1	DNS
5.	--	PC1	HTTP

- Find the following packets given in the table above in the **Event List**, and click on the colored square in the **Info** column.

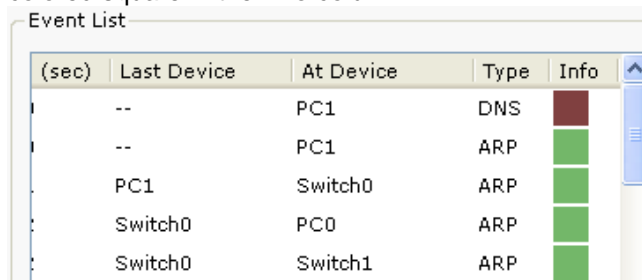

- When you click on the Info square for a packet in the event list the **PDU information** window opens.

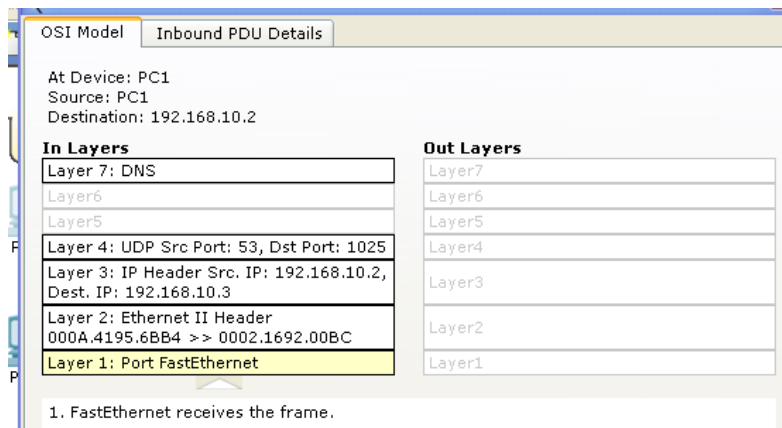

- This window displays the OSI layers and the information at each layer for each device. (At Device).
- If you click on these layers, the algorithm used by the device (in this case, the PC) is displayed. View what is going on at each layer.
- Examine the PDU information for the remaining events in the exchange.

Packets 1&2 representing ARP packets:

Packet 1 represents the ARP request by PC1. Which devices' MAC addresses are included as source and destination?

Here Source is PC1 and its MAC address is 0002.1692.00BC and its destination MAC address is 0000.0000.0000 as it doesn't know the destination yet.

Why is PC1 sending an ARP packet?

PC1 needs to know the IP address of the given URL. To know the IP address it needs to reach the Local DNS Server and to reach there PC1 is sending an ARP request to fetch the MAC address of the Local DNS Server.

Why was this packet sent to all devices?

This packet is sent to all devices because initially it doesn't know the destination and to broadcast a message it sent the packet to all devices until it reaches a router.

Packet 2 represents the ARP reply by the Local DNS server. What is the difference in the devices' MAC addresses included as source and destination?

Here source is Local DNS Server and its MAC address is 000A.4195.6BB4 and destination is PC1 and its MAC address is 0002.1692.00BC.


Packets 3&4 representing DNS packets:

Packet 3 represents the DNS request made by PC1, why? Which devices' IP addresses are included as source and destination?

PC1 will send a DNS request to the Local DNS server to fetch the IP address of the given URL.

Here Source is PC1 and it has an IP address of 192.168.10.3. Its destination is Local DNS

Server and IP address is 192.168.10.2.

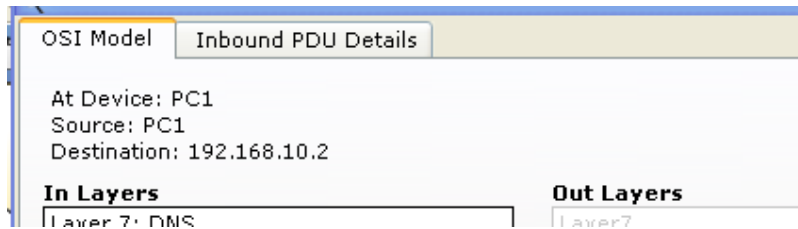

Click onto “Inbound PDU details” tab. Scroll down, you should come across “DNS Query”. What is the purpose of this DNS Query?

DNS QUERY contains the URL information. It is used to fetch IP address of the URL.

Packet 4 is the reply from the DNS server, what is the difference between Packet 1 and Packet 2 source and destination IP addresses?

For packet 3 source is PC1 (IP address:192.168.10.3) and destination Local DNS Server (IP address:192.168.10.2).

For packet 4 source Local DNS Server(IP address:192.168.10.2) and destination PC1 (IP address:192.168.10.3).

For packet 4, click onto “Inbound PDU details” tab. Scroll down, do you see anything different after the DNS query?

Yes, there is another extra table named DNS answer which contains the IP address of the URL.

Packets 5 is the HTTP request for the web page made by PC1.

Details of this packet will be observed later.