



FRANKONIA

EMC Test-Systems GmbH

LISN C2-16 / C4-32

DATASHEET



LISN (LINE IMPEDANCE STABILIZATION NETWORK)
FOR APPLICATION IN EMI-MEASUREMENTS

Frankonia EMC Test-Systems GmbH

Daimlerstr. 17

91031 Forchheim

Germany

+49 9191 73666-0

+49 9191 73666-20

sales@frankonia-emv.com


WWW.FRANKONIA-SOLUTIONS.COM

C2-16

Artificial mains network C2-16 is a LISN used for RFI measurements on AC single-phase, power supplied electric and electronic equipment, drawing up to 16 Amps, that is in the most frequently encountered applications. C2-16 is a two line V-network with an equivalent circuit of 50 ohm // (5ohm + 50μH), fully compliant with CISPR publ. 16, VDE 0876 and FCC part 15 regulation.

C2-16 is suited to perform measurements on conducted interference in the frequency range from 9 kHz to 30 MHz.

Designed according to criteria of cheaply and compactness it can be used together with the Frankonia receiver CORE-6 as well as manually (stand-alone) for conducted interference or with any other RF receiver.

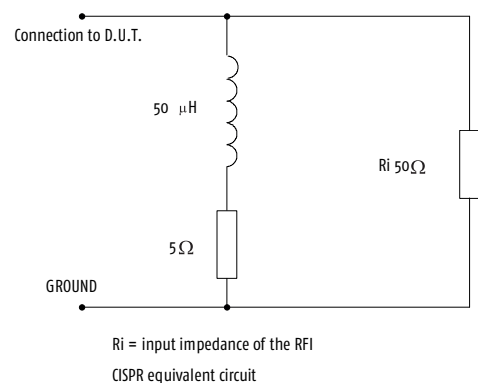

Main specifications	
Frequency range:	9 kHz to 30 MHz
Continuous rated output current:	16 A
Max permissible operating voltages (L/N) (L/PE):	250 VAC / 350 VDC
AC supply frequency range:	DC – 60 Hz
Equivalent circuit:	50 Ohm // (5 Ohm + 50 μH)
RF output:	BNC female
Test item:	SCHUKO connector
Rated temperature:	10° to + 45° C
Storage temperature:	25° to + 75° C
Overall dimension mm (W x H x D):	230 x 105 x 285
Weight:	5.5 kg

C4-32

Main specifications

Frequency range:	9 kHz to 30 MHz
Maximum continuous rated output current:	EC plug: 32 A Schuko plug: 16 A
Maximum operating voltage	
Single-phase (L/N) (L/PE) (N/PE):	230 VAC / 325 VDC
Three-phase (L/N) (L/PE) (N/PE):	230 VAC / 325 VDC
(L/L) (L/N):	400 VAC / 565 VDC
Input Mains frequency range:	DC - 60 Hz
Equivalent circuit:	50 Ohm // (5 Ohm + 50 µH)
RF output:	BNC female
Test item:	32 A IEC connector and 16A Schuko -10°
Rated temperature:	-10° to + 40° C
Storage temperature:	-25° to + 75° C
Overall dimension mm (W x H x D):	342 x 254 x 510
Weight:	16.5 kg

Front and Rear Panels

In Fig. 2-1 and Fig. 2-2 you can see front and rear connecting points and terminals of Frankonia C4-32.

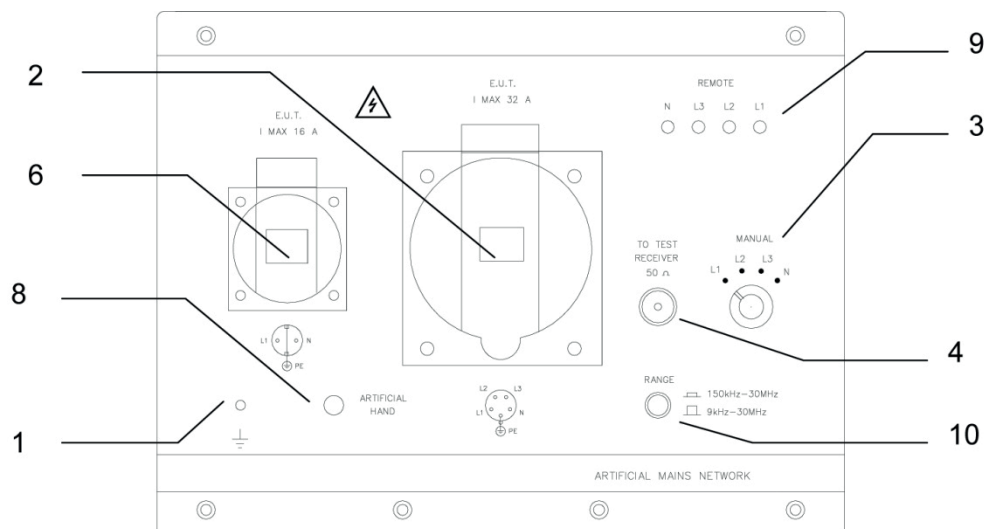


Fig. 2-1 Front Panel

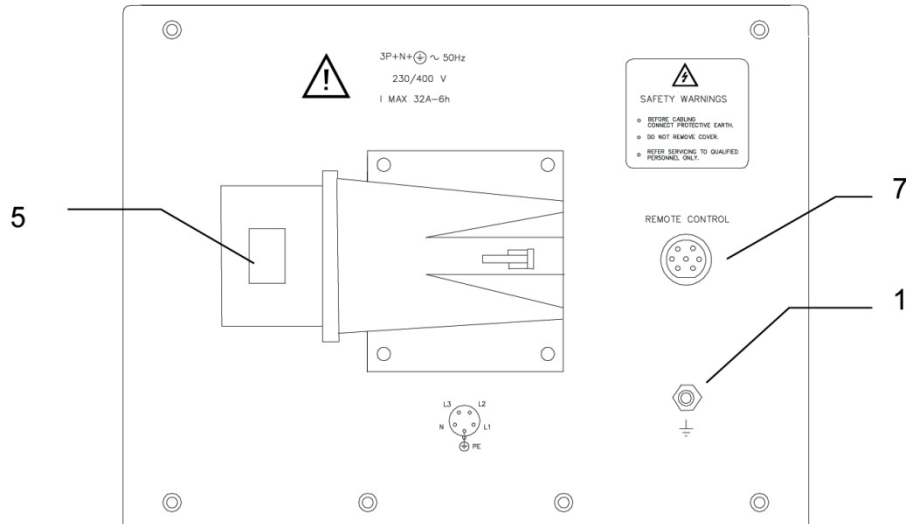


Fig. 2-2 Rear Panel

Frequency range:

- 1 - Ground contact
- 2 - Mains supply to DUT 32A
- 3 - Manual switch for phase under test (With PMM receivers the switch is disabled and the switching is automatic)
- 4 - RF output to EMI Signal Analyzer (50 ohm, BNC female connector)
- 5 - Mains LISN supply.
- 6 - Mains supply to DUT 16A Schuko
- 7 - Remote receiver control connector
- 8 - Artificial hand.
- 9 - Line under test indicating led. 10- Filter 150kHz-30MHz



Frankonia EMC Test-Systems GmbH

Daimlerstr. 17
91031 Forchheim
Germany

 +49 9191 73666-0

 +49 9191 73666-20

 sales@frankonia-emv.com

WWW.FRANKONIA-SOLUTIONS.COM