CIRCUIT COMPARISON

ChryslerScanner

Original schematic -> current circuit sets

A visual cross-reference atlas. Each comparison pairs a current circuit set with the corresponding cropped area of the original drawing. The circuit drawings remain vector artwork and can be zoomed without raster blur.

How to read it

Original drawings are on the left; current drawings are on the right. Original sheet zones and current page numbers accompany every pair. Several original regions can map to one current sheet, and one current sheet can appear in several focused comparisons.

What the status means

RETAINED means the original block is represented in the current circuit. REORGANIZED means original components are drawn elsewhere or grouped differently. MODIFIED identifies intentional changes. NEW identifies circuitry with no original equivalent; context crops are explicitly labeled.

Material changes

USB-C and the OBD connector replace original connectors. Input protection, comparator supply protection, ADC divider/isolation and supervised reset are revised. The SD logger and TP1-TP52 are additions. Matching a block does not mean electrical identity with the original.

Scope

This document compares schematic circuits, not PCB trace geometry or automotive qualification. Original pin details and complete source sheets remain available in the embedded source PDFs. The final appendix reproduces the full original page.

Sources bound to this report

Original: original-atopile/reference/upstream/ChryslerScanner_V240_schematic.pdf

`SHA-256 334b04164cfa96183cf502f690024a764cc719671f20583043f37604c9ed590d`

Current: current/ChryslerScanner_V240_SD-Hierarchy.pdf

`SHA-256 360f1f24f24e2f70823a58a7a44bbd4679d428a5f27a1032c83e215295d3abb6`


Original: Daniel Laszlo, revision 2.4.0-1, 2026-01-05. Current: Rev C, 24 pages / 329 circuit-probe endpoints.

`Current PCB checkpoint: 800c05930a0ca24fe280d5f3aace70974889129942a1b5602ce2eabfea026301`

Circuit matching index


Click a row or use the PDF bookmarks. Full source PDFs are also embedded as attachments.

Original: one A2 page, circuit zones A-H / 1-11

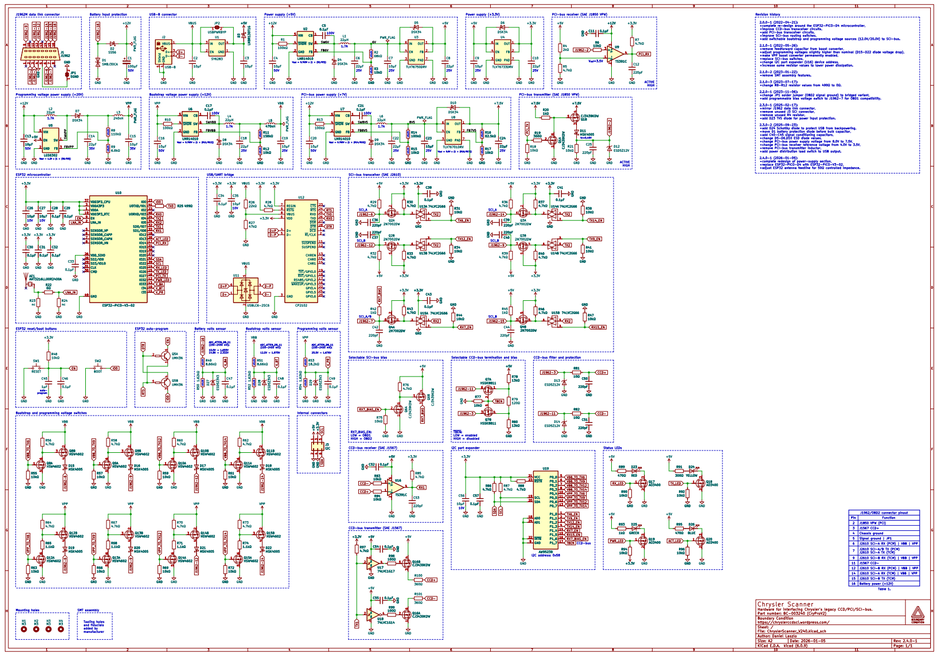

Original p1

Current: native hierarchical system block diagram

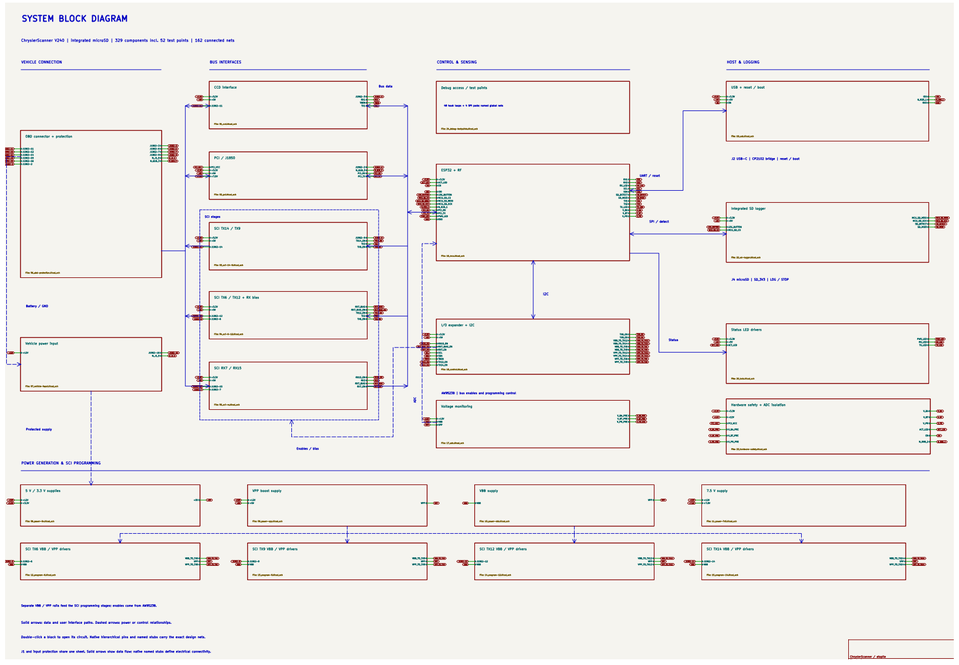

Current p1


Comparison	Current p.	Atlas p.
01 Vehicle battery input	6	3
02 OBD connector and line protection	2	4
03 USB connector and power selection	5	5
04 6 V pre-regulator and +5 V output	10	6
05 +3.3 V logic supply	10	7
06 VPP programming boost supply	14	8
07 VBB bootstrap supply	18	9
08 PCI +7.5 V supply	22	10
09 PCI / J1850 receiver and transmitter	7	11
10 ESP32, RF and local decoupling	4	12
11 USB / UART bridge and USB ESD	5	13
12 Reset, boot and automatic programming	4,5	14
13 SCI TX14 and TX9 paths	11	15
14 SCI TX6 / TX12 and selectable bias	15	16
15 SCI RX7 and RX15 paths	19	17
16 Battery, VBB and VPP monitoring dividers	12	18
17 CCD termination, bias and input filtering	3	19
18 CCD receiver	3	20
19 CCD transmitter	3	21
20 SCI pin 6: VBB / VPP programming switches	16	22
21 SCI pin 9: VBB / VPP programming switches	17	23
22 SCI pin 12: VBB / VPP programming switches	20	24
23 SCI pin 14: VBB / VPP programming switches	21	25
24 I2C expander and internal connector	8	26
25 Status LED drivers	13	27
26 Integrated microSD logger	9	28
27 Added ADC power-off isolation	23	29
28 Added supervisor, watchdog and hardware permit	23	30
29 Added PCI comparator supply clamp	7,23	31
30 Hook test points and SPI probe pads	24	32

01 Vehicle battery input

MODIFIED Original zone: A1 | Current page(s): 6

ORIGINAL PROJECT


Battery input protection: D1, D2, C1

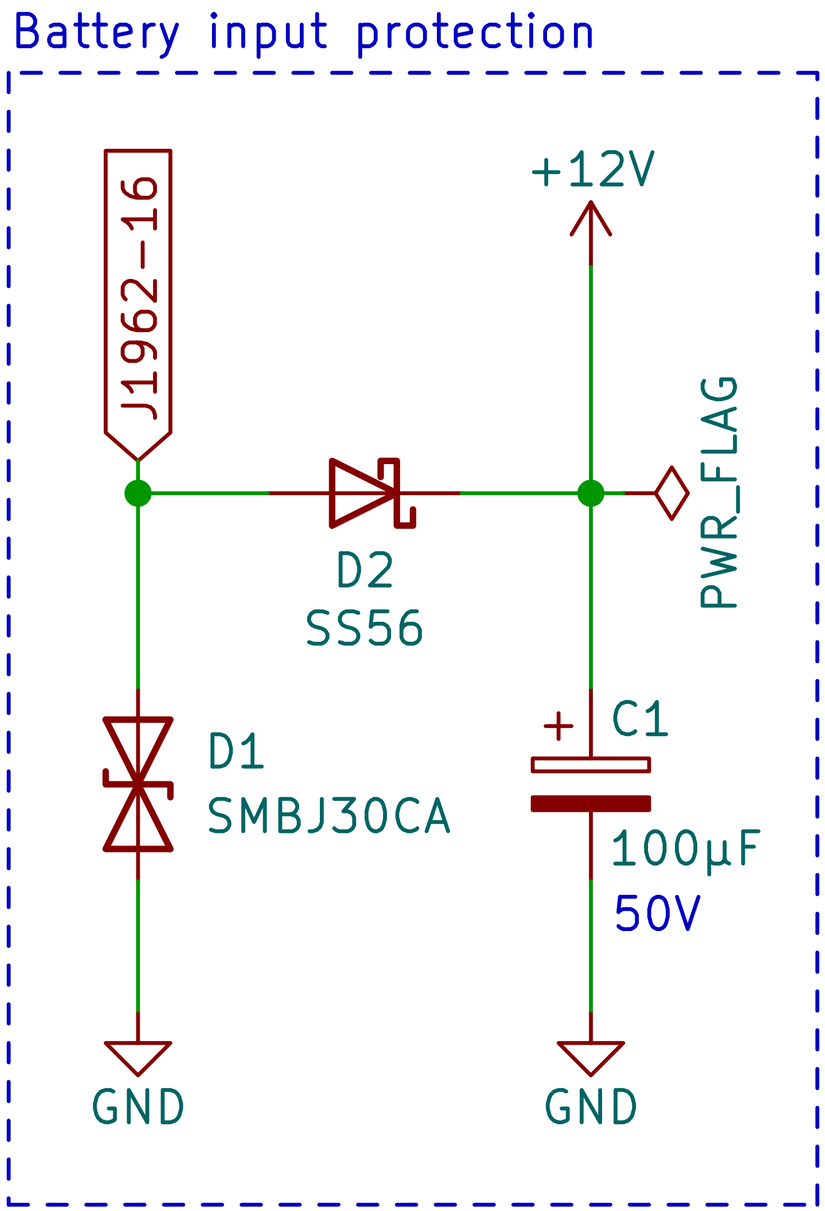

Original p1

CURRENT PROJECT

07_vehicle-input

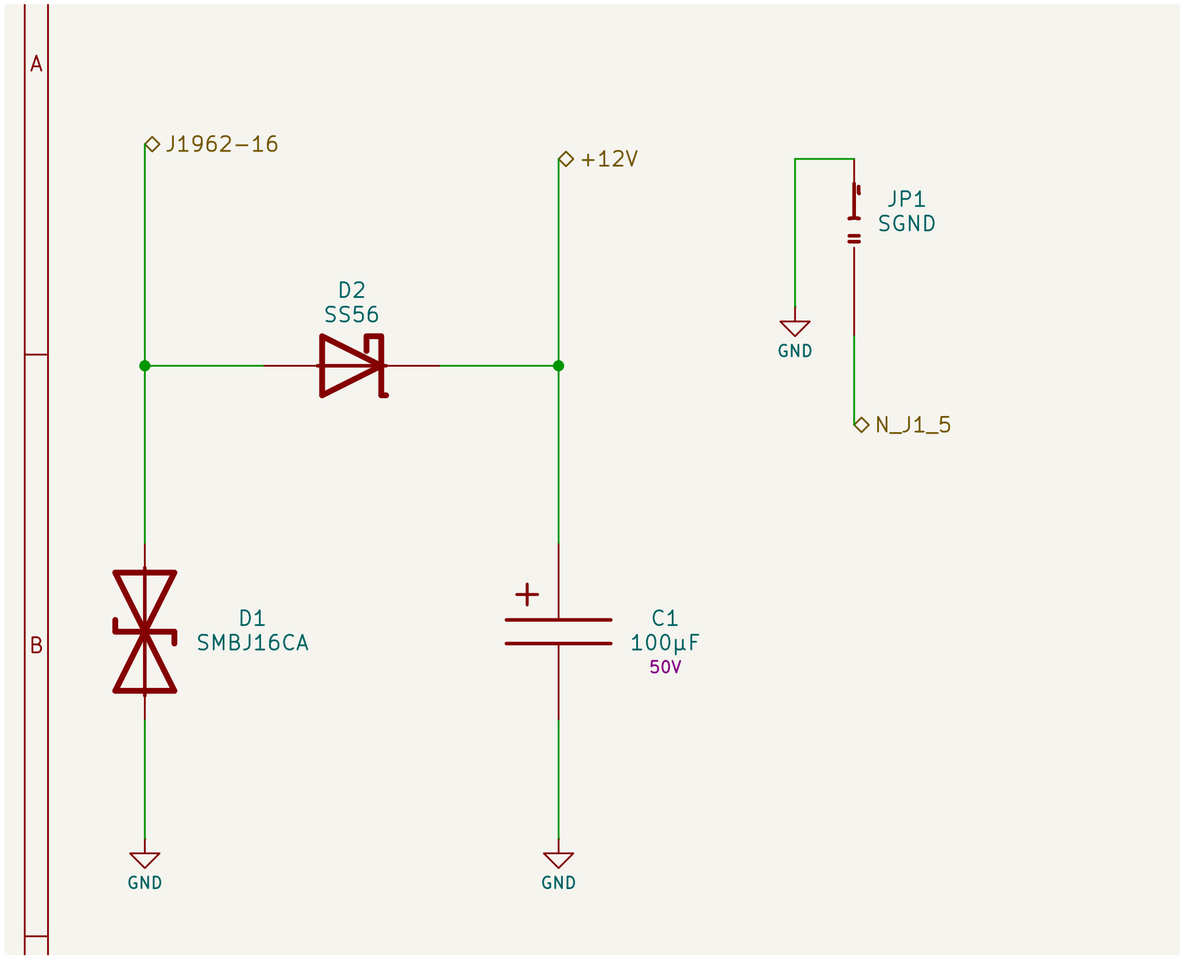

Current p6

- D1 changes from SMBJ30CA to SMBJ16CA. D2, C1 and the JP1 signal-ground link remain.
- The battery ADC now senses protected +12V after D2, rather than raw J1962-16. This is an intentional safety change.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

02 OBD connector and line protection

REORGANIZED Original zone: A1 / B7-B8 / C-E | Current page(s): 2


ORIGINAL PROJECT

Original J1962M connector and pin assignments




Original p1

PCI: C25 / D11 / D12 in transmitter block

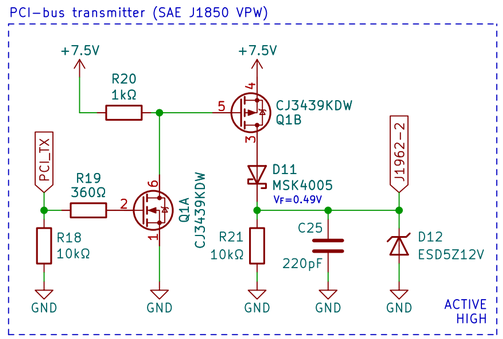


Original p1

SCI TX6 / TX12: C36 / C37

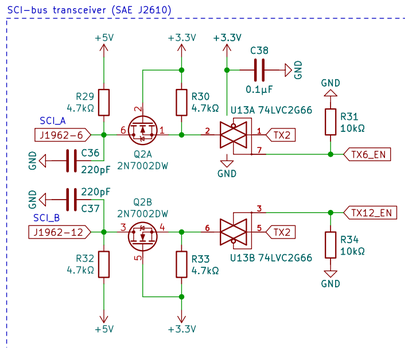


Original p1

SCI TX14 / TX9: C39 / C40

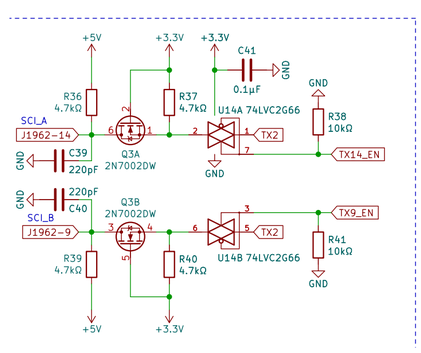


Original p1

SCI RX7 / RX15: C42 / C44

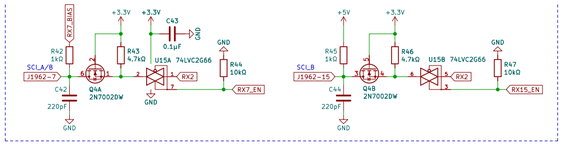

Original p1


CCD: D13 / D14 in original filter/protection block



Original p1

CURRENT PROJECT

06_obd-protection

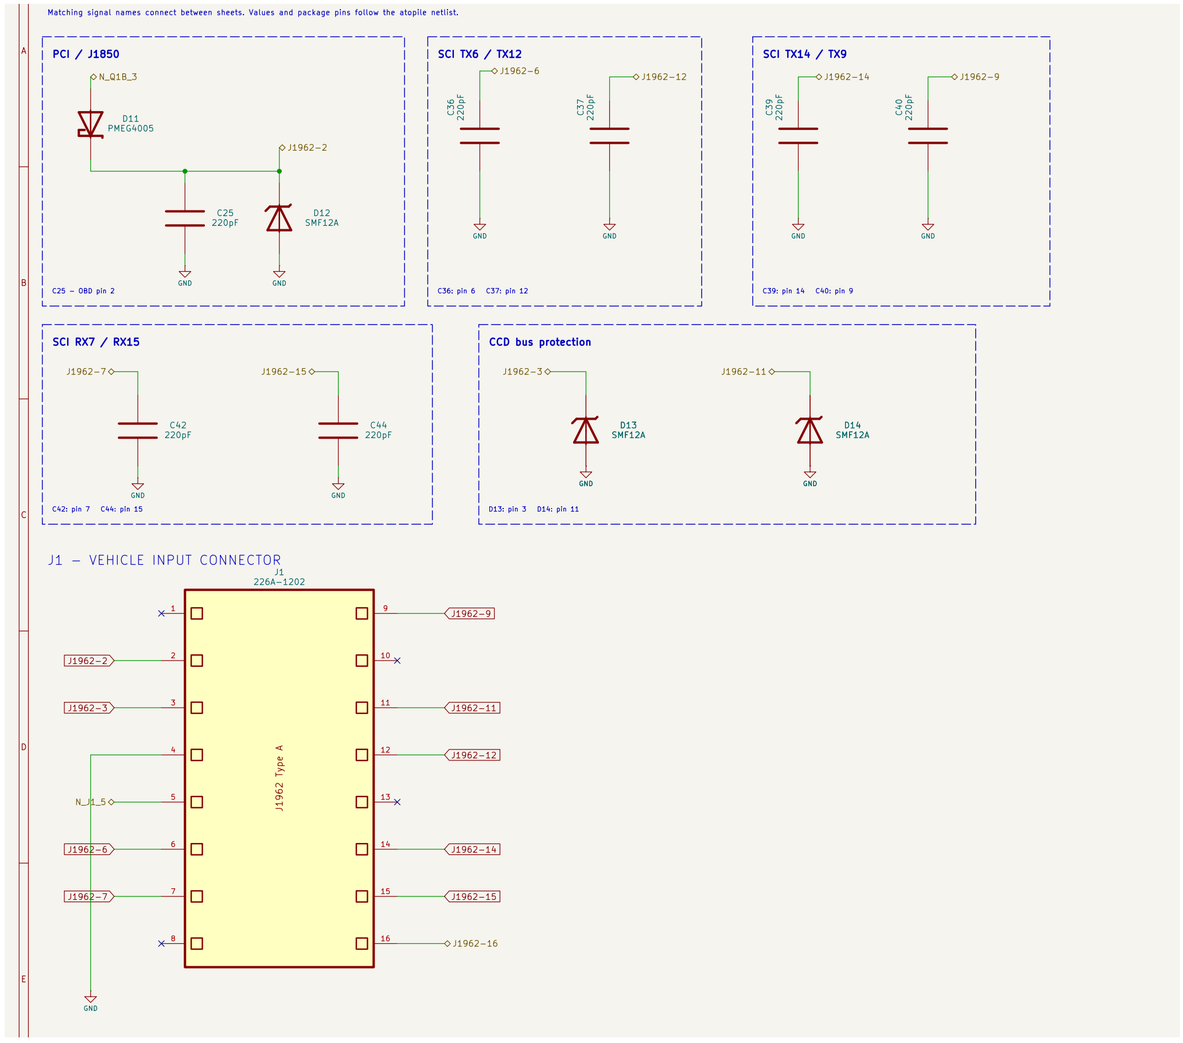

Current p2

- J1 is now an ATTEND 226A-1202; logical vehicle pin assignments are retained.
- Capacitors and protection diodes formerly scattered across bus blocks are grouped by PCI, SCI and CCD on one page. These crops identify their original locations.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

03 USB connector and power selection

MODIFIED Original zone: A2-A3 | Current page(s): 5

ORIGINAL PROJECT


Original USB-B, U1, JP2, D3 and C2/C3

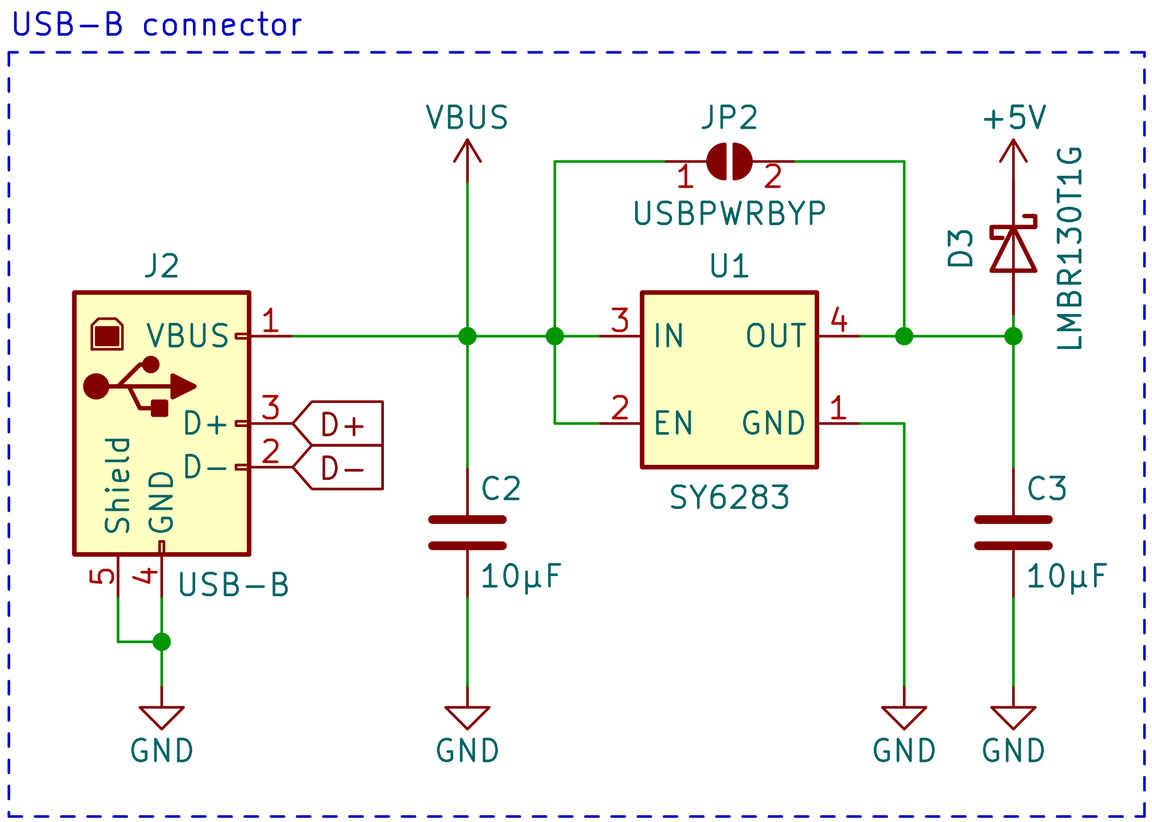

Original p1

CURRENT PROJECT

USB-C connector and USB/vehicle power selection

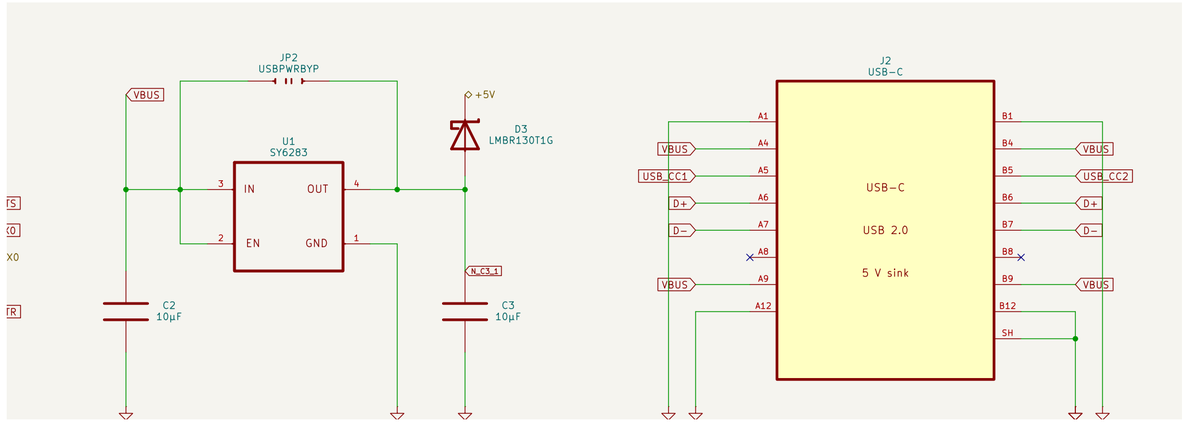

Current p5

- USB-B is deliberately replaced by USB-C, with separate CC pull-down resistors R102/R103.
- U1 SY6283 power switching, JP2 bypass, D3 and the input/output capacitor functions remain. See comparison 11 for UART/ESD circuitry.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

04 6 V pre-regulator and +5 V output

RETAINED Original zone: A4-A6 | Current page(s): 10

ORIGINAL PROJECT


U2 buck pre-regulator, U3 +5 V regulator and feedback

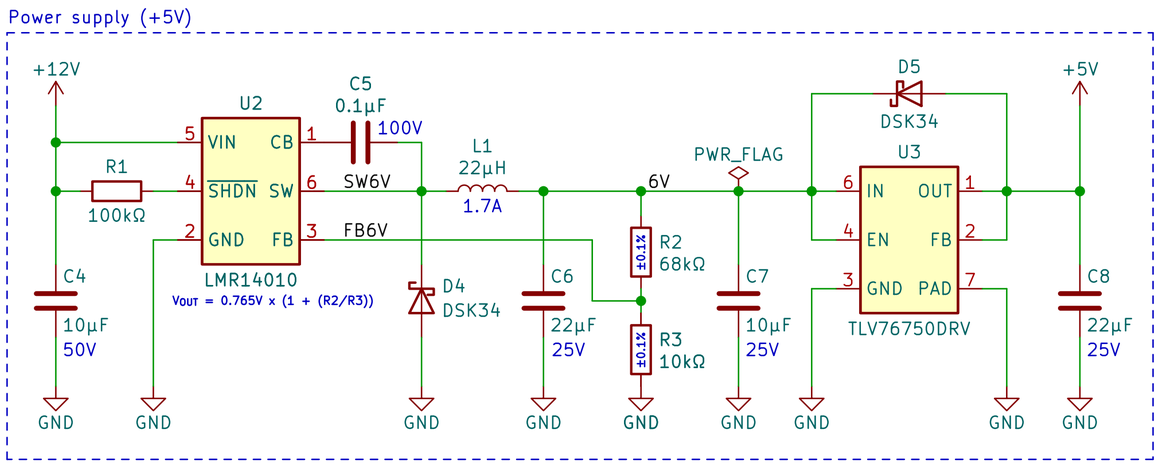

Original p1


CURRENT PROJECT

U2 / U3 and the +5 V chain

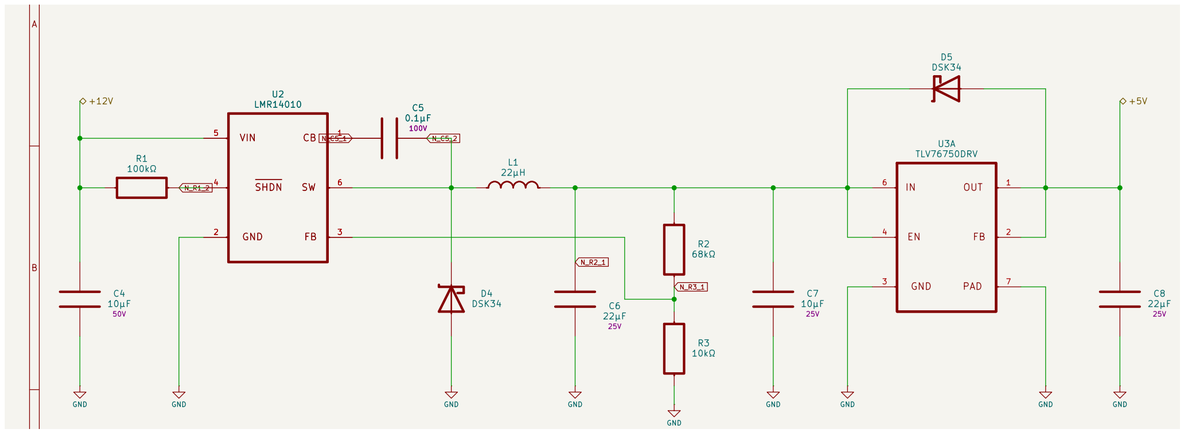

Current p10

Additional displayed U3 package unit

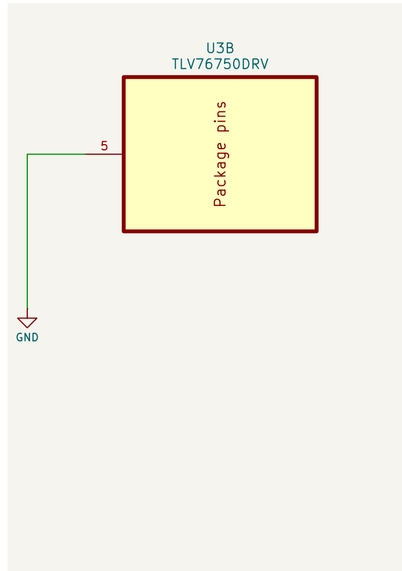

Current p10

- U2, L1, D4/D5, U3 and feedback/output-sense functions correspond to the original block.
- The migrated regulator symbol library exposes electrical units/pins explicitly; compare named IN, OUT, FB, SNS and EN connections rather than symbol appearance.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

05 +3.3 V logic supply

RETAINED Original zone: A6-A7 | Current page(s): 10

ORIGINAL PROJECT


U4, D6 and C9/C10

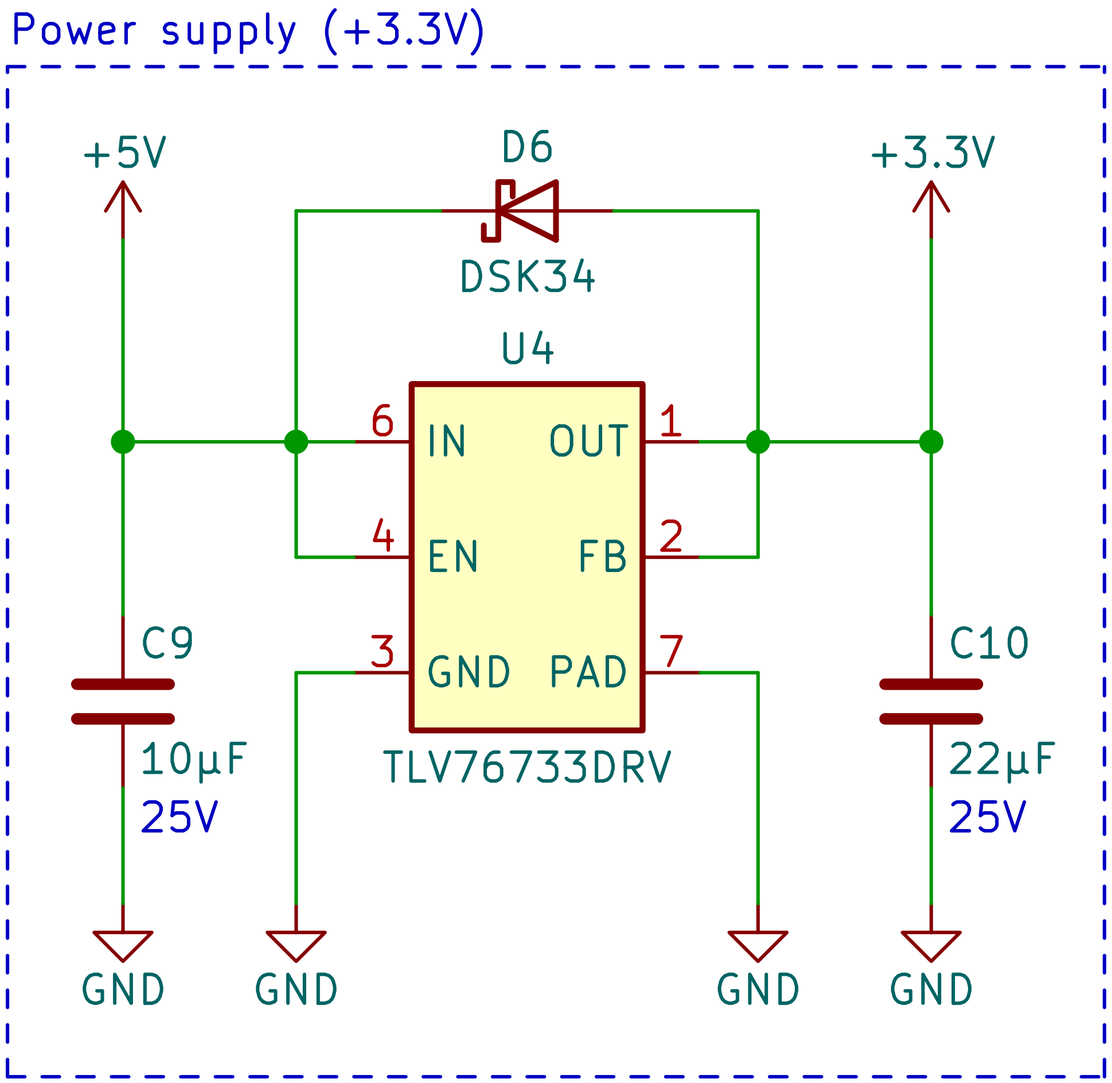

Original p1


CURRENT PROJECT

U4 +3.3 V regulator

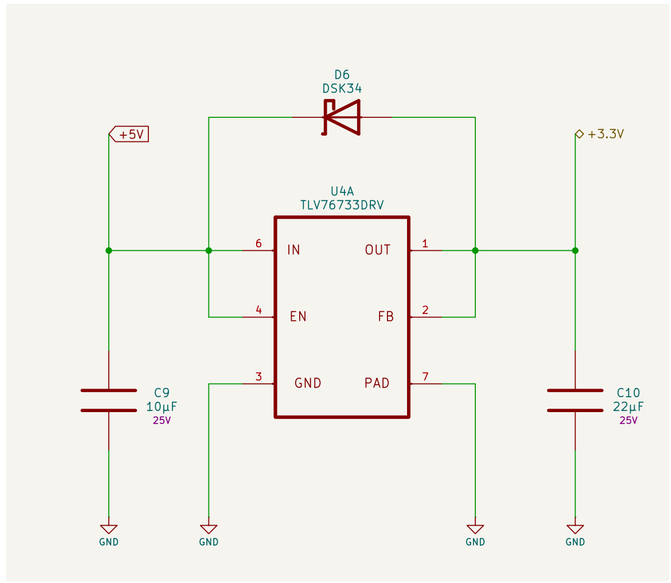

Current p10

Additional displayed U4 unit

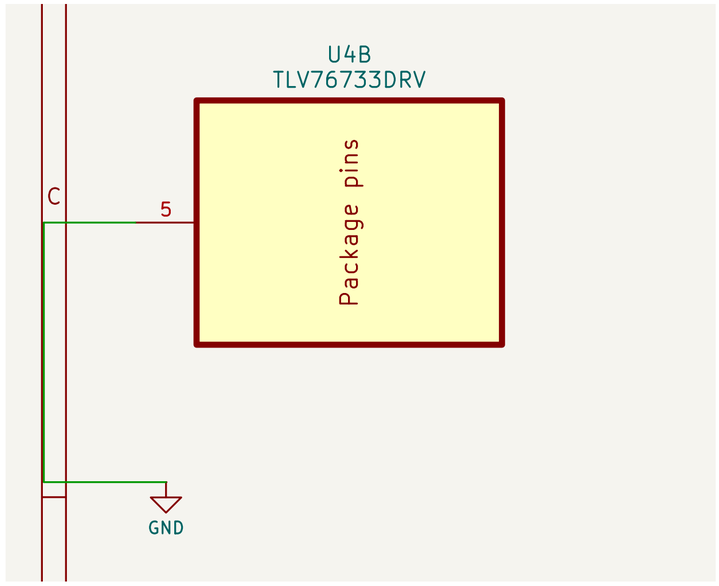

Current p10

- The original +3.3 V regulation and filtering remain. The additional displayed symbol unit belongs to the same U4 package.
- The separate SD_3V3 regulator is a later addition, not a replacement for this logic supply.

Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.


06 VPP programming boost supply

MODIFIED

Original zone: B1-B3 | Current page(s): 14

ORIGINAL PROJECT


U5 boost regulator, L2/L3, D7 and VPP filtering

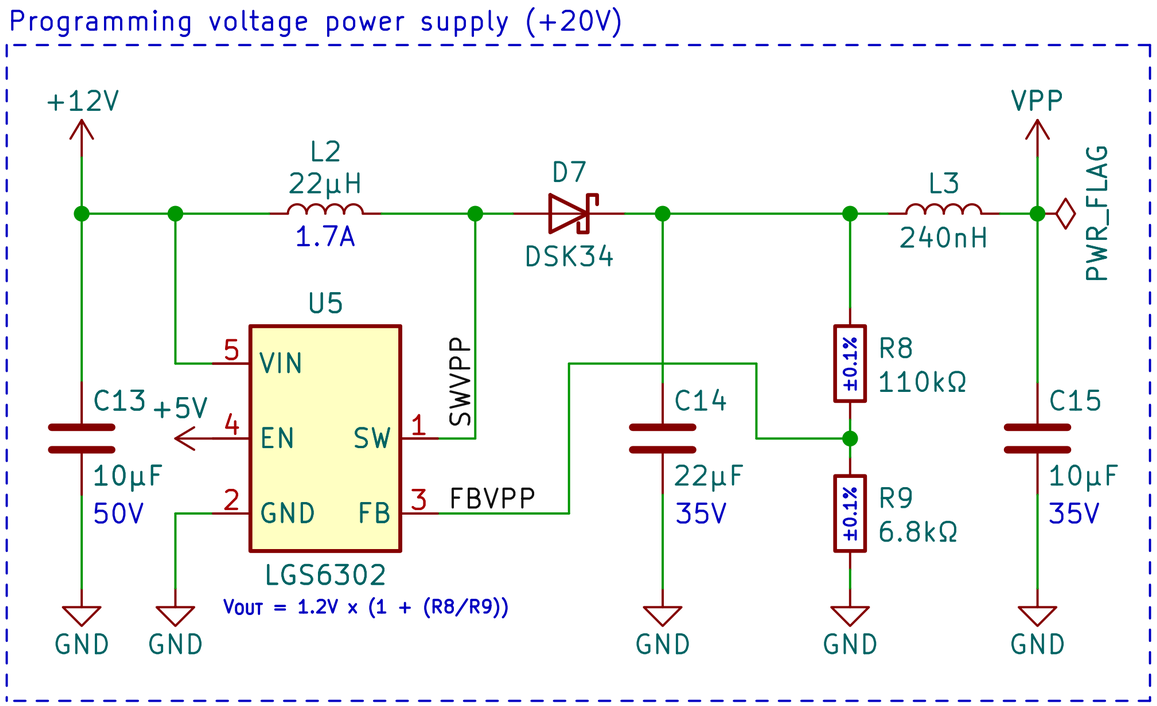

Original p1

CURRENT PROJECT

09_power-vpp

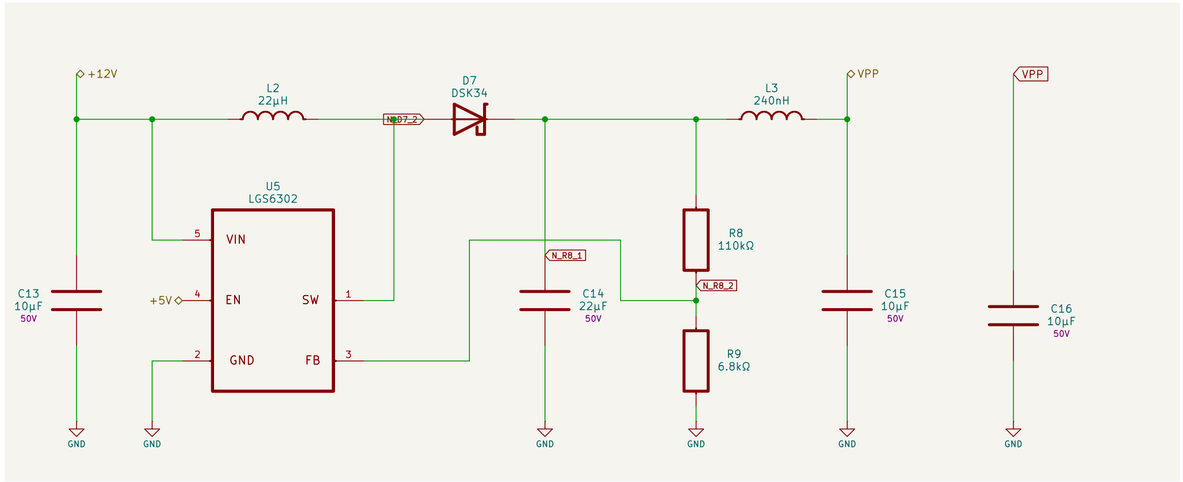

Current p14

- The original boost topology and programming-rail function remain.
- C14 and C15 now specify at least 50 V, deliberately increased from the original 35 V labels. The bounded prototype still requires protected-input/VPP peaks at or below 28 V.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

07 VBB bootstrap supply

RETAINED Original zone: B3-B5 | Current page(s): 18

ORIGINAL PROJECT


U6, L4/L5, D8 and feedback/filtering

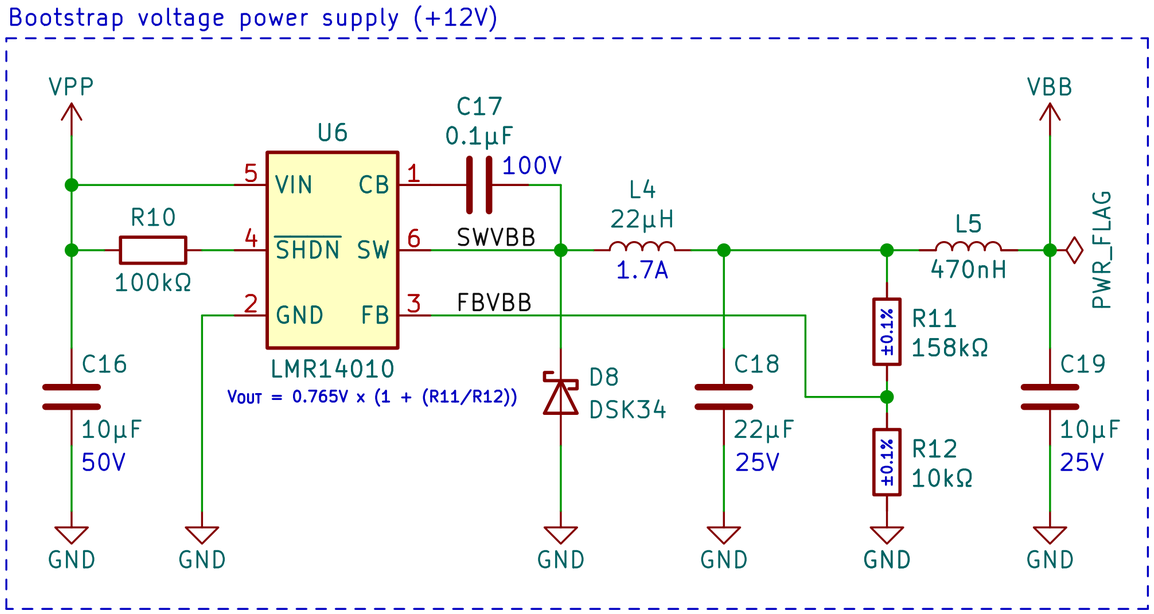

Original p1

CURRENT PROJECT

10_power-vbb

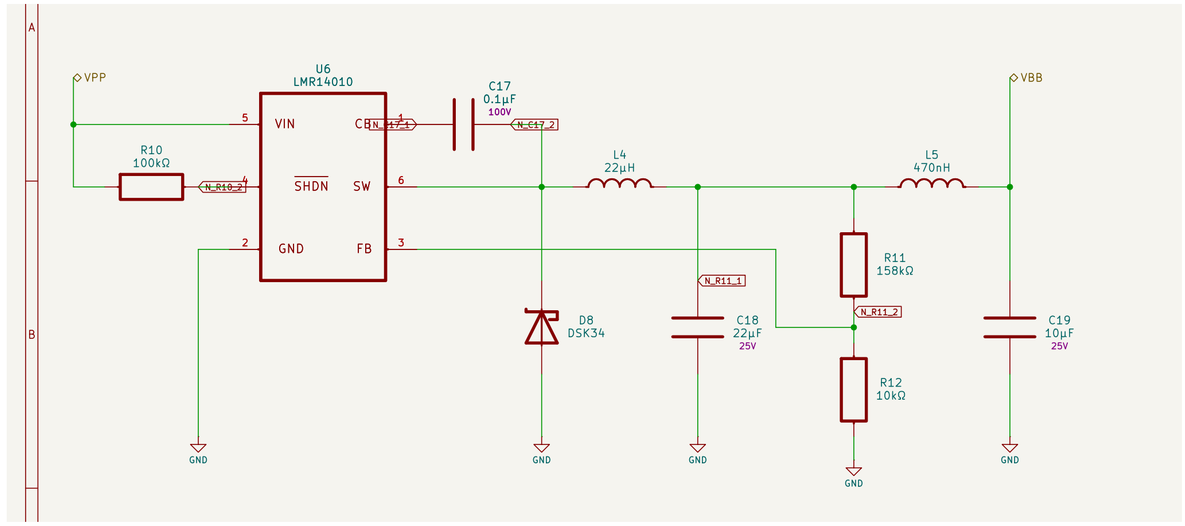

Current p18

- The original VBB rail and feedback/output-filtering blocks correspond directly.
- The page title refers to the rail function; original reference designators and named VBB connections identify the match.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

08 PCI +7.5 V supply

RETAINED Original zone: B5-B7 | Current page(s): 22

ORIGINAL PROJECT


U7 / U8 power chain and two feedback networks

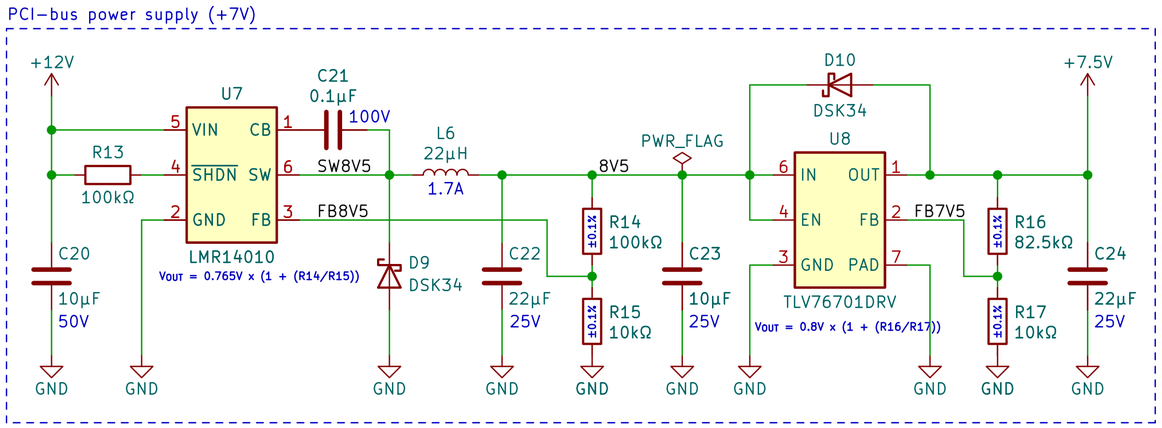

Original p1

CURRENT PROJECT

11_power-7v5

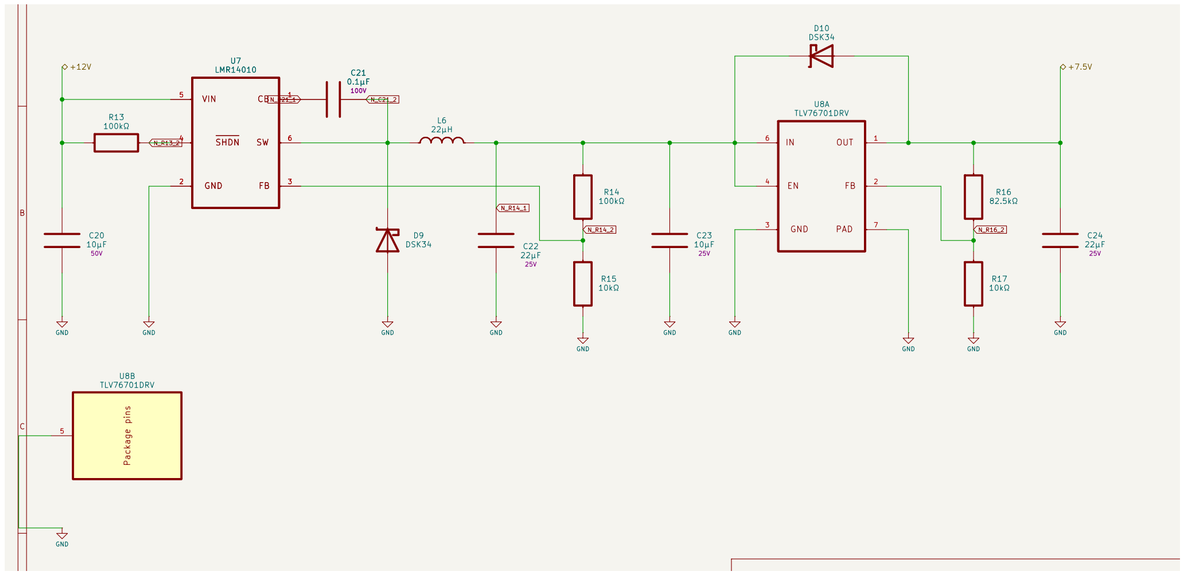

Current p22

- U7, U8, L6, D9/D10 and their feedback/output filters retain the original PCI supply function.
- This rail is distinct from the new PCI_VCC clamp supplying the comparator. See comparison 29.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

09 PCI / J1850 receiver and transmitter

MODIFIED Original zone: A7-A8 / B7-B8 | Current page(s): 7


ORIGINAL PROJECT

Original U9 receiver

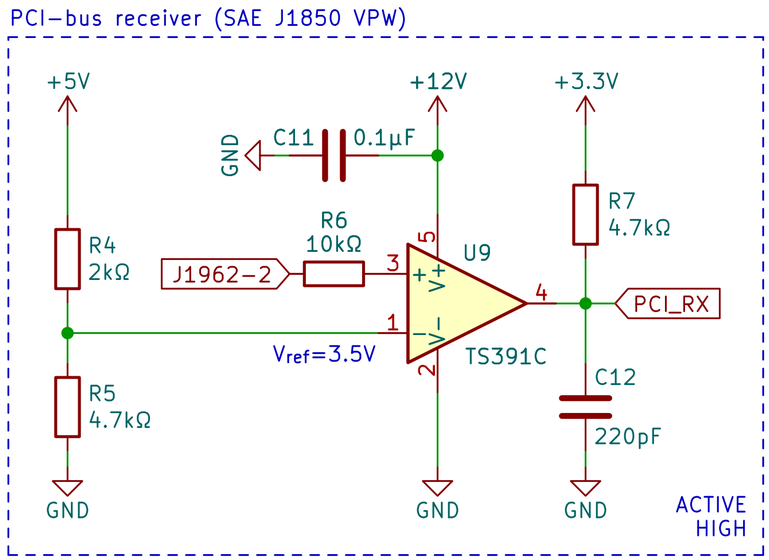

Original p1


Original Q1 transmitter and protection

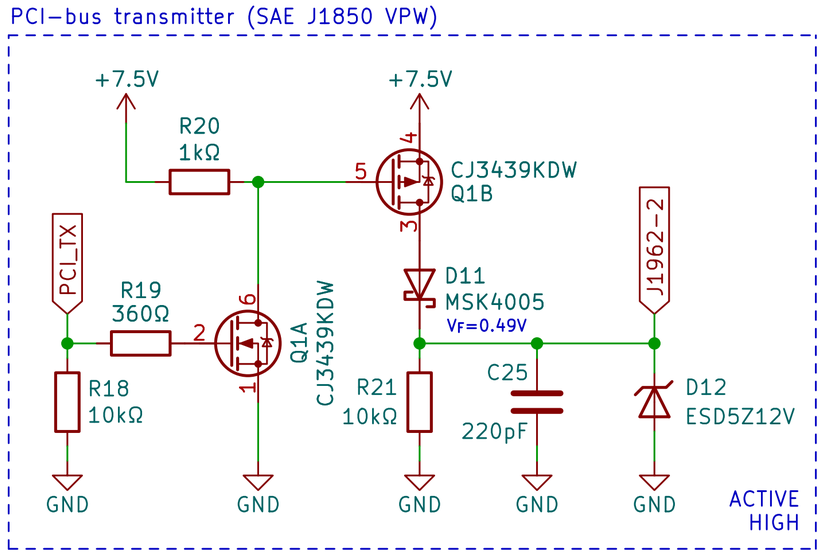

Original p1

CURRENT PROJECT

02_pci

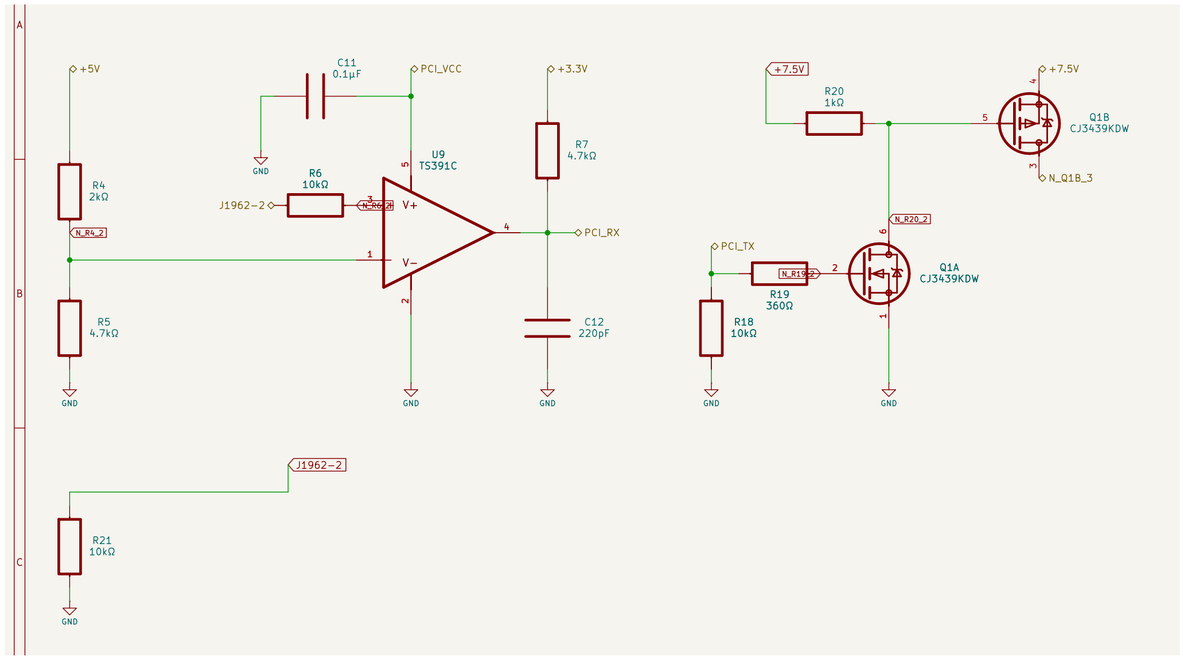

Current p7

- U9, Q1, R4-R7 and R18-R21 retain the PCI receive/transmit functions.
- U9.5 and C11.2 now use the separately clamped PCI_VCC rail instead of direct +12V. C25 and D11/D12 are displayed on the connector/protection page.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

10 ESP32, RF and local decoupling

MODIFIED Original zone: C1-D3 | Current page(s): 4

ORIGINAL PROJECT


Original U10 ESP32-PICO-V3-02 and RF network

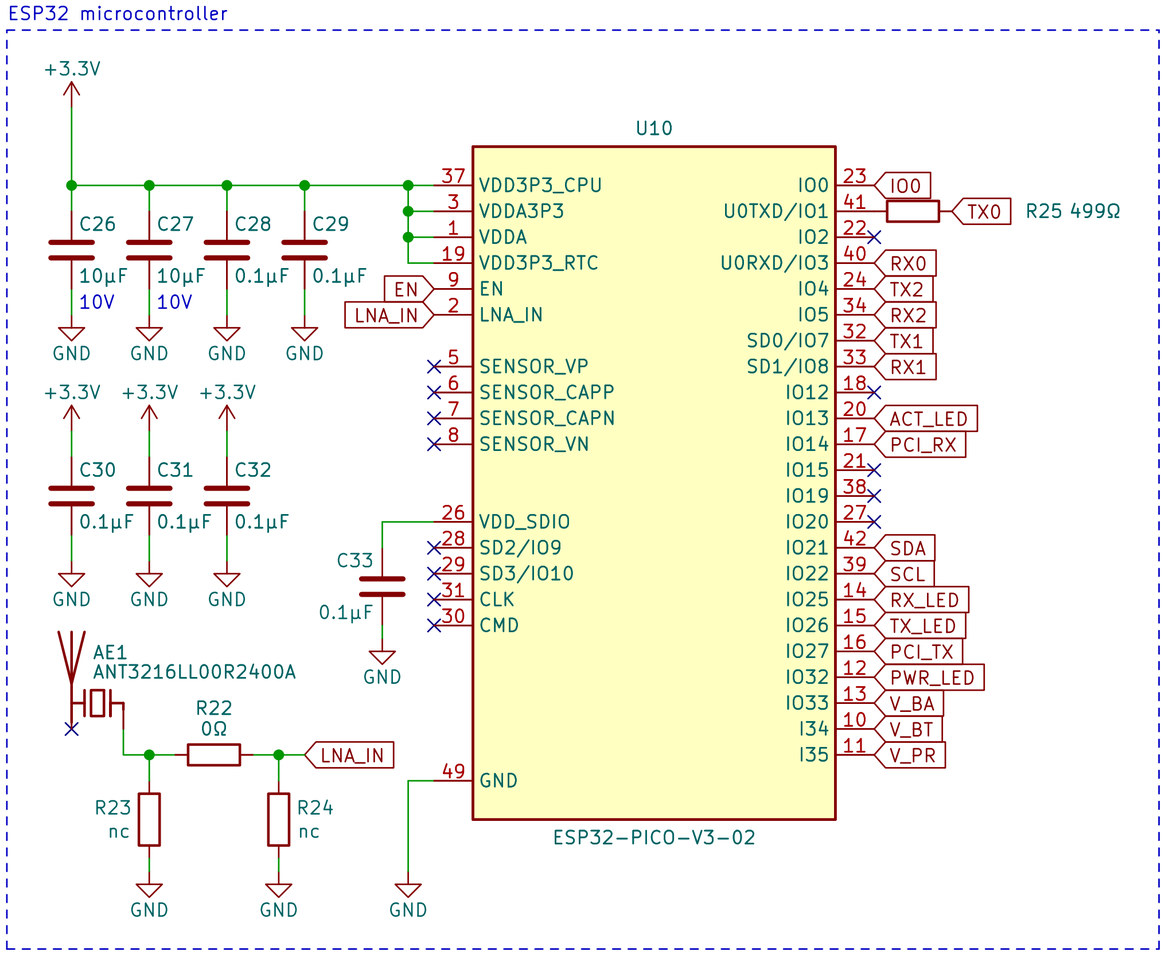

Original p1

CURRENT PROJECT

16_mcu

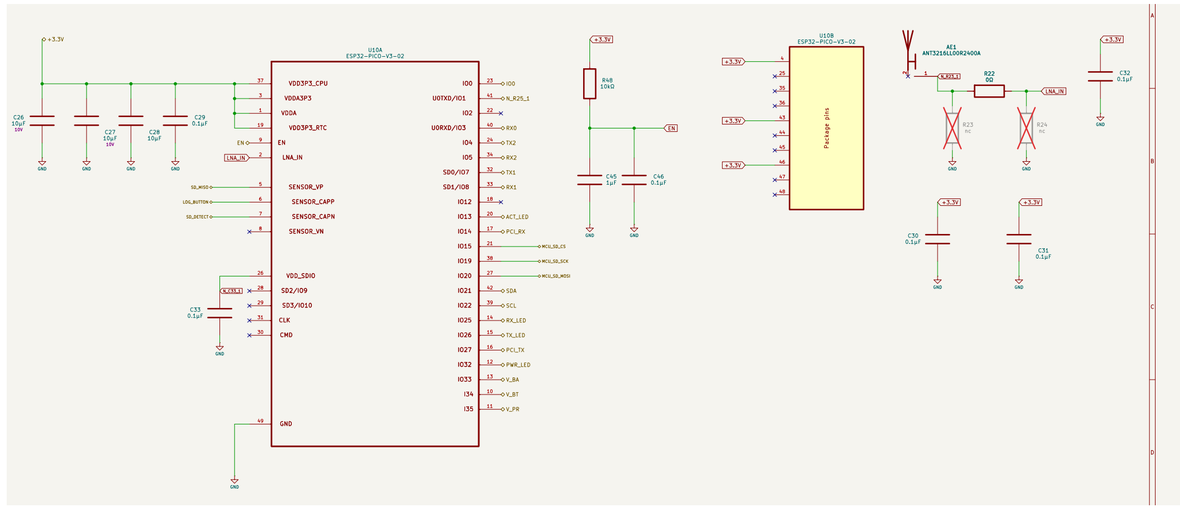

Current p4

- The original ESP32 package, RF network and existing functional pin assignments remain.
- Previously unused U10 pads 5, 6, 7, 21, 27 and 38 now serve SD and logging functions. ACT_LED is assigned exclusively to the supervised health heartbeat; legacy activity firmware is incompatible.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

11 USB / UART bridge and USB ESD

MODIFIED Original zone: C3-D4 | Current page(s): 5

ORIGINAL PROJECT


Original CP2102, USBLC6 and VBUS divider

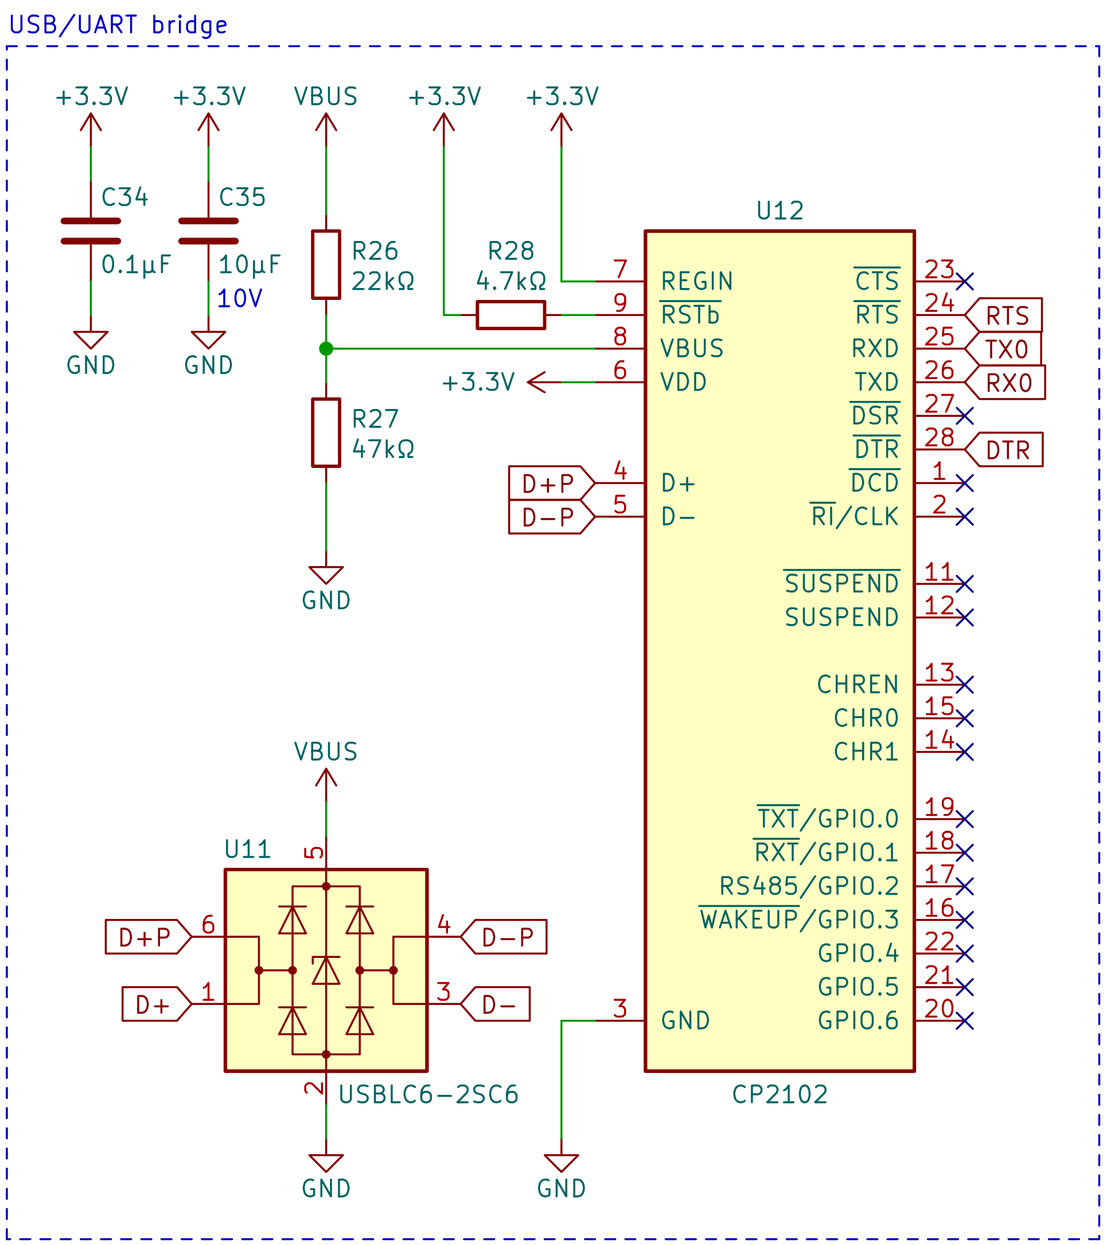

Original p1


CURRENT PROJECT

CP2102 serial/control unit

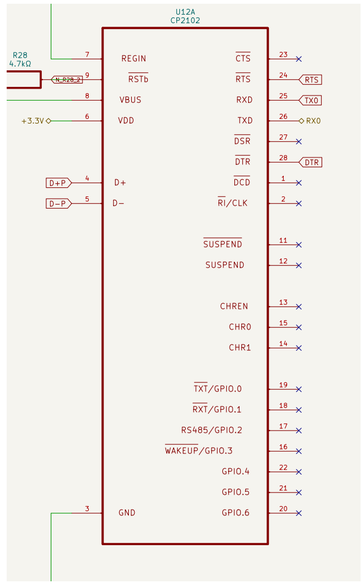


Current p5

USBLC6 ESD and USB-C CC resistors

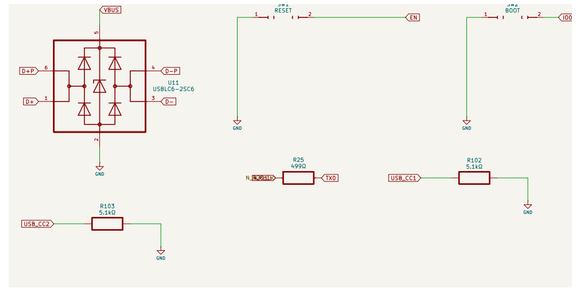


Current p5

CP2102 supply/ground units

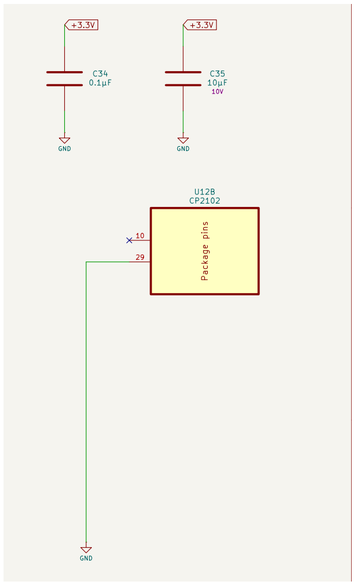

Current p5

VBUS sense divider (continuation at main unit)

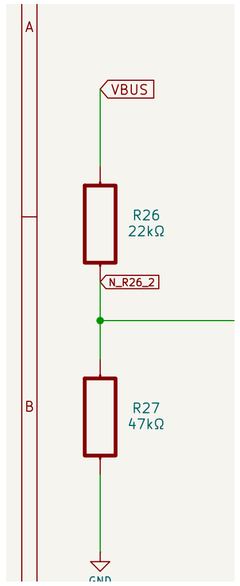

Current p5

- The classic CP2102 is retained; this is not a CP2102N conversion. U11 retains the USBLC6 protection function.
- The current symbol drawing is split into several units belonging to U12. USB-C contact mapping and CC termination are intentional additions.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

12 Reset, boot and automatic programming

REORGANIZED Original zone: E1-E3 | Current page(s): 4,5


ORIGINAL PROJECT

SW1 / SW2, R48 and C45/C46

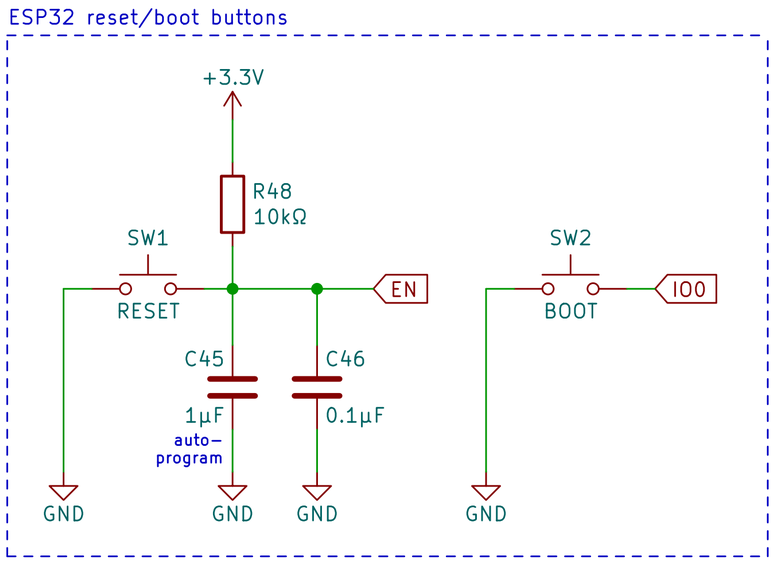

Original p1


Q5 automatic programming

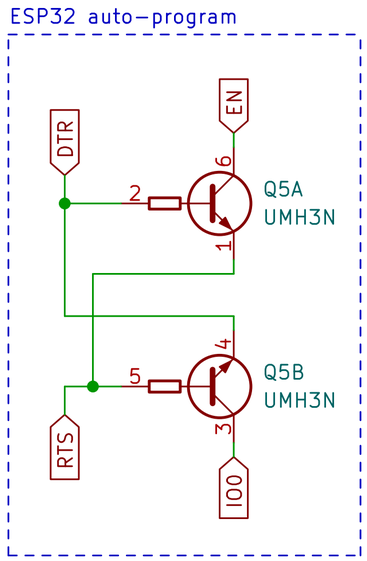

Original p1


CURRENT PROJECT

Reset and boot buttons

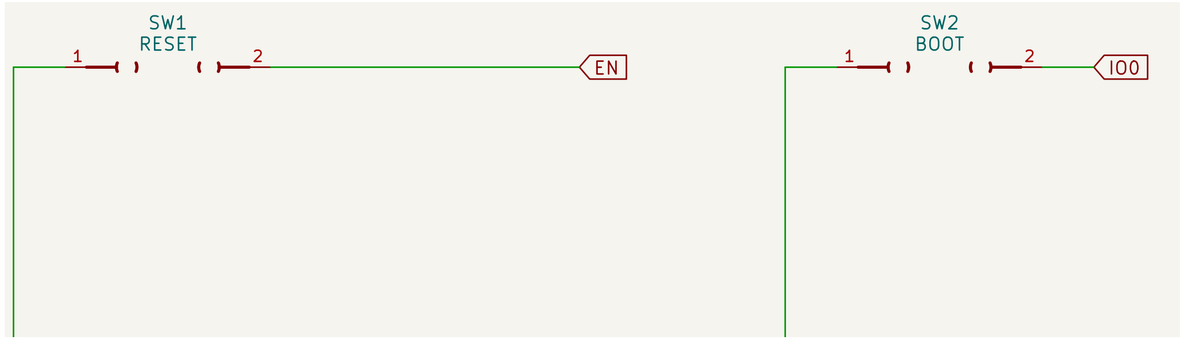


Current p5

Q5 automatic programming pair

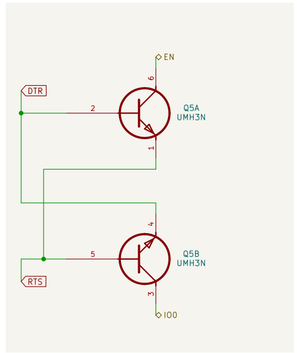

Current p5

R48 and reset/boot capacitors

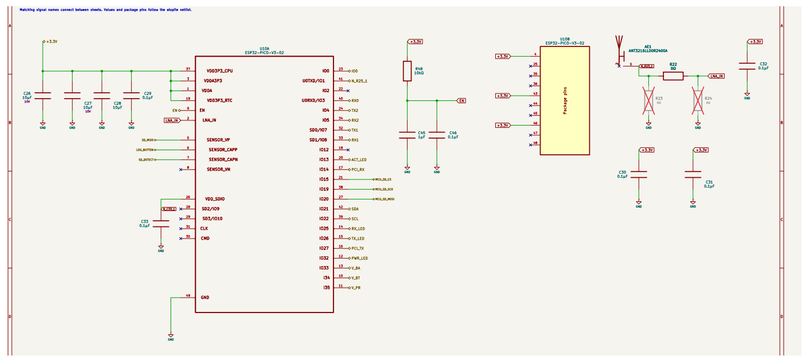

Current p4

- Buttons and automatic programming are grouped with USB; the reset resistor/capacitors remain on the MCU sheet.
- Q5 multi-unit drawing and named EN / IO0 / RTS / DTR nets correspond to the original automatic programming topology.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

13 SCI TX14 and TX9 paths

REORGANIZED Original zone: C6-D8 | Current page(s): 11

ORIGINAL PROJECT


Original Q3 / U14 SCI TX14 and TX9 paths

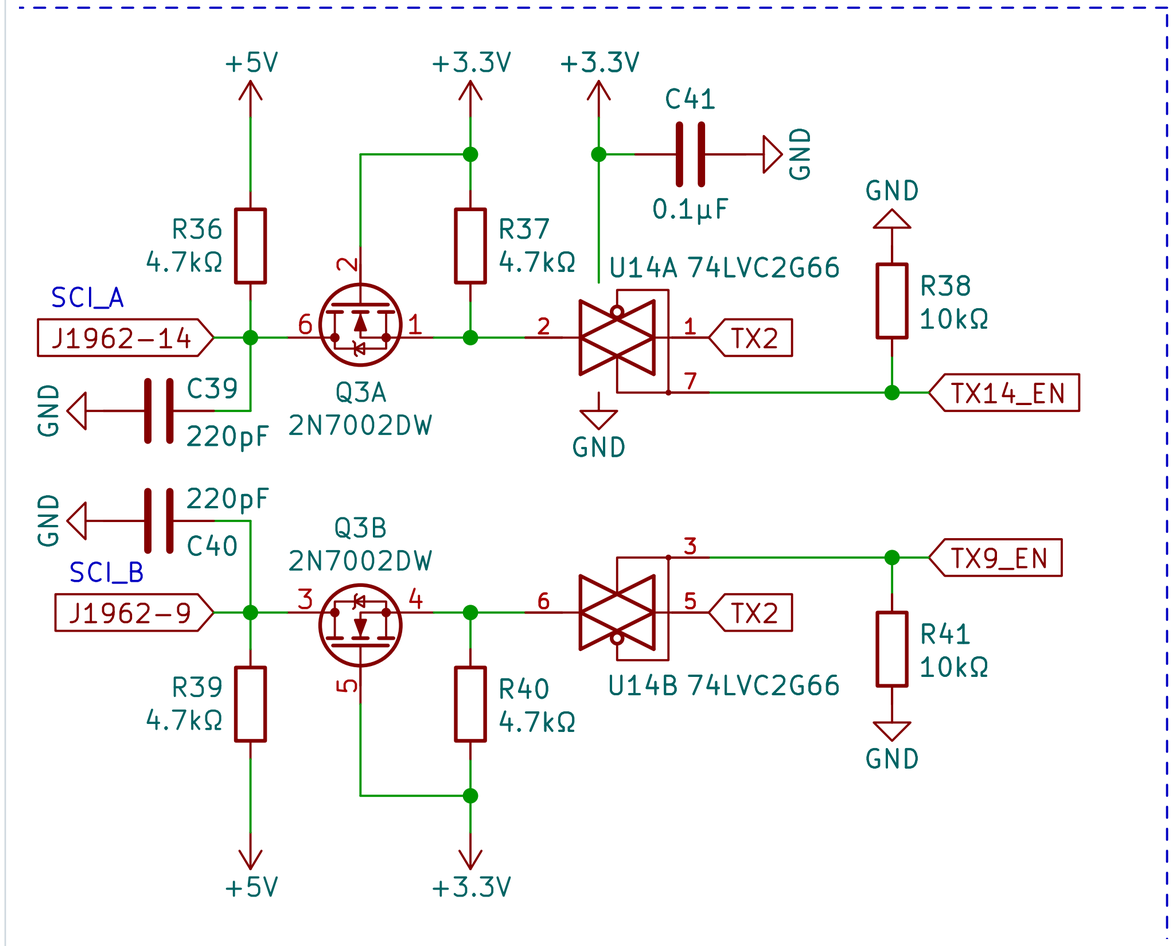

Original p1

CURRENT PROJECT

03_sci-14-9

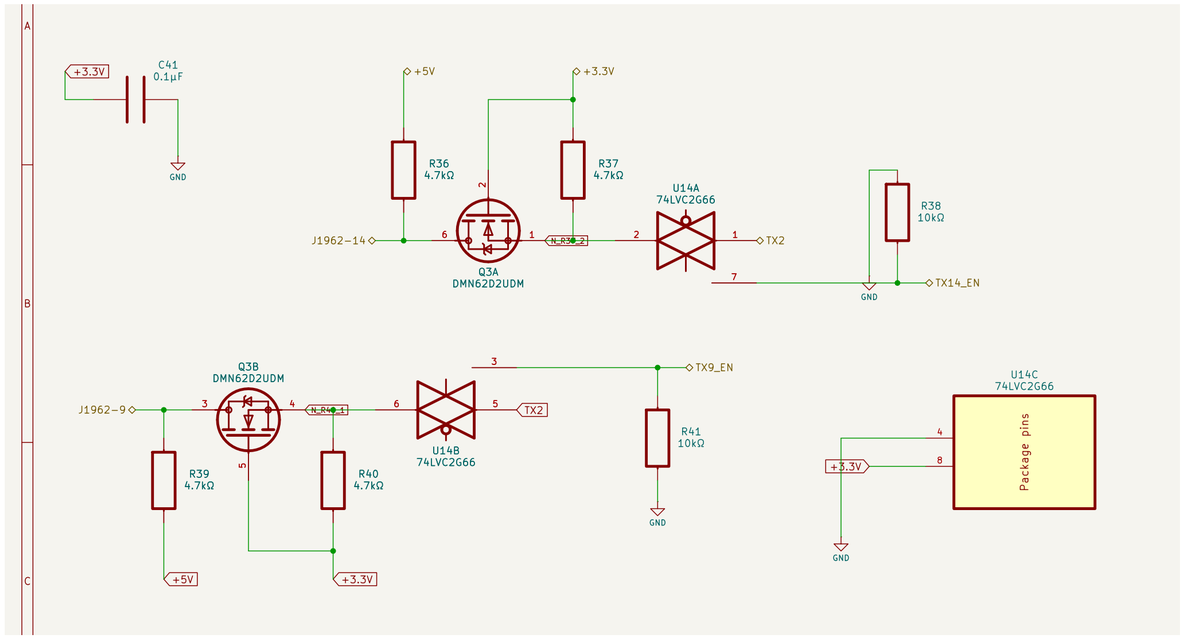

Current p11

- Q3, U14, R36-R41 and C41 correspond to the original two transmit paths.
- C39 and C40 are now grouped on the connector/protection page. Vehicle pins 14 and 9, enable names and shared TX2 function remain identifiable.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

14 SCI TX6 / TX12 and selectable bias

REORGANIZED Original zone: C4-D6 / E5-E6 | Current page(s): 15


ORIGINAL PROJECT

Original Q2 / U13 transmit paths

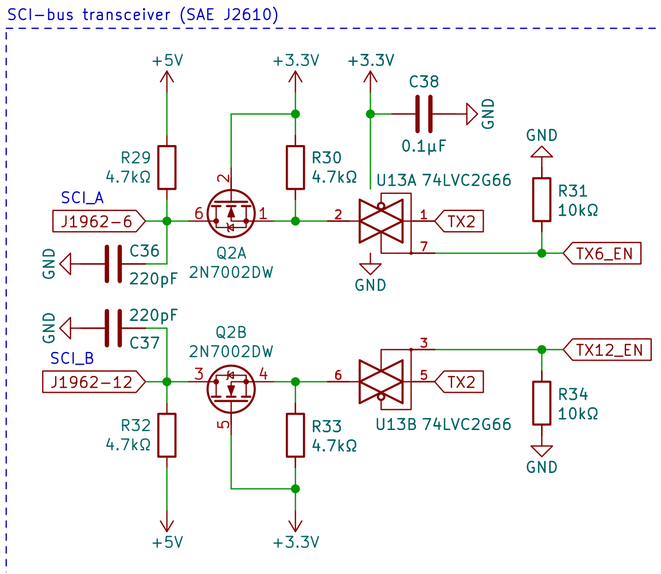

Original p1


Original Q6 selectable SCI bias

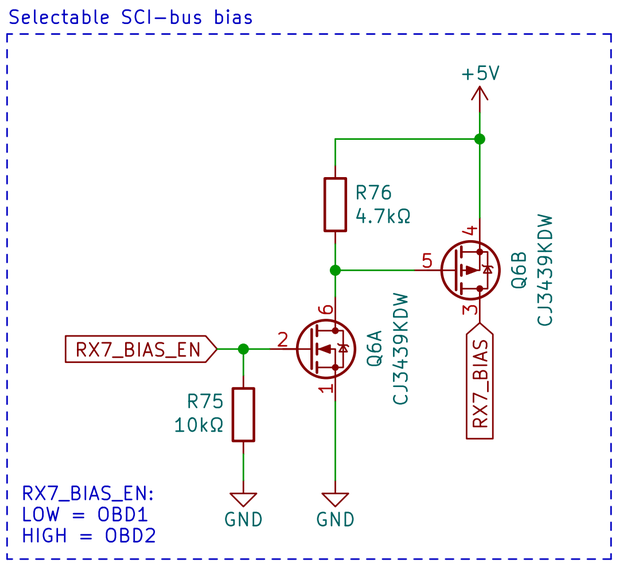

Original p1

CURRENT PROJECT

04_sci-6-12

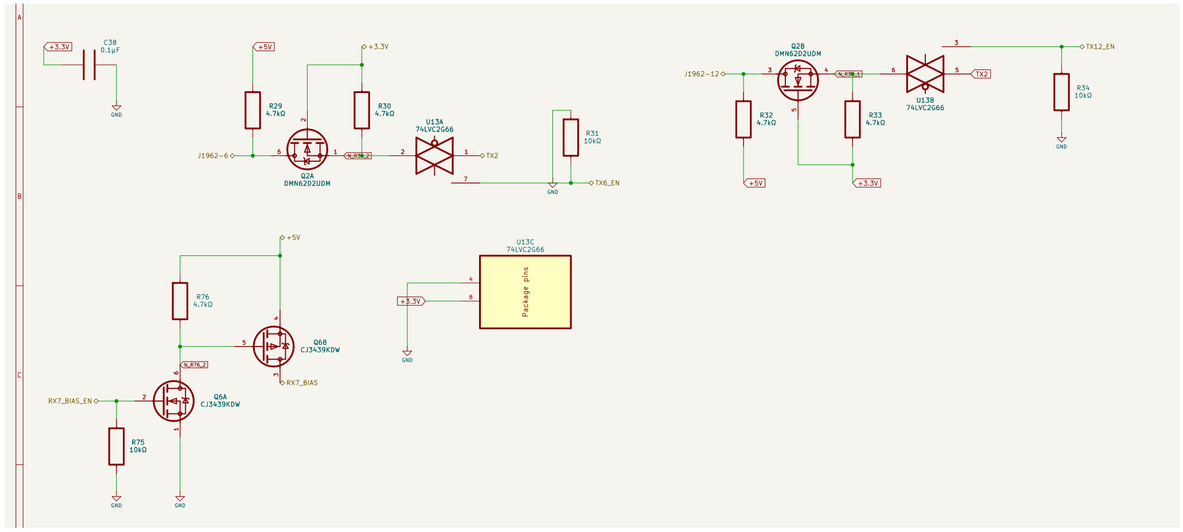

Current p15

- Q2/U13 transmit switching and Q6/R75/R76 selectable bias are grouped on one page.
- C36/C37 are on connector protection. RX7_BIAS_EN, TX6_EN, TX12_EN and the corresponding vehicle pins retain their original roles.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

15 SCI RX7 and RX15 paths

REORGANIZED Original zone: D4-E8 | Current page(s): 19

ORIGINAL PROJECT


Original Q4 / U15 receive paths

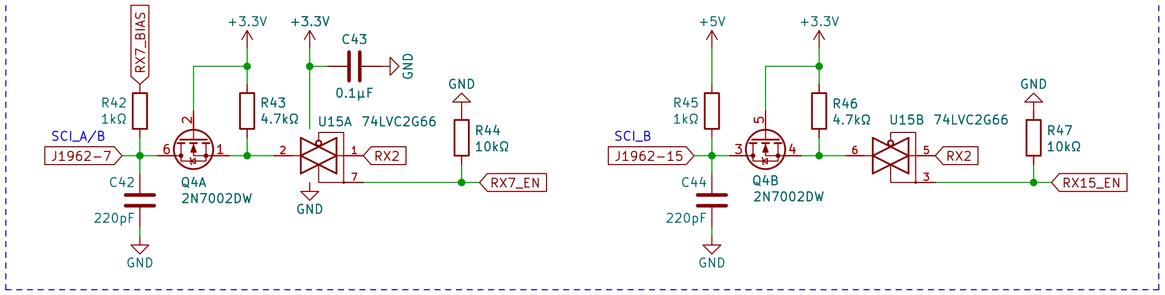

Original p1

CURRENT PROJECT

05_sci-rx

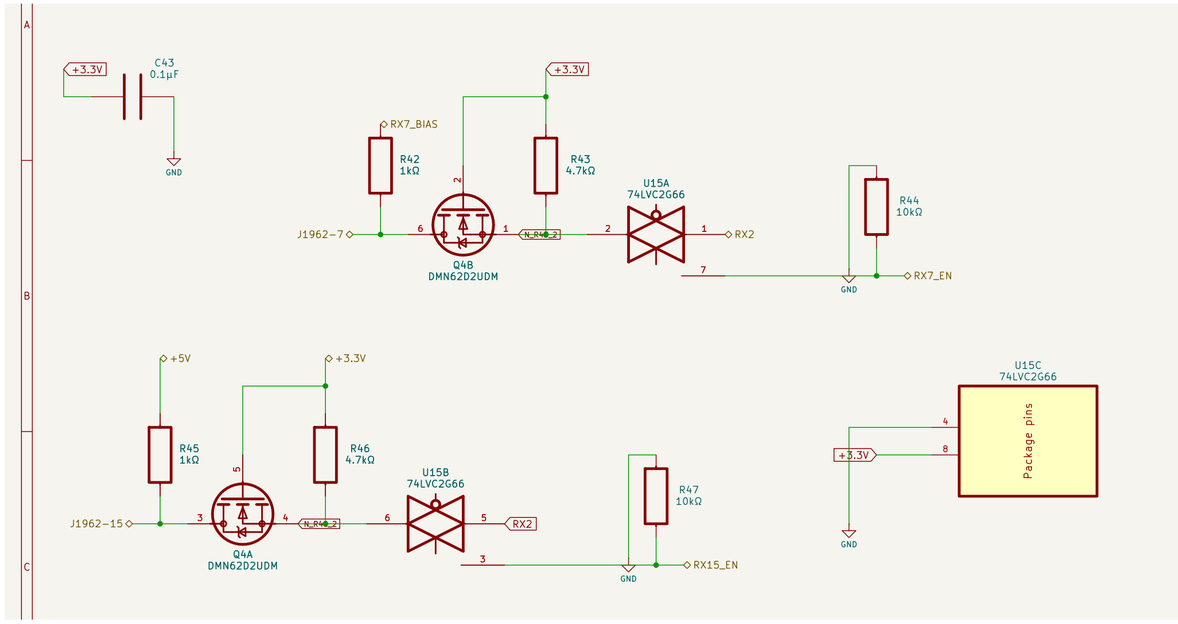

Current p19

- The Q4/U15 sections, R42-R47, C43 and RX2 receive function correspond to the original.
- C42 and C44 have moved to the grouped connector/protection drawing; they are not missing from the receive networks.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

16 Battery, VBB and VPP monitoring dividers

MODIFIED Original zone: E3-E5 | Current page(s): 12

ORIGINAL PROJECT


Original three divider / clamp / filter circuits

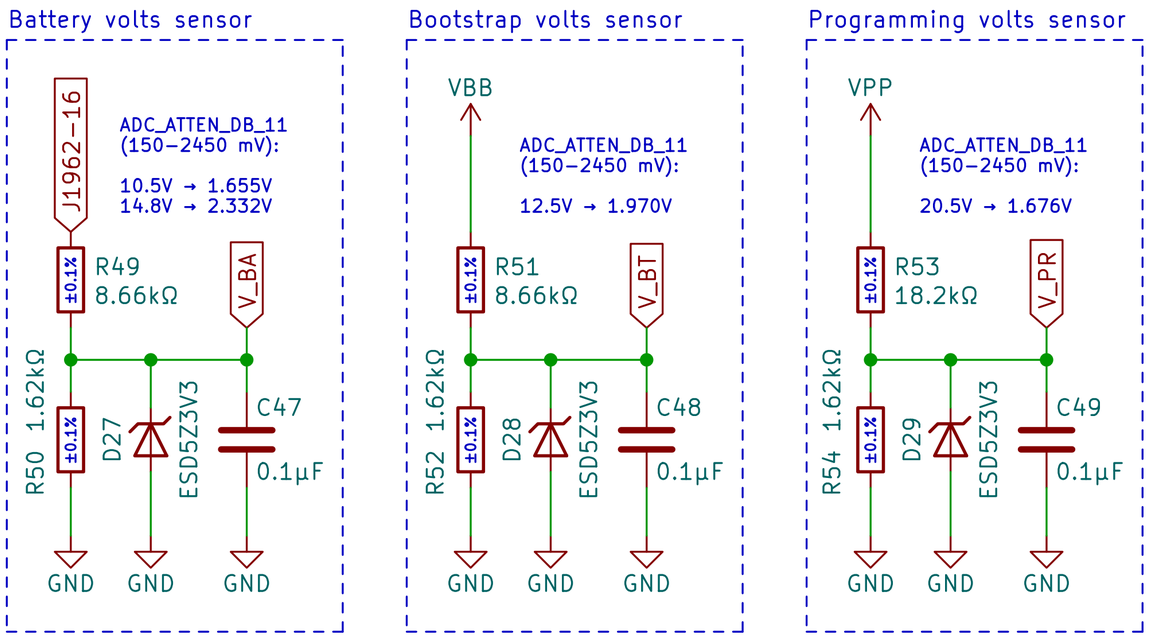

Original p1

CURRENT PROJECT

17_adc

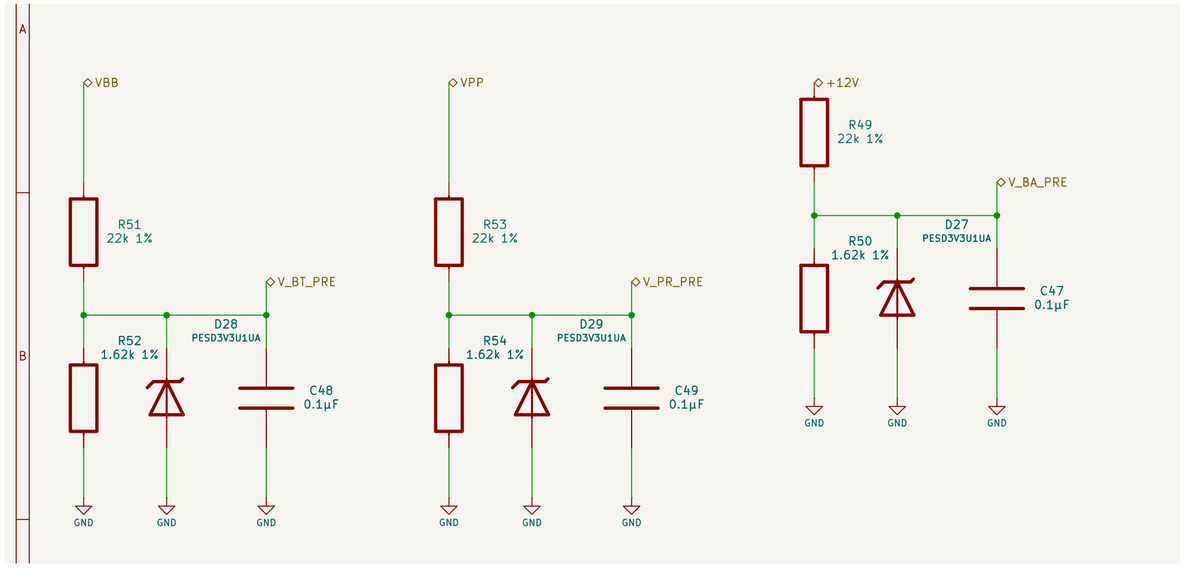

Current p12

- R49/R51/R53 are now 22k 1%; R50/R52/R54 are 1.62k 1%. R49 input moves to protected +12V.
- The divider outputs are now V_BA_PRE, V_BT_PRE and V_PR_PRE. U21 isolation on the safety page creates the final ADC nets; calibration must reflect these intentional changes.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

17 CCD termination, bias and input filtering

REORGANIZED Original zone: E6-E8 | Current page(s): 3


ORIGINAL PROJECT

Original Q7 termination / bias

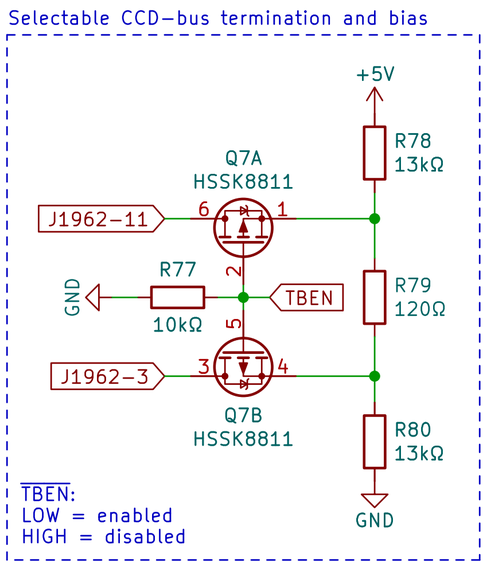

Original p1


Original R81/R82, C50/C51 and D13/D14

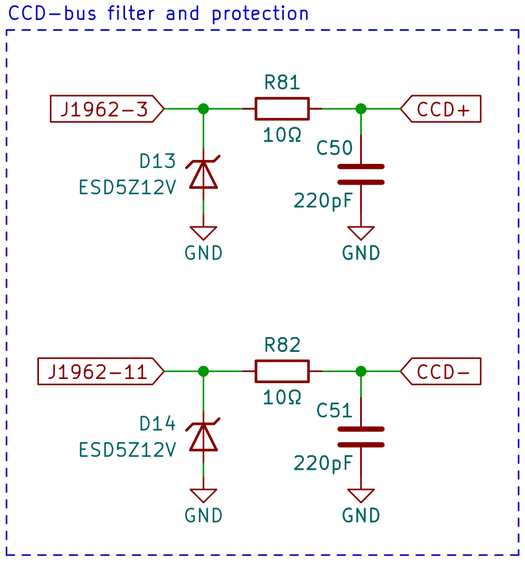

Original p1

CURRENT PROJECT

CCD input filtering and Q7 bias

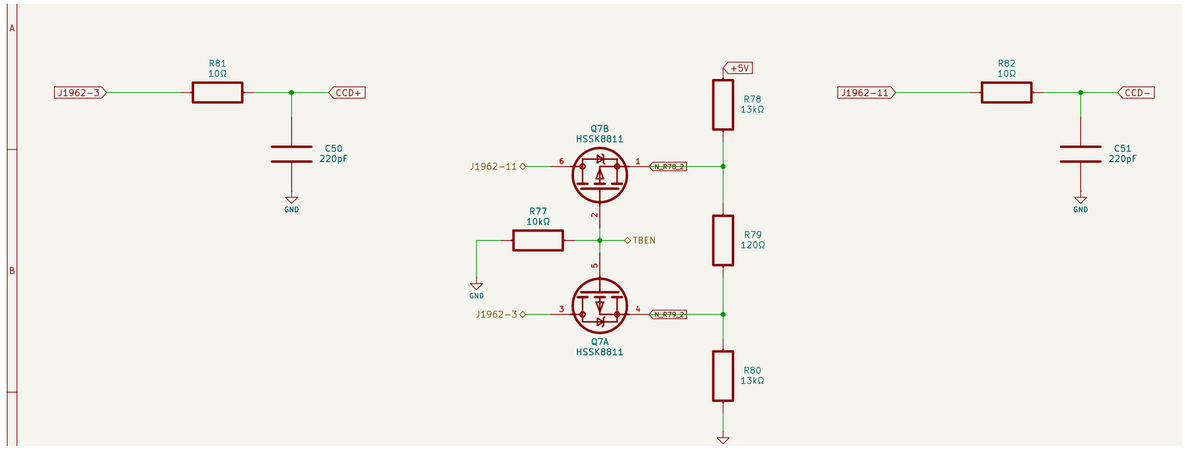

Current p3

- Q7, R77-R82 and C50/C51 retain the original termination, bias and filter functions.
- D13/D14 are grouped on the input-protection page. The vehicle input nets and internal CCD+ / CCD- nets remain distinct as drawn.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

18 CCD receiver

RETAINED Original zone: F5-F6 | Current page(s): 3

ORIGINAL PROJECT


Original U16 receiver

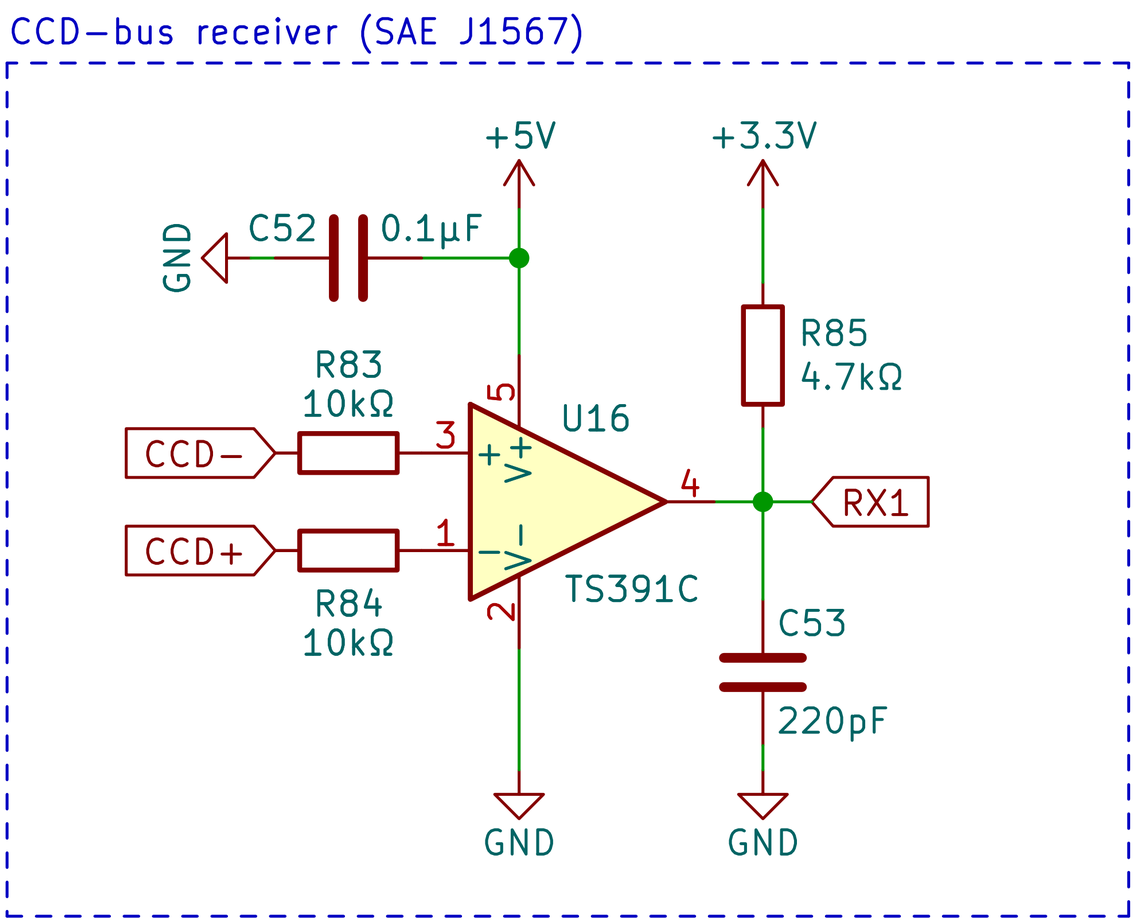

Original p1

CURRENT PROJECT

U16 / R83-R85 / C52-C53

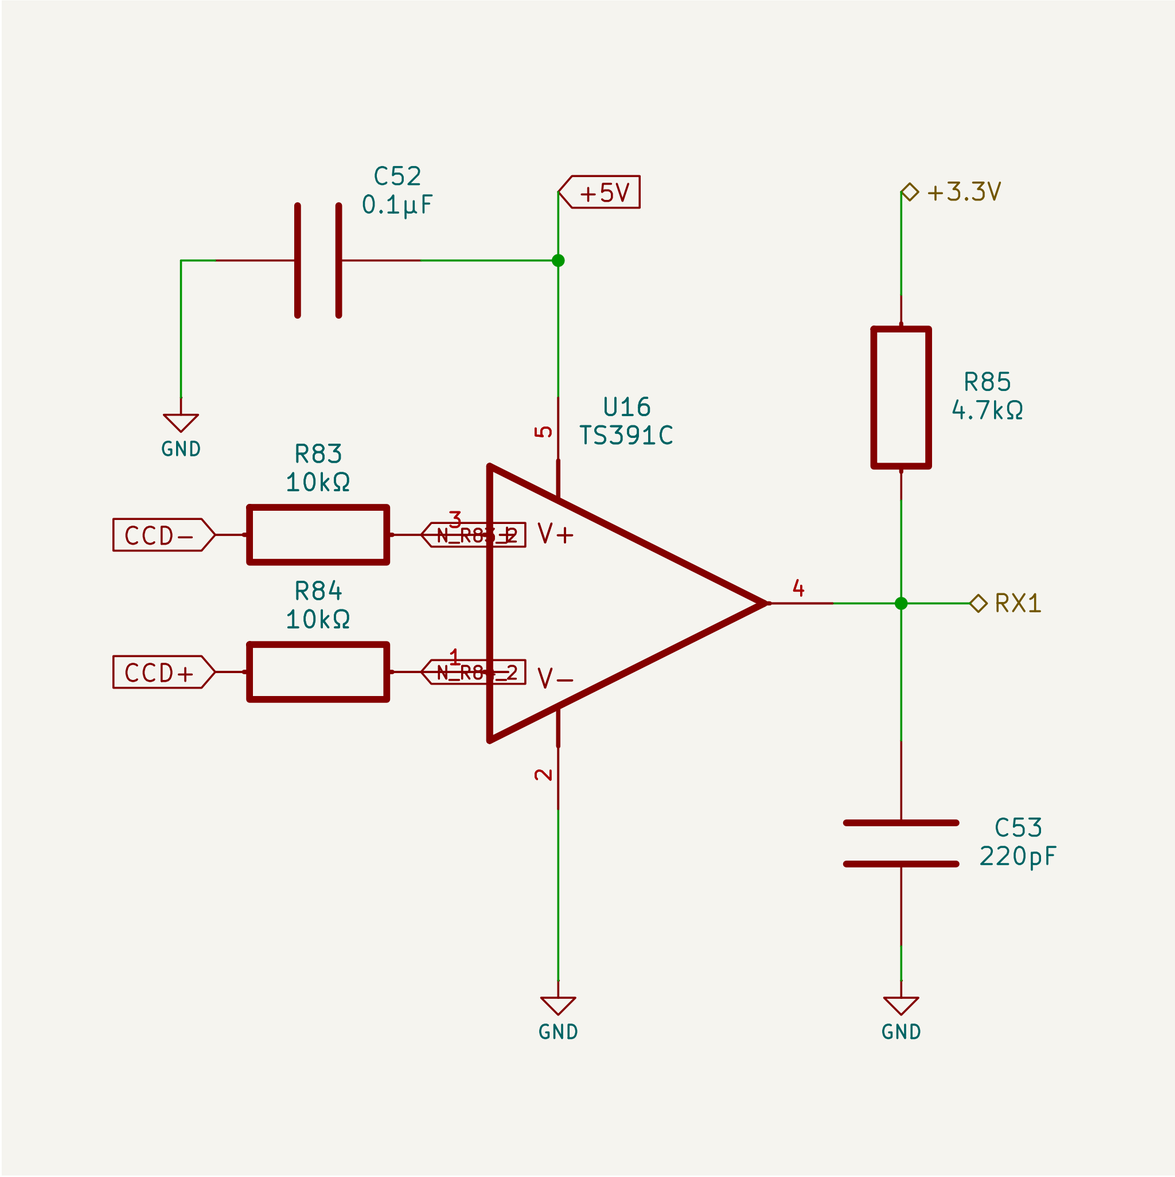

Current p3

- U16 TS391C, R83-R85 and C52/C53 correspond to the original CCD-to-RX1 receiver.
- The receive logic net is RX1; identify the comparator by reference and net labels, independently of the new sheet position.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

19 CCD transmitter

RETAINED Original zone: G5-H6 | Current page(s): 3

ORIGINAL PROJECT


Original U17/U18 and Q16 drive pair

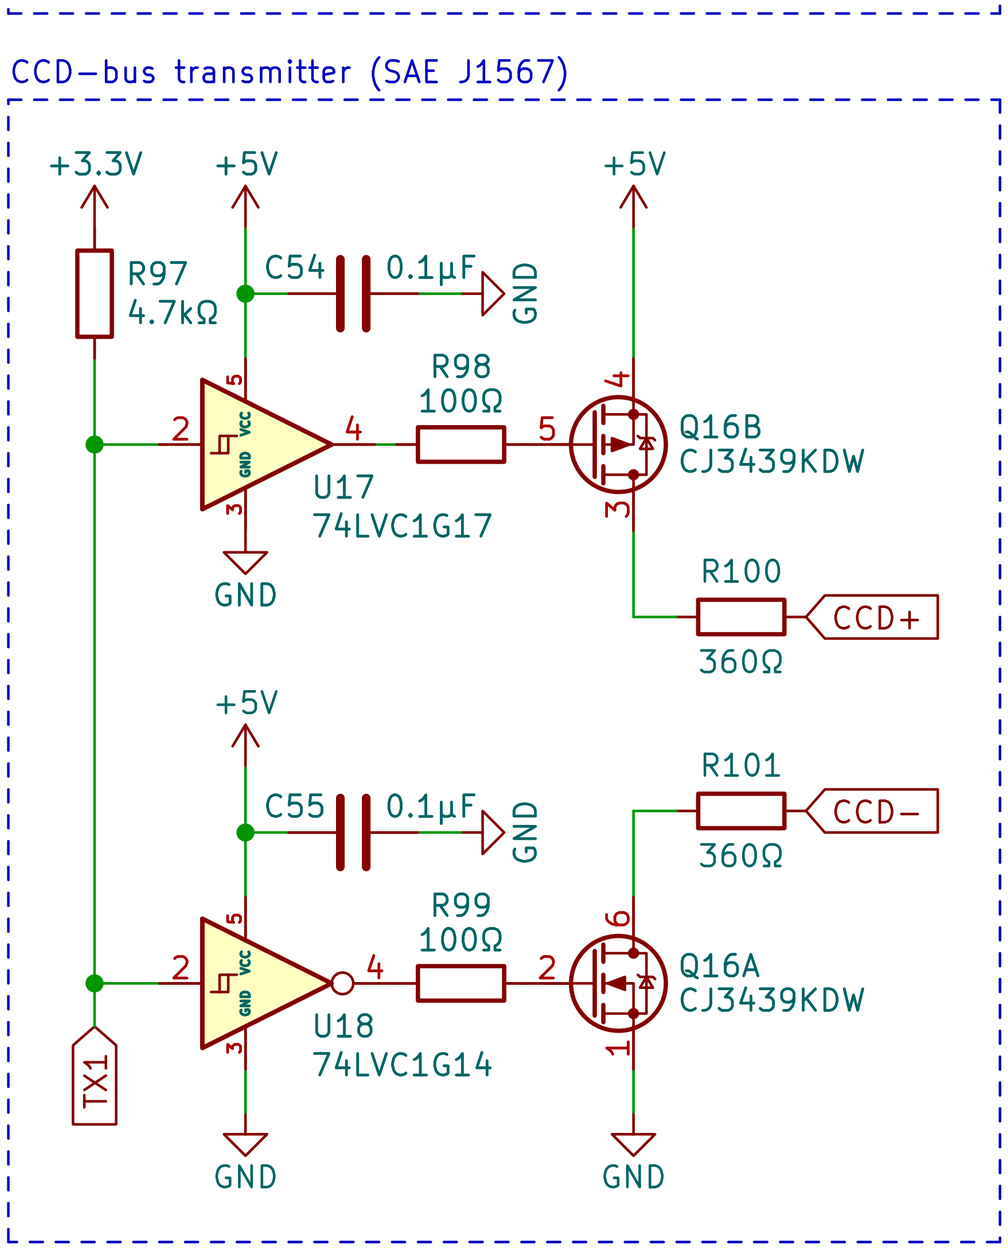

Original p1

CURRENT PROJECT

U17 / U18, Q16 and R97-R101 drive paths

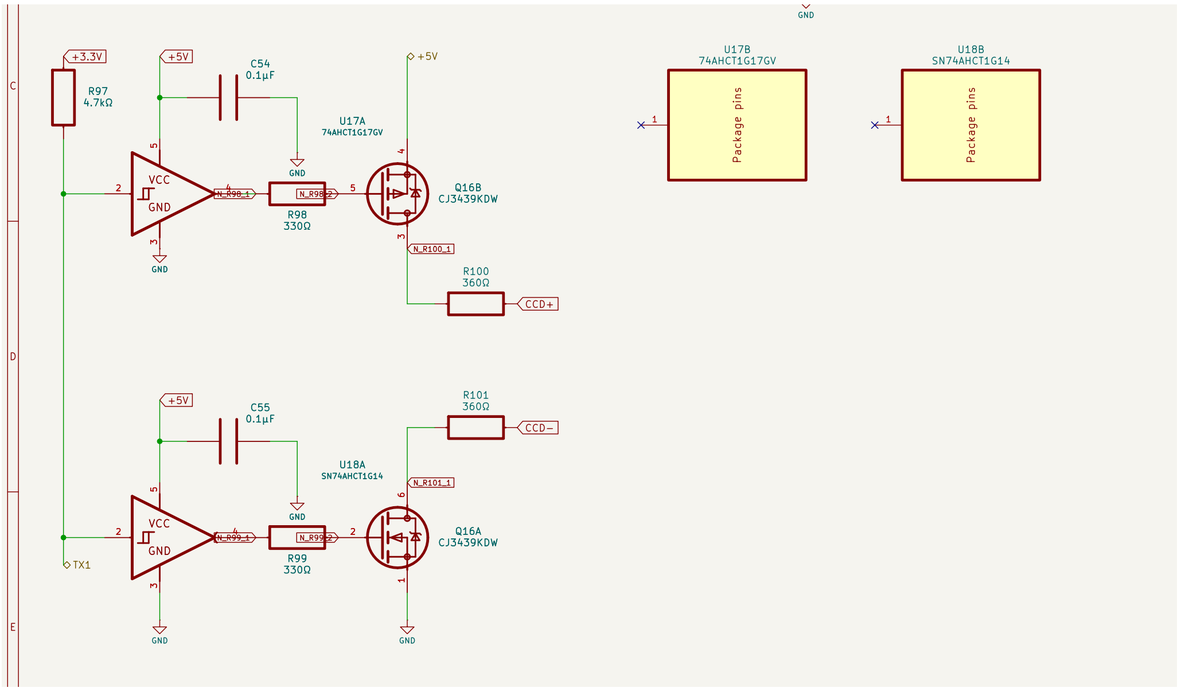

Current p3

- U17/U18, both Q16 sections, R97-R101 and C54/C55 correspond to the original TX1 drive circuitry.
- Extra displayed gate units belong to the same existing IC packages and do not add a new transmitter capability.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

20 SCI pin 6: VBB / VPP programming switches

MODIFIED Original zone: F1-G5 | Current page(s): 16


ORIGINAL PROJECT

Original VBB driver for vehicle pin 6

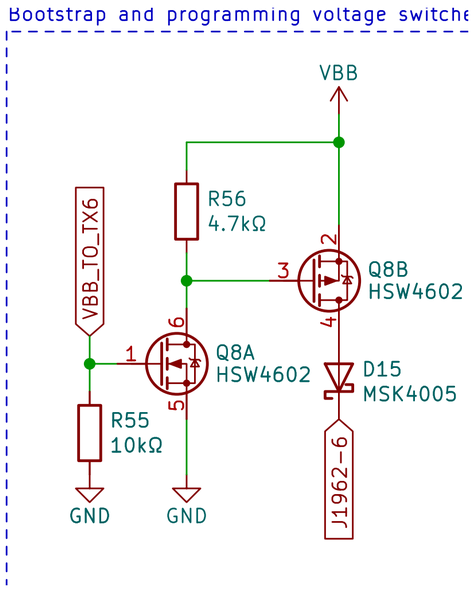

Original p1


Original VPP driver for vehicle pin 6

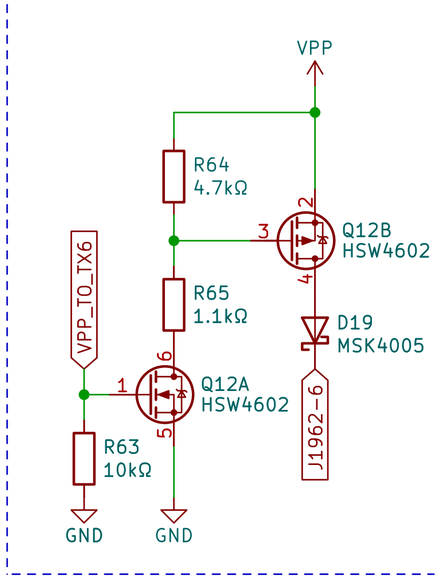

Original p1

CURRENT PROJECT

12_program-6

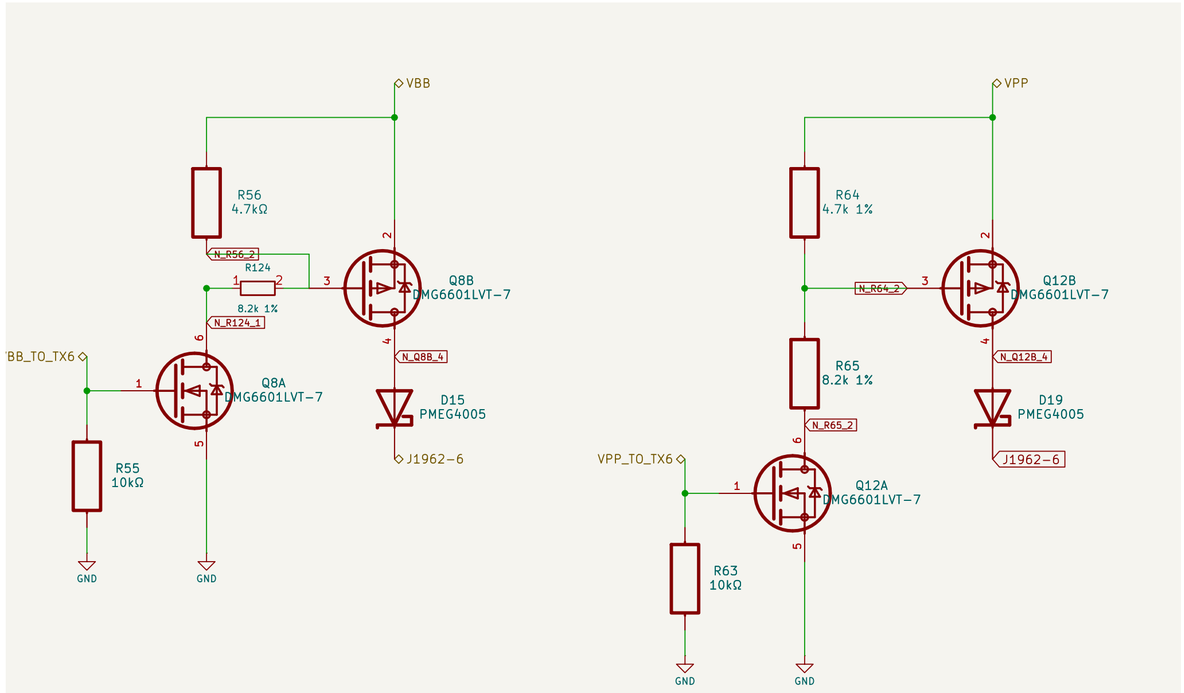

Current p16

- The two rail-switching branches are paired by vehicle pin on a dedicated page.
- Q8-Q15 now use DMG6601LVT-7, with 2.5 V drive specifications. New R124-R127 give the VBB branches the same 4.7k / 8.2k gate-divider arrangement as VPP; the original direct gate/drain links are intentionally split.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

21 SCI pin 9: VBB / VPP programming switches

MODIFIED Original zone: F1-G5 | Current page(s): 17


ORIGINAL PROJECT

Original VBB driver for vehicle pin 9

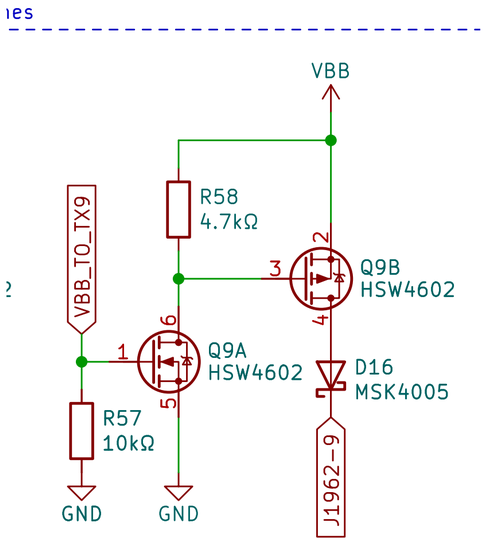

Original p1


Original VPP driver for vehicle pin 9

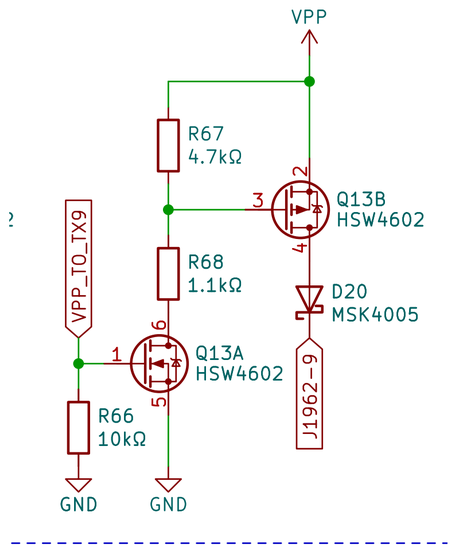

Original p1

CURRENT PROJECT

13_program-9

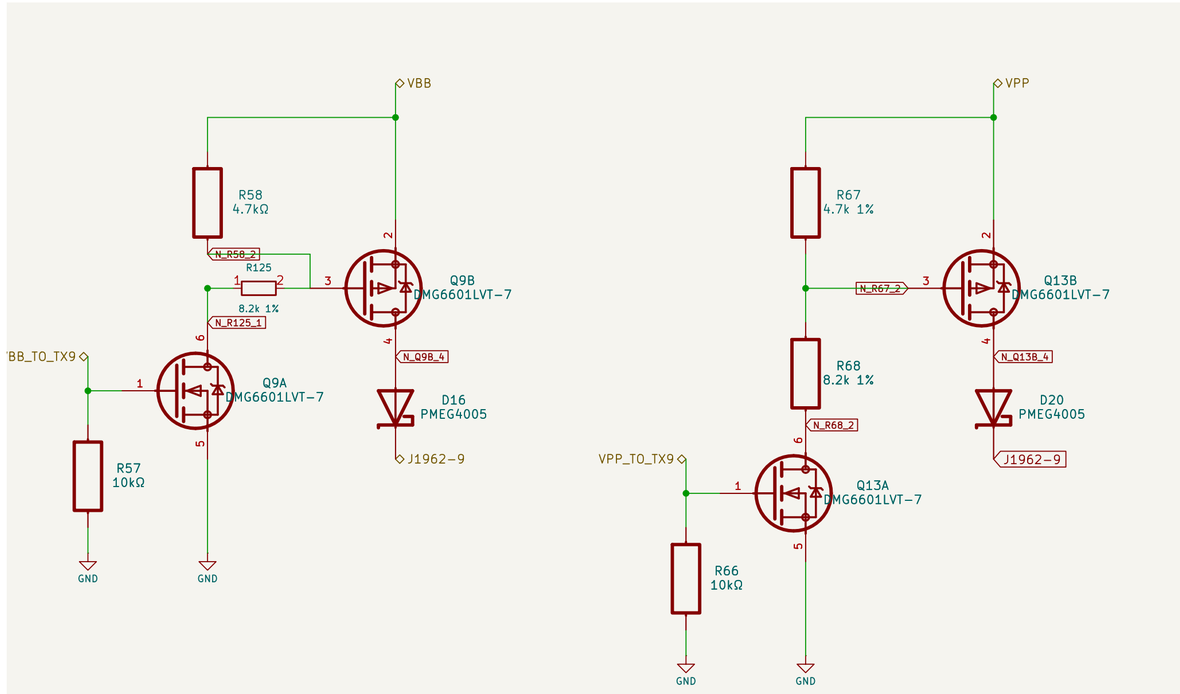

Current p17

- The two rail-switching branches are paired by vehicle pin on a dedicated page.
- Q8-Q15 now use DMG6601LVT-7, with 2.5 V drive specifications. New R124-R127 give the VBB branches the same 4.7k / 8.2k gate-divider arrangement as VPP; the original direct gate/drain links are intentionally split.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

22 SCI pin 12: VBB / VPP programming switches

MODIFIED Original zone: F1-G5 | Current page(s): 20


ORIGINAL PROJECT

Original VBB driver for vehicle pin 12

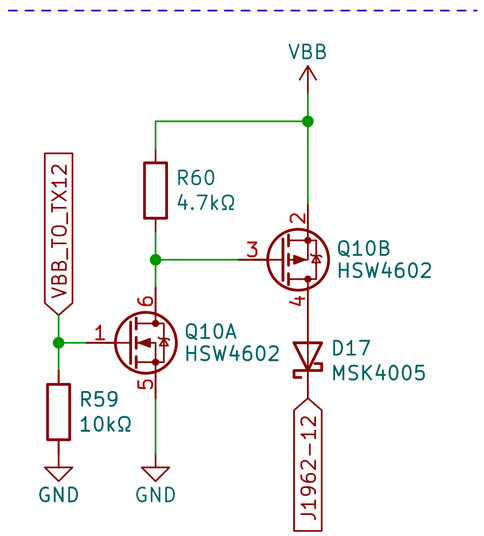

Original p1


Original VPP driver for vehicle pin 12

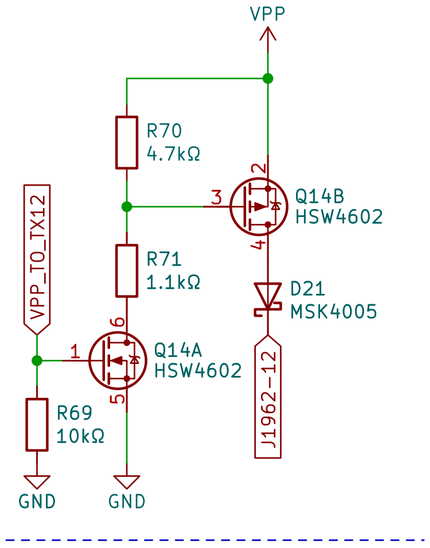

Original p1

CURRENT PROJECT

14_program-12

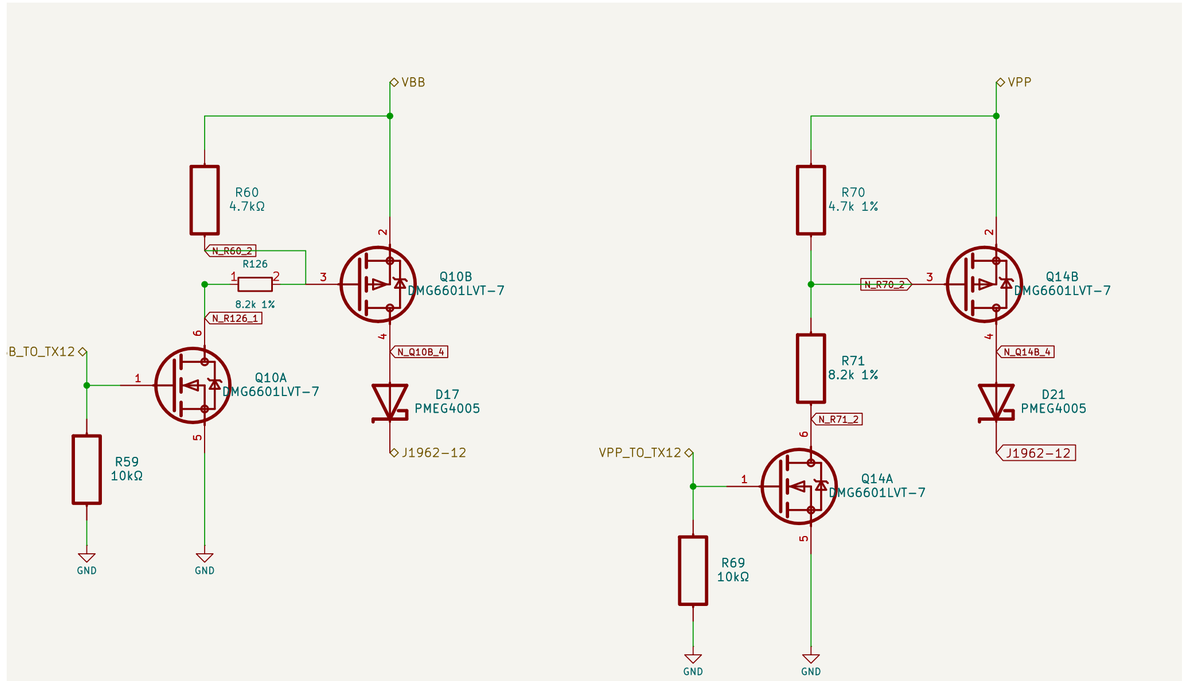

Current p20

- The two rail-switching branches are paired by vehicle pin on a dedicated page.
- Q8-Q15 now use DMG6601LVT-7, with 2.5 V drive specifications. New R124-R127 give the VBB branches the same 4.7k / 8.2k gate-divider arrangement as VPP; the original direct gate/drain links are intentionally split.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

23 SCI pin 14: VBB / VPP programming switches

MODIFIED Original zone: F1-G5 | Current page(s): 21


ORIGINAL PROJECT

Original VBB driver for vehicle pin 14

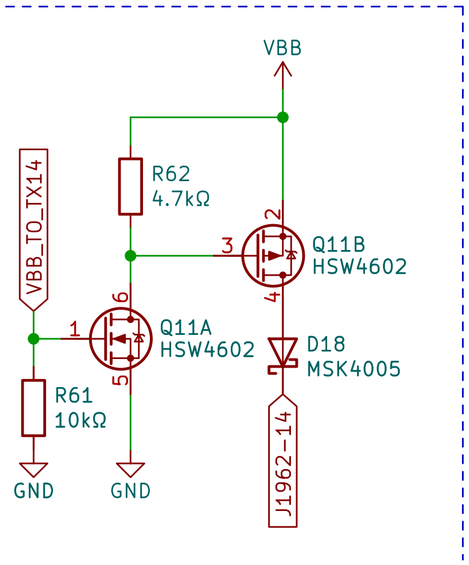

Original p1


Original VPP driver for vehicle pin 14

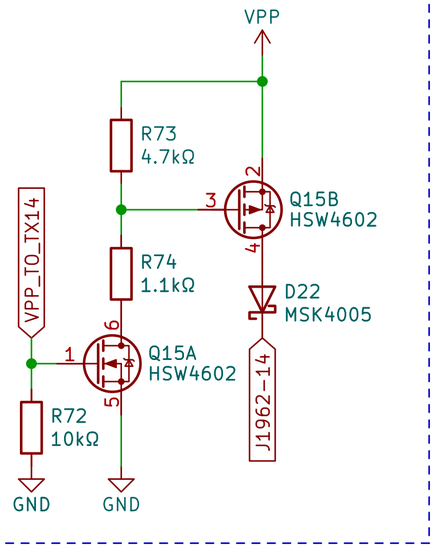

Original p1

CURRENT PROJECT

15_program-14

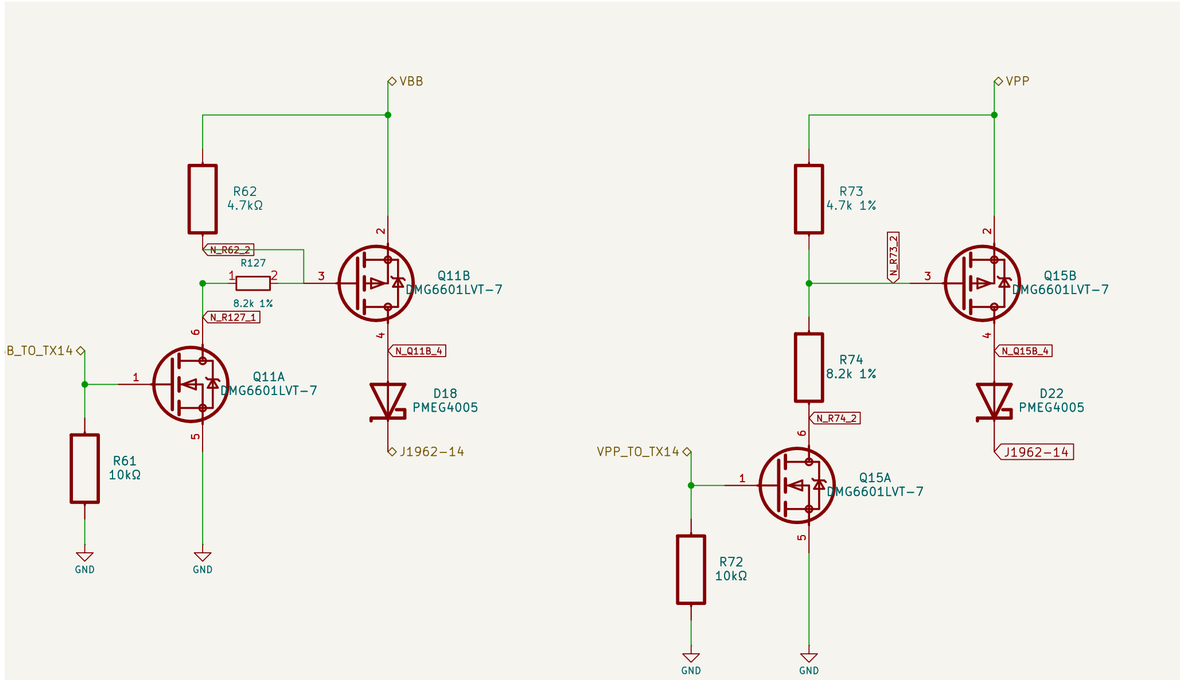

Current p21

- The two rail-switching branches are paired by vehicle pin on a dedicated page.
- Q8-Q15 now use DMG6601LVT-7, with 2.5 V drive specifications. New R124-R127 give the VBB branches the same 4.7k / 8.2k gate-divider arrangement as VPP; the original direct gate/drain links are intentionally split.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

24 I2C expander and internal connector

MODIFIED Original zone: F5-G7 | Current page(s): 8


ORIGINAL PROJECT

Original U19 AW9523B and pull-ups

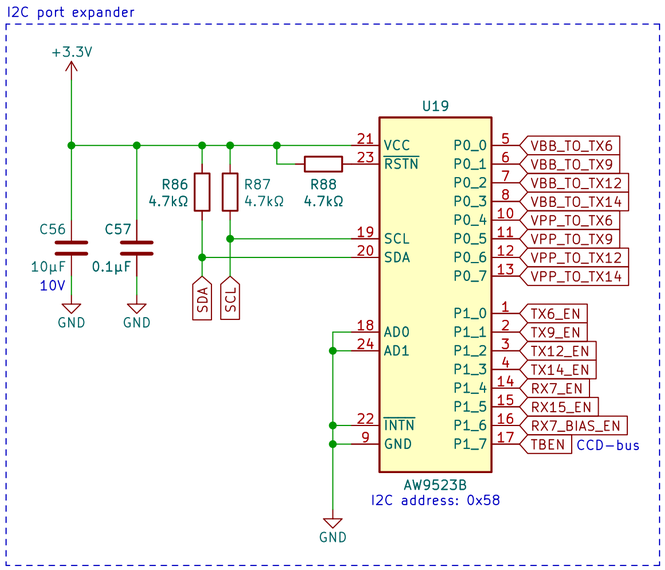

Original p1


Original internal I2C connector J3

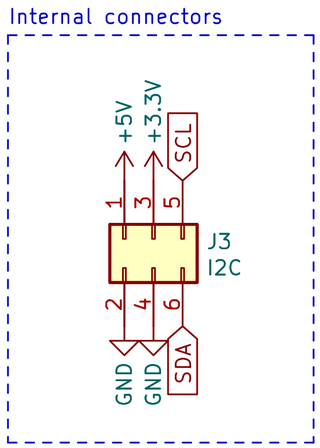

Original p1

CURRENT PROJECT

18_control

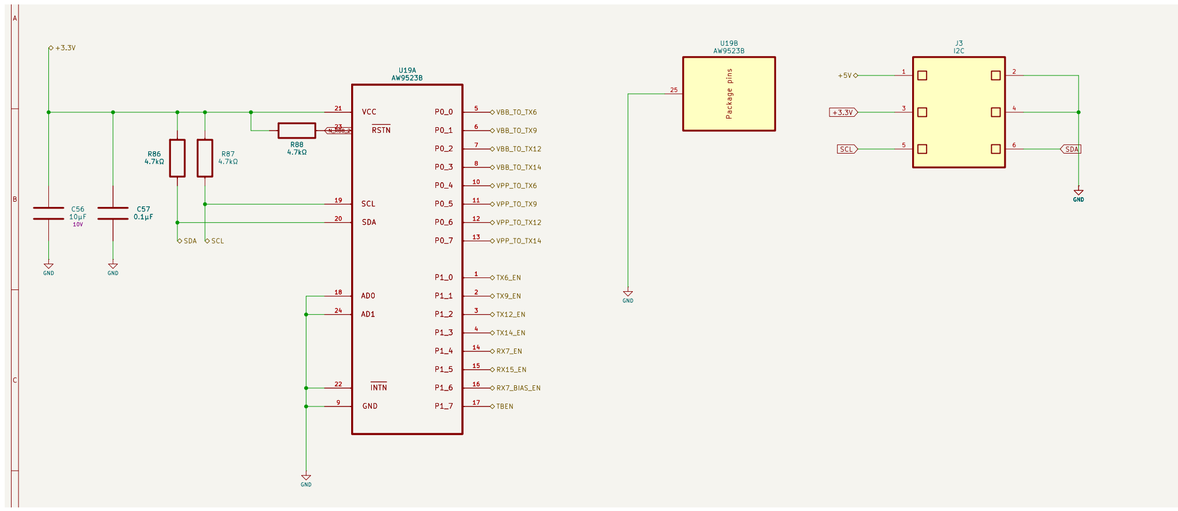

Current p8

- U19 AW9523B, its 16 output functions, grounded address straps, I2C pull-ups and J3 are retained.
- The reset/permit net N_R88_2 is now driven by the new supervised hardware permit. The original independent reset pull-up is not sufficient by itself to describe the new safety behavior.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

25 Status LED drivers

MODIFIED Original zone: F7-G8 | Current page(s): 13

ORIGINAL PROJECT


Original four LED / transistor channels

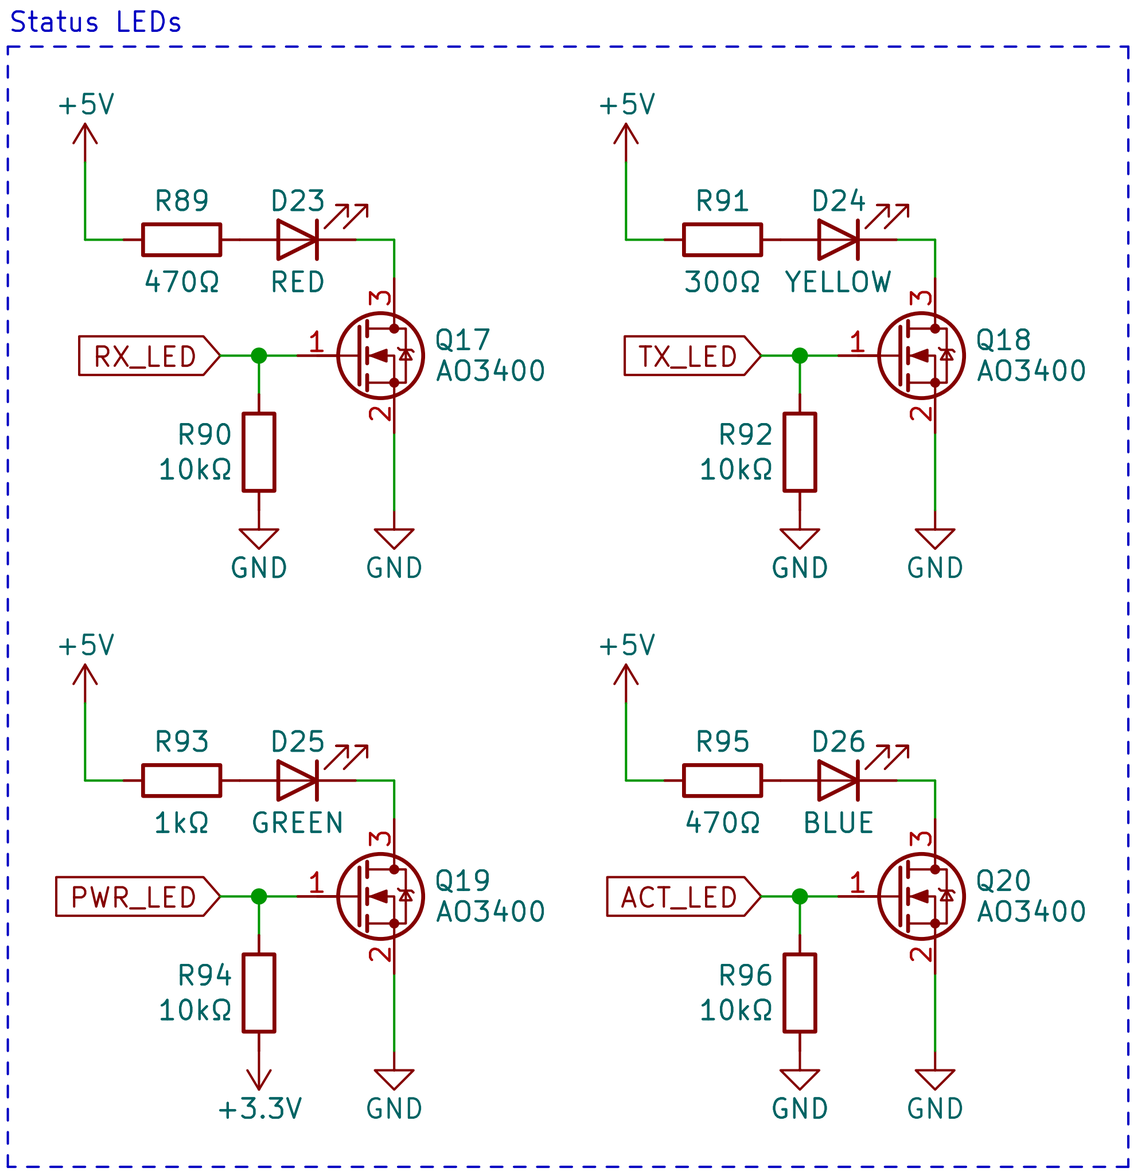

Original p1

CURRENT PROJECT

20_leds

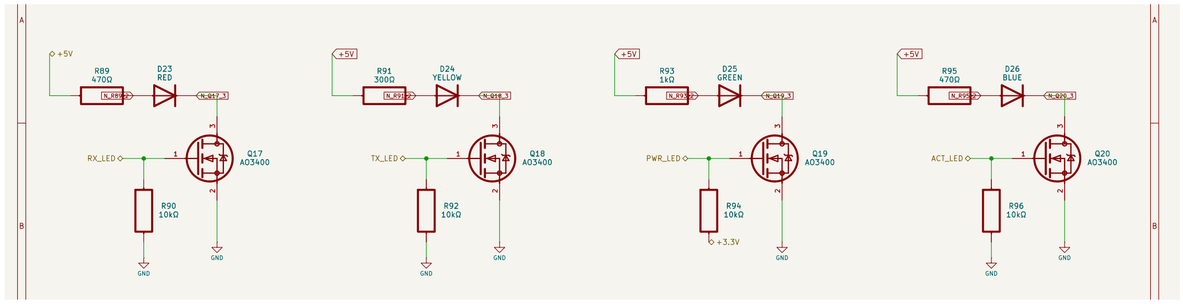

Current p13

- D23-D26 and Q17-Q20 retain the four LED driver channels.
- The ACT_LED channel is now a dedicated health/permit indication. It must not be driven by the old general-purpose activity-blink code.

Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.


26 Integrated microSD logger

NEW

Original zone: No original block | Current page(s): 9

ORIGINAL PROJECT


Context only: original MCU unused pins; no SD circuit

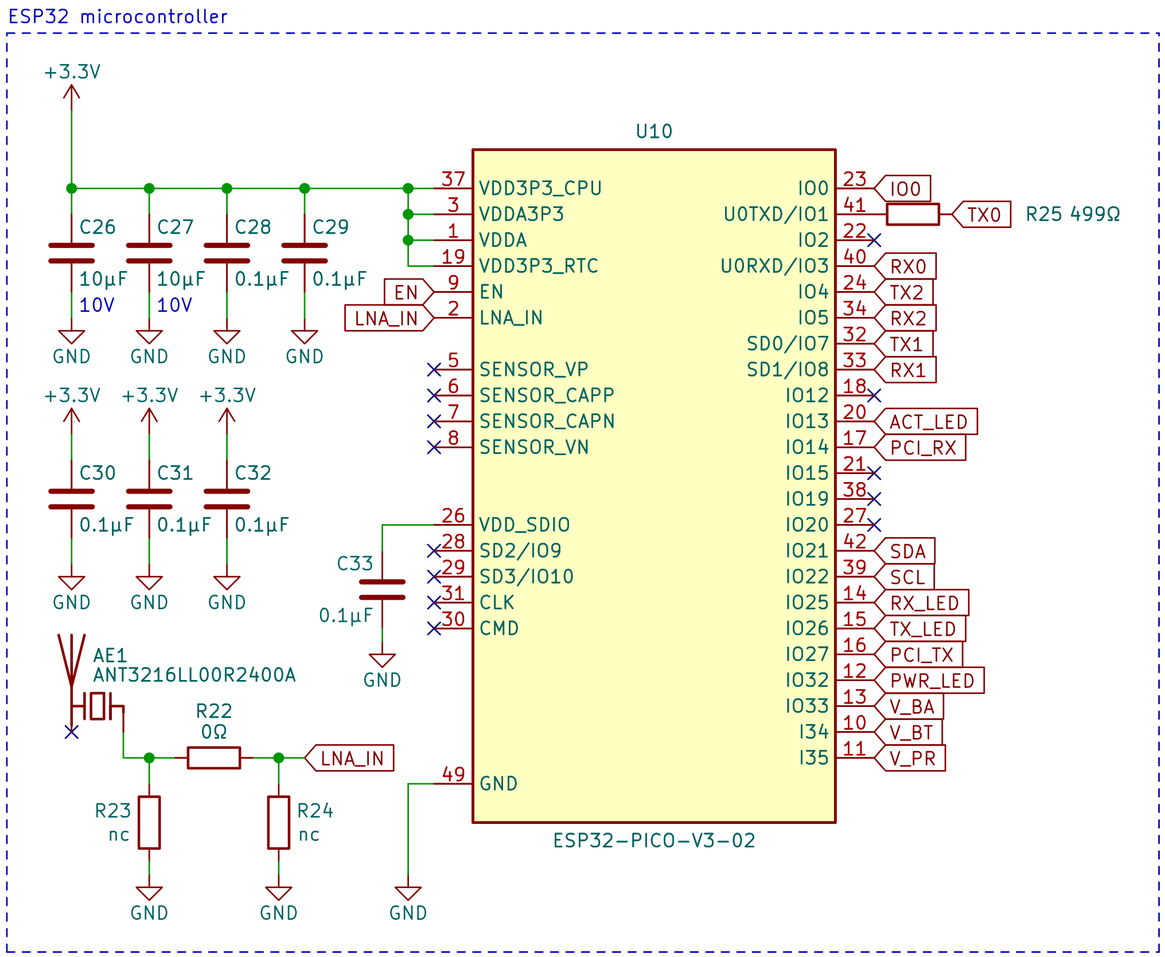

Original p1

CURRENT PROJECT

22_sd-logger

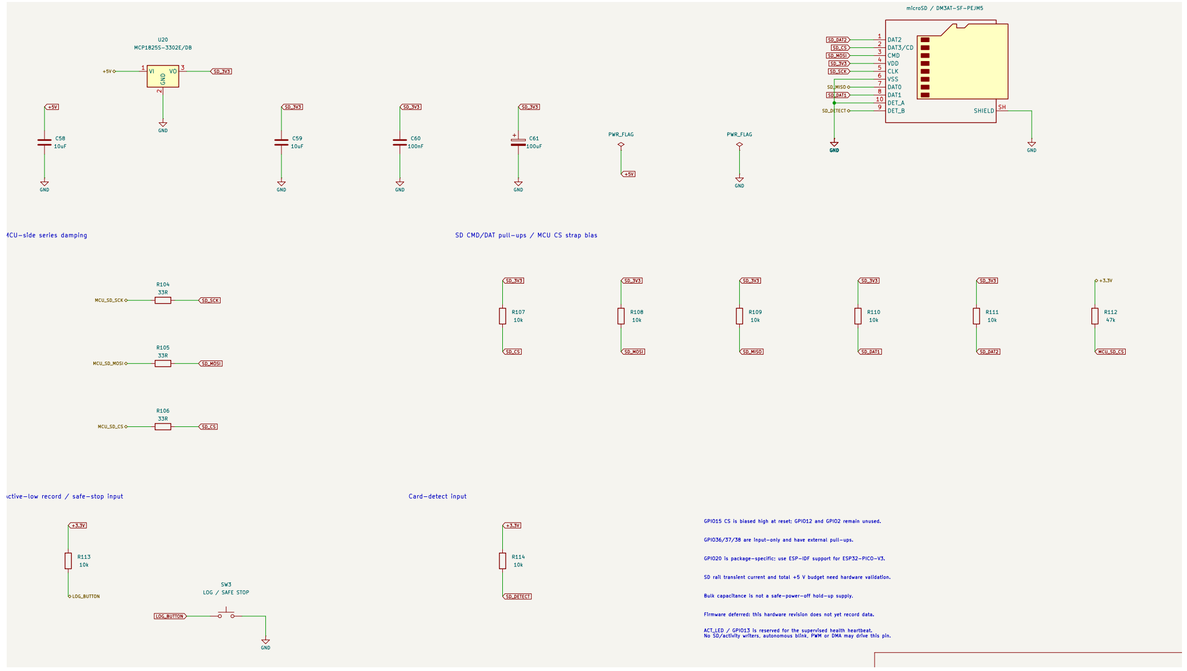

Current p9

- There is no corresponding microSD block in the original drawing. U20, J4, C58-C61, R104-R114 and SW3 are later additions.
- SD_3V3 regulation, SPI resistors/pull-ups, card detect and logging control use previously unused MCU pins. C61 is now top-side; that physical move does not change the schematic circuit.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

27 Added ADC power-off isolation

NEW / MODIFIED Original zone: Original ADC: E3-E5 | Current page(s): 23

ORIGINAL PROJECT


Original direct-to-MCU monitor dividers

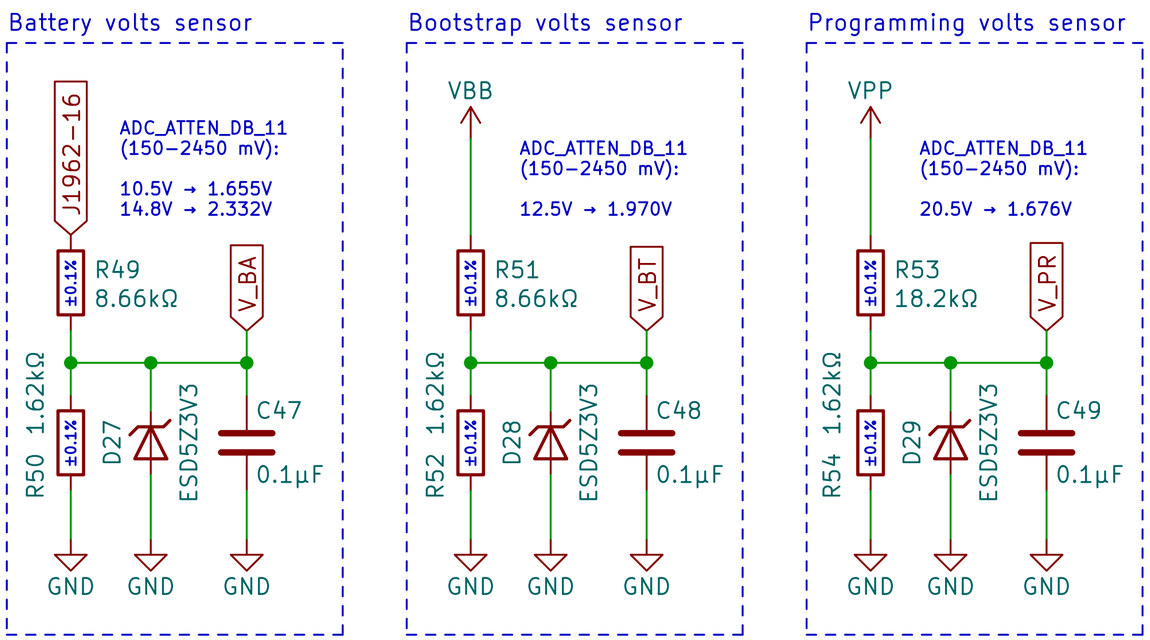

Original p1

CURRENT PROJECT

Complete safety page; focus: U21 and R120-R122

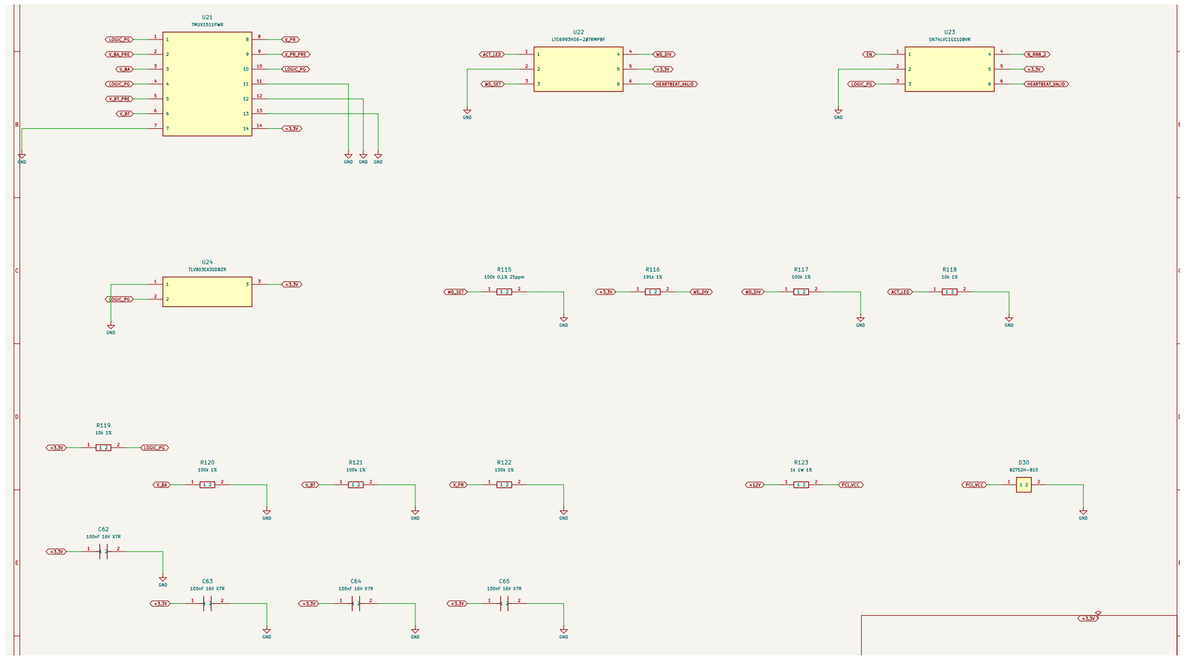

Current p23

- U21 and R120-R122 are new. The original ADC paths now terminate on *_PRE nets before this isolation stage.
- The additions address powered-off MCU injection; they deliberately depart from the original direct ADC connection. See comparison 16 for the changed divider inputs/ratios.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

28 Added supervisor, watchdog and hardware permit

NEW / MODIFIED Original zone: Original expander reset: F6-G7 | Current page(s): 23


ORIGINAL PROJECT

Original independent expander reset / control

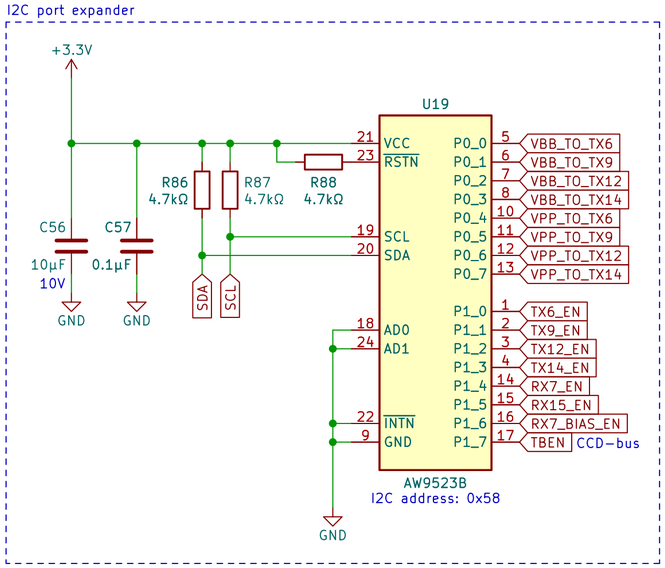

Original p1


Original ACT_LED driver context

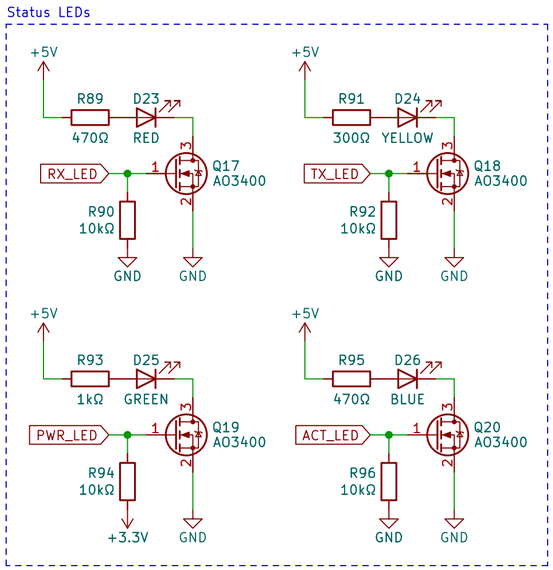

Original p1

CURRENT PROJECT

Complete safety page; focus: U22-U24 / R115-R119

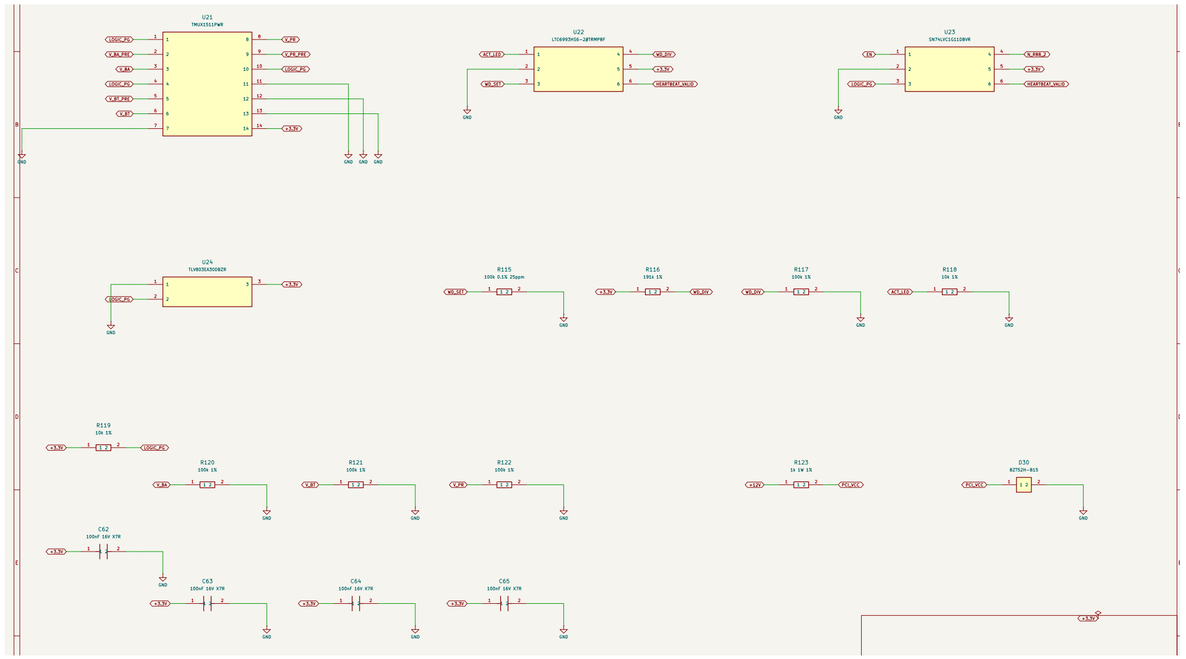

Current p23

- U22-U24, R115-R119 and associated bypassing implement a new supervised permit, not an original circuit copied to another page.
- Dedicated ACT_LED health pulses and LOGIC_PG / HEARTBEAT_VALID govern N_R88_2. Firmware integration and measured timing remain required; the comparison is not a bench qualification.


Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

29 Added PCI comparator supply clamp

NEW / MODIFIED Original zone: Original PCI receiver: A7-A8 | Current page(s): 7,23

ORIGINAL PROJECT


Original U9/C11 supply taken from +12V

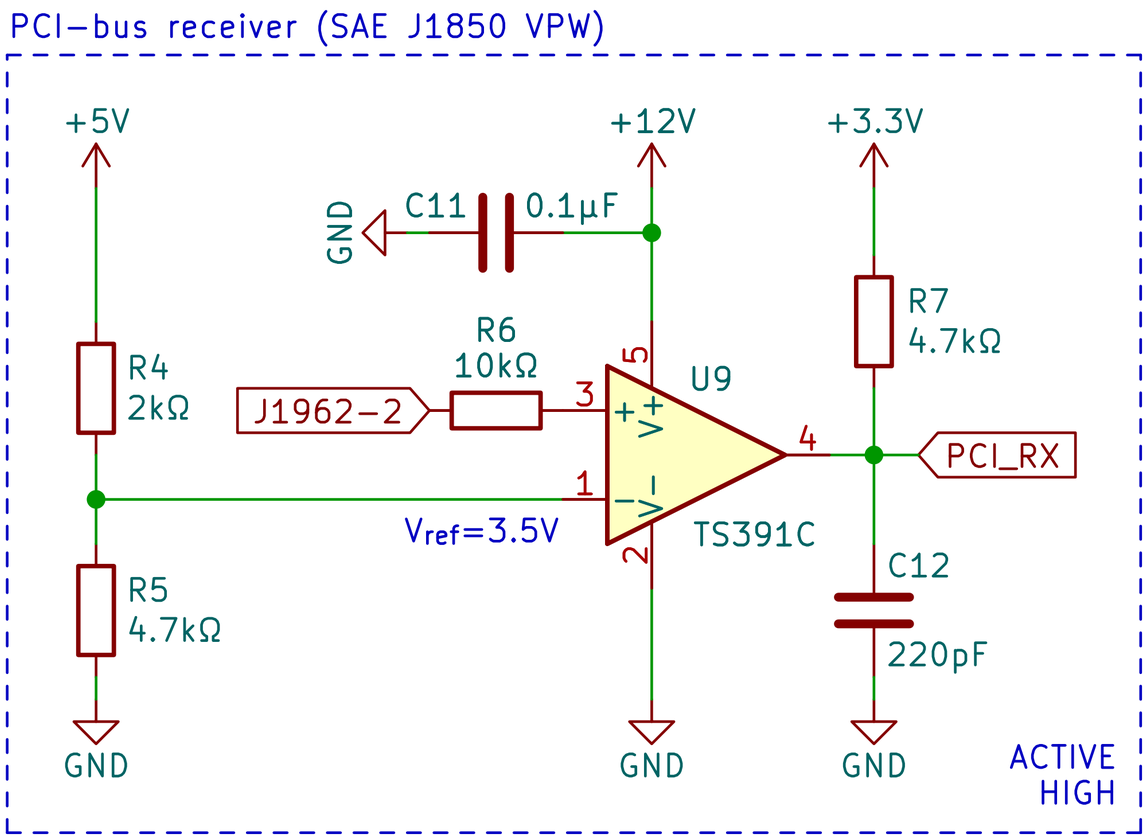

Original p1


CURRENT PROJECT

New R123 / D30 PCI_VCC clamp

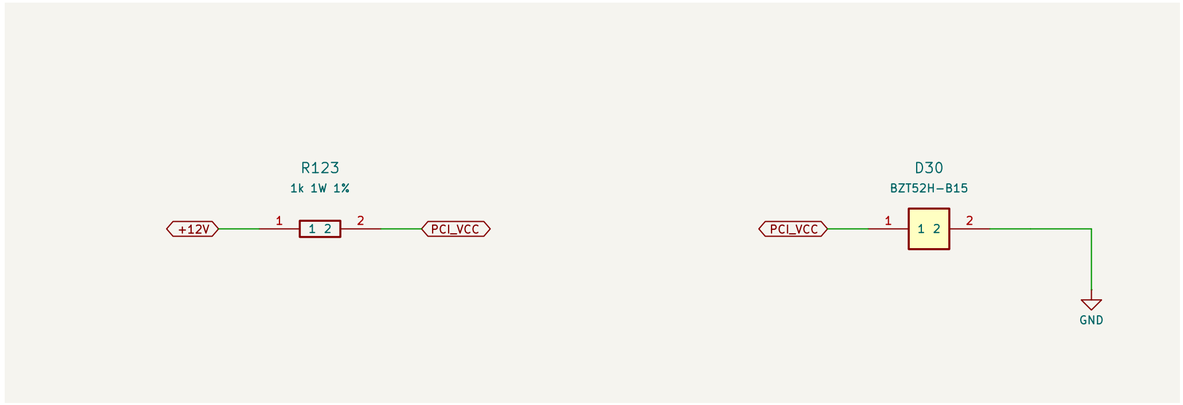

Current p23

PCI page; focus: U9 / C11 PCI_VCC connections

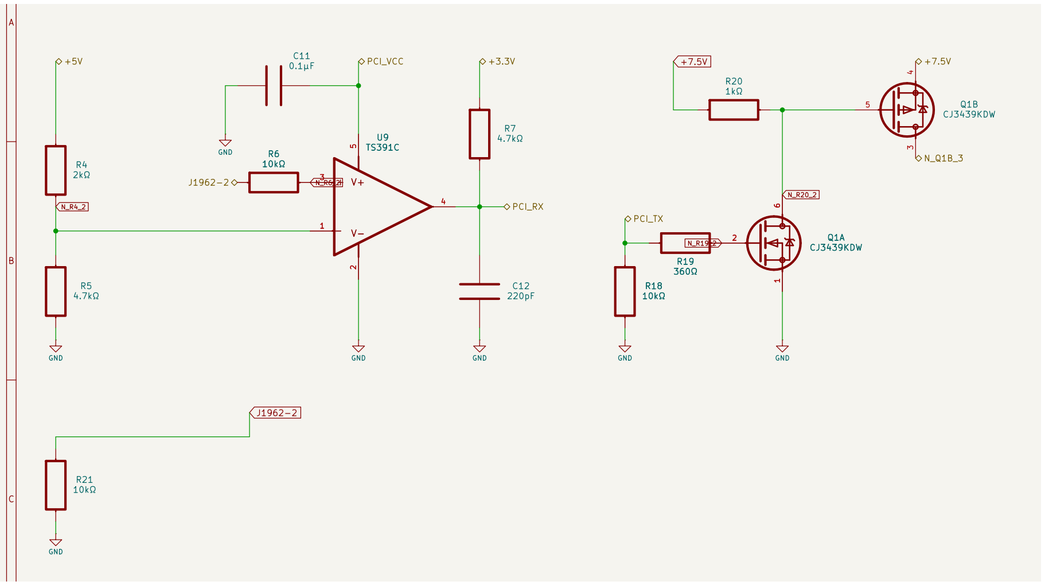

Current p7

- R123 and D30 are new. U9.5 and C11.2 now use PCI_VCC rather than direct +12V.
- The original receiver function remains, while its supply protection is deliberately changed.

Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

30 Hook test points and SPI probe pads

NEW Original zone: No original block | Current page(s): 24


ORIGINAL PROJECT

No corresponding original circuit

This is an intentional addition. The original single-sheet drawing contains no equivalent block.

CURRENT PROJECT

24_debug-testpoints

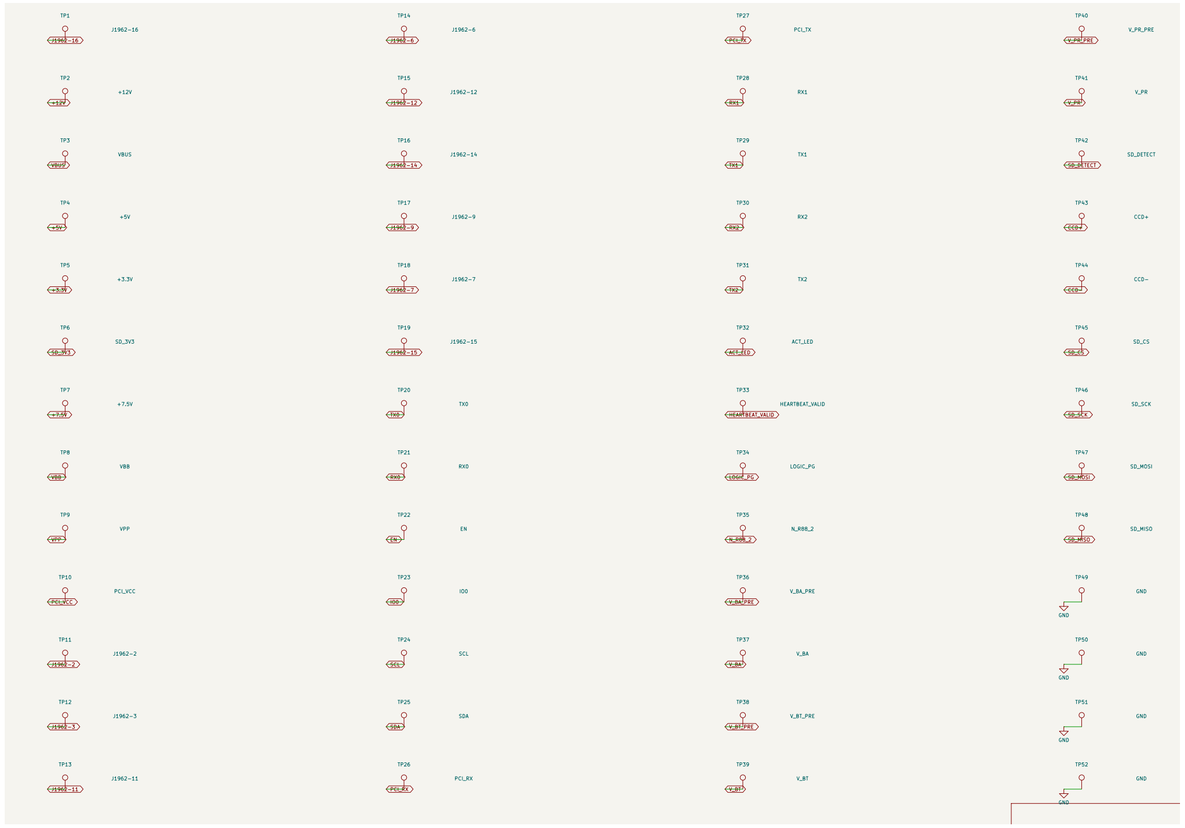

Current p24

- The original PDF has no TP1-TP52 debug-access block. The current design adds 48 Keystone 5015 hook loops and four bare SPI pads, with four local ground clips.
- Page 24 and rev-c-testpoint-map.md identify every net. Existing circuit geometry is retained; new pads require 230 total filled/capped/planarized via sites in the current fabrication package.

Reference designators are the matching keys. Vector source crops preserve original text and wiring; zoom for pin-level inspection.

Revision history

2.0.0-1 (2022-04-21):
- complete re-design around the ESP32-PICO-D4 microcontroller,
- improve CCD-bus transceiver circuits,
- add PCI-bus transceiver circuits,
- improve SCI-bus routing switches,
- add switchable bootstrap and programming voltage sources (12.0V/20.0V) to SCI-bus.

2.1.0-1 (2022-05-26):
- remove feedforward capacitor from boost converter,
- adjust programming voltages slightly higher than nominal (D15-D22 diode voltage drop),
- make VPP boost converter permanently enabled,
- replace SCI-bus switches,
- change I2C port expander (U16) device address,
- increase some resistor values to lower power dissipation.

2.1.0-2 (2023-01-22):
- remove SMT assembly features.

2.1.0-3 (2023-07-17):
- change R8-R12 resistor values from 499Ω to 0Ω.

2.2.0-1 (2023-11-06):
- change JP1 solder jumper (OBD2 signal ground) to bridged variant,
- add programmable bias voltage switch to J1962-7 for OBD1 compatibility.

2.3.0-1 (2025-02-17):
- mirror J1962 data link connector,
- remove unused J3 SCI connector,
- remove unused R4 resistor,
- add D23 TVS diode for power input protection.

2.3.0-2 (2025-09-23):
- add D24 Schottky diode to protect USB from backpowering,
- move D1 battery protection diode before bulk capacitor,
- add C40-C45 signal conditioning capacitors,
- change D5-D6,D10 ESD diode values,
- change PCI-bus power supply voltage from 8.0V to 7.5V,
- change PCI-bus receiver reference voltage from 4.0V to 3.5V,
- remove PCI-bus transmitter inductor,
- add power distribution load switch to USB output.

2.4.0-1 (2026-01-05):
- complete redesign of power-supply section,
- replace ESP32-PICO-D4 with ESP32-PICO-V3-02,
- adjust ESP32 antenna feedline for 50Ω controlled impedance.

J1962/OBD2 connector pinout	
Pin	Function
2	J1850 VPW (PCI)
3	J1567 CCD+
4	Chassis ground
5	Signal ground | JP1
6	J2610 SCI-A RX (PCM) | VBB | VPP
7	J2610 SCI-A/B TX (PCM) J2610 SCI-A TX (TCM)
9	J2610 SCI-B RX (TCM) | VBB | VPP
11	J1567 CCD-
12	J2610 SCI-B RX (PCM) | VBB | VPP
14	J2610 SCI-A RX (TCM) | VBB | VPP
15	J2610 SCI-B TX (TCM)
16	Battery power (+12V)

Table 1.

Chrysler Scanner

Hardware for interfacing Chrysler's legacy CCD/PCI/SCI-bus.
Part number: BC-003240 (CryProV2)

Boundary Condition
https://chryslerccdsci.wordpress.com/

Sheet: /
File: ChryslerScanner_V240.kicad_sch

Author: Daniel Laszlo

Size: A2	Date: 2026-01-05	Rev: 2.4.0-1
KiCad E.D.A. kicad (6.0.9)		Page: 1/1