

DB15


FPC Connector




BTB Connector

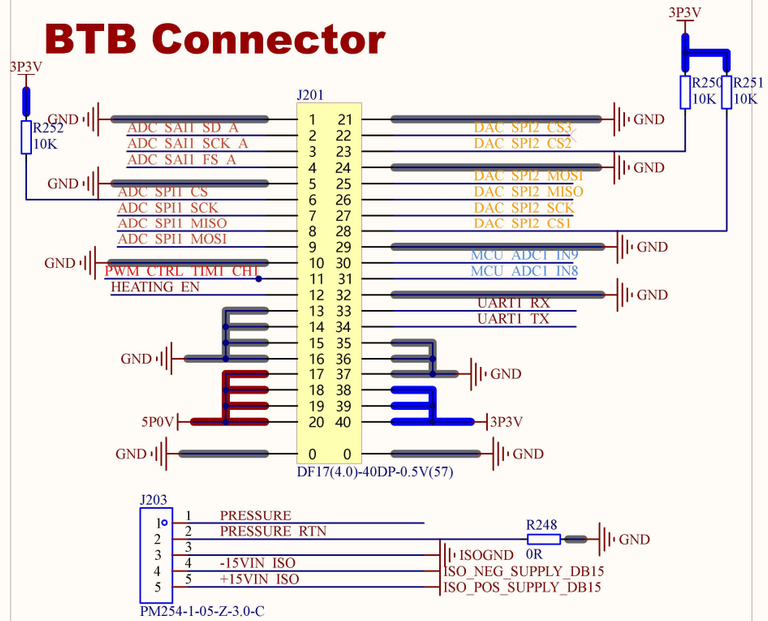


Heating Jacket Conn



Power Input Protection (To Converter)

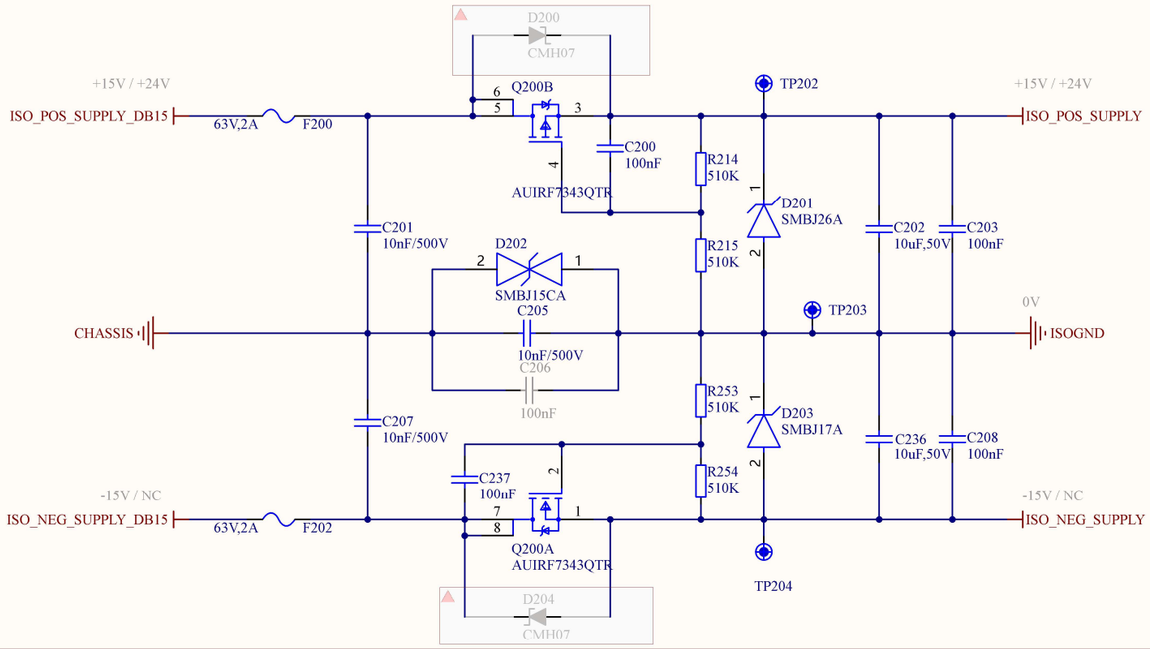

Heating Supply Selection

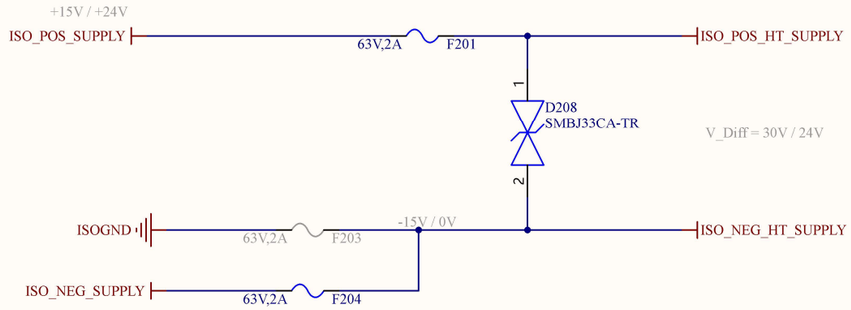


ISO_NEG_SUPPLY_DB15

This document contains proprietary and confidential information pertaining to Shenzhen BLUE DYNAMICS Technology Co., Ltd. and/or its affiliates ("BLUE DYNAMICS Group") intended only for the use by BLUE DYNAMICS Group and its authorized suppliers, and should not be used, reproduced, disclosed or disseminated without the prior written approval of BLUE DYNAMICS Group. Any unauthorized use, reproduction, disclosure or dissemination of this document or any content hereof constitutes infringement of intellectual property and will result in serious legal liabilities.


Title: *			BLUE DYNAMICS 蓝动精密科技有限公司
Model No:			
PCB No: 30200132	Rev: *	Sheet 1 of 6	
Size: File: Connector.SchDoc			
Design by: *	Checked by:	Approved by:	
Date:	Date:	Date:	
Add: *		Website: *	

电控部 晏燕楠


12-28V to 5V No-Opto Iso-Buck (Load Req. 0.5W-3W)

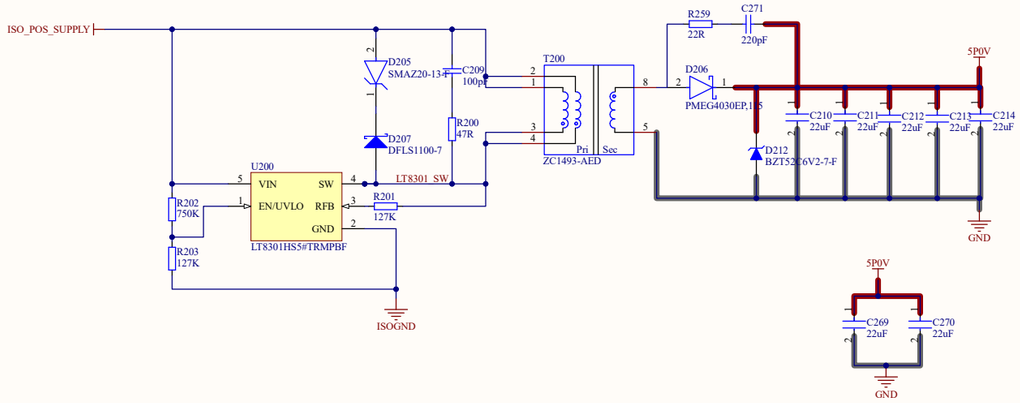

12-28V to 5V No-Opto Iso-Buck (10W)

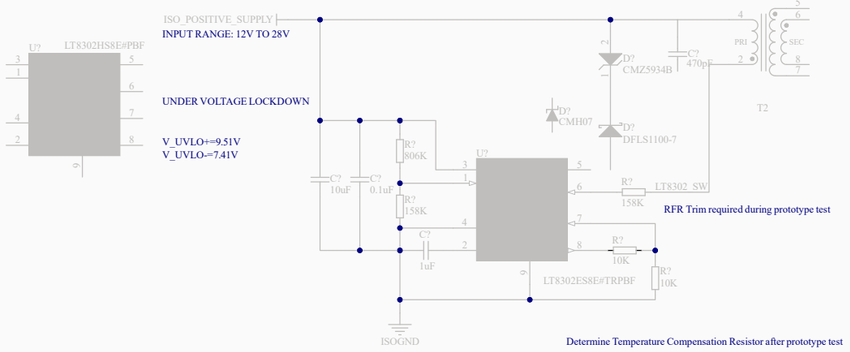

+5V to ±15V/0.3A Split-Rail

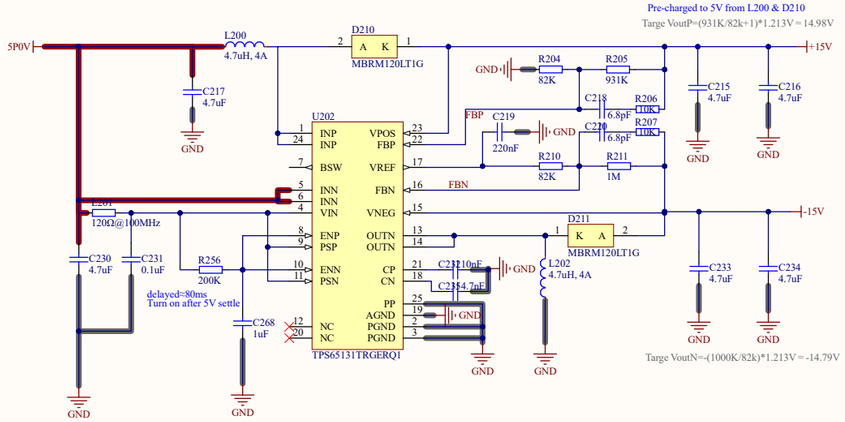

±15V to ±14V/0.15A LDO

RJA=44.4°C/W
Pd_max=(125-85)/44.4=0.9W
Iout_max=Pd_max/(15-14V)>150mA

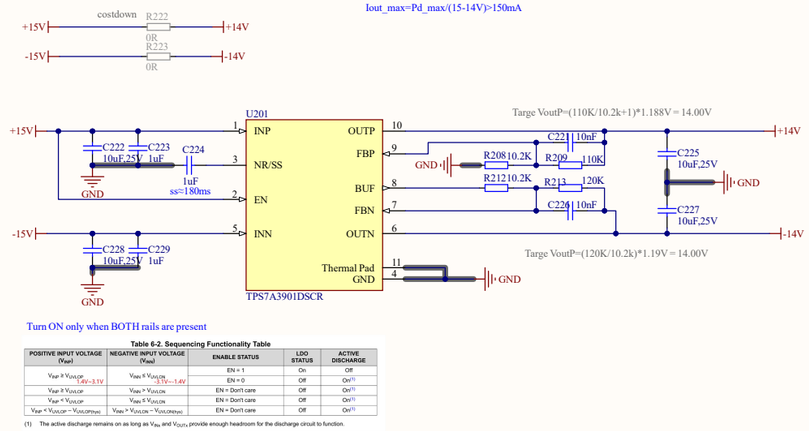


Table 6-2. Sequencing Functionality Table

POSITIVE INPUT VOLTAGE (V_{IN+})	NEGATIVE INPUT VOLTAGE (V_{IN-})	ENABLE STATUS	LDO STATUS	ACTIVE DISCHARGE
$V_{IN+} \geq V_{UVLOR}$ 1.4V~3.1V	$V_{IN-} \leq V_{UVLON}$ -3.1V~-1.4V	EN = 1	On	Off
		EN = 0	Off	On[1]
$V_{IN+} \geq V_{UVLOR}$	$V_{IN-} > V_{UVLON}$	EN = Don't care	Off	On[1]
$V_{IN+} < V_{UVLOF}$	$V_{IN-} \leq V_{UVLON}$	EN = Don't care	Off	On[1]
$V_{IN+} < V_{UVLOF} - V_{UVLOFhys}$	$V_{IN-} > V_{UVLON} - V_{UVLONhys}$	EN = Don't care	Off	On[1]

(1) The active discharge remains on as long as V_{IN} and V_{OUTx} provide enough headroom for the discharge circuit to function.

±15V to ±5V/0.15A LDO

RJA=44.4°C/W
Pd_max=(125-85)/44.4=0.9W
Iout_max=Pd_max/(15-5V)=90mA

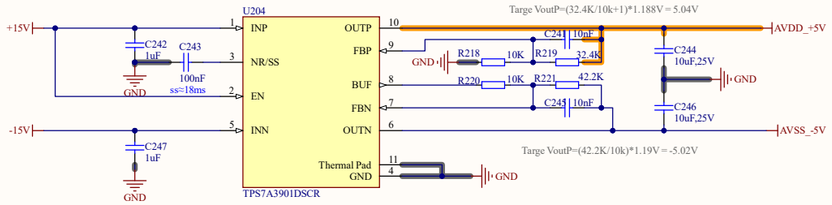


Table 6-2. Sequencing Functionality Table

POSITIVE INPUT VOLTAGE (V_{IN+})	NEGATIVE INPUT VOLTAGE (V_{IN-})	ENABLE STATUS	LDO STATUS	ACTIVE DISCHARGE
$V_{IN+} \geq V_{UVLOR}$ 1.4V~3.1V	$V_{IN-} \leq V_{UVLON}$ -3.1V~-1.4V	EN = 1	On	Off
		EN = 0	Off	On[1]
$V_{IN+} \geq V_{UVLOR}$	$V_{IN-} > V_{UVLON}$	EN = Don't care	Off	On[1]
$V_{IN+} < V_{UVLOF}$	$V_{IN-} \leq V_{UVLON}$	EN = Don't care	Off	On[1]
$V_{IN+} < V_{UVLOF} - V_{UVLOFhys}$	$V_{IN-} > V_{UVLON} - V_{UVLONhys}$	EN = Don't care	Off	On[1]

(1) The active discharge remains on as long as V_{IN} and V_{OUTx} provide enough headroom for the discharge circuit to function.

±5V to ±2.5V/0.15A LDO

RJA=44.4°C/W
Pd_max=(125-85)/44.4=0.9W
Iout_max=Pd_max/(5-2.5V)>150mA


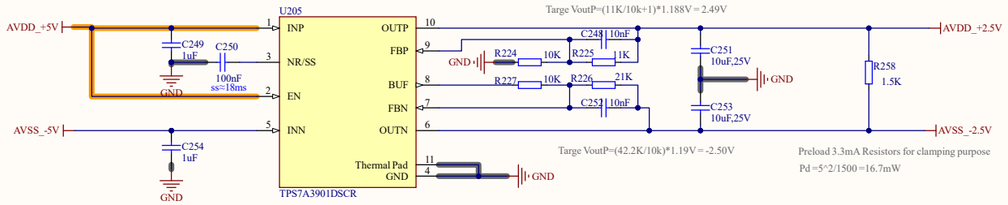


Table 6-2. Sequencing Functionality Table


POSITIVE INPUT VOLTAGE (V_{IN+})	NEGATIVE INPUT VOLTAGE (V_{IN-})	ENABLE STATUS	LDO STATUS	ACTIVE DISCHARGE
$V_{IN+} \geq V_{UVLOR}$ 1.4V~3.1V	$V_{IN-} \leq V_{UVLON}$ -3.1V~-1.4V	EN = 1	On	Off
		EN = 0	Off	On[1]
$V_{IN+} \geq V_{UVLOR}$	$V_{IN-} > V_{UVLON}$	EN = Don't care	Off	On[1]
$V_{IN+} < V_{UVLOF}$	$V_{IN-} \leq V_{UVLON}$	EN = Don't care	Off	On[1]
$V_{IN+} < V_{UVLOF} - V_{UVLOFhys}$	$V_{IN-} > V_{UVLON} - V_{UVLONhys}$	EN = Don't care	Off	On[1]

(1) The active discharge remains on as long as V_{IN} and V_{OUTx} provide enough headroom for the discharge circuit to function.


LDO

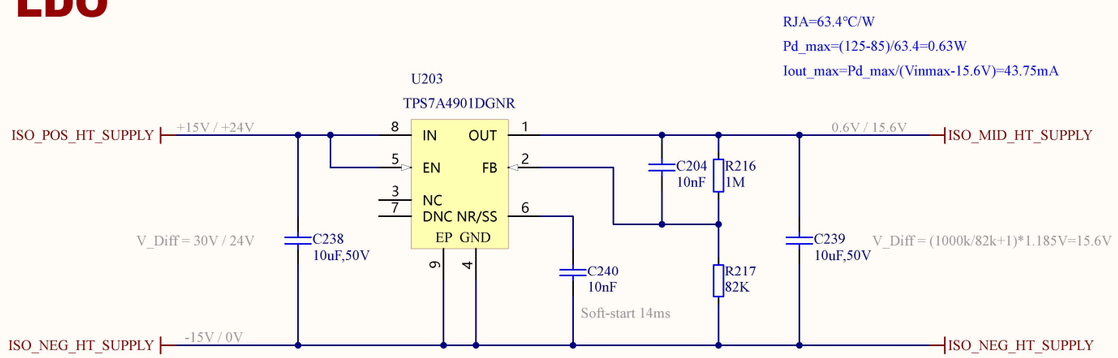

Heating Resistor Selection



OnBoard NTC

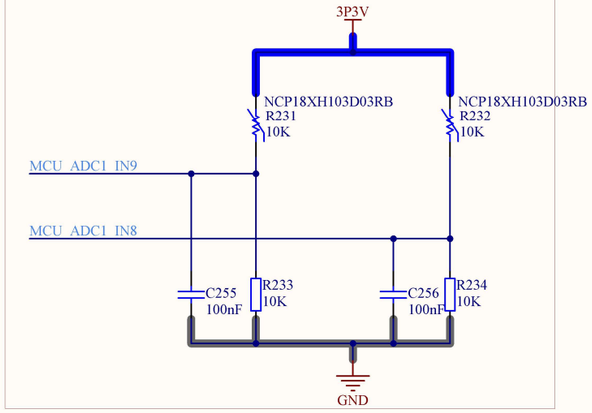

ISO PWM CONTROL


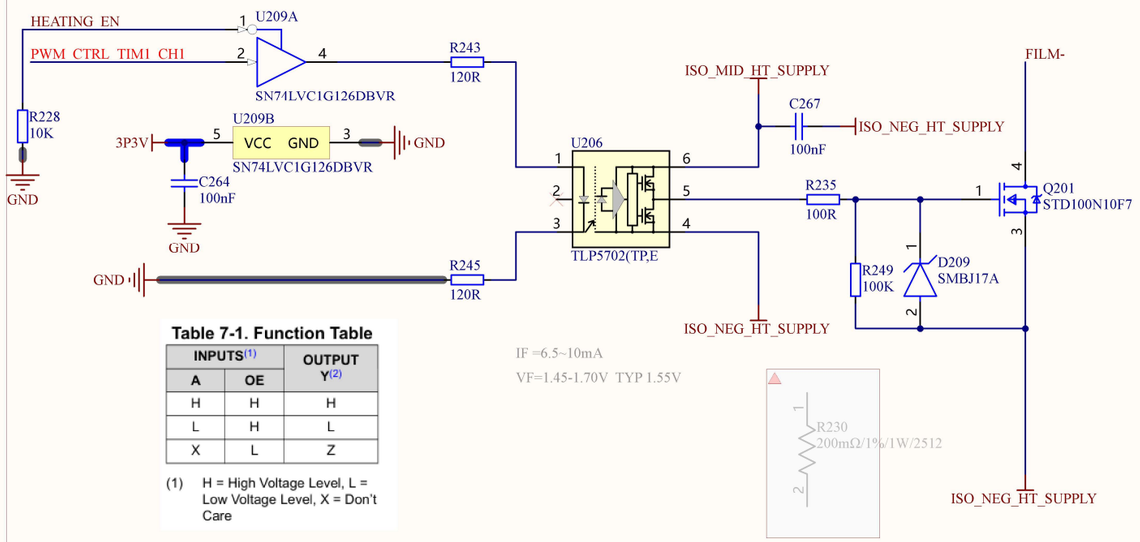


Table 7-1. Function Table

INPUTS(1)		OUTPUT Y(2)
A	OE	
H	H	H
L	H	L
X	L	Z

(1) H = High Voltage Level, L = Low Voltage Level, X = Don't Care

NTC / ADC Input Driver CH3

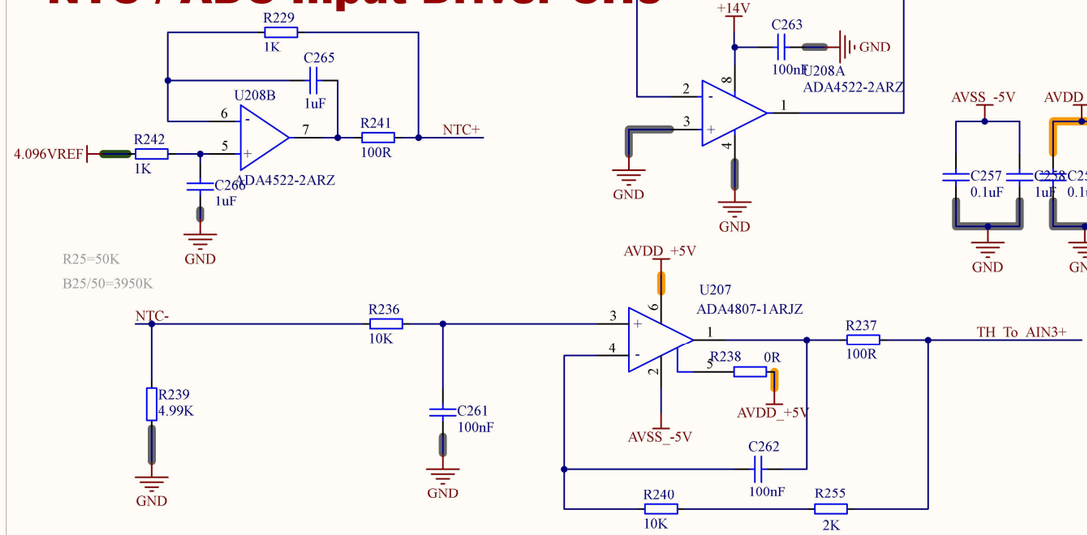


This document contains proprietary and confidential information pertaining to Shenzhen BLUE DYNAMICS Technology Co., Ltd. and/or its affiliates ("BLUE DYNAMICS Group") intended only for the use by BLUE DYNAMICS Group and its authorized suppliers, and should not be used, reproduced, disclosed or disseminated without the prior written approval of BLUE DYNAMICS Group. Any unauthorized use, reproduction, disclosure or dissemination of this document or any content hereof constitutes infringement of intellectual property and will result in serious legal liabilities.


Title: *		BLUE DYNAMICS 蓝动精密科技有限公司
Model No:		
PCB No: 30200132	Rev: *	Sheet 3 of 6
Size: File: HeatingControl.SchDoc		
Design by: *	Checked by:	Approved by:
Date:	Date:	Date:
Add: *		Website: *

电控部 晏燕楠


Gain Calibration (Factory) & Filter

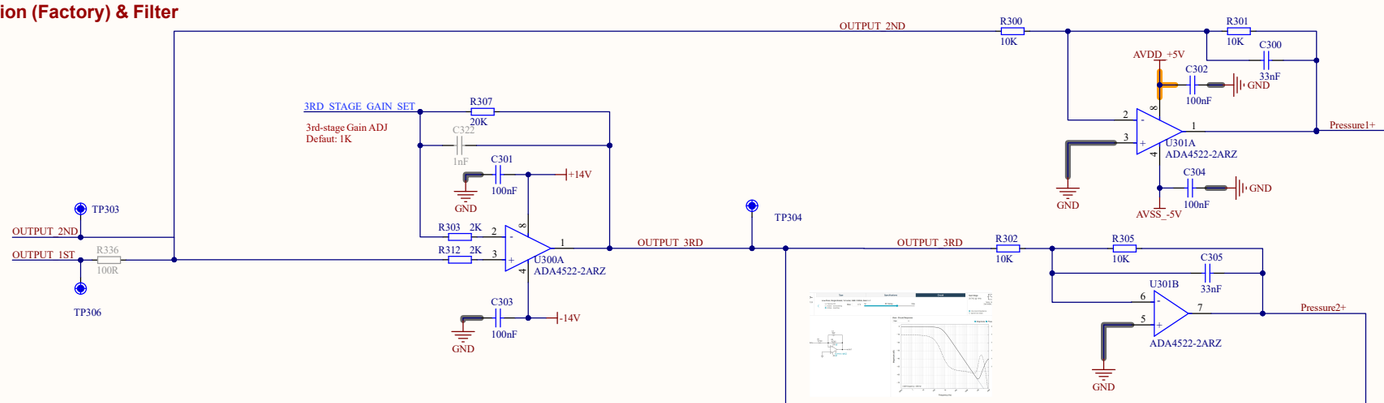


ADC Input Driver CH0

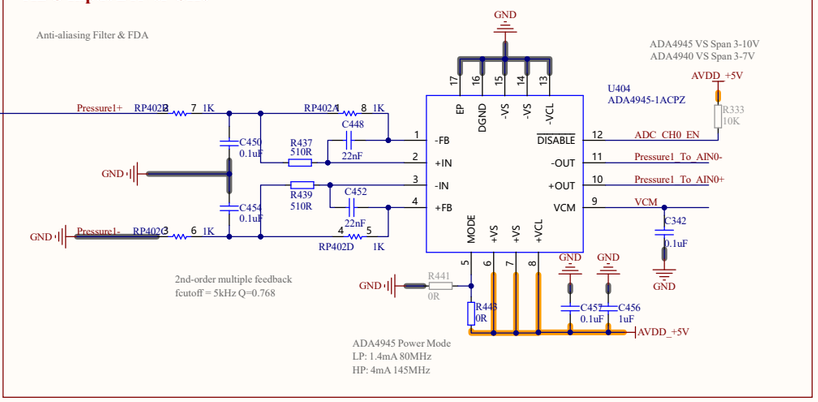


Linearity Trim (Factory)

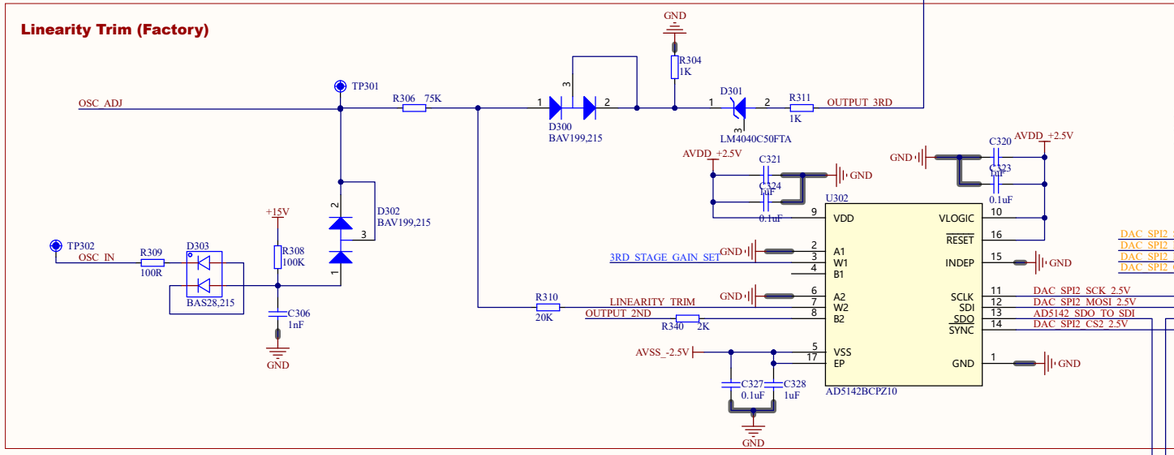


ADC Input Driver CH1

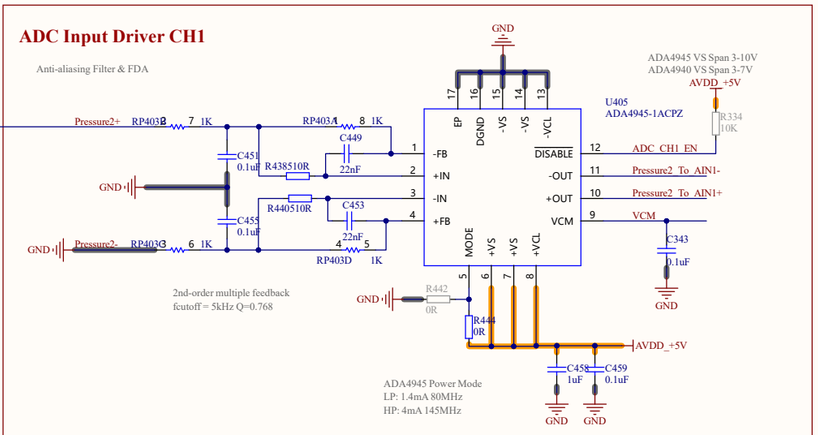


Bridge Offset Coarse/Fine Trim (Factory)

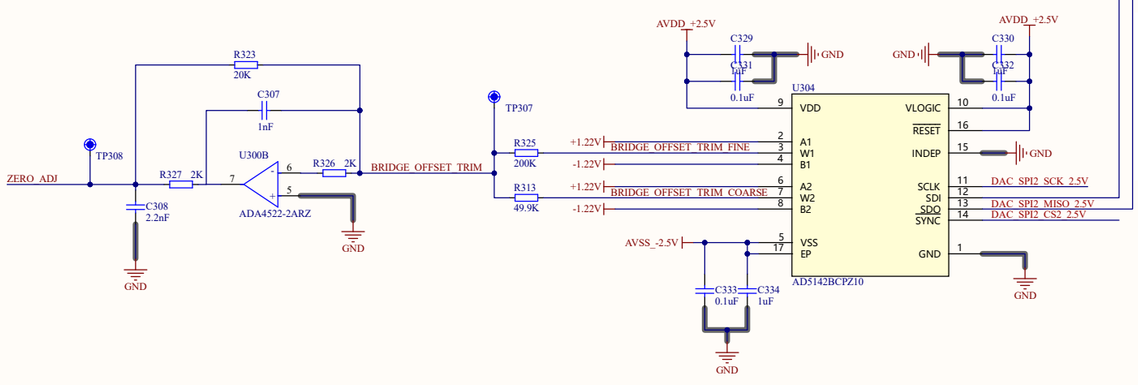


Daisy Chain Configuration
32 bit DATA

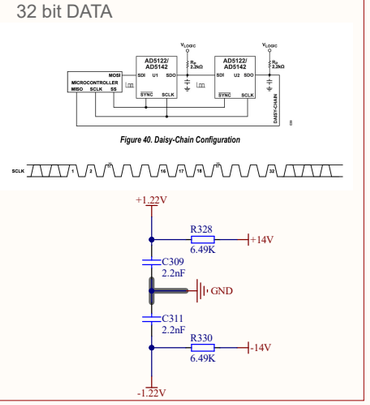


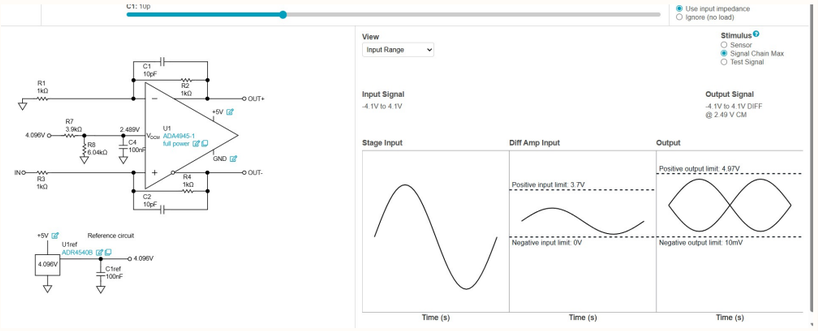


DAC AD5061

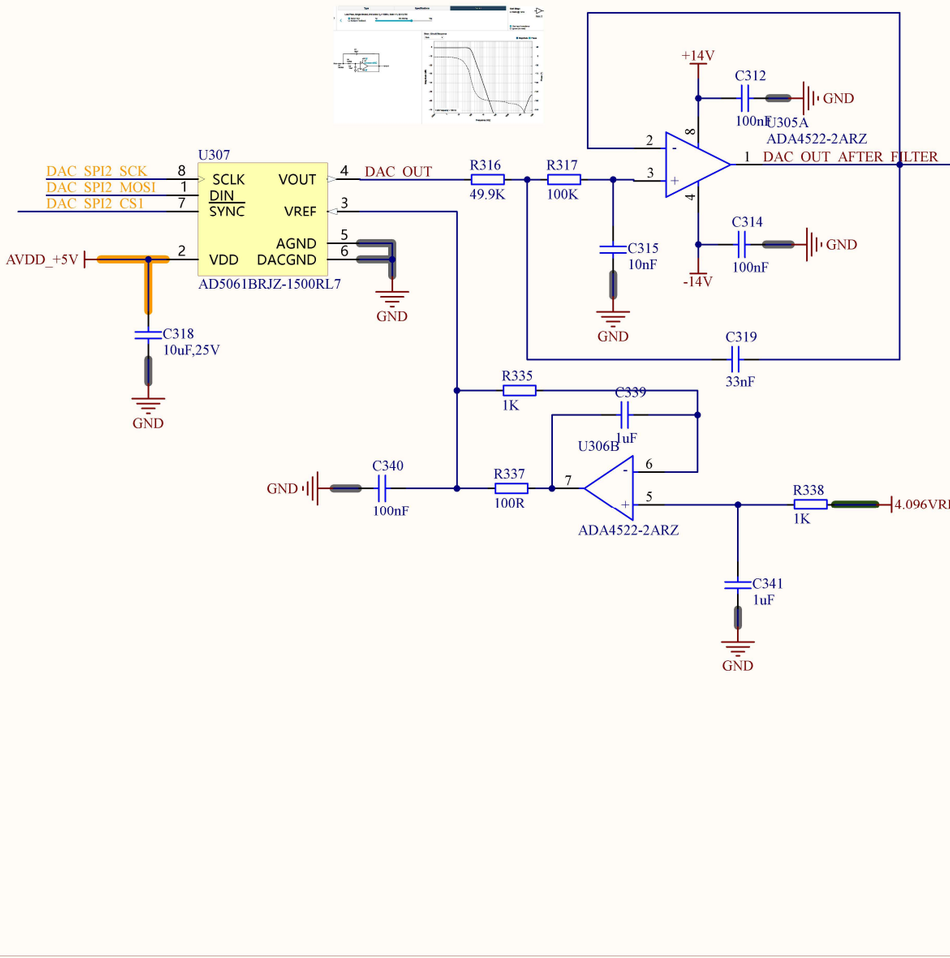

Output Amplifier / Filter

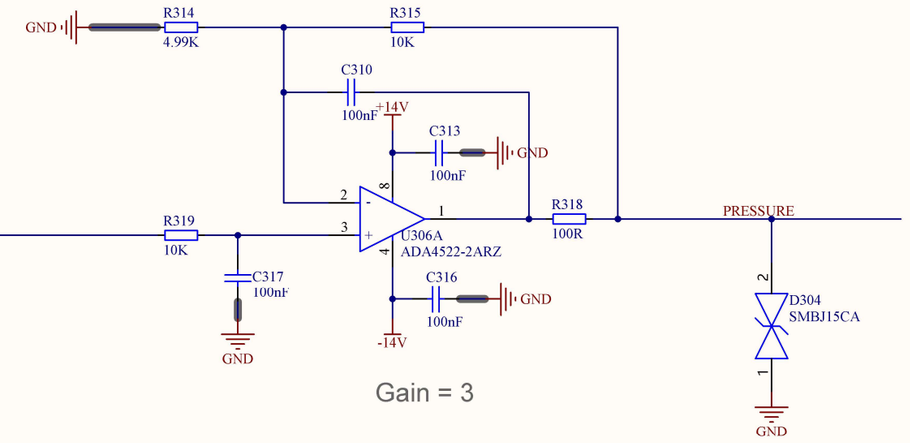

ADC Input Driver CH2

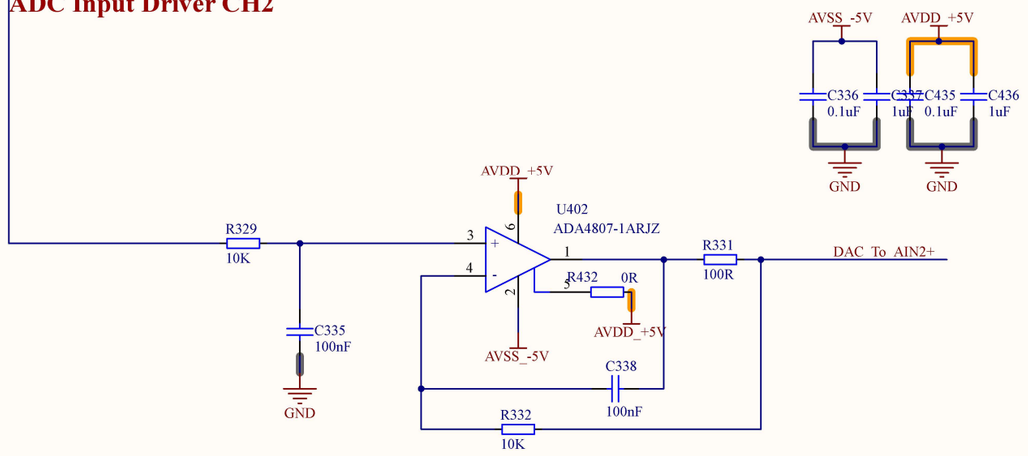

Title: *			
Model No:			
PCB No: 30200132	Rev: *	Sheet 5 of 6	
Size: File: AnalogOutput.SchDoc			
Design by: *	Checked by:	Approved by:	
Date:	Date:	Date:	
Add: *		Website: *	


BLUE DYNAMICS 蓝动精密科技有限公司

This document contains proprietary and confidential information pertaining to Shenzhen BLUE DYNAMICS Technology Co., Ltd. and/or its affiliates ("BLUE DYNAMICS Group") intended only for the use by BLUE DYNAMICS Group and its authorized suppliers, and should not be used, reproduced, disclosed or disseminated without the prior written approval of BLUE DYNAMICS Group. Any unauthorized use, reproduction, disclosure or dissemination of this document or any content hereof constitutes infringement of intellectual property and will result in serious legal liabilities.


电控部 晏燕楠

ADC AD7768-4


AVDD1 32.5mA max @ fastmode
AVDD2 20.3mA max @ fastmode
IOVDD 46.8mA max @ fastmode

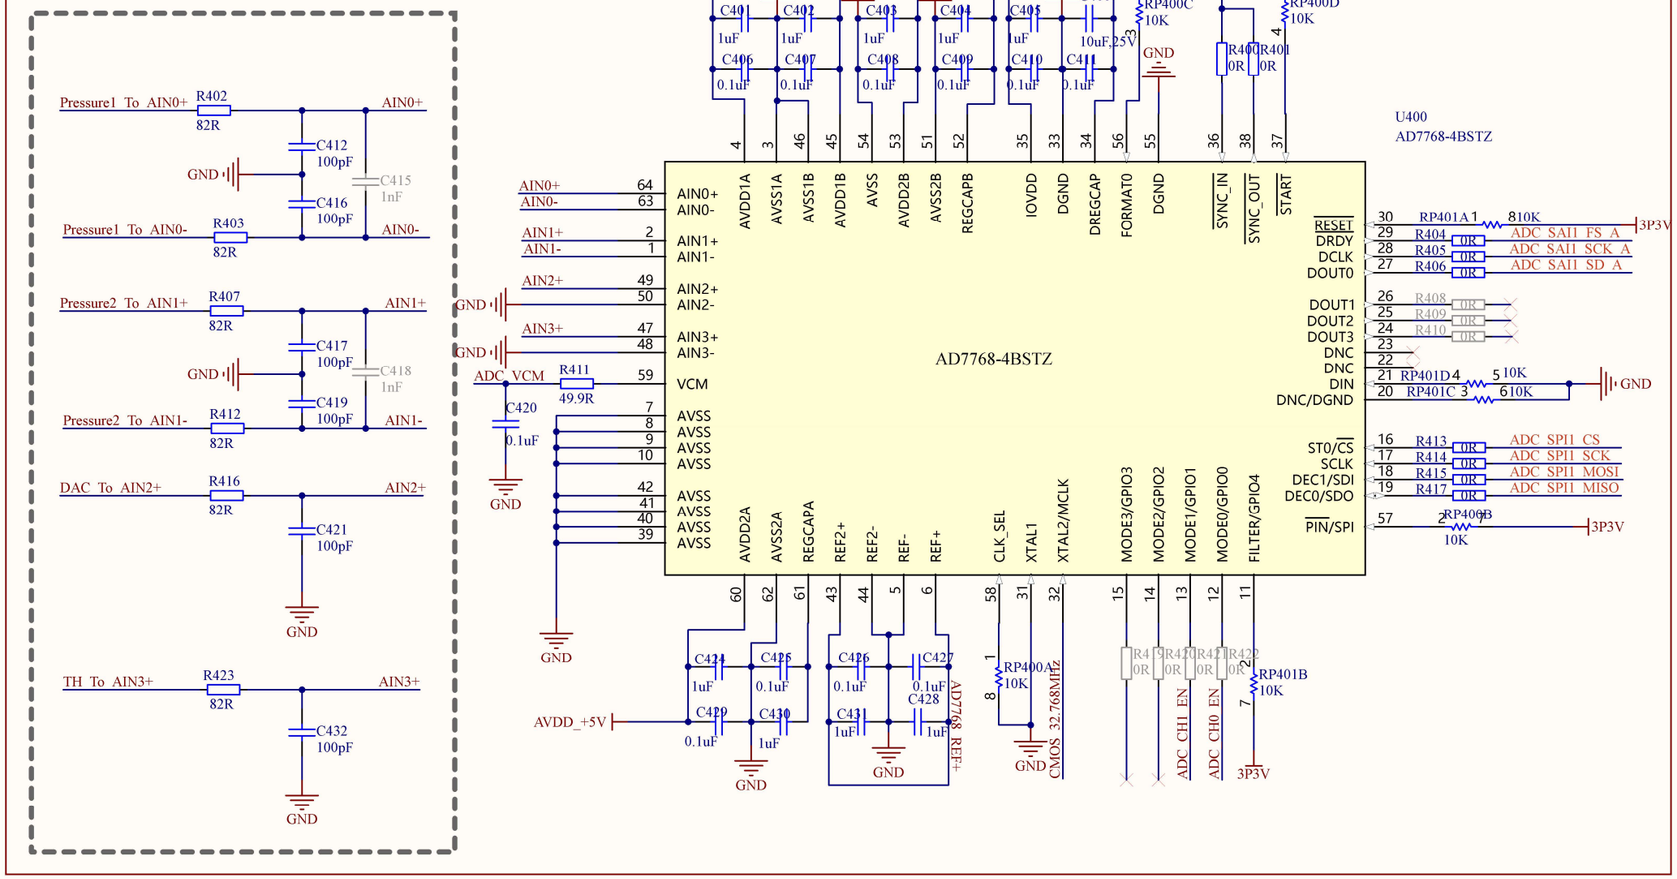


Oscillator 32.768MHz

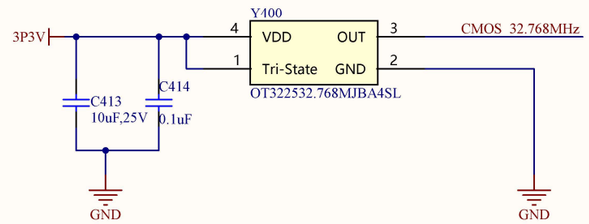

VREF 4.096V

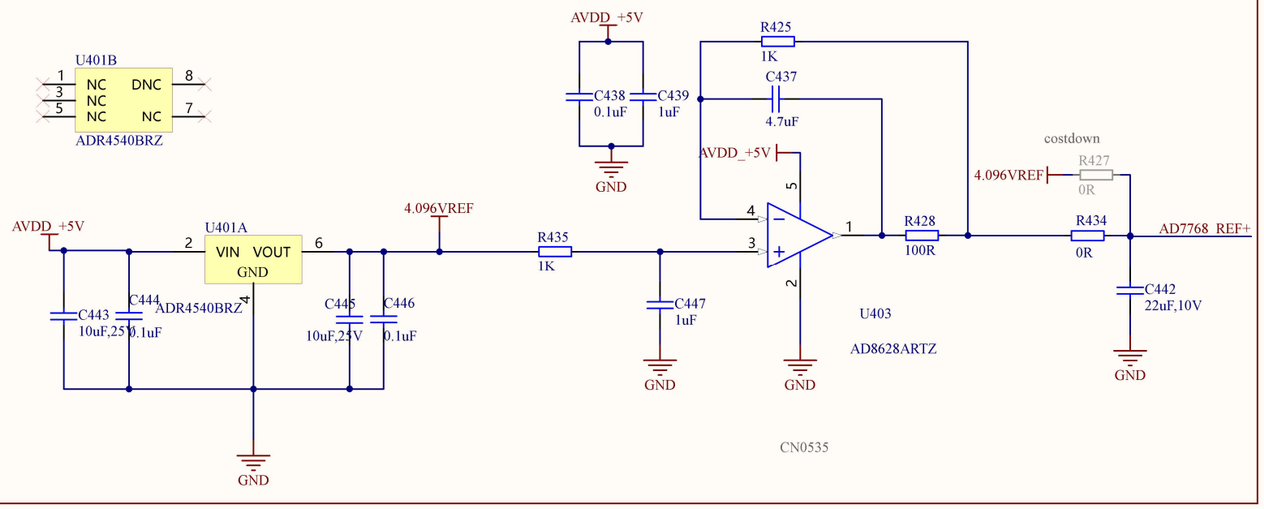

Differential Input VCM

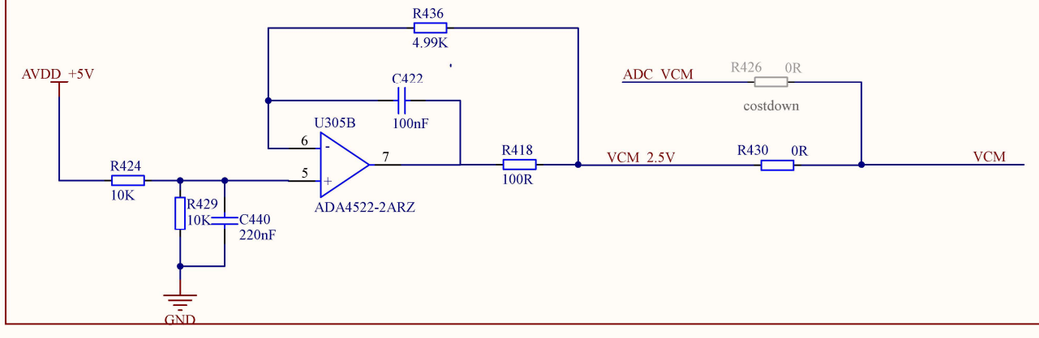

Title: *	
Model No:	
PCB No: 30200132	Rev: * Sheet 6 of 6
Size: File: ADC.SchDoc	
Design by: *	Checked by: Approved by:
Date:	Date: Date:
Add: *	Website: *

BLUE DYNAMICS 蓝动精密科技有限公司

This document contains proprietary and confidential information pertaining to Shenzhen BLUE DYNAMICS Technology Co., Ltd. and/or its affiliates ("BLUE DYNAMICS Group") intended only for the use by BLUE DYNAMICS Group and its authorized suppliers, and should not be used, reproduced, disclosed or disseminated without the prior written approval of BLUE DYNAMICS Group. Any unauthorized use, reproduction, disclosure or dissemination of this document or any content hereof constitutes infringement of intellectual property and will result in serious legal liabilities.

电控部 晏燕楠