



科技创新/合作共赢



广州安明利光电科技有限公司

Anmingli Stage Lighting Manufacturer Co.,Ltd



舞美娱乐灯光先行者



PART 1

Performance products and cases
演出产品及案例

Showcases



《Hunan Satellite TV 2021 New Year's Eve》



《China Central Broadcasting Station 2021 New Year's Eve》



《Zhejiang Satellite TV New Year's Eve Party》



《Beijing Satellite TV Shopping Day Party》

Showcases



《Tianjin Satellite TV Shows》



《Hunan Satellite TV Shows》



《Hunan Satellite TV Shows》



《Hunan Satellite TV Shows》



《Hunan Satellite TV Shows》



《Hunan Satellite TV Shows》

Showcases




《Shanghai Music Festival》



《Anhui Satellite TV Shows》




《Volkswagen Conference》

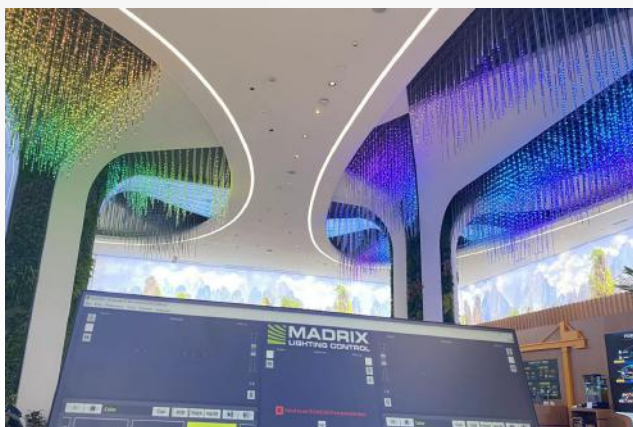

《Huawei Showroom》



《Hennessy Tasting》

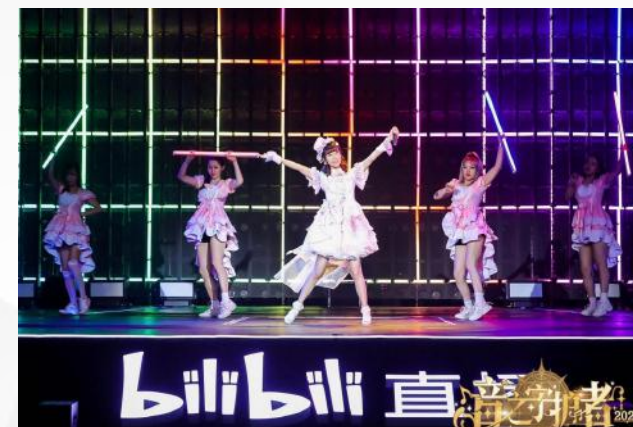

《Shanghai Satellite TV Shows》

Showcases



《ZheJiang Satellite TV Shows》



《ZheJiang Satellite TV Shows》



《ZheJiang Satellite TV Shows》



《CCTV TV Shows》



《AnHui Satellite TV Shows》



《Hunan Satellite TV Shows》

New Product Series

AL-006A




AL-006B



AL-007



AL-008



AL-005IP



50W Pocket Stormy AL-006A

This series of lights and lanterns have multiple functions, integrating strobe, beam, pixel auxiliary light, glare and condensing effects. Users can use fewer lamps to achieve better and more eye-catching visual effects. The control signal is compatible with DMX512/Art-Net (Madrix) multiple control systems, integrated control, easy deployment, and greatly enhances the experience of use. This series of lamps can easily control various combinations and arrangements, intelligent interlocking to achieve any combination, perfect combination of different shape requirements, giving users greater creative potential and achieving richer lighting effects. Whether it is a small and exquisite bar or a grand concert venue, the LED flashing elf 50W IP can bring an extraordinary feast of light and shadow to the audience. This product can be used in conjunction with AL-006B. (This product requires a dedicated controller)

- ♦Voltage: 90V-240V 50/60Hz (power supply through a dedicated controller)
- ♦Power Consumption: 65 watts
- ♦Color temperature: 2700K/6000K (optional)
- ♦Led Source: 1*50W COB warm white light source (2700K) + 24 RGB5050 (auxiliary light source)
- ♦Control method: DMX512/Art-Net (Madrix software can be directly connected)
- ♦Beam angle: 12°
- ♦Product size: 164*247*95mm (including handle)
- ♦Connect method: special quick lock, which can realize quick splicing of any shape.
- ♦Channel mode: 8CH
- ♦Product weight: 2.5KG
- ♦Waterproof rating: IP65
- ♦Controller is required.



60W Pocket Beam AL-006B


The design of this luminaire sets a new standard for multifunctional lighting fixtures. The compact and unique design can be perfectly qualified for festival activities, touring performances, and entertainment installations. RGBW color mixing, rich and full color, 4.2°-42° zoom, can be extremely narrow The powerful beam naturally transitions to the full-color dyeing effect. IP65 structure waterproof design, outstanding all-weather, suitable for outdoor and travel performances. This series of lamps can easily control various combinations and arrangements, and intelligently interlock to achieve any combination, giving users greater creative potential and achieving richer lighting effects. Compatible with industry standard DMX512 signal and standard network signal Art-Net, it can be directly connected to MADRIX without using an additional third-party controller, multiple control protocols, integrated control, easy deployment, greatly improving the experience of use. This product can be used in conjunction with AL-006A. (This product needs to be equipped with a dedicated controller)

- ♦Voltage: 90V-240V 50/60Hz (power supply through a dedicated controller)
- ♦Power consumption: 80 watts
- ♦Color temperature: 2500k-10000K
- ♦Leds Quantity: 1*60W OSRAM RGBW lamp beads
- ♦Control method: DMX512/Art-Net (Madrix software can be directly connected)
- ♦Beam angle: 4.2°-42°
- ♦Series connection mode: male and female series (signal/power integration)
- ♦Product size: 247*247*95mm (including handle position)
- ♦Connect method: special quick lock, which can realize quick splicing of any shape.
- ♦Channel mode: 8CH
- ♦Product weight: 3.5KG
- ♦Waterproof rating: IP65
- ♦Controller is required.



Infinite Rotating Pixel Tube AL-007


The LED endless rotating pixel light bar is a fixture that supports X/Y axis rotation. This product is a creative derivative of the current hot product LED pixel light bar on the market. By adding the rotation and movement function, the designer's creative ideas can also be used. It has been extended to a large extent. The length of this product is 1.0/1.5 meters, and each light-emitting LED can be individually controlled. Compatible with industry DMX signals and mainstream network signals, it can be directly connected to MADRIX control without the need for additional third-party control systems. In the movement part, each of us is equipped with a magnetic encoding disk positioning system, and the equipment signals two-way communication, maintaining a high degree of uniformity in high-speed operation, without losing step/losing step, calmly and perfectly implementing each designer's delicate design ideas.

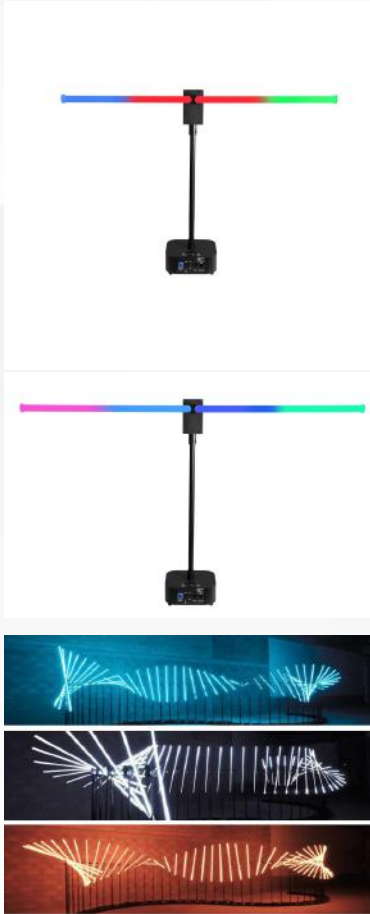

- ◆ Movement direction: X axis + Y axis (infinite rotation)
- ◆ Number of LEDs:
1000MM tube: 160 xSMD5050 RGB
1500MM tube: 240 xSMD5050 RGB
- ◆ LENS: transparent/Milky white flame-retardant PVC material.
- ◆ Control method: DMX/Artnet (Madrix direct connection), no third-party control system is required.
- ◆ Signal/Power Connection: 2*Power in/out + 2*3-pin DMX in/out + 2*EtherCon in/out
- ◆ Product size:
Motor controller (1M tube): 248X215X780MM
Motor controller (1.5M tube): 248X215X960MM
Led tube: 1000X25X25MM / 1500X25X25MM
- ◆ Waterproof rating: IP20 (indoor use)
- ◆ Fixing method: hanging/side hanging/upright
- ◆ Product weight: 7.5KG

Led Flash Storm AL-008

This product is a highly anticipated high-power LED stroboscopic strip lamp, which doubles as a high-performance audience lamp and a wall washer. Powerful, the burst flash function and the full-color effect are perfectly combined and the stage is magnificent, to achieve a true 2 in 1 function, the equipment is designed with an aluminum housing, and the heat dissipation effect is excellent. , Bring the best effect and best effect to the user, can bring multi-level dream dynamic effect to the stage, the equipment supports conventional DMX512 control, and industry standard network signal, can be directly connected to MADRIX software, no need to use a third party system. The perfect combination of these agreements can escort the needs of different stage effects.

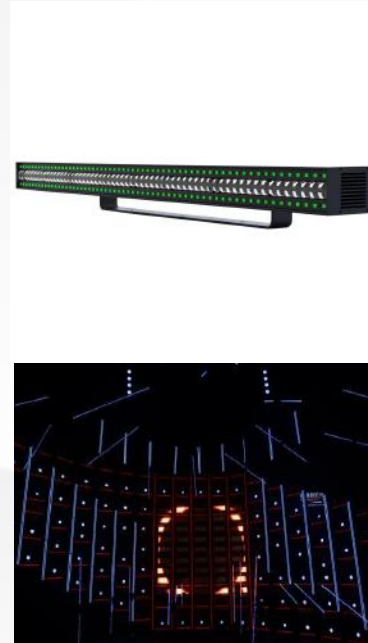

- ◆ Voltage: AC90-240V 50/60Hz
- ◆ Number of LEDs: 120*5W (white light in the middle) + 240*0.3W RGB LEDs(upper and lower auxiliary light)
- ◆ Lamp power: rated constant power: 450 watts, peak flash power: 650 watts
- ◆ Control method: DMX512/Art-net network protocol in program self-propelled
- Signal/Power Connection: 2*Power in/out + 2*3-pin DMX in/out + 2*EtherCon in/out
- ◆ Channel: 9CH/35CH/125CH/390CH
- ◆ Product Size: 1000x65x198mm (length * width * height)
- ◆ Weight: 7.5KG

IP65 1000W Super Strobe Light AL-005BIP



Photometrics

- ◆ Light Source: 960 pcs LEDs(480X1.5W RGB + 480X0.5W White)

- ◆ Beam Angle: 60°

- ◆ Field Angle: 125°

Key Features

- ◆ Pixel Matrix: 4 x 15

- ◆ Strobe: 0 ~ 30Hz

- ◆ Dimming: 4 dimming curve modes

Control

- ◆ Protocol: DMX, ArtNet, KlingNet, RDM

- ◆ DMX Channels: 12/28/44/244

- ◆ Built-in Programs: Yes

Power

- ◆ Mains: 100 - 240 VAC, 50/60 Hz

- ◆ Consumption: 1000W (full-on constant output)

- ◆ Consumption: 1200W (peak instant strobe)

I/O

- ◆ Power connections: IP65 PowerKon In/Out

- ◆ Data connections: IP65 XLR In/Out for DMX,

- ◆ IP65 EtherCon for ArtNet

Housing

- ◆ Material Diecast Aluminum

- ◆ IP rating: IP65

Thermal


- ◆ Cooling Variable speed fans

- ◆ Ambient operating temps: -20° ~ 40°C

Physical

- ◆ Dimensions: 510 x 250 x 268 mm

- ◆ Weight: 12 KG

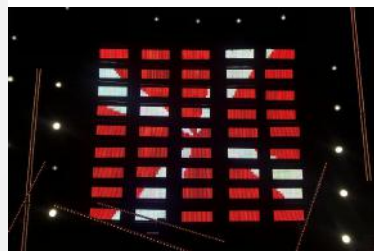

IP65 1500W Super Strobe Bar AL-005IP

- ◆ Light Source: 512pcs x 1.5W RGB LEDs + 512 x 0.5W white led

- ◆ CT: W: 6250 K

- ◆ Protocols: DMX512, RDM, Art-Net, Kling-Net

- ◆ DMX Channels: 8/12/73/132

- ◆ Pixel Control: 4/8/16/32 selectable and controllable

- ◆ RDM: RDM ready for fixture remote monitor and settings

- ◆ Dimmer: Linear 0~100% electronic dimmer

- ◆ Dimmer Curves: 4 Different dimming curves available

- ◆ Strobe/Shutter: 1-30 Hz, electronic

- ◆ Operating Temperature: -10° ~ +45°

- ◆ Selectable PWM: 800~16K Hz

- ◆ Power Supply: 100-240V ~ 50/60Hz

- ◆ Power Consumption (at 230V): Strobe: 1200 W Static: 950 W

- ◆ Power Consumption (at 120V): Strobe: 1200 W Static: 850 W

- ◆ IP: 65

- ◆ Dimensions (WxHxD): 1000x283x252 mm

- ◆ Weight: 16 kg

LED Pixel Mapping Light Series


AL-DC180



AL-003B



AL-003

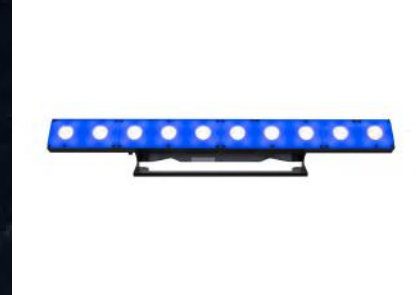

LED Pixel Mapping Light Series



1x80 Led Pixel Strip AL-DC180

- ◆Light Source:80Pcs SMD5050 RGB LEDs
- ◆Control Mode:DMX, Art-Net, RDM
- ◆Pixel: 1LED/2LEDs/4LEDs as 1Pixel
- ◆Power Consumption:25W(All on)
- ◆Size:1000x35x100mm(with handle)
- ◆Weight: 2KG ◆Each Strip is equipped with two 500MM 2+3pin cable (2+3pin for both power&data to the product)
- ◆Cover selection: Flat,Dome Round,Square (replacable)

AL-DC Driver 4.0 is NEEDED.



IP65 1x80 Led Pixel Strip AL-DC180IP

- ◆Light Source:80Pcs SMD5050 RGB LEDs
- ◆Control Mode:DMX, Art-Net, RDM
- ◆Pixel: 1LED/2LEDs/4LEDs as 1Pixel
- ◆Power Consumption:25W(All on)
- ◆Size:1000x35x100mm(with handle)
- ◆IP Rate: IP65
- ◆Weight: 2KG ◆Each Strip is equipped with two 500MM 2+3pin cable (2+3pin for both power&data to the product)
- ◆Cover selection: Flat,Dome Round,Square (replacable)

AL-DC Driver 4.0 is NEEDED.



Pixel Strip Driver AL-DC Driver 4.0

- ◆InPut Power:AC90V-260V
- ◆Output power:36V
- ◆Power Consumption : 36V 2200W (MeanWell PSU)
- ◆Max connection of Units:32PCS of AL-DC180
- ◆Size:2U Design
- ◆Weight:5.5KG
- ◆IP Rating:IP20
- ◆Signal Input Connection:2xDMX 3/5 pin In/Out ports
- ◆+2xEthernet ports
- ◆Signal Output Connection (Ethernet): Ethernet ports
- ◆Control Protocol: Art-Net, Kling-Net, DMX, Sound, Auto,

Preset Programs



LED 3D Tube AL-DC180C

- ◆1m 80 (double-sided) high-brightness RGB lamp beads, lamp beads CRI> 80, full color without color difference, using TM1926 chip. Gray scale: 256 levels Power: 0.44W/digit
- ◆Single point monochrome control
- ◆12V voltage drive
- ◆Resume uploading
- ◆Set the pitch P25MM
- ◆Protection level: IP30
- ◆Installation method: hanging
- ◆Required controller box



Led 2 in 1 Matrix Beam Tile

AL-003B



- ◆Input: 110V-240V 50/60HZ
- ◆PUS spec.: 6V*13.3A 80W
- ◆Power consumption : 160W
- ◆Led light source : CREE warm white 3W*36PCS + LEDMAN SMD5050 0.3W*144pcs
- ◆Color temperature : 2600K
- ◆FUSE : F1.5A / 250V
- ◆Control : Auto,DMX,ARTNET,KLINGNET, RDM
- ◆DMX Channel : 10CH /45CH/146CH/468CH
- ◆Product physical size : 500x500x100mm

LED 2IN1 PIXEL Matrix Bar

AL-003



- ◆Input: 110V-240V 50/60HZ
- ◆PUS spec.: 6V*13.3A 80W
- ◆Power consumption : 50W
- ◆Led light source : CREE warm white 3W*10PCS + LEDMAN SMD5050 0.3W*60pcs
- ◆Color temperature : 2600K
- ◆FUSE : F1.5A / 250V
- ◆Control : Auto,DMX,ARTNET,KLINGNET, RDM
- ◆DMX Channel : 9CH / 190CH
- ◆Product physical size : 780x103x73mm

Wireless battery led table light package

AL-004



- ◆Source: 6pcs*2W RGBW leds+6pcs 1W warm winter leds
- ◆CT: NW 4000K
- ◆CRI: 80
- ◆Source life expectancy: >50,000 h
- ◆Battery Life: All-on: 9 hours、Single Color on:14 hours、Auto mode: 11 hours
- ◆DYNAMIC EFFECTS
- ◆Static colour mode: selection of static colour
- ◆Manual colour mode: manual adjustment of colour
- ◆Hardware on-board: magnetic base
- ◆Body: sturdy die-cast aluminium body conceived for long-time durability
- ◆Product size : 142*322*200 MM
- ◆Weight: 1.1KG
- ◆Protocols: WDMX/IR/Stand Along
- ◆DMX channels: 9 channel
- ◆IR: infrared sensor controlled by remote
- ◆Dimmer: linear 0~100% electronic dimmer
- ◆PACKING:Carry case 560X420X200MM
- ◆Weight:8KG

LED Strobe Light Series

AL-Q1IP



AL-Q2IP




AL-005IP



AL-005BIP




AL-921RGBW



AL-921IP65



AL-1024

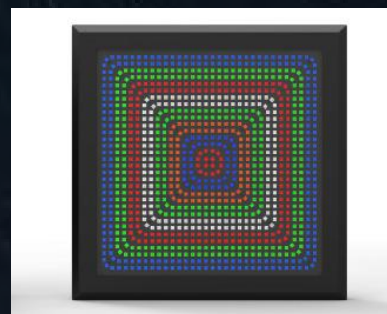

AL-006



2 in 1 Strobe Light AL-Q1IP



- ♦Working voltage: 110-240V/50-60HZ
- ♦White strobe: 1000W (192*5W white lamp beads)
- ♦Color strobe; 150W (640*5050 lamp beads)
- ♦Stroboscopic: The whole can be stroboscopic, and 8 lamp beads can also be changed to create a flowing water effect. The brightness can be adjusted. Its half power is also very bright.
Effect: Flash control can be used. Create a flowing water effect. Many lamp beads can be changed to make macro effects. There are many macro instructions inside.
You can use Art Net and DMX512 and RDM to connect.
- ♦Surface: composite material PA66, anti-ultraviolet treatment, high temperature resistance; anti-aging.
- ♦Weight: 10Kg



1000W Moving Strobe Light AL-Q2IP

- ♦Rated voltage: AC100-240V, 50/60Hz
- ♦Rated power consumption: 1000W
- ♦LED: 8-segment RGB 3in1 LEDs (color surface)
4 segments of cool white LEDs (white light strobe segment)
- ♦Maximum vertical rotation angle: 185°
- ♦Display: LCD display
- ♦Dimmer: 0-100% linear electronic dimming
- ♦Strobe: 0-25
- ♦DMX channel: 7/14/42CH
- ♦Installation method: tripod support / lamp hook hanging / base on the ground
- ♦Size: L535*W152*H300mm
- ♦Net weight: 12 kg

IP65 1500W Super Strobe Bar AL-005IP



- ♦ Source:512pcsx1.5W RGB LEDs+512x0.5W white led
- ♦ CT:W: 6250 K
- ♦ Protocols: DMX512, RDM, Art-Net, Kling-Net
- ♦ DMX Channels:8/12/73/132
- ♦ Pixel Control:4/8/16/32 selectionable and controllable
- ♦ RDM: RDM ready for fixture remote monitor and settings
- ♦ Dimmer: Linear 0~100% electronic dimmer
- ♦ Dimmer Curves:4 Different dimming curves available
- ♦ Strobe/Shutter:1-30 Hz, electronic
- ♦ Operating Temperature: -10° ~ +45°
- ♦ Selectable PWM: 800~16K Hz
- ♦ Power Supply: 100-240V – 50/60Hz
- ♦ Power Consumption (at 230V):Strobe: 1200 W Static:950 W
- ♦ Power Consumption (at 120V):Strobe: 1200 W Static: 850 W
- ♦ IP:65
- ♦ Dimensions (WxHxD):1000x283x252 mm
- ♦ Weight:16 kg



IP65 1000W Super Strobe Light AL-005BIP

- ♦Light Source: 960 pcs LEDs(480X1.5W RGB + 480X0.5W White)
- ♦Beam Angle: 60° ♦Field Angle: 125°
- ♦Pixel Matrix: 4 x 15 ♦Strobe: 0 ~ 30Hz
- ♦Dimming: 4 dimming curve modes
- ♦Protocol: DMX, ArtNet , KlingNet,RDM
- ♦DMX Channels: 12/28/44/244
- ♦Mains: 100 - 240 VAC, 50/60 Hz
- ♦Consumption: 1000W (full-on constant output)
- ♦Consumption: 1200W (peak instant strobe)
- ♦Power connections: IP65 PowerKon In/Out
- ♦Data connections: IP65 XLR In/Out for DMX,
♦IP65 EtherCon for ArtNet
- ♦IP rating: IP65
- ♦Ambient operating temps: -20° ~ 40°C
- ♦Dimensions: 510 x 250 x 268 mm
- ♦Weight: 12 KG



921 Pcs Strobe Light AL-921RGBW

- ♦ Working voltage: 110-240V/50-60HZ
- ♦ Light source: 921 LED SMD5050RGBW
- ♦ Maximum power: 260W
- ♦ Flooding angle: 120°
- ♦ Control mode: manual mode/built-in effects/DMX512/sound control
- ♦ DMX channel: 6CH/9CH /36CH/41CH
- ♦ Data connection: 3Pin+5 Pin XLR
- ♦ Display: LCD screen + four light touch buttons
- ♦ Installation method: tripod support / lamp hook hanging / base on the ground
- ♦ Size: 386*346*165mm
- ♦ Net weight: 3.2 kg



IP65 921 Pcs Strobe Light AL-921IP65

- ♦ Working voltage: 110-240V/50-60HZ
- ♦ Light source: 921 LED SMD5050RGBW
- ♦ Maximum power: 350W
- ♦ Flooding angle: 120°
- ♦ Control mode: manual mode/built-in effects/DMX512/sound control
- ♦ DMX channel: 6CH/9CH /36CH/41CH
- ♦ Data connection: 3Pin+5 Pin XLR
- ♦ Display: LCD screen + four light touch buttons
- ♦ Installation method: tripod support / lamp hook hanging / base on the ground
- ♦ Size: 386*346*165mm
- ♦ Net weight: 8.8 kg



1024 Pcs Strobe Light AL-1024

- ♦ Working voltage: 110-240V / 50-60HZ
- ♦ Light source: 1024PCS, SMD5050 4NI1
- ♦ Maximum power: 300W
- ♦ Flooding angle: 120°
- ♦ Control mode: manual mode/built-in effects/DMX512/voice control
- ♦ DMX channel: 6CH / 9CH / 32CH / 36CH
- ♦ Data connection: 3Pin + 5 Pin XLR
- ♦ Display: LCD screen + four touch buttons
- ♦ Installation method: tripod support/light hook hanging/base on the ground




380W Strobe Bar AL-006

- ♦ Input voltage: AC100-250V, 50-60Hz
- ♦ Power: 380 W
- ♦ Beads: 1296 0.3 watt RGBW beads
- ♦ Life: > 50000 hours
- ♦ Luminescence angle: 120
- ♦ Control mode: DMX512/self-propelled/RDM
- ♦ DMX512 Channel: 6CH-64CH Multichannel Multiprogram
- ♦ Shell Material: Aluminum
- ♦ Base hanger: lamp hook splicing plug-in
- ♦ Display screen: LCD screen, 4 physical keys, switching between Chinese and English, 180 degree rotation.
- ♦ Protection Level: IP20
- ♦ Effect: 16 area control effect, facial light, sectional stroboscopic horse backlight supplementary effect
- ♦ Smooth dimming, no jitter, bulb temperature control protection, low noise.
- ♦ Product size: 1000*95*137.5mm
- ♦ Total weight: 4kg

Retro Light Series


AL-TT3



AL-TT1B



AL-TT1

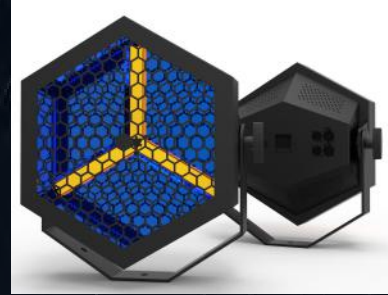


AL-TT600LED



AL-TT700LED



AL-TT100LED



AL-TT60RGB





7PCS RGB Retro Light

AL-TT3

- ♦Working voltage: 110-240V / 50-60HZ
- ♦Light source: 7×60WLED (customized light source) + 168×1W RGB
- ♦Maximum power: 550W
- ♦Color temperature: 2200K + RGB
- ♦Control mode: self-propelled/master-slave online/DMX512
- ♦DMX channel: 4CH / 6CH / 28CH / 30CH
- ♦Data connection: 3Pin + 5 Pin XLR
- ♦Display: LCD screen
- ♦Installation method: tripod support/light hook hanging/base on the ground
- ♦Net weight: 17 kg
- ♦Product size: 860 * 966 * 170MM
- ♦Packing: carton (1 pack 1)
- ♦Outer box packing size: 104 * 29 * 90cm



Retro Background Light

AL-TT1B

- ♦Rated voltage: AC100-240V, 50/60HZ
- ♦Rated power consumption: 750W
- ♦LED: TX-RGB05A140-002A RGB 96PCS
- ♦Halogen bulb: Osram HPL750 240V
- ♦Dimmer: 0-100%
- ♦Strobe: 0-25
- ♦Control mode: self-propelled/master-slave online/DMX512
- ♦DMX channel: 4/6/9 channel
- ♦Installation method: tripod support / lamp hook hanging / base on the ground
- ♦Net weight: 7 kg
- ♦Product size: 639 * W330 * H661mm
- ♦Packing: carton (1 pack 1)
- ♦Outer box packing size: 71.5*67*41.5cm



7PCS Retro Light

AL-TT700LED

- ♦Working voltage: 110-240V/50-60HZ
- ♦Light source: 7×60WLED (customized light source)
- ♦Maximum power: 450W
- ♦Color temperature: 2200K
- ♦Control mode: self-propelled/master-slave online/DMX512
- ♦DMX channel: 4CH/6CH /28CH/30CH
- ♦Data connection: 3Pin+5 Pin XLR
- ♦Display: LCD screen
- ♦Installation method: tripod support / lamp hook hanging / base on the ground
- ♦Net weight: 16.5 kg
- ♦Product size: 860*966*170MM
- ♦Packing: carton (1 pack 1)
- ♦Outer box packing size: 104*29*90cm



6PCS Retro Light


AL-TT600LED

- ♦Working voltage: 110-240V/50-60HZ
- ♦Light source: 6×60WLED (customized light source)
- ♦Maximum power: 360W
- ♦Color temperature: 2200K
- ♦Control mode: self-propelled/master-slave online/DMX512
- ♦DMX channel: 1CH/6CH /6CH-Pixel
- ♦Data connection: 3Pin+5 Pin XLR
- ♦Display: LCD screen
- ♦Installation method: tripod support / lamp hook hanging / base on the ground
- ♦Net weight: 11 kg
- ♦Product size: 1530*320*410MM
- ♦Packing: carton (1 pack 2)
- ♦Outer box packing size: 156*37*26cm



7PCS Mini Retro Light AL-TT100LED

- ♦Working voltage: 110-240V/50-60HZ
- ♦Light source: 7×30WLED (customized light source)
- ♦Maximum power: 210W
- ♦Color temperature: 2200K
- ♦Control mode: self-propelled/master-slave online/DMX512
- ♦DMX channel: 1CH/6CH /7CH-Pixel
- ♦Data connection: 3Pin+5 Pin XLR
- ♦Display: LCD screen
- ♦Installation method: tripod support / lamp hook hanging / base on the ground
- ♦Net weight: 8.2 kg
- ♦Size: 520*485*130MM
- ♦Packing: carton (1 pack 1)
- ♦Carton packing size: 62*56*24cm




3PCS RGB Retro Light AL-TT1

- ♦Working voltage: AC100-240V, 50/60HZ
- ♦Rated power consumption: 220W
- ♦LED: 3×60W LED (customized light source)+48*0.5WRGB LED
- ♦Color temperature: 2200k+RGB
- ♦Control mode: self-propelled/master-slave online/DMX512
- ♦DMX channel: 1CH/3CH /6CH-Pixel/10CH
- ♦Data connection: 3/5 Pin XLR
- ♦Display: LCD screen
- ♦Installation method: tripod support / lamp hook hanging / base on the ground
- ♦Net weight: 8.2 kg
- ♦Size: 450*350*161MM
- ♦Packing: carton (1 pack 1)
- ♦Carton packing size: 47*40*25cm



1PCS Retro Light AL-TT60LED

- ♦Working voltage: 110-240V/50-60HZ
- ♦Light source: 1×60WLED (customized light source)
- ♦Maximum power: 60W
- ♦Color temperature: 2200K
- ♦Control mode: self-propelled/master-slave online/DMX512
- ♦DMX channel: 1CH
- ♦Data connection: 3Pin+5 Pin XLR
- ♦Display: LCD screen
- ♦Installation method: tripod support / lamp hook hanging / base on the ground
- ♦Net weight: 2.3 kg,
- ♦Size: 236*175*130MM
- ♦Packing: carton (1 pack of 6)
- ♦Outer box packing size: 84*48*21cm



1PCS RGB Retro Light AL-TT60RGBLED

- ♦Working voltage: 110-240V/50-60HZ
- ♦Light source: 1×60WLED (customized light source)
+18*0.5WRGB LED
- ♦Maximum power: 80W
- ♦Color temperature: 2200K+RGB
- ♦Control mode: self-propelled/master-slave online/DMX512
- ♦DMX channel: 1CH
- ♦Data connection: 3Pin+5 Pin XLR
- ♦Display: LCD screen
- ♦Installation method: tripod support / lamp hook hanging / base on the ground
- ♦Net weight: 2.4 kg
- ♦Size: 236*175*130MM
- ♦Packing: carton (1 pack of 6)
- ♦Outer box packing size: 84*48*21cm

Halogen Retro Light Series




7PCS Halogen Retro Light AL-TT700

- ♦Work voltage : 220V/50-60HZ
- ♦Light source : 7×300W Halogen lamps (philips)
- ♦Power consumption : 2100W
- ♦Color temperature : 1900-5600K
- ♦Control Mode : Auto-run , Master-Slave ,DMX control
- ♦DMX channel : 1CH/6CH /7CH-Pixel
- ♦DMX connector : 3/5 pin XLR connector (selected)
- ♦Color LCD display
- ♦Installation : tripod stand /Hang on /Put on the base
- Shape : hexagonal/ Circle (selected)
- Reflector Bowl Color : Golden /Silver(selected)
- Shell Color : Black(standard)/White (customized)
- ♦Packing Carton/1pcs , Flight case/2pcs
- ♦Size : 966*860*170MM
- ♦G.W : 12.5KG



6PCS Halogen Retro Light AL-TT600

- ♦Work voltage : 220V/50-60HZ
- ♦Light source : 6×300W Halogen lamps (philips)
- ♦Power consumption : 1800W
- ♦Color temperature : 1900-5600K
- ♦Control Mode : Auto-run , Master-Slave ,DMX control
- ♦DMX channel : 1CH/6CH /6CH-Pixel
- ♦DMX connector : 3/5 pin XLR connector (selected)
- ♦Color LCD display
- ♦Installation : Hang on / Put on the base
- Shape : hexagonal/ Circle (selected)
- Reflector Bowl Color : Golden /Silver(selected)
- Shell Color : Black(standard)/White (customized)
- ♦Size : 153*320*410MM
- ♦G.W : 7.7KG



3PCS Halogen Retro Light AL-TT300

- ♦Work voltage : 220V/50-60HZ
- ♦Light source : 3×300W Halogen lamps (philips)
- ♦Power consumption : 900 W
- ♦Color temperature : 1900-5600K
- ♦Control Mode : Auto-run , Master-Slave ,DMX control
- ♦DMX channel : 1CH/3CH
- ♦DMX connector : 3/5 pin XLR connector (selected)
- ♦Color LCD display
- ♦Installation : stand
- ♦ Reflector Bowl Color : Golden /Silver(selected)
- Shell Color : Black(standard)/White (customized)
- ♦Size : 450*350*161MM
- ♦G.W : 3.5KG



7PCS Halogen Mini Retro Light AL-TT100

- ♦Work voltage : 220V/50-60HZ
- ♦Light source : 7×100W Halogen lamps (philips)
- ♦Power consumption : 700 W
- ♦Color temperature : 1900-5600K
- ♦Control Mode : Auto-run , Master-Slave , DMX control
- ♦DMX channel : 1CH/6CH /7CH
- ♦DMX connector : 3/5 pin XLR connector (selected)
- ♦Color LCD display
- ♦Installation : Tripod stand /Hang on /Base
- ♦ Reflector Bowl Color : Golden /Silver(selected)
- ♦45.6 x 52 x13 CM
- ♦7.65KG

LED Par Light Series

AL-90D



AL-36RGBW



AL-740RGBA



AL-371



AL-374



AL-400RGB



AL-200B



90Pcs 4 IN 1 Par

AL-90D

- ♦Lamp beads: 90pcs, 2W4in1 LED
- ♦Angle: 25°
- ♦Voltage: AV110-240V
- ♦Power: 180W
- ♦DMX 3/5PINS (optional)
- ♦Powecon:Input/Output
- ♦DMX Channels: 6CH/9CH/20CH/25CH
- ♦Size: L386*346*165mm
- ♦Net weight: 3.75 kg
- ♦Packing: carton (1 pack of 6)
- ♦Carton packing size: 86.5*61*40cm



7X30W RGBW Par

AL-730RGB

- ♦Lamp beads: 7pcs, 30W3in1 LED
- ♦Angle: 25°
- ♦Voltage: AV110-240V
- ♦Power: 210W
- ♦DMX 3/5PINS (optional)
- ♦Powecon:Input/Output
- ♦DMX Channels: 3/5/21/25CH
- ♦Size: L386*346*165mm
- ♦Net weight: 3.75 kg
- ♦Packing: carton (1 pack of 6)
- ♦Carton packing size: 86.5*61*40cm



36Pcs 4 IN 1 Par

AL-36A

- ♦Lamp beads: 36pcs, 3W4in1 LED
- ♦Angle: 25°
- ♦Voltage: AV110-240V
- ♦Power: 110W
- ♦DMX 3/5PINS (optional)
- ♦Powecon:Input/Output
- ♦DMX Channels: 4CH/7CH
- ♦Size: L386*346*165mm
- ♦Net weight: 3.45 kg
- ♦Packing: carton (1 pack of 6)
- ♦Carton packing size: 86.5*61*40cm



37Pcs Beam PAR

AL-371

- ♦Lamp beads: 37pcs, 5W CREE LED
- ♦Angle: 3°
- ♦Voltage: AV110-240V
- ♦Power: 185W
- ♦DMX 3/5PINS (optional)
- ♦Powecon:Input/Output
- ♦DMX Channels: 1CH/2CH
- ♦Net weight: 3.5 kg
- ♦Packing: carton (1 pack of 4)
- ♦Carton packing size: 85*53*41CM



37Pcs Beam PAR (RGBW)

AL-374

- ♦Lamp beads: 37pcs, 5W RGBW
- ♦Angle: 3°
- ♦Voltage: AV110-240V
- ♦Power: 185W
- ♦DMX 3/5PINS (optional)
- ♦Powecon:Input/Output
- ♦DMX Channels: 4CH/6CH
- ♦Net weight: 3.5 kg
- ♦Packing: carton (1 pack of 4)
- ♦Carton packing size: 85*53*41CM



400W COB RGB 2in1 PAR AL-400



- ♦Lamp beads: 1pcs, 300W COB+8PCS LUXEON
- ♦Angle: 57°
- ♦Voltage: AV110-240V
- ♦Power: 400W
- ♦DMX 3/5PINS (optional)
- ♦Powecon:Input/Output
- ♦DMX Channels: 1CH/2CH/4CH
- ♦Size: L386*346*165mm
- ♦Net weight: 10.5 kg


IP65 200W Audience Light AL-200B



- ♦Lamp beads: 1PCS, 200W + warm white two-in-one LED module
- ♦Angle: 60°
- ♦Voltage: AV110-240V
- ♦Power: 160W
- ♦DMX 3/5PINS (optional)
- ♦Powecon:Input/Output
- ♦DMX Channels: 4CH/6CH
- ♦Size: L283*261*152mm
- ♦Net weight: 4.8 kg

LED Matrix Light Series

AL-DB530

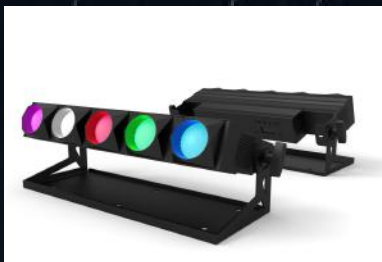


AL-YT640



AL-1040B



AL-DB1030

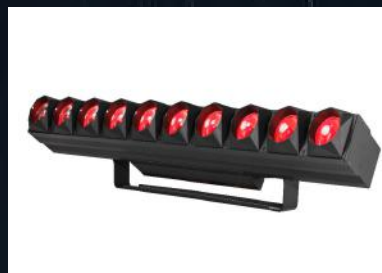

AL-YT1240



AL-1040A





6X40W Moving Beam Bar with Zoom AL-YT640

- ◆Voltage: AC90-240V, 50/60Hz
- ◆Power: 260W
- ◆LED light source: 6pcs 40W high brightness four in one lamp beads
- ◆Control channel: 6/13/21/26/33CH
- ◆Control mode: self-propelled, DMX512, master-slave, voice control
- ◆Display: LCD liquid crystal display
- ◆Smooth 0-100% linear dimmer
- ◆Beam angle: 5-45 degrees
- ◆Size: 670x180x350mm
- ◆Net weight: 8.5kg

12X40W Moving Beam Bar with Zoom AL-YT1240

- ◆Voltage: AC90-AC240 50-60HZ
- ◆Number of lamp beads: 12 pieces of 40w high brightness four-in-one lamp beads
- ◆Light source life: average 50000 hours
- ◆Dimming: 0-100% linear dimming
- ◆Maximum power: 580W
- ◆Y axis: 220°+16 bit smooth, high-precision rotation
- ◆Strobe: 1-25 times/sec
- ◆Zoom angle: 5°-35°
- ◆Control signal: DMX512, master-slave, voice control, self-propelled
- ◆Control channel: 20/57CH
- ◆Lamp body size: 102*10.75*26.6cm
- ◆Net weight: 15KG



Led Matrix Beam Bar (5*30W)

AL-DB530

- ◆Working voltage: 110-240V/50-60HZ
- ◆Power: 160W
- ◆Light source: 5PCS 30W RGBW LED (Osram)
- ◆Beam angle: 4°
- ◆Control mode: self-propelled/master-slave connection/DMX512/voice control
- ◆DMX channel: 4CH/6CH /8CH/20CH
- ◆Data connection: 3Pin+5 Pin XLR
- ◆Size: 500*85*232cm
- ◆Net weight: 4 kg



Led Matrix Beam Bar (10*30)

AL-DB1030

- ◆Working voltage: 110-240V/50-60HZ
- ◆Power: 310W
- ◆Light source: 10PCS 30W RGBW LED (Osram)
- ◆Beam angle: 4°
- ◆Control mode: self-propelled/master-slave connection/DMX512/voice control
- ◆DMX channel: 4CH/7CH /40CH
- ◆Data connection: 3Pin+5 Pin XLR
- ◆Size: 1000*85*232cm
- ◆Net weight: 6.8 kg



10X40W Moving Beam Bar with Zoom AL-1040B



- ◆Input voltage: AC90-AC240 50-60HZ
- ◆Number of lamp beads: 10pcs 40w high brightness four in one lamp beads
- ◆Light source life: average 50000 hours
- ◆Dimming: 0-100% linear dimming
- ◆Maximum power: 580W
- ◆Y axis: 220°+16 bit smooth, high-precision rotation
- ◆Strobe: 1-25 times/sec
- ◆Zoom angle: 5°-35°
- ◆Control signal: DMX512, master-slave, voice control, self-propelled



10X40W Moving Beam Light AL-1040A

- ◆Voltage: AC110-240V 50 / 60Hz
- ◆Maximum power: 450W
- ◆LED light source: 10 pieces of 40W four-in-one high-brightness lamp beads
- ◆Beam power: 3 degrees
- ◆Life: 50000 hours
- ◆Strobe: 0-20 times/S
- ◆Dimming: 0-100% linear dimming
- ◆Channel: 13CH/53CH-point control mode
- ◆Control mode: DMX512, self-propelled, manual, voice control
- ◆Working environment: 0-40°C
- ◆Protection level: IP20
- ◆Cooling system: fan forced cooling system
- ◆Lamp size: 1100 * 175 * 87mm
- ◆Net weight: 7.9KG

LED Dance Floor Series

AL-8450



AL-8451



AL-8447



Led Starlit Dance Floor(white LEDs)

AL-8450



- ◆Input Voltage: AC90-240
- ◆Output Voltage: 36V
- ◆Power Supply: Meanwell power supply
- ◆Size per panel: 2ft*2ft and 2ft*4ft
- ◆Watt: 4W
- ◆LED QTY: 16 pieces(2ft*2ft) 32 pieces (2ft*4ft) of SMD5050 replaceable led lamps.
- ◆Effect: Twinkling (the speed can be adjusted by wireless remote)
- ◆Weight : 7KG (2ft*2ft) 14KG (2ft*4ft)
- ◆This floor required power supply,controller and edges.So contact us for more information.



Wireless Digital Dance Floor

AL-8447



- ◆Power Supply: AC90V-250V, 50/60HZ
- ◆LED Quantity (pcs/unit): 64pcs
- ◆Max.power:30W
- ◆Input voltage:AC90 ~ 245V
- ◆Output voltage:DC12V
- ◆Net weight:8.8KG
- ◆Resolution (L*W):8*8
- ◆Supporting weight:300KG/m2
- ◆Protection Level Front : IP65 Back:IP54
- ◆Cover Material:Tempered glass
- ◆Life span ≥30 , 000 hours
- ◆Working temperature: -20~ +60°C
- ◆Isolating Grade:CLASSE II
- ◆Control mode:SD Control & PC control
- ◆Dimension(mm):L500*W500*H70mm



Led Starlit Dance Floor(RGB LEDs)

AL-8451



- ◆Input Voltage: AC90-240
- ◆Output Voltage: 36V
- ◆Size per panel: 2ft*2ft and 2ft*4ft
- ◆Watt: 4W
- ◆LED QTY: 16 pieces(2ft*2ft) 32 pieces (2ft*4ft) RGB Tri-color SMD5050 replaceable LED.
- ◆Function: 16 functions.
- ◆Weight : 7KG (2ft*2ft) 14KG (2ft*4ft)
- ◆This floor required power supply,controller and edges.So contact us for more information.




P10cm Led Pixel Dance Floor

AL-8449



- ◆Product Size: 60x60x3cm
- ◆Power consumption:15W
- ◆LEDs Source: 36 pcs of SMD5050 LEDs
- ◆Working Temperature: -10°C - 60°C
- ◆Lifespan of LED: 5000h
- ◆Control mode: DMX ,Auto Run,PC controlled
- ◆IP Rate:IP54
- ◆DMX Channel : 8 CH
- ◆N.W. :9KG
- ◆G.W. :10KG



Led Wireless 3D Dance Floor

AL-8448

- ◆Control mode: DMX512 console、 SD controller (with DMX、 sound control、 audio control、 remote control)
- ◆Input Signal: DMX512
- ◆Dimension(mm): L600*W600*H70mm
- ◆Light source: RGB 3 IN 1
- ◆Max power consumption: 15W
- ◆Input voltage: DC27V
- ◆Net weight: 8.5KG
- ◆Surface material: Tempered glass
- ◆Based material: metal
- ◆Bearing weight :300KG/m2
- ◆Protection grade :IP55
- ◆Visual angle: 160°
- ◆Working temperature: -20~ +45°C
- ◆Lifespan: ≥50 , 000hours



Led Wireless color changing Dance Floor

AL-8446

- ◆Control mode: DMX512 console、 SD controller (with DMX、 sound control、 audio control、 remote control)
- ◆Input Signal: DMX512
- ◆Dimension(mm): L600*W600*H70mm
- ◆Light source: RGB 3 IN 1
- ◆Max power consumption: 15W
- ◆Input voltage: DC27V
- ◆Net weight: 8.5KG
- ◆Surface material: PP board
- ◆Based material: metal
- ◆Bearing weight :300KG/m2
- ◆Protection grade :IP55
- ◆Visual angle: 160°
- ◆Working temperature: -20~ +45°C
- ◆Lifespan: ≥50 , 000hours





广州安明利光电科技有限公司

Anmingli Stage Lighting Manufacturer Co.,Ltd