
Machine control system

Automation cell with servo axes, camera and field I/O

Customer	Customer name
Company	Company name
Drawing no.	DOC-0001
Date	10/31/2026
Drawn	XX
Revision	0
Number of pages	51

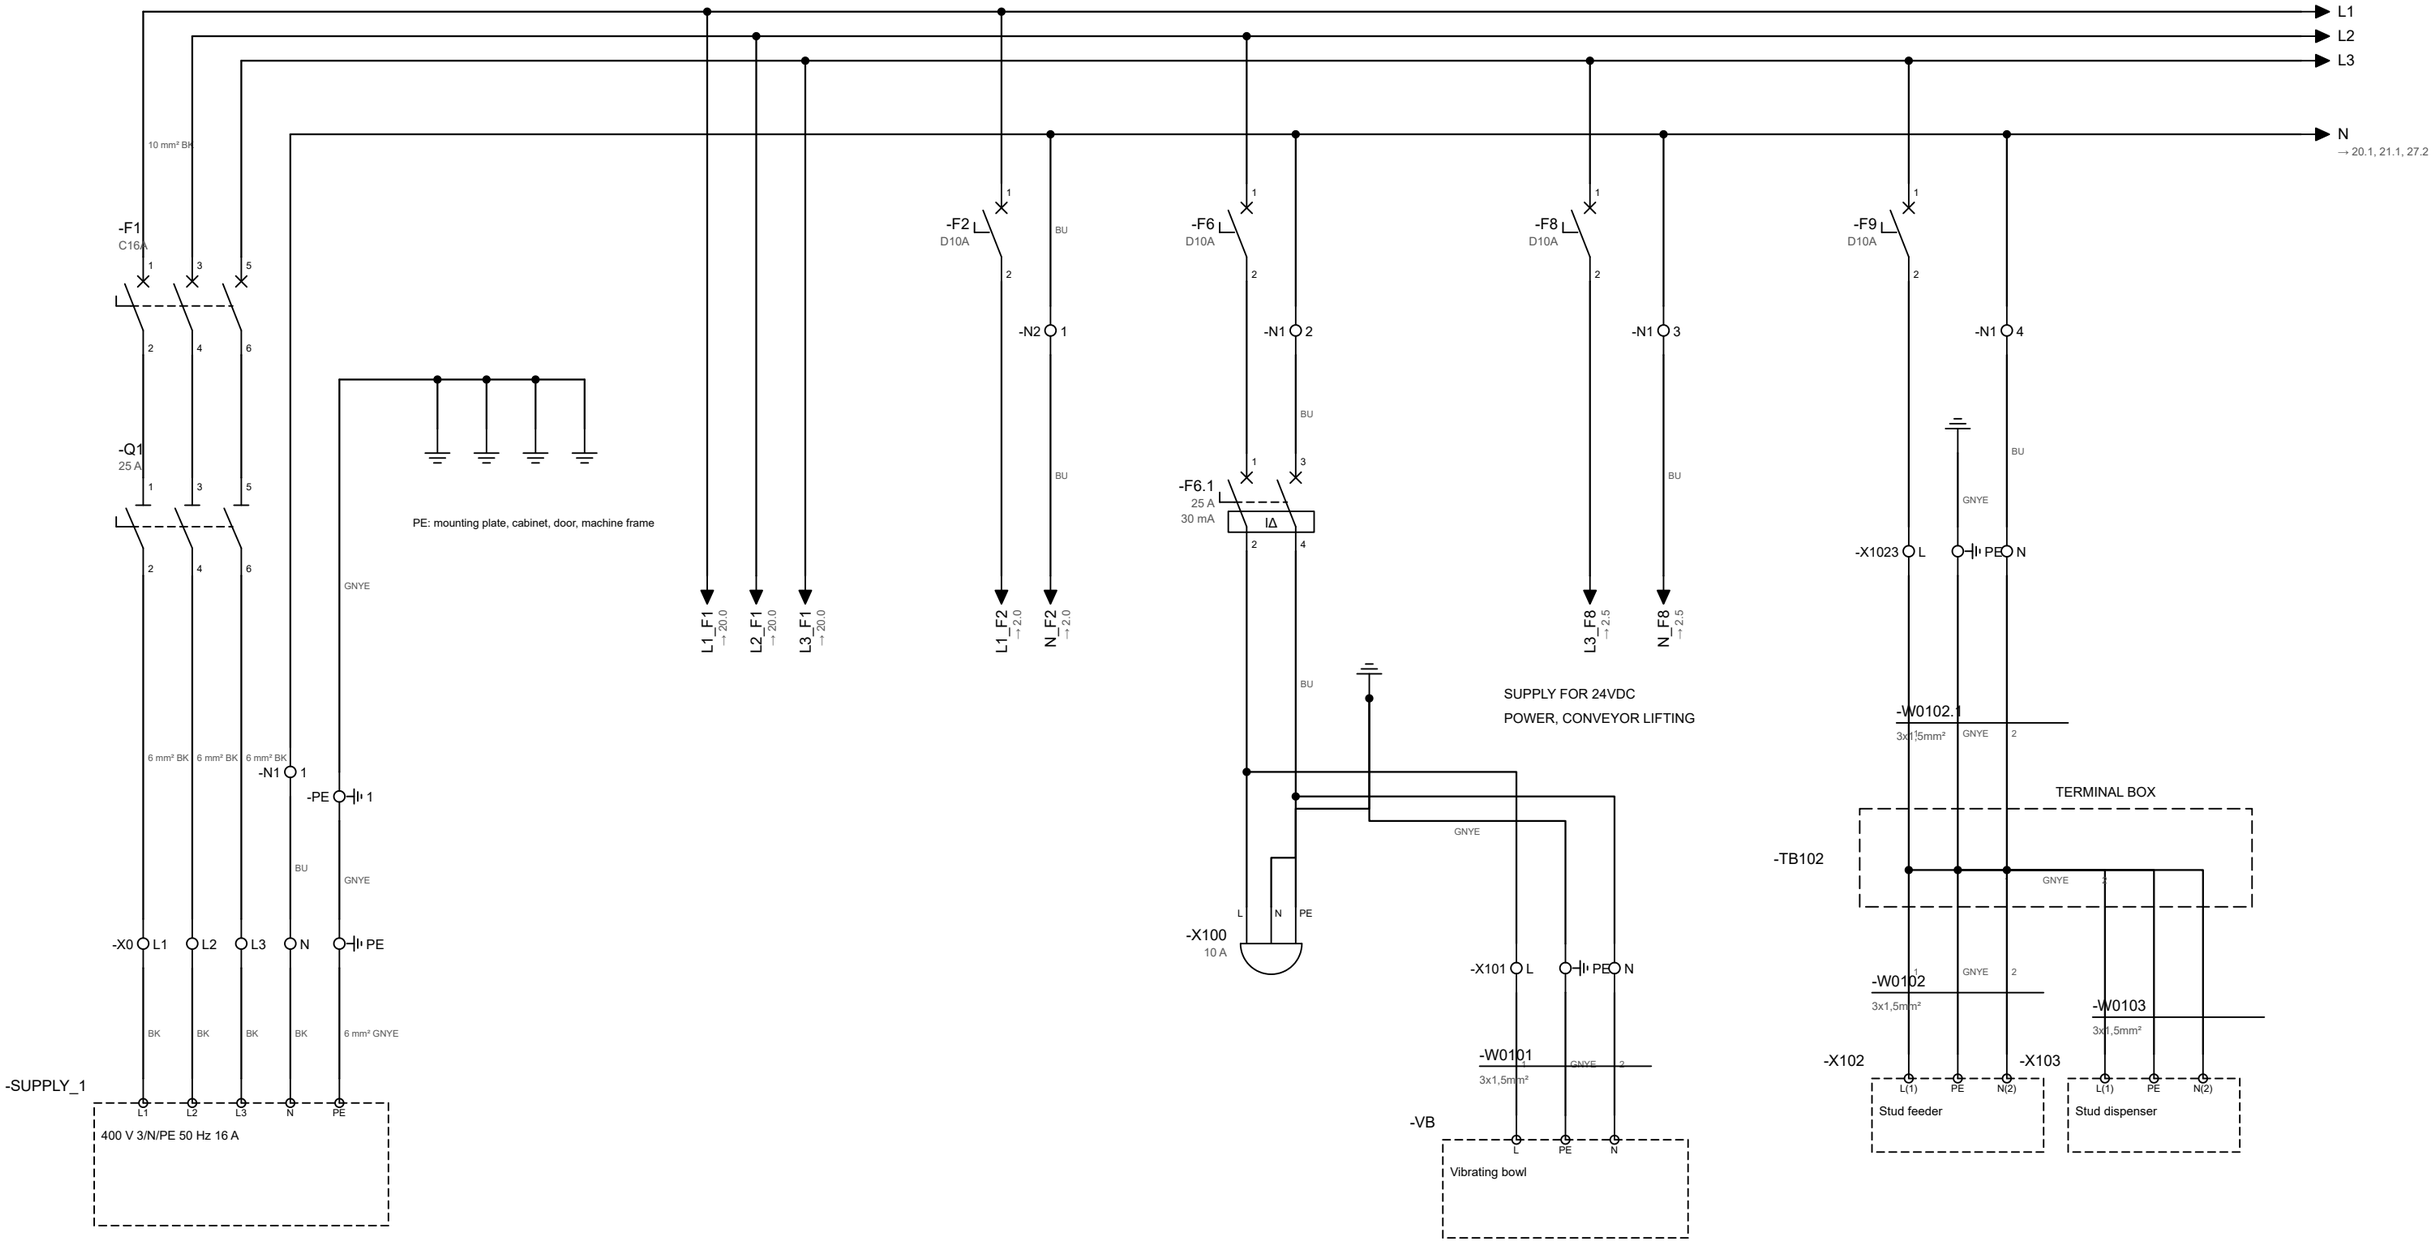

POWER SUPPLY 400VAC, N, PE 16A 50Hz

SUPPLY FOR SERVO

SUPPLY FOR 24VDC
POWER AND UPS

SERVICE SOCKET AND
CABINET LED LIGHT

VIBRATING BOWL

STUD FEEDER OUTSIDE
THE CABINET

STUD DISPENSER
OUTSIDE THE CABINET

	Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Power supply** Customer Customer name	Date 10/31/2026	Function = =AT	Drawing no. DOC-0001
				Drawn XX	Location + +CP	Page **1**
				Approved YY	Revision 0	Sheet 2 / 51

24VDC POWER SUPPLY AND UPS

L1_F2
→ 1.4

N_F2
→ 1.4

BU

GNYE

L N PE

-G1
20 A
24 V DC

~ =

\+ −

2,5 mm² DBU

-G2

IN:+ IN:-

UPS control module 24 V DC

OUT:+ OUT:- X2:2 X2:1 BAT:+ BAT:-

2,5 mm² DBU

-BAT

X2:12 X2:11 X1:+ X1:-

UPS battery module

2,5 mm² DBU

-X5 1 2

L+ G2
3.0, 3.9, 3.1.0
→

M_G2
3.0, 3.9, 3.1.0
→

TERMINAL STRIP X5 RESERVED FOR 24VDC DISTRIBUTION

L3_F8
→ 1.6

N_F8
→ 1.6

BU

GNYE

L N PE

-G3
10 A
24 V DC

~ =

\+ −

2,5 mm² DBU

1

-F8.1
D10A

2

L+ LIFTER
→ 61.3


M LIFTER
→ 61.3

24VDC SUPPLY FOR
CONVEYOR LIFTING

Company **Company name** Street 1, City	Project **Machine control system**	Page title **24VDC Supply**	Date 10/31/2026	Function = =AT	Drawing no. DOC-0001
	Description Automation cell with servo axes, camera and field I/O		Drawn XX	Location + +CP	Page **2**
		Customer Customer name	Approved YY	Revision 0	Sheet 3 / 51

0	1	2	3	4	5	6	7	8	9

24VDC DISTRIBUTION

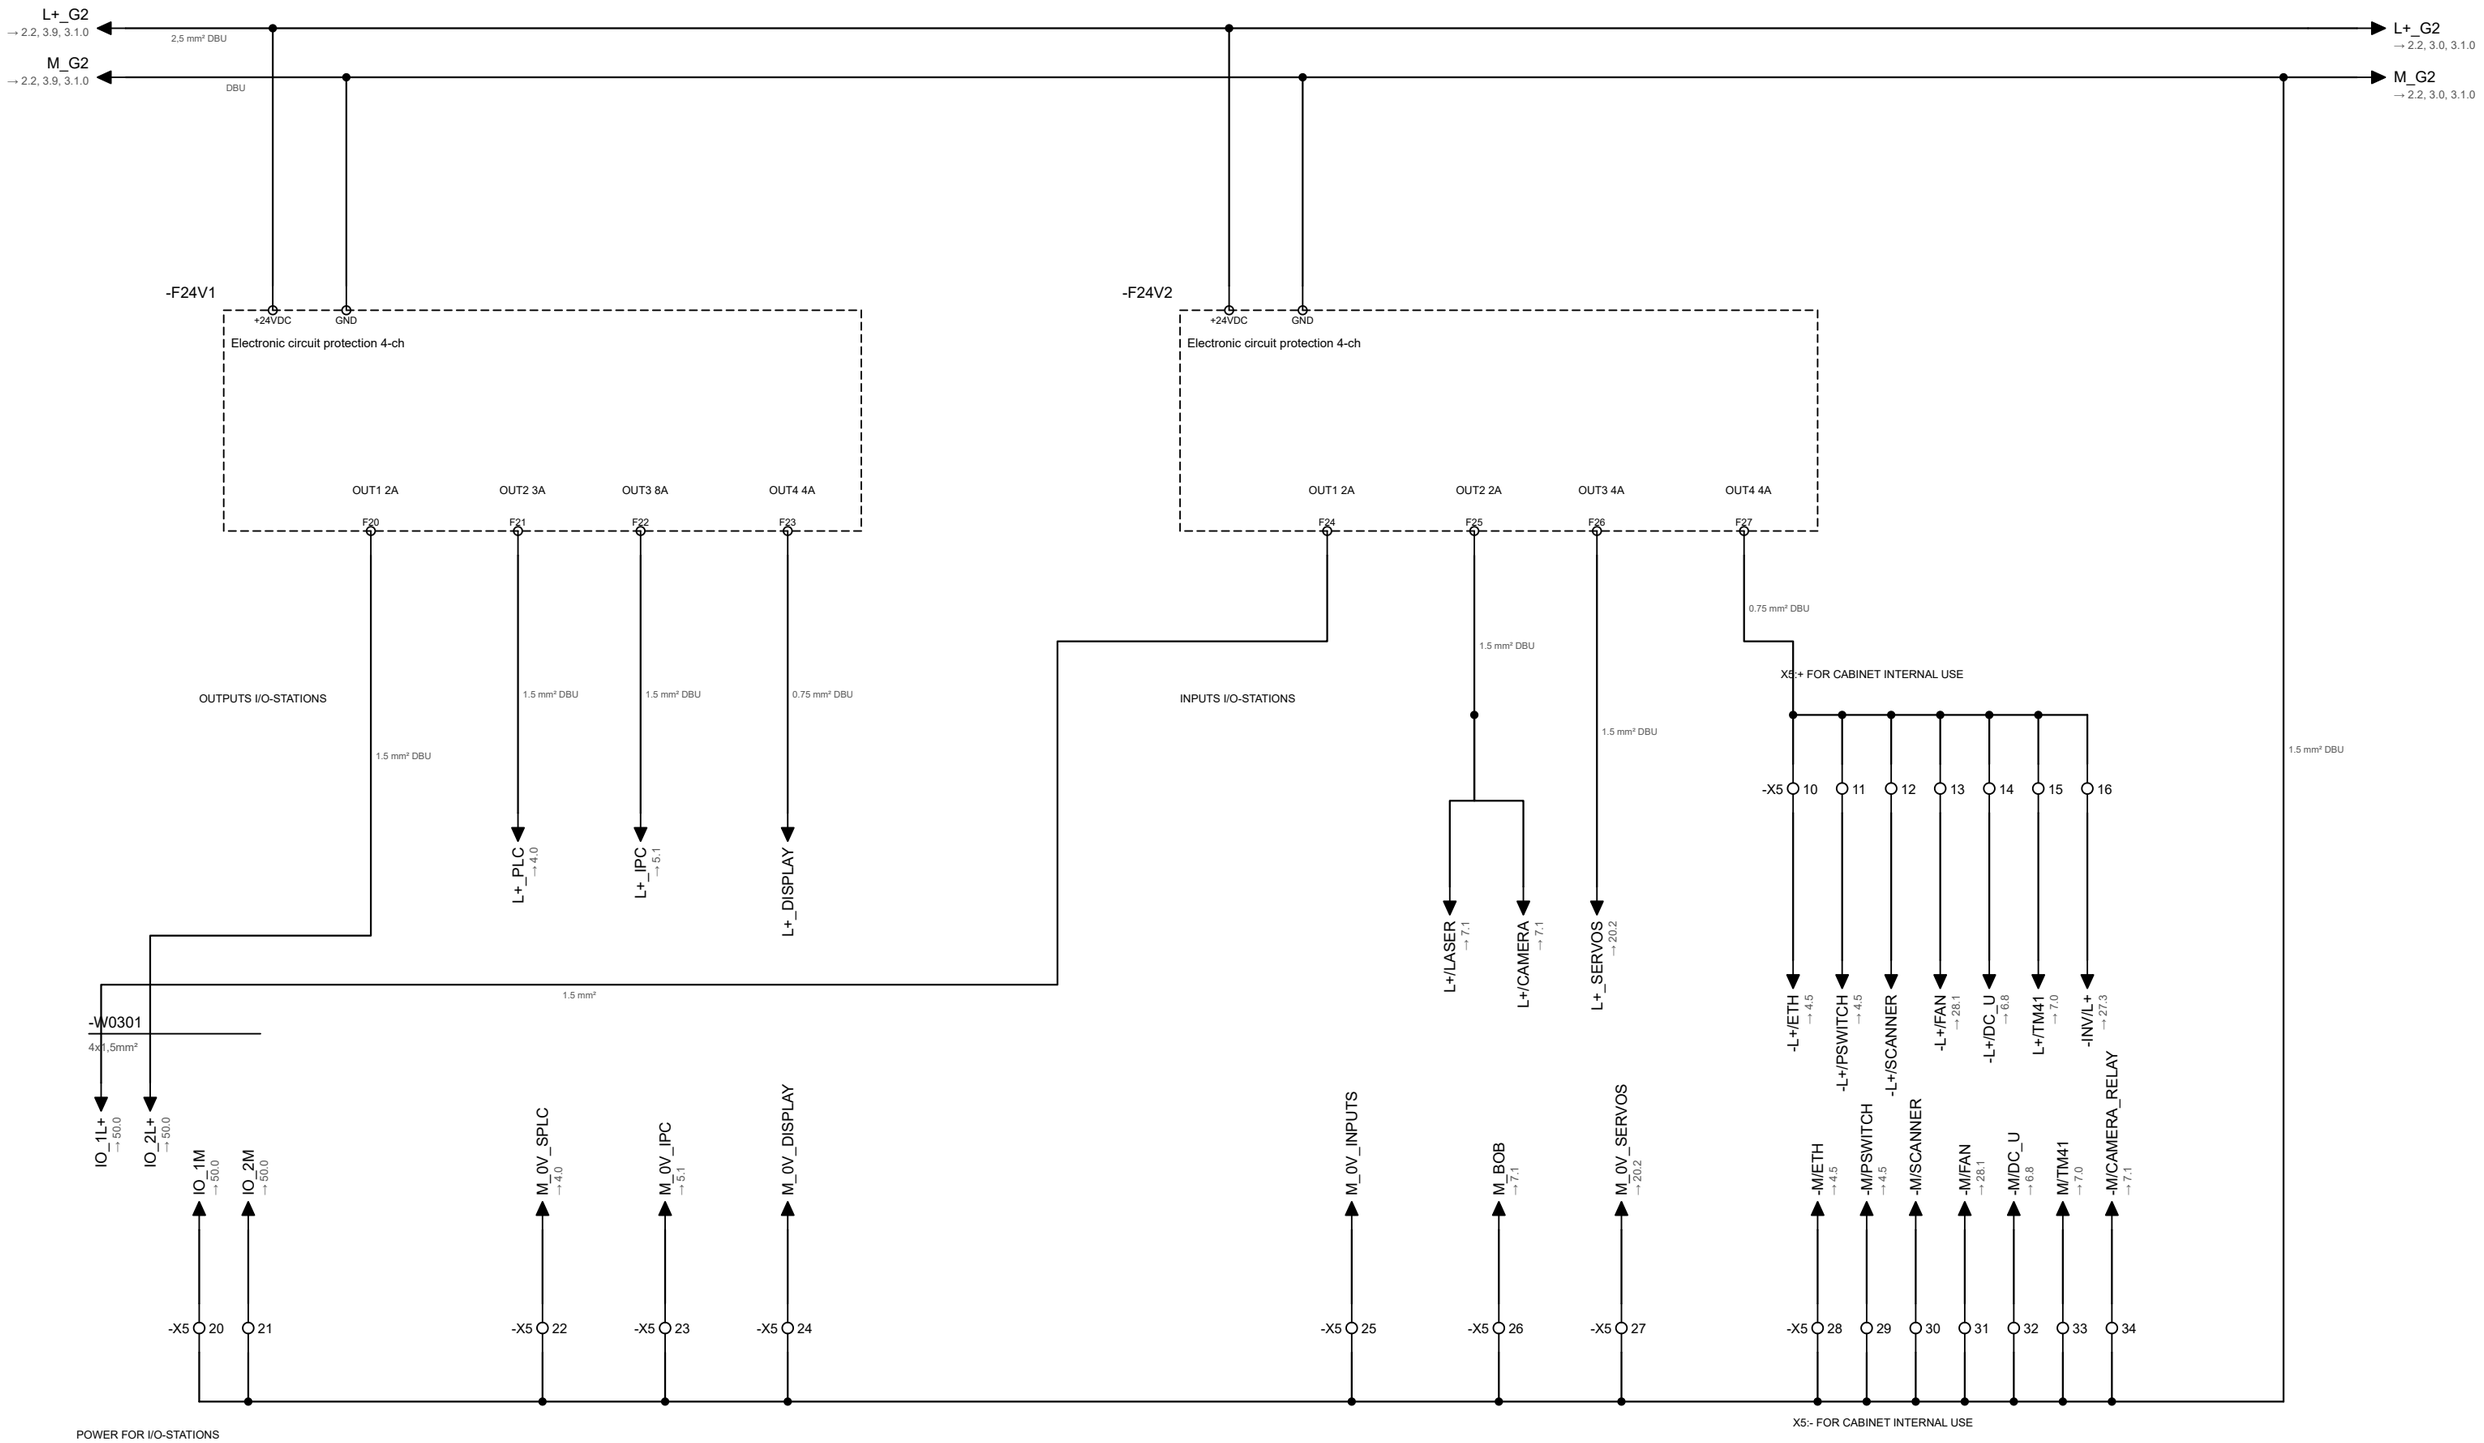

Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **24VDC Distribution** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +CP Revision 0	Drawing no. DOC-0001 Page **3** Sheet 4 / 51

24VDC DISTRIBUTION FOR EXTERNAL SAFETY SYSTEM

L+_G2
→ 2.2, 3.0, 3.9

M_G2
→ 2.2, 3.0, 3.9

2,5 mm² DBU

DBU

-F24V3
Electronic circuit protection 4-ch
+24VDC
GND
OUT1 2A
OUT2 2A
OUT3 4A
OUT4 4A
F28
F29
F30
F31

CP-CABINET

MACHINE FRAME TOP

TB2 FOR EXTERNAL SAFETY SYSTEM

-TB2
-X1 1 2 3 4
-X1 5 6
-X1 7 8
-X1 9 10
-X1 11 12
-X1 13
-X1 14 15

-W0311
4x0,75mm² BN BK BU WH
IM2_1L+ → 51.1.0
IM2_2L+ → 51.1.0
IM2_1M → 51.1.0
IM2_2M → 51.1.0
POWER FOR I/O-STATION IM2

-WA701
4x0,34mm² BN BU
-A701
1 3
Safety light curtain transmitter

-WA705
4x0,34mm² BN BU
-A705
1 3
Safety light curtain transmitter


-WA707
4x0,34mm² BN BU
-A707
1 3
Safety light curtain transmitter

-WBAR_1
4x0,34mm² BN BU
-BAR_1
1 3
Barcode reader
ETH
-ETH/BARC → 4.7


SPARE_F30

-WPC2
2x0,75mm² RD BU
-PC2
L+24VDC M(0V)
Integrated PC / display
ETH
-ETH/PC2 → 4.7

	Company: **Company name**, Street 1, City	Project: **Machine control system**	Page title: **24VDC Distribution 2**	Date: 10/31/2026	Function =: =AT	Drawing no.: DOC-0001
		Description: Automation cell with servo axes, camera and field I/O		Drawn: XX	Location +: +CP	Page: **3.1**
			Customer: Customer name	Approved: YY	Revision: 0	Sheet: 5 / 51

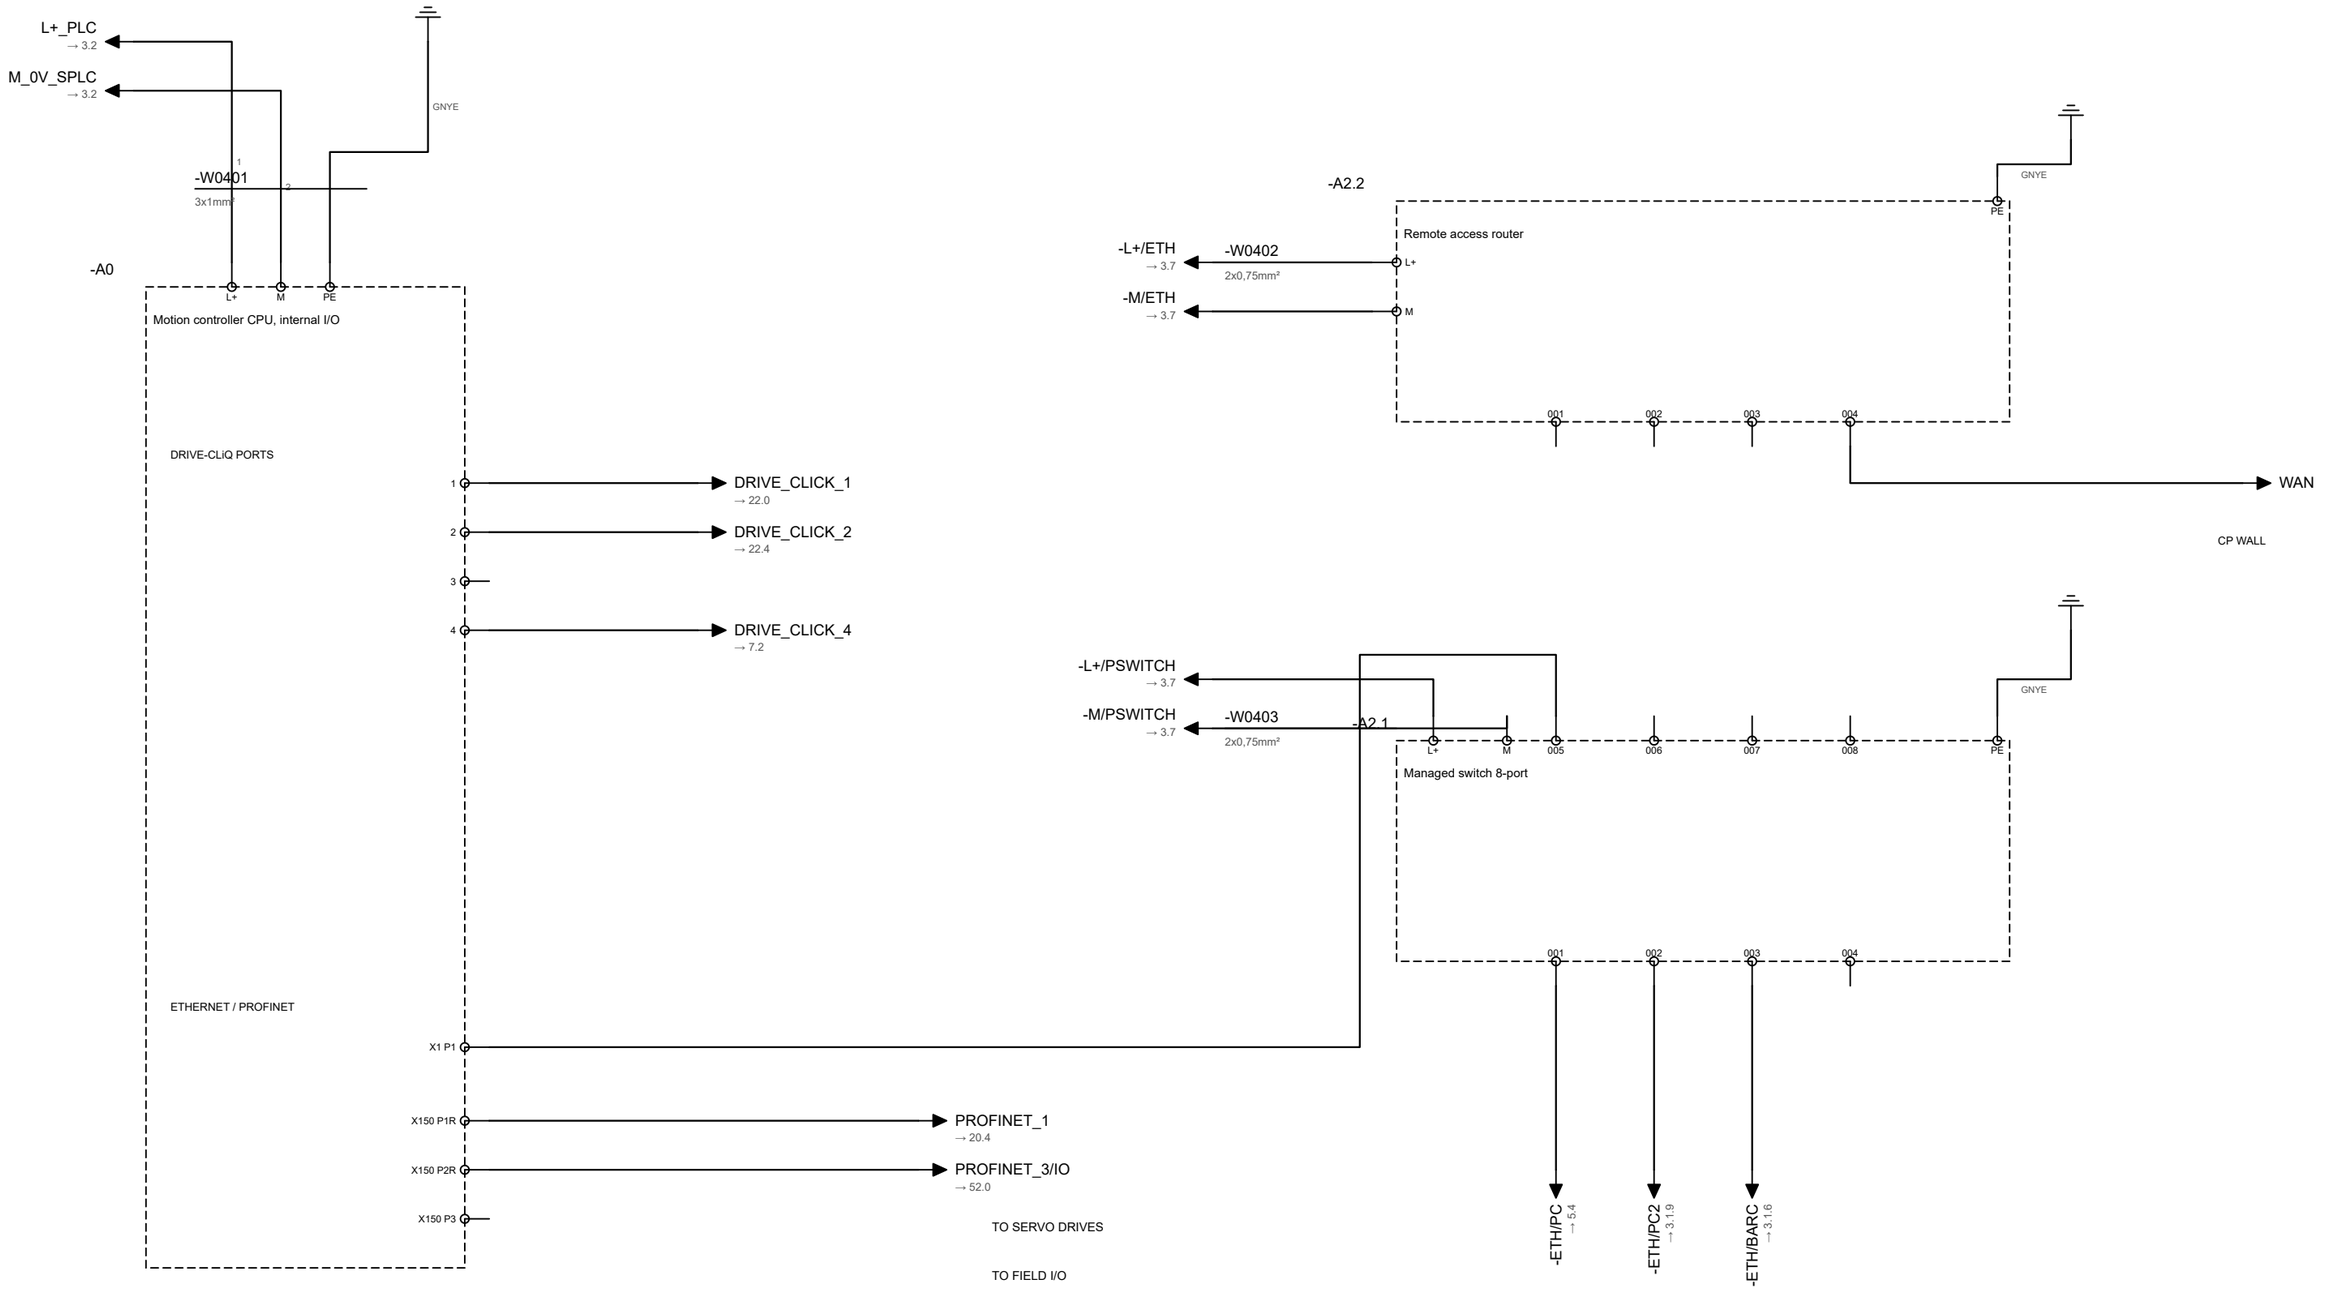


	Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **24VDC Distribution PLC** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +CP Revision 0	Drawing no. DOC-0001 Page **4** Sheet 6 / 51

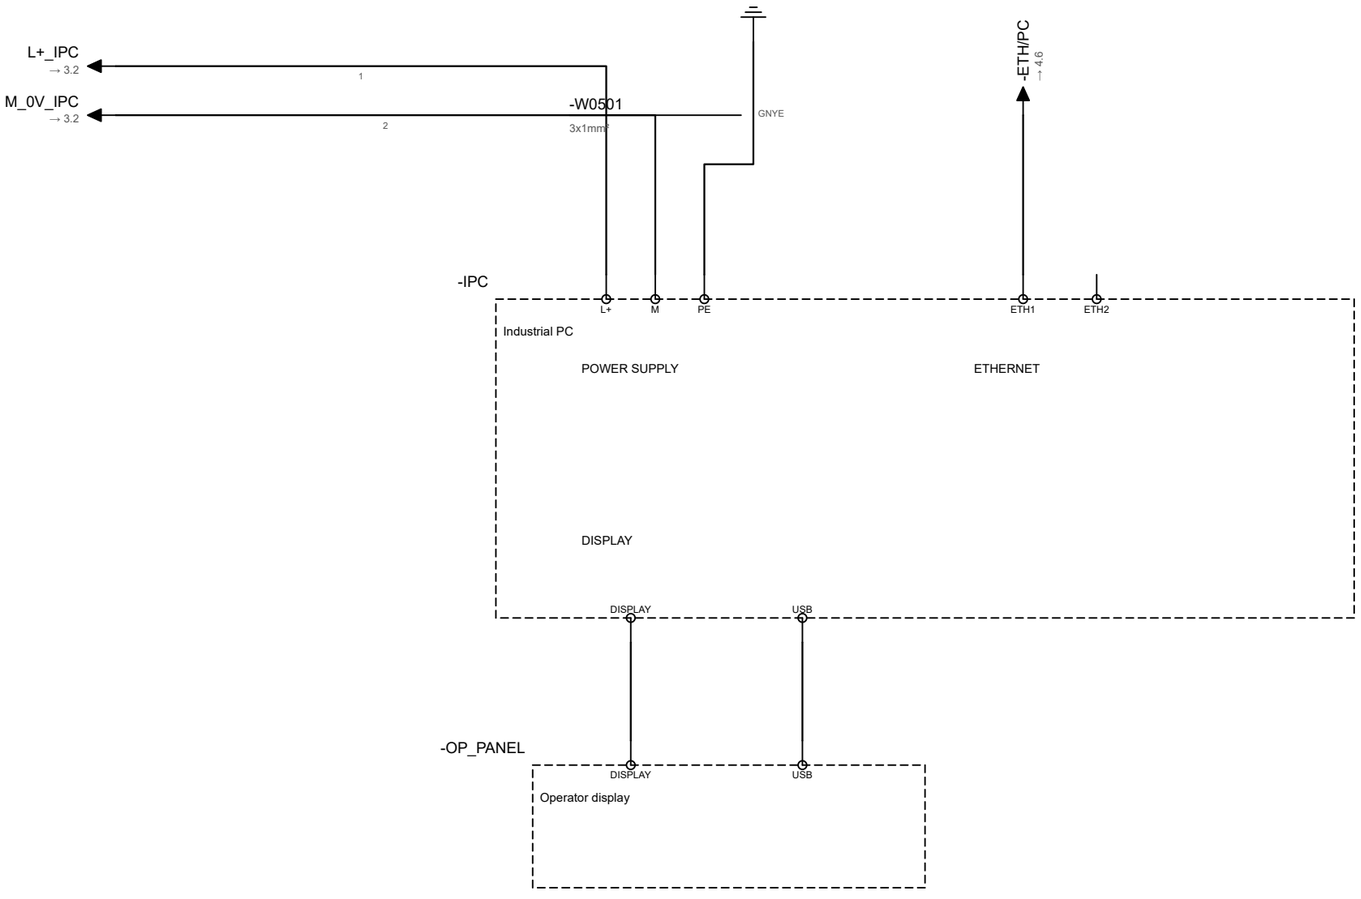


Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **IPC** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +CP Revision 0	Drawing no. DOC-0001 Page **5** Sheet 7 / 51


INTERNAL I/O OF CPU AND DC-UNIT

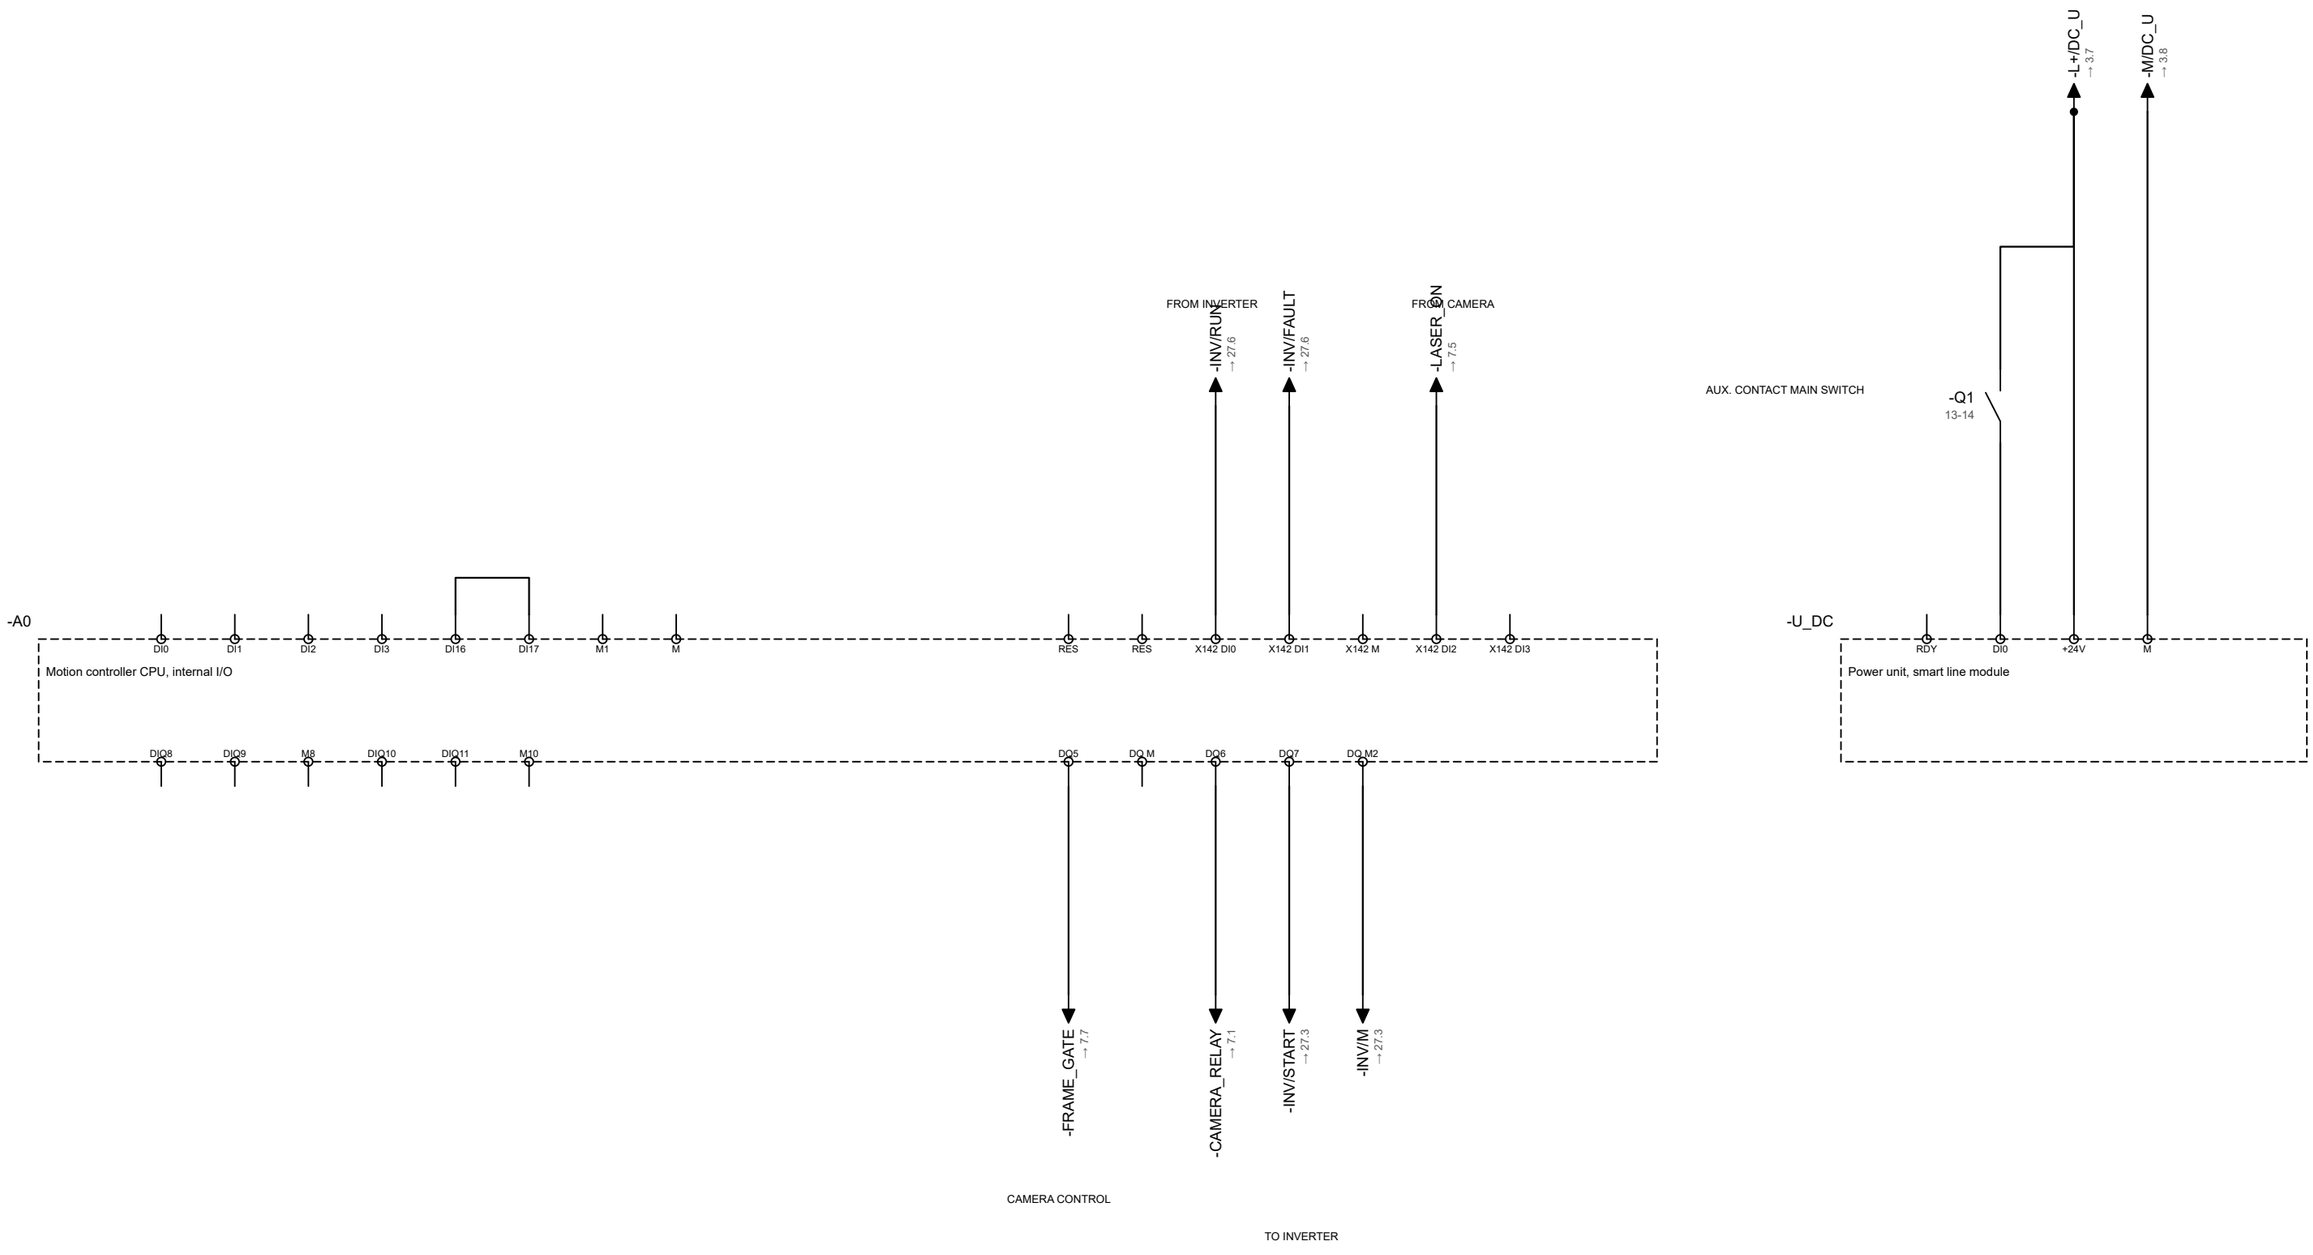


Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **CPU Internal I/O** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +CP Revision 0	Drawing no. DOC-0001 Page **6** Sheet 8 / 51

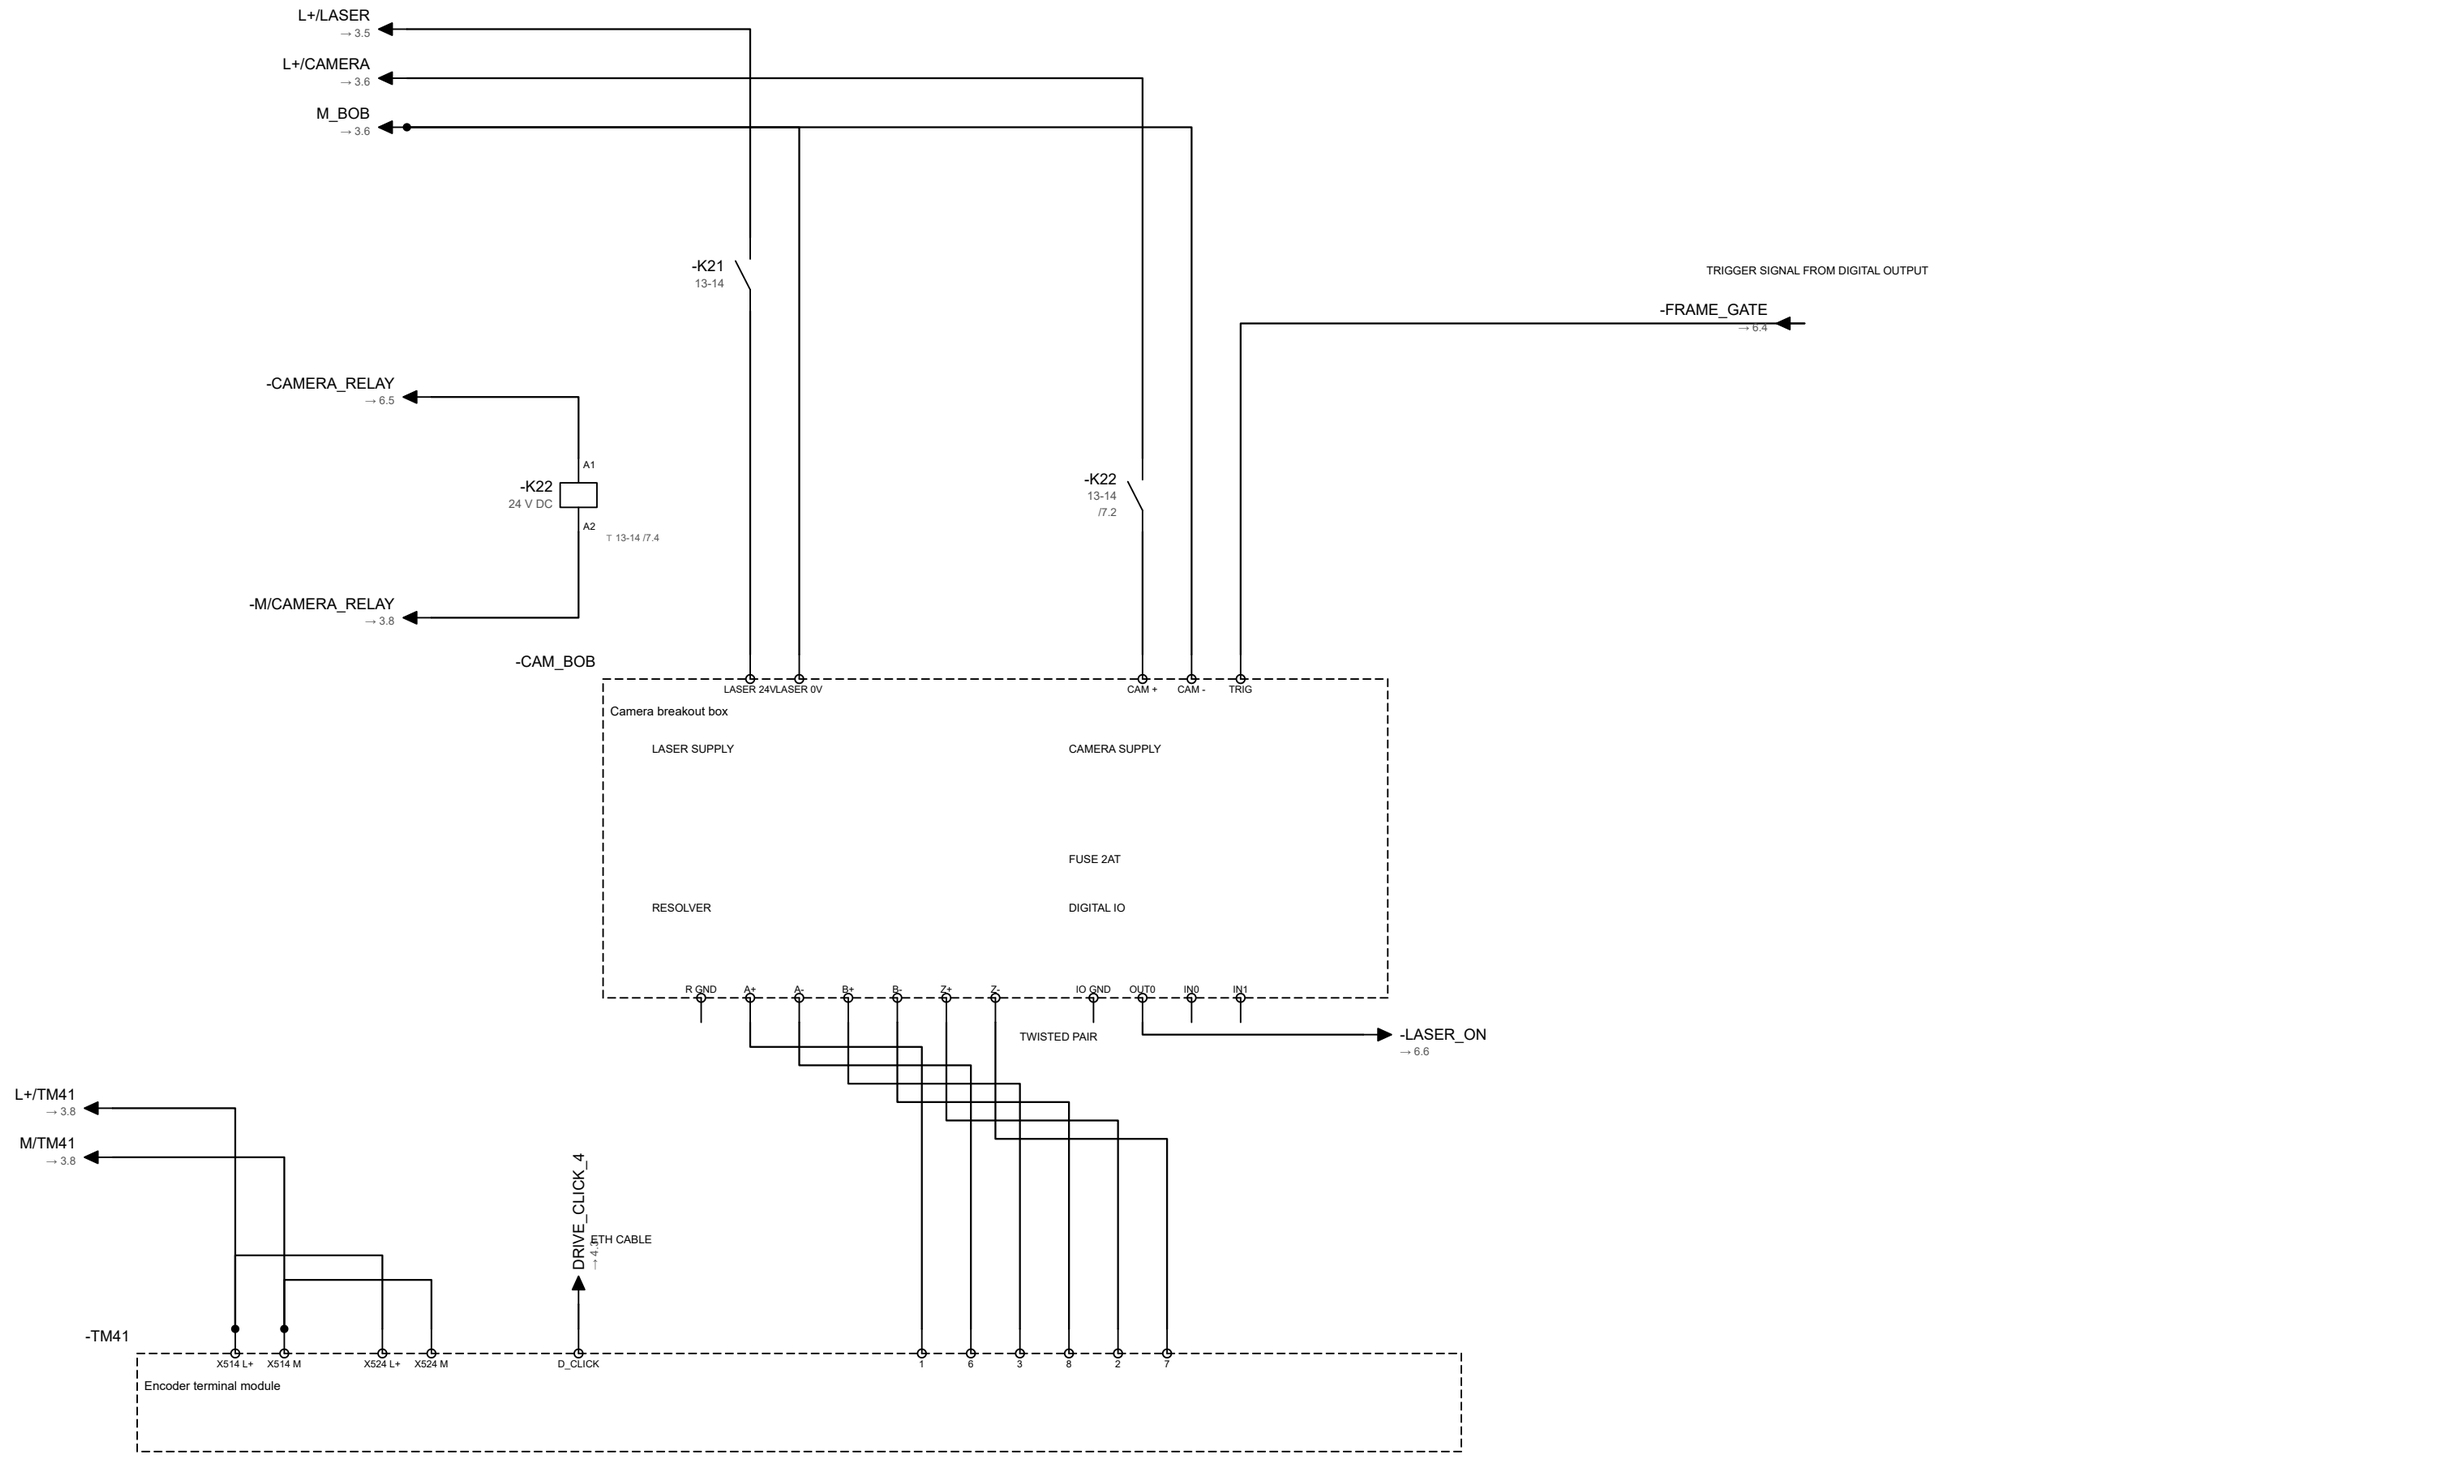


	Company **Company name** Street 1, City	Project **Machine control system**	Page title **Camera Control**	Date 10/31/2026	Function = =AT	Drawing no. DOC-0001
		Description Automation cell with servo axes, camera and field I/O		Drawn XX	Location + +CP	Page **7**
			Customer Customer name	Approved YY	Revision 0	Sheet 9 / 51

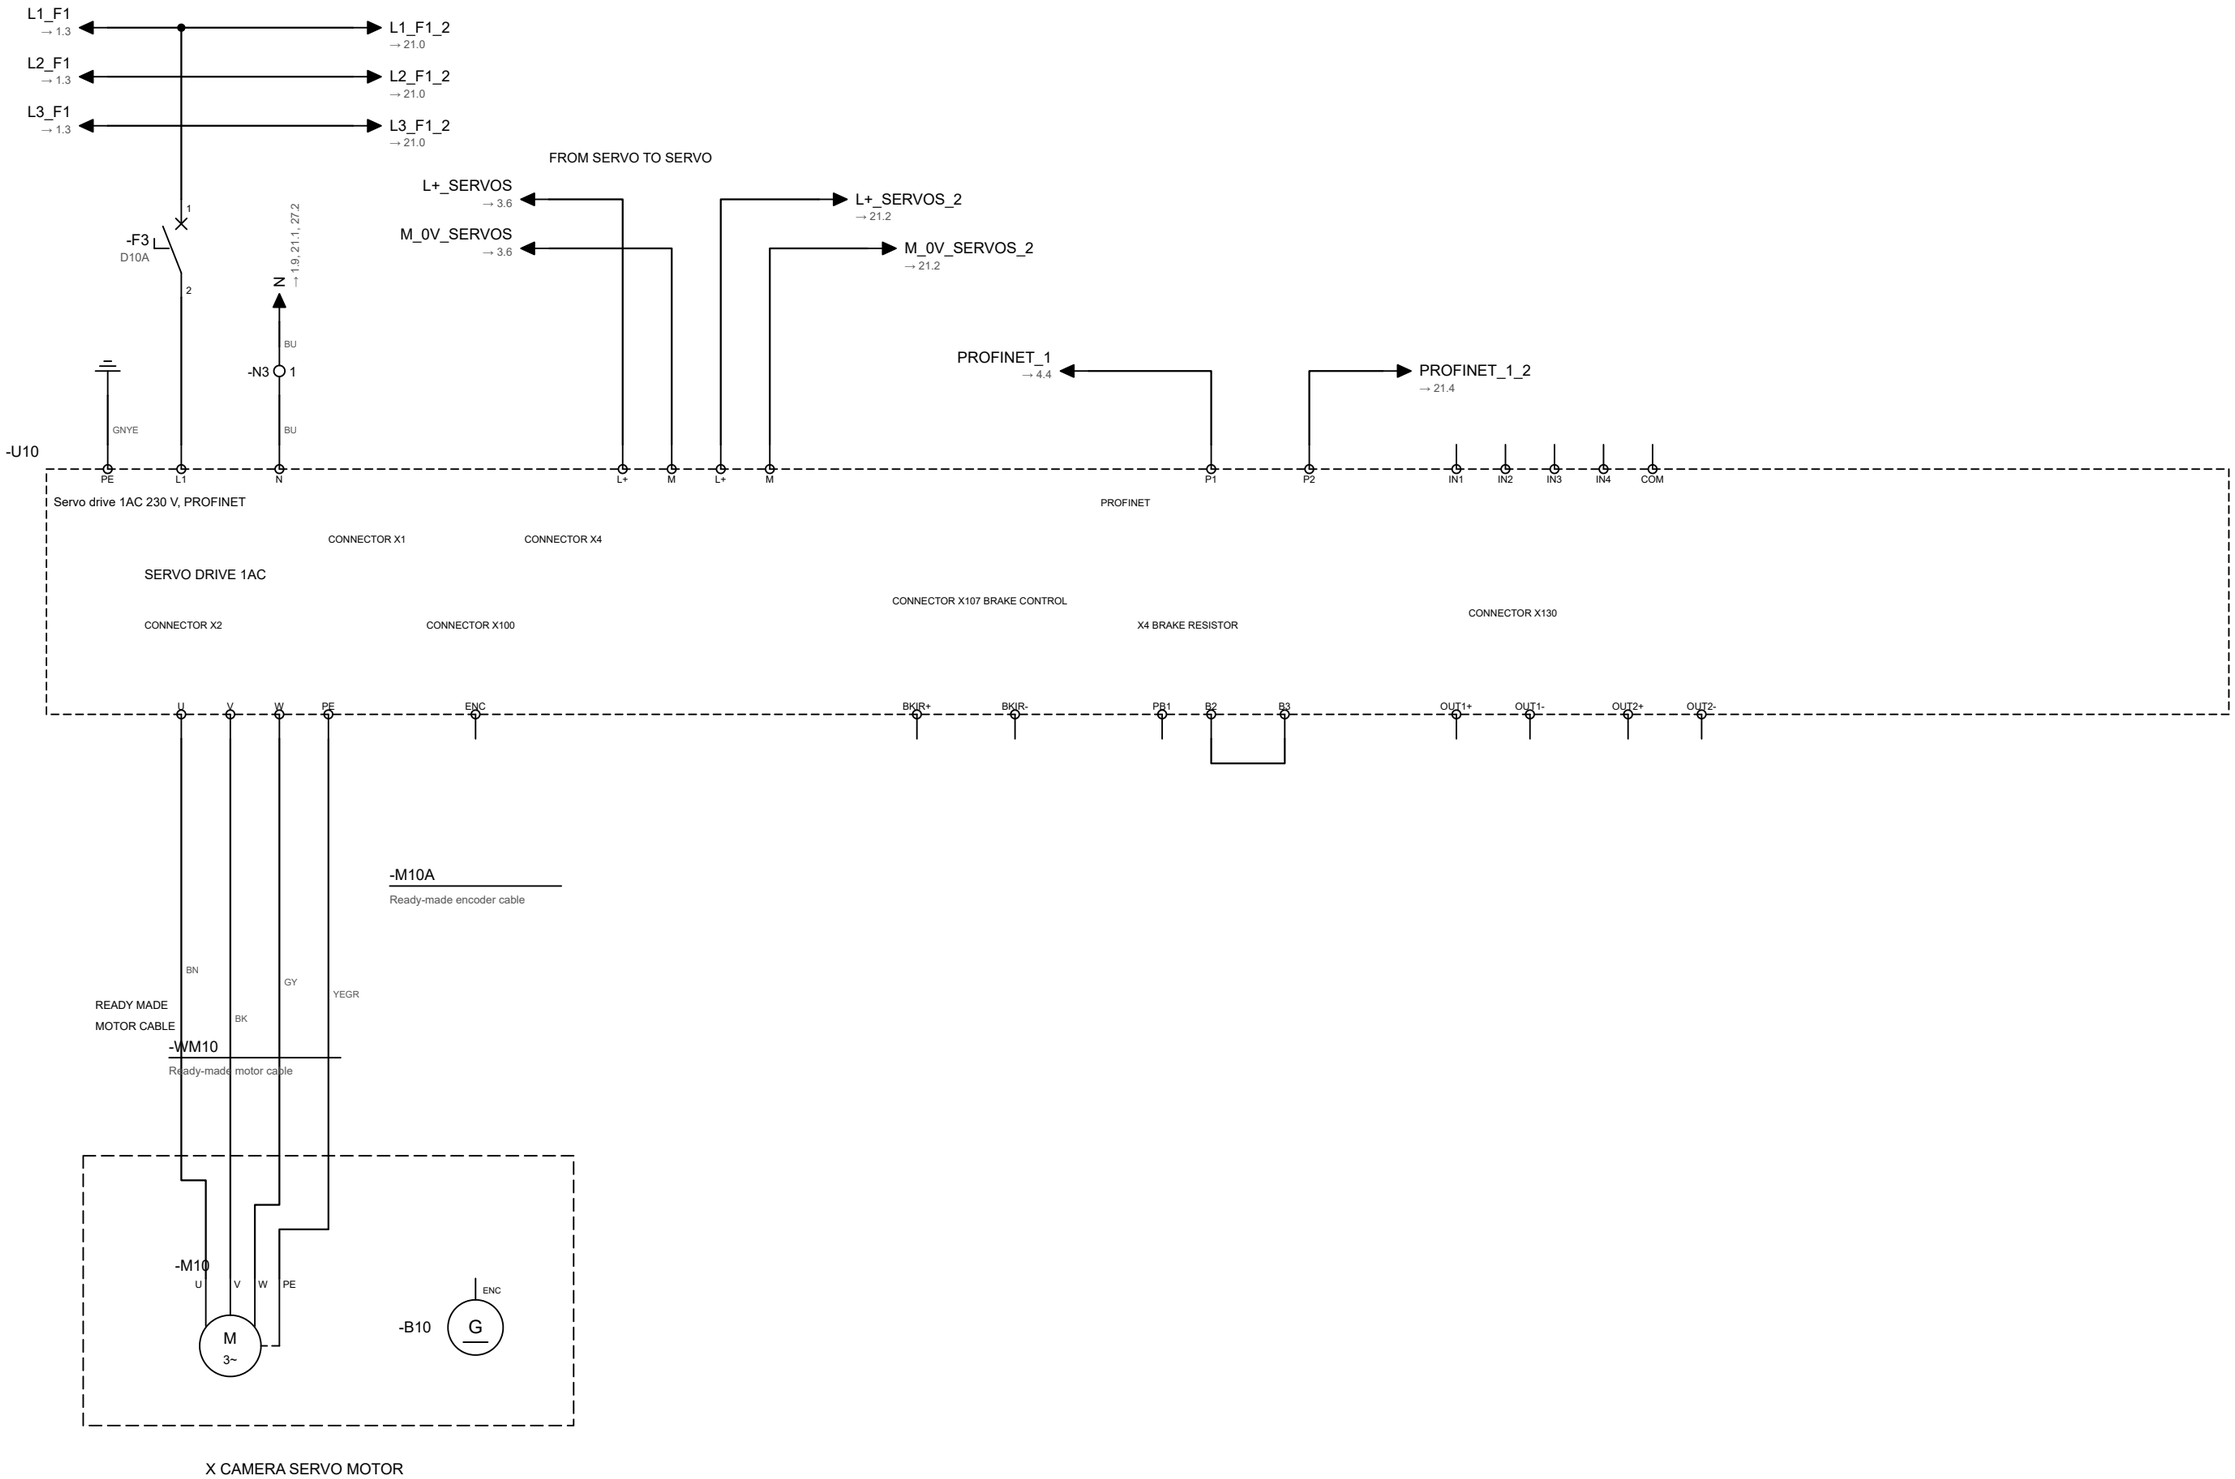


Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Servo U10 X-camera** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +CP Revision 0	Drawing no. DOC-0001 Page **20** Sheet 10 / 51

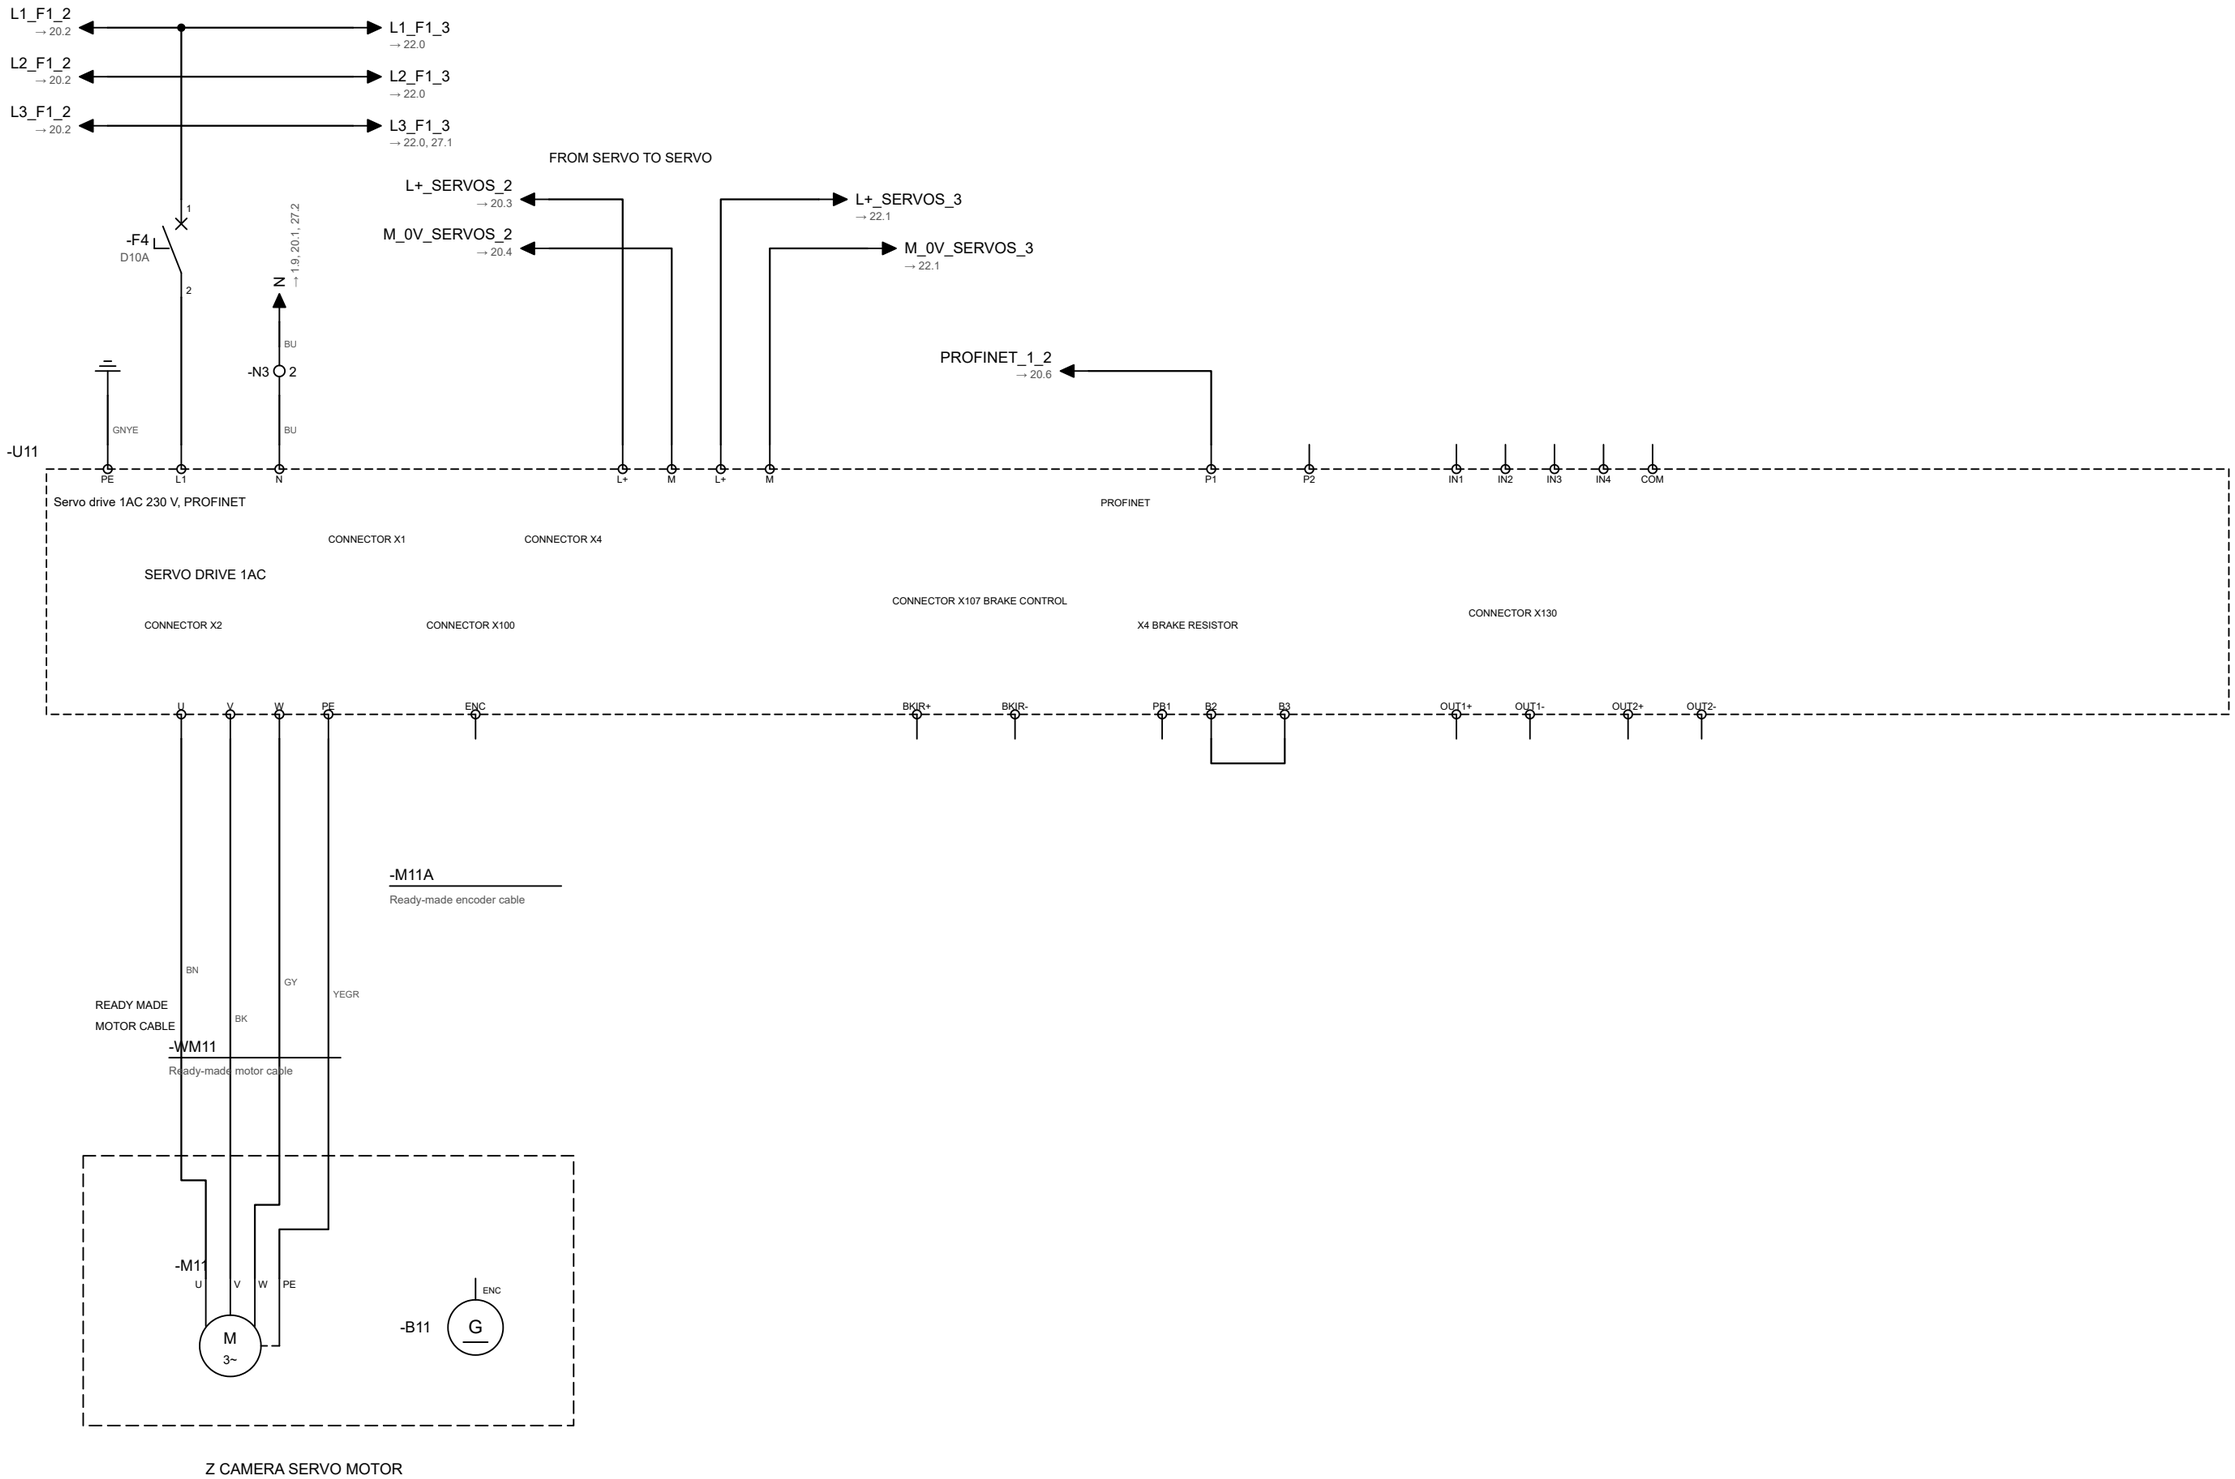


Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Servo U11 Z-camera** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +CP Revision 0	Drawing no. DOC-0001 Page **21** Sheet 11 / 51

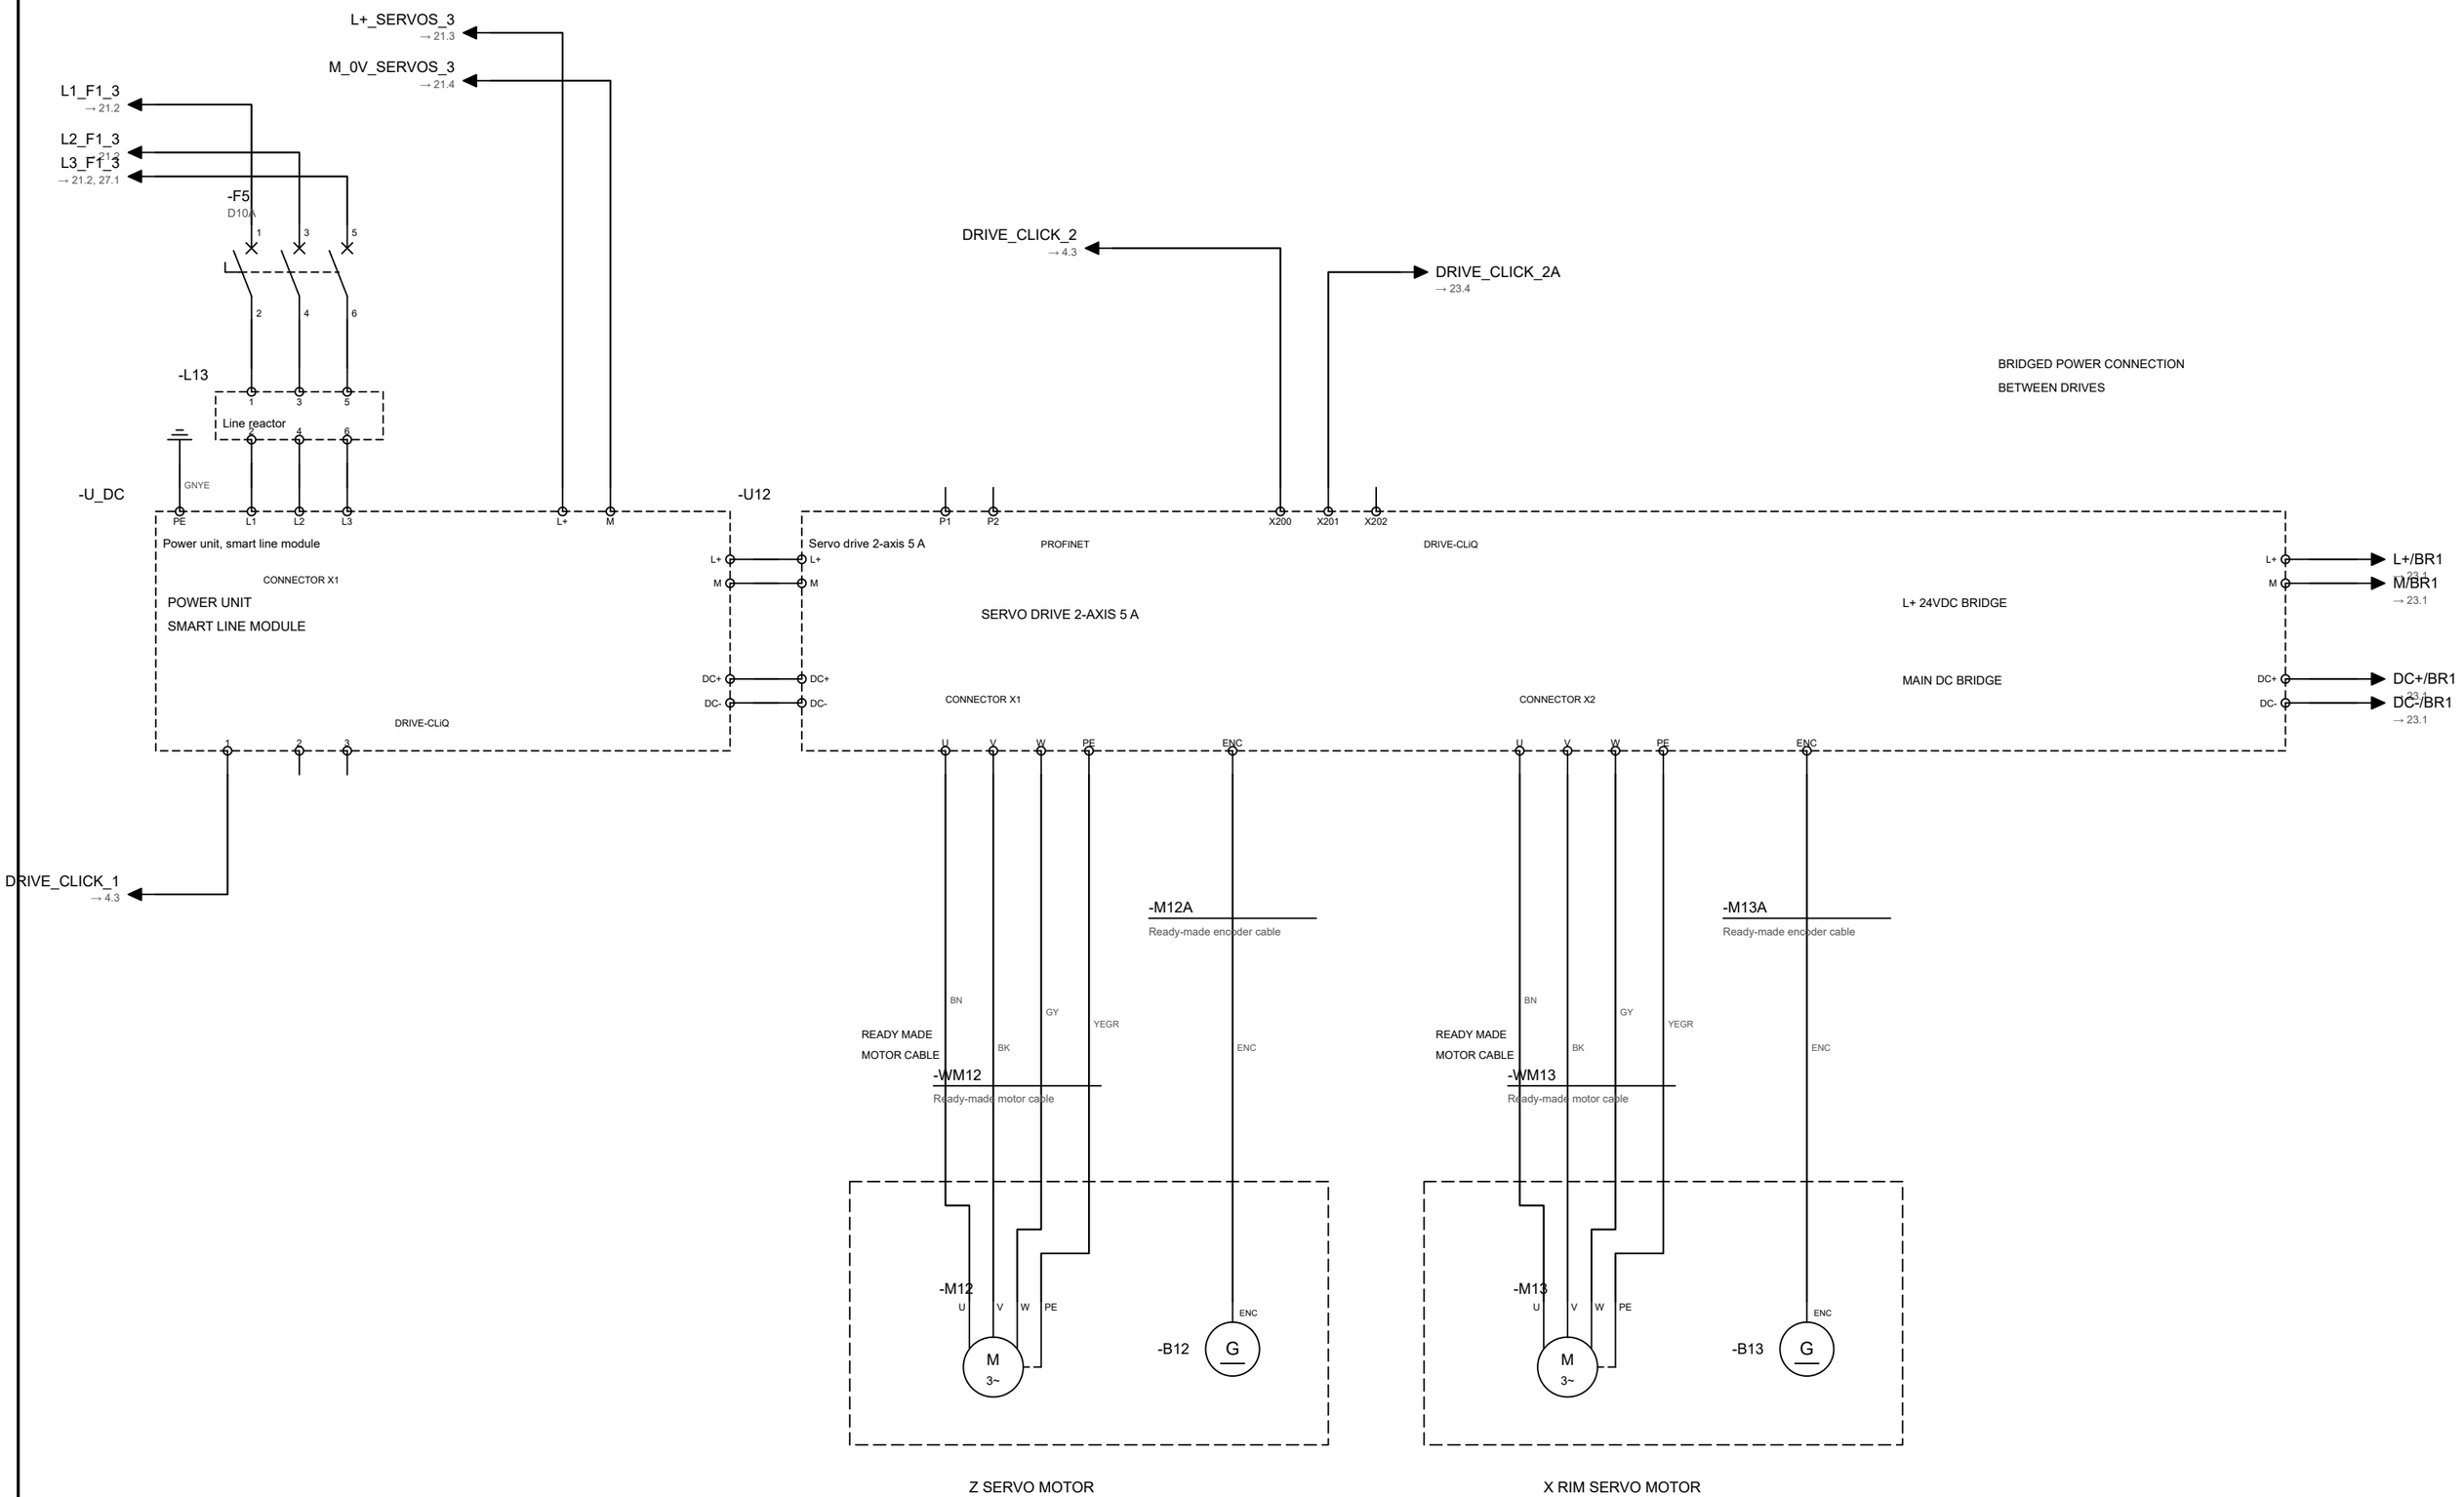


Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Servo power Z, Xrim** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +CP Revision 0	Drawing no. DOC-0001 Page **22** Sheet 12 / 51

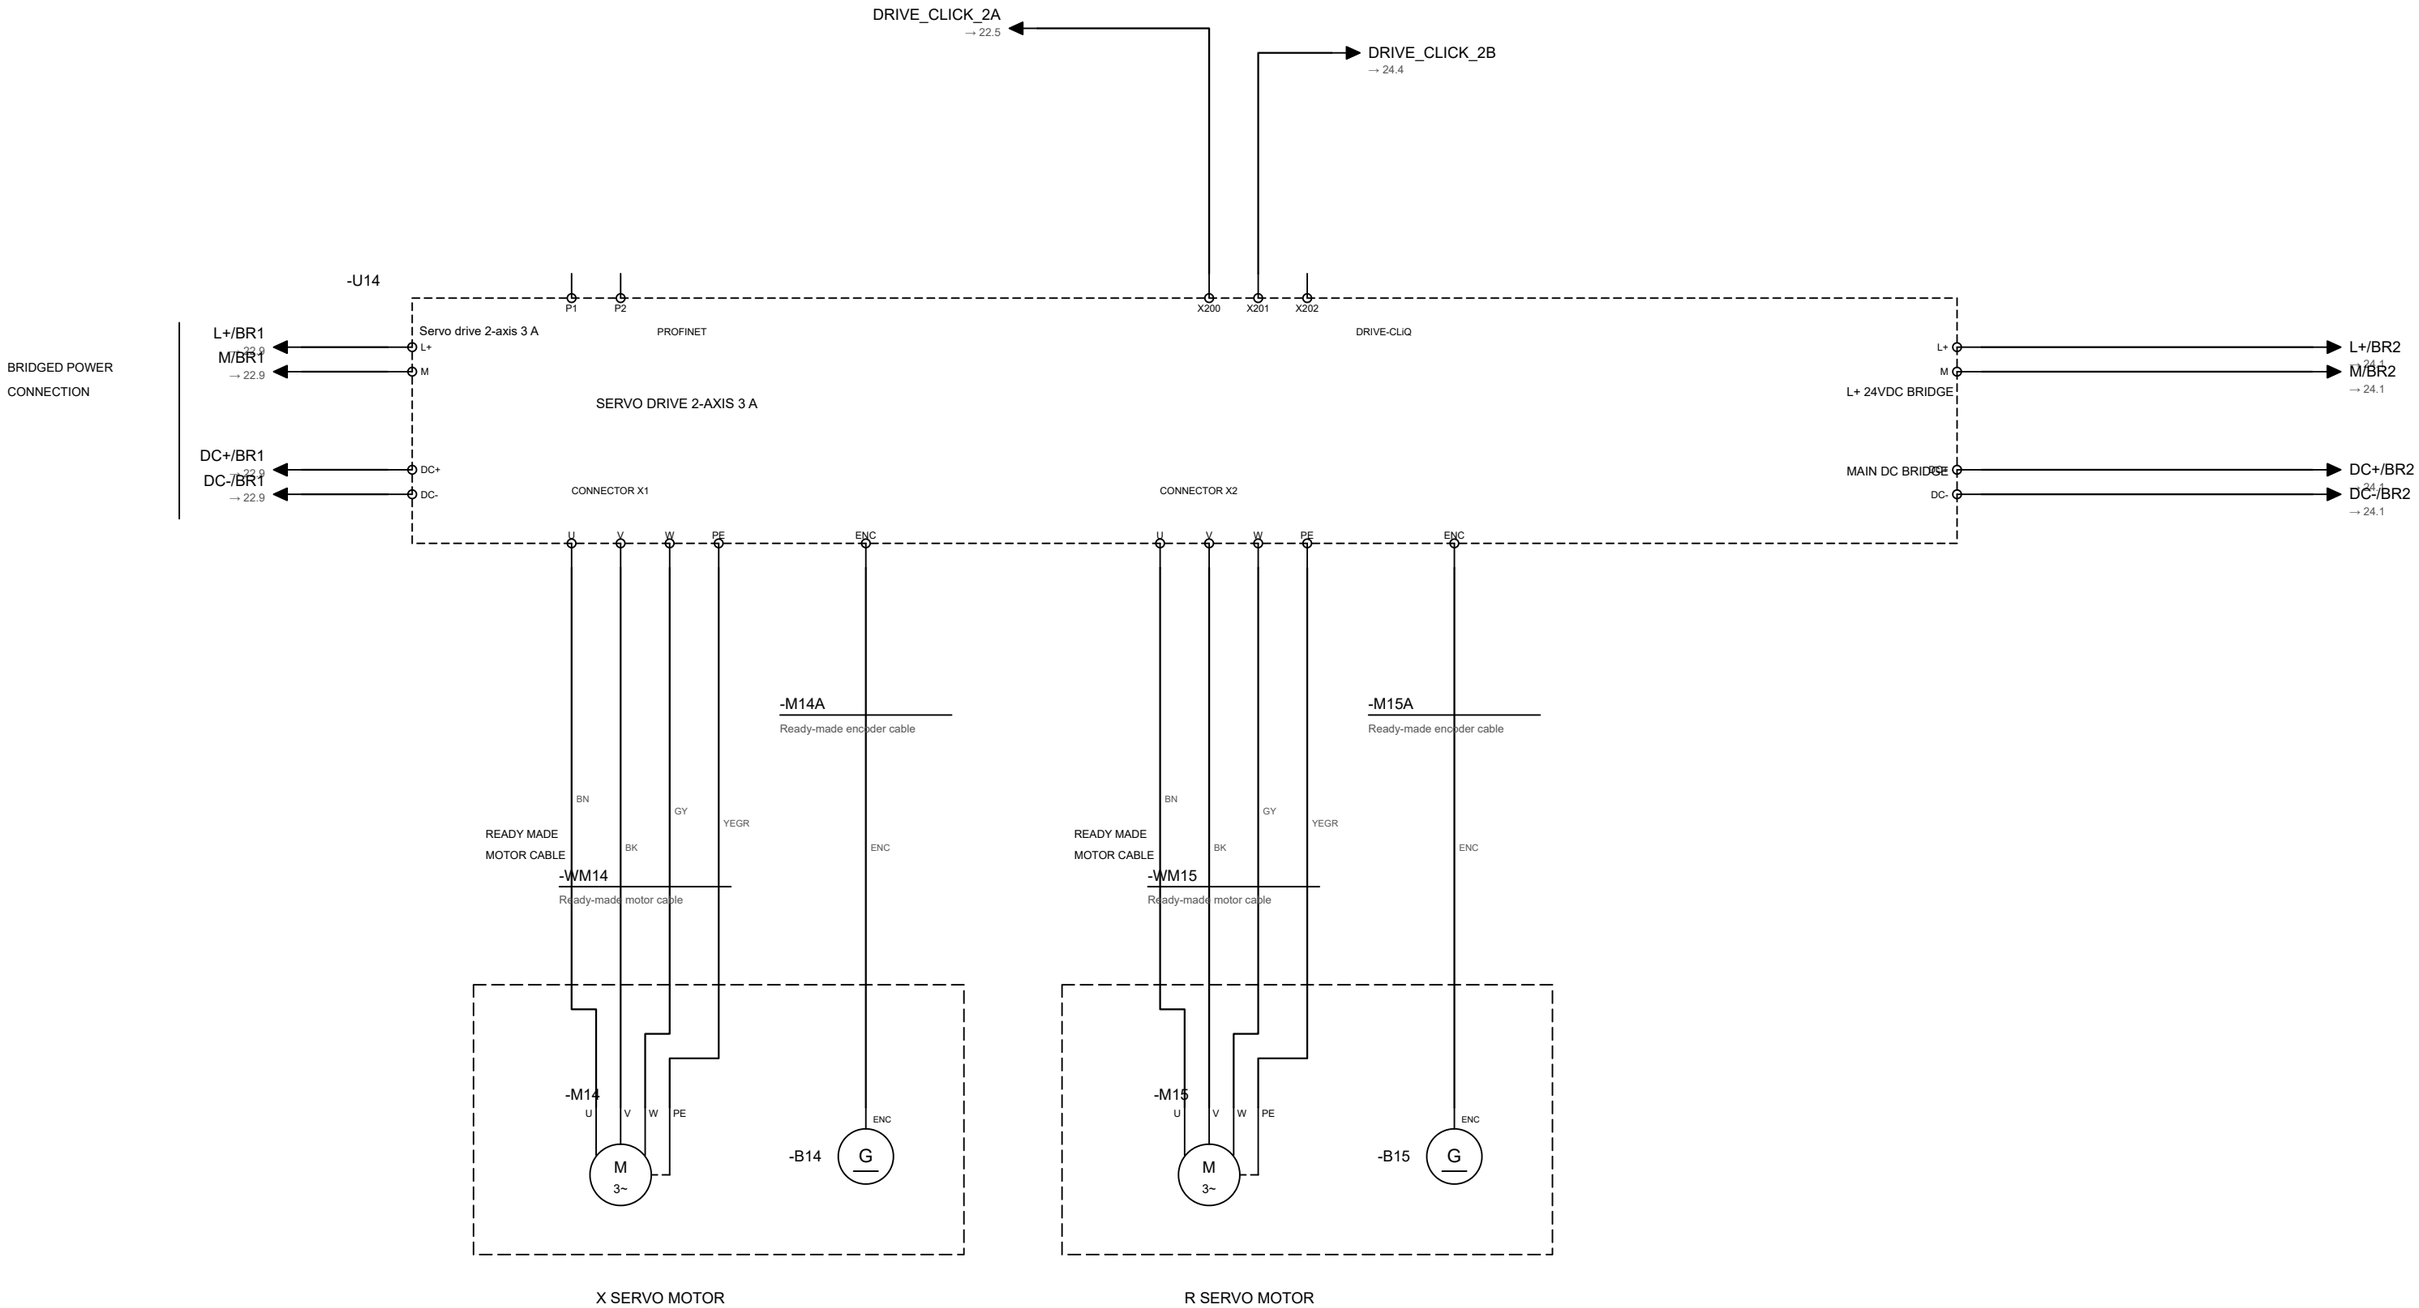

Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **X, R servos** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +CP Revision 0	Drawing no. DOC-0001 Page **23** Sheet 13 / 51

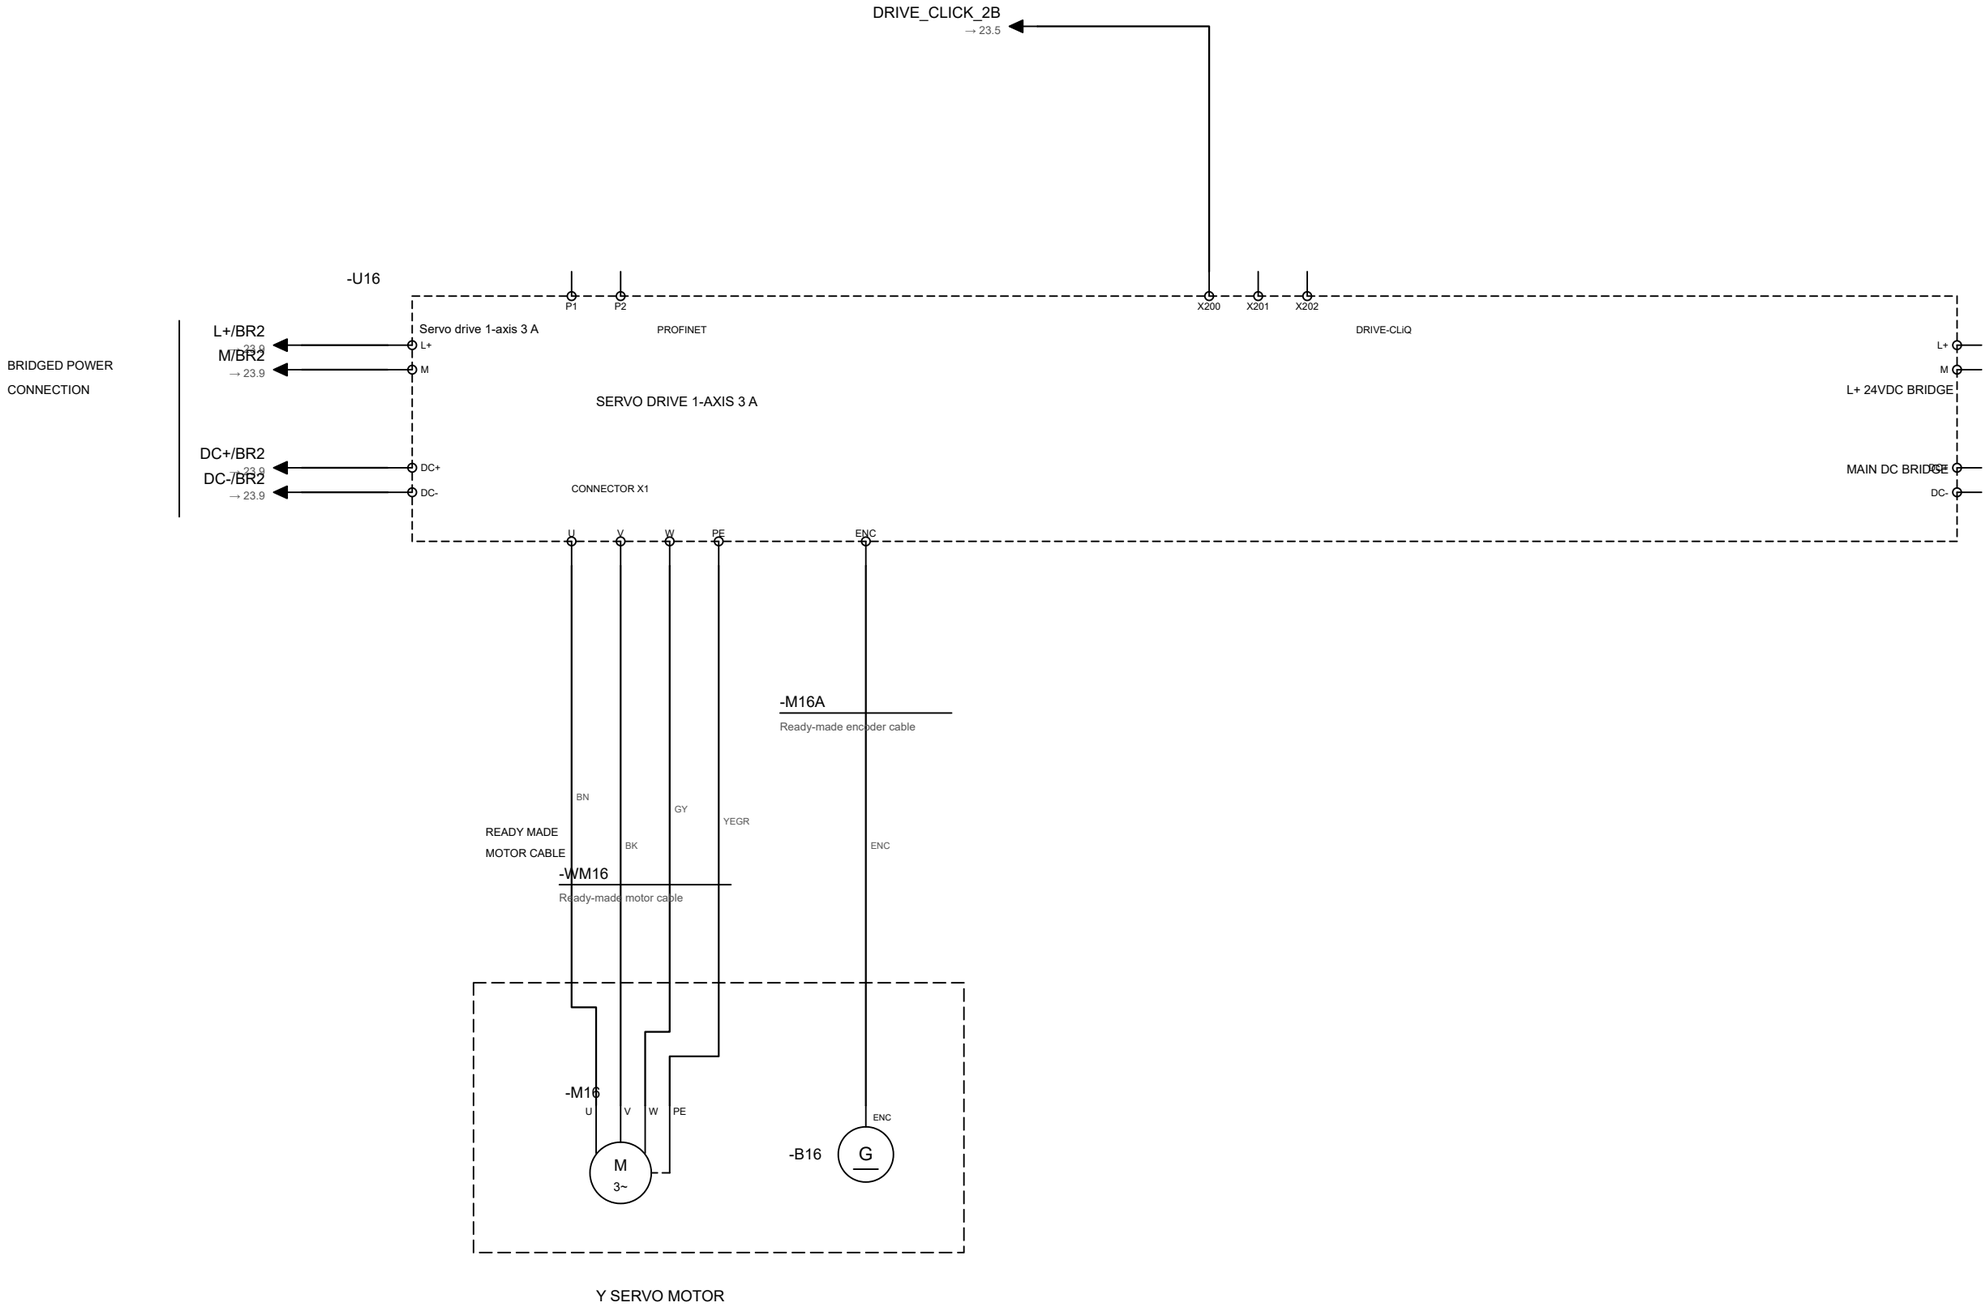


Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Y servo** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +CP Revision 0	Drawing no. DOC-0001 Page **24** Sheet 14 / 51

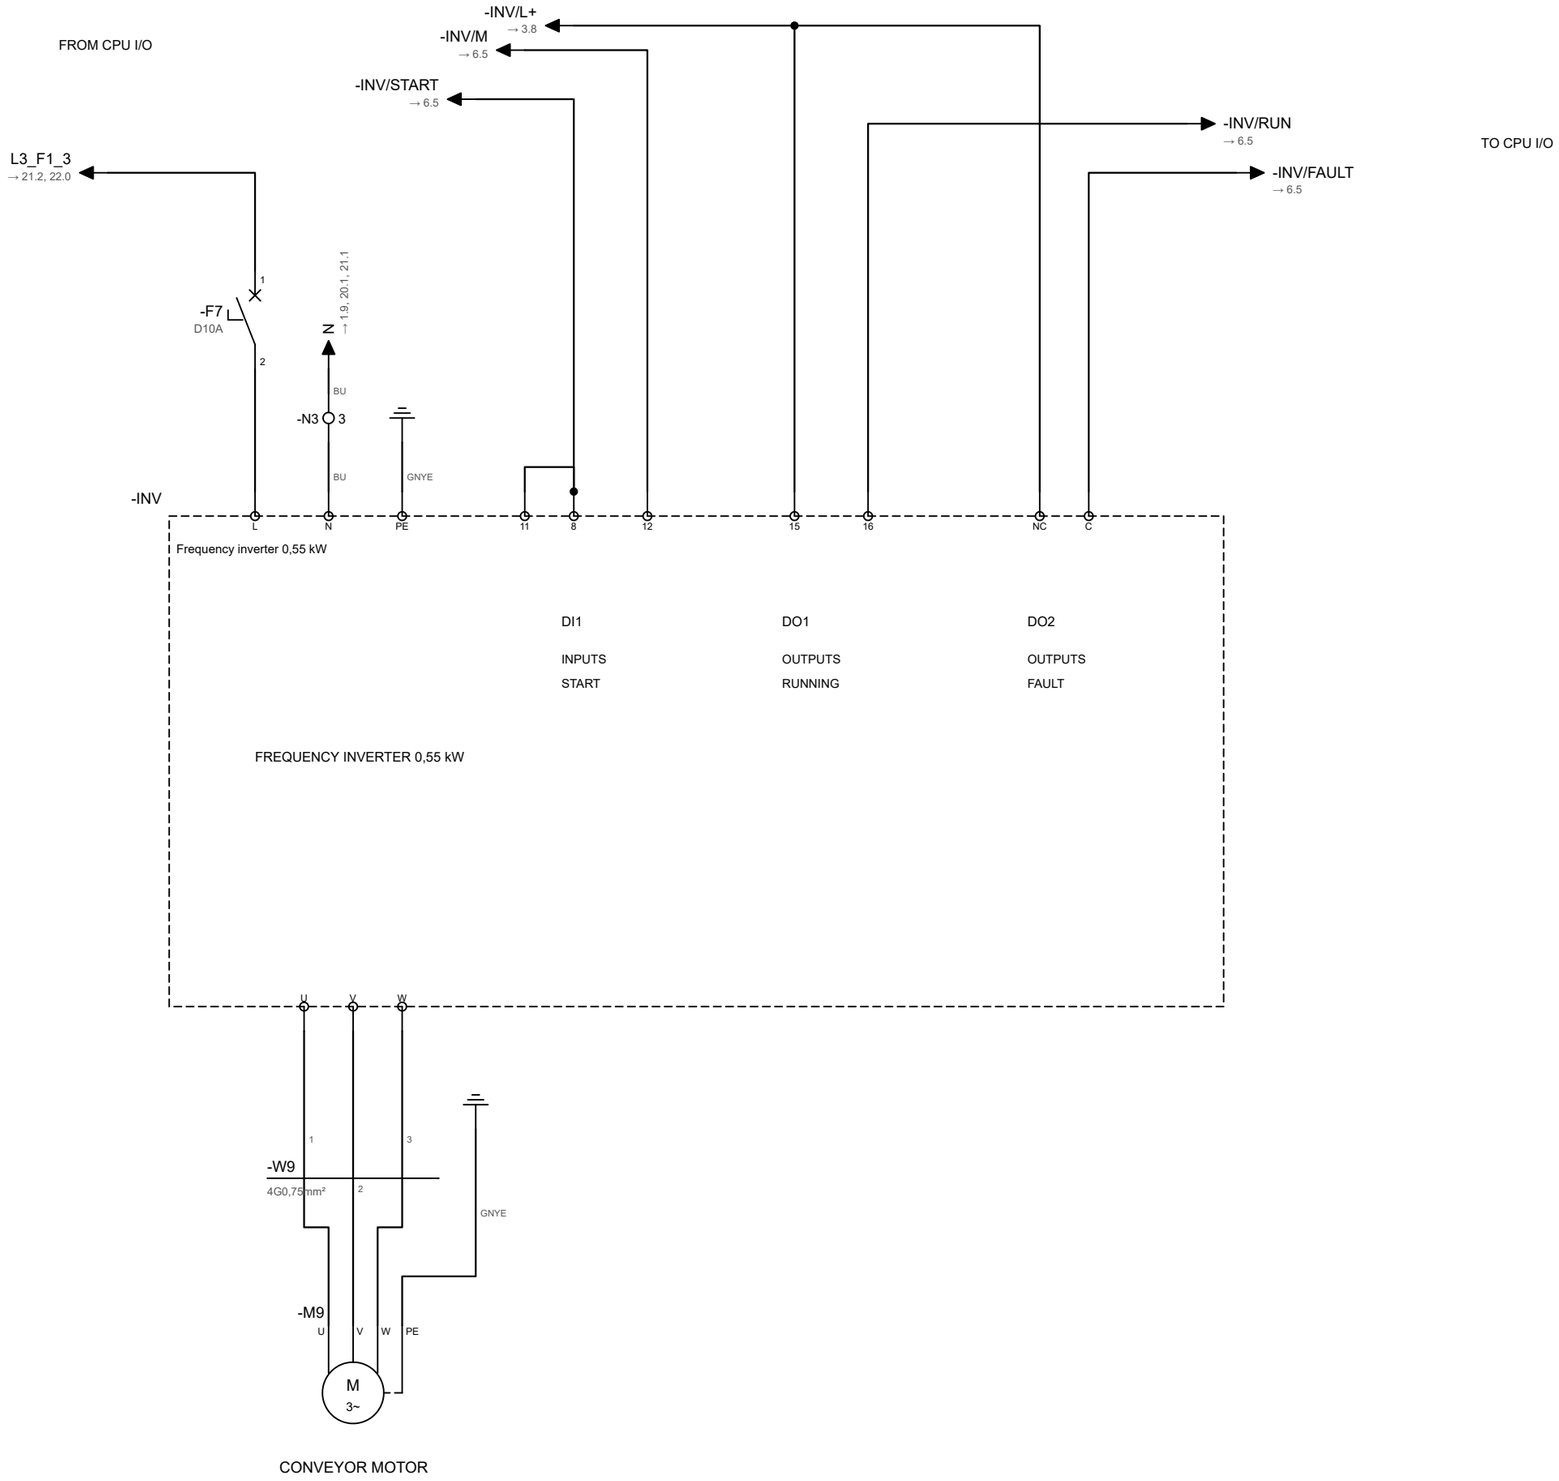

	Company **Company name** Street 1, City	Project **Machine control system**	Page title **Conveyor inverter INV**	Date 10/31/2026	Function = =AT	Drawing no. DOC-0001
		Description Automation cell with servo axes, camera and field I/O		Drawn XX	Location + +CP	Page **27**
			Customer Customer name	Approved YY	Revision 0	Sheet 15 / 51

CABINET COOLING FAN 24VDC

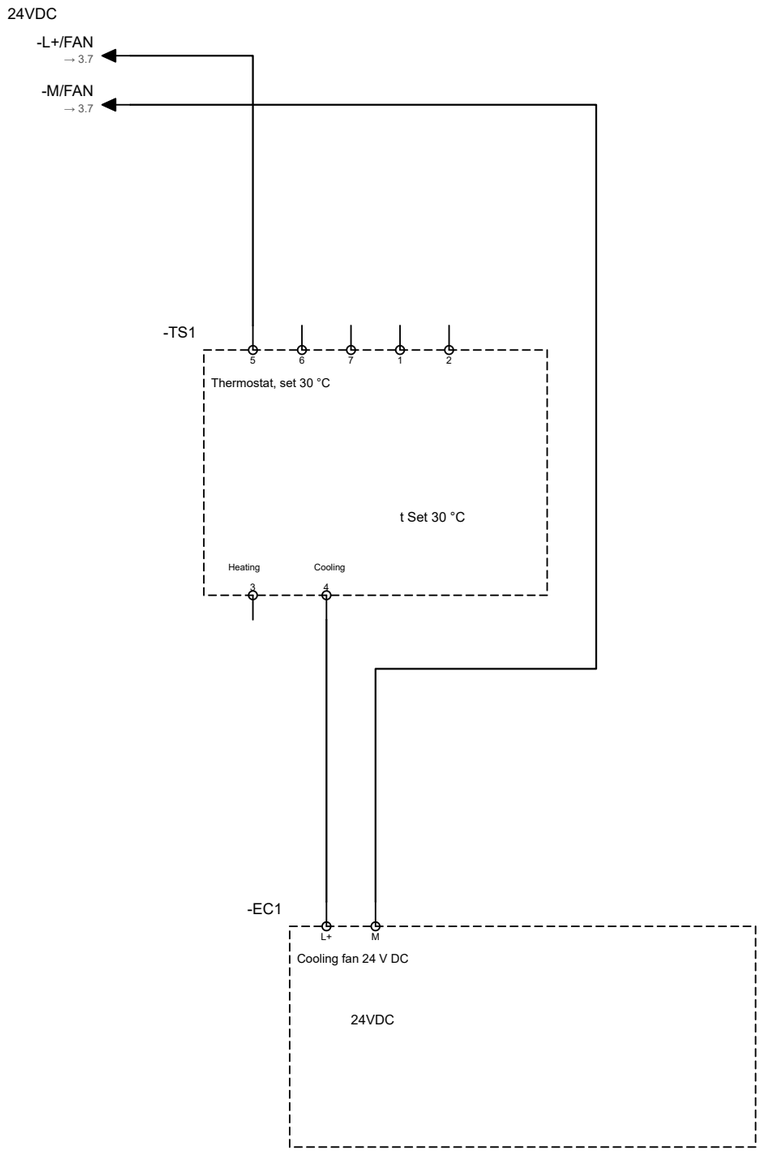


COOLING FAN
MAIN CABINET

	Company **Company name** Street 1, City	Project **Machine control system**	Page title **Cabinet cooling fan**	Date 10/31/2026	Function = =AT	Drawing no. DOC-0001
		Description Automation cell with servo axes, camera and field I/O		Drawn XX	Location + +CP	Page **28**
			Customer Customer name	Approved YY	Revision 0	Sheet 16 / 51

0	1	2	3	4	5	6	7	8	9

ENCLOSURE 800x2000x400mm

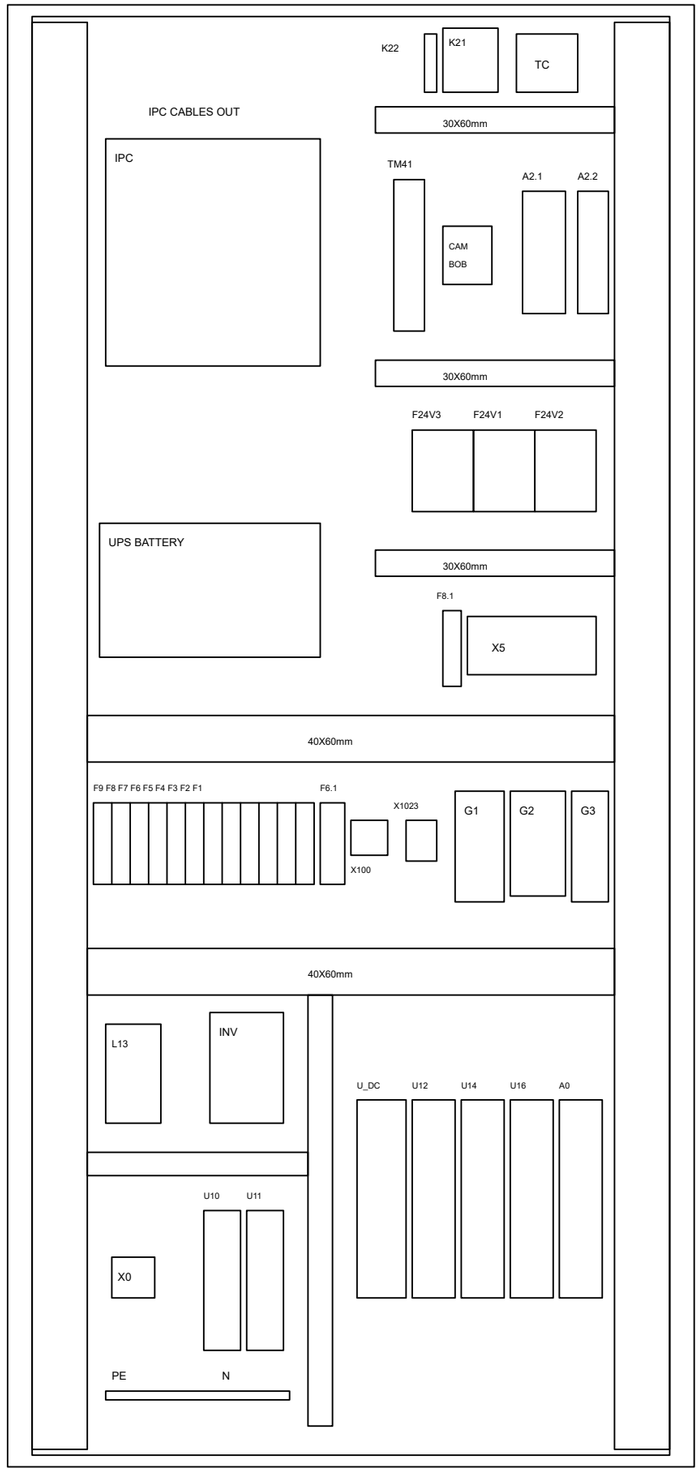


MOUNTING PLATE LAYOUT, FRONT VIEW

Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Enclosure +CP** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +ATM Revision 0	Drawing no. DOC-0001 Page **M1** Sheet 17 / 51


0	1	2	3	4	5	6	7	8	9

I/O MODULE LOCATIONS

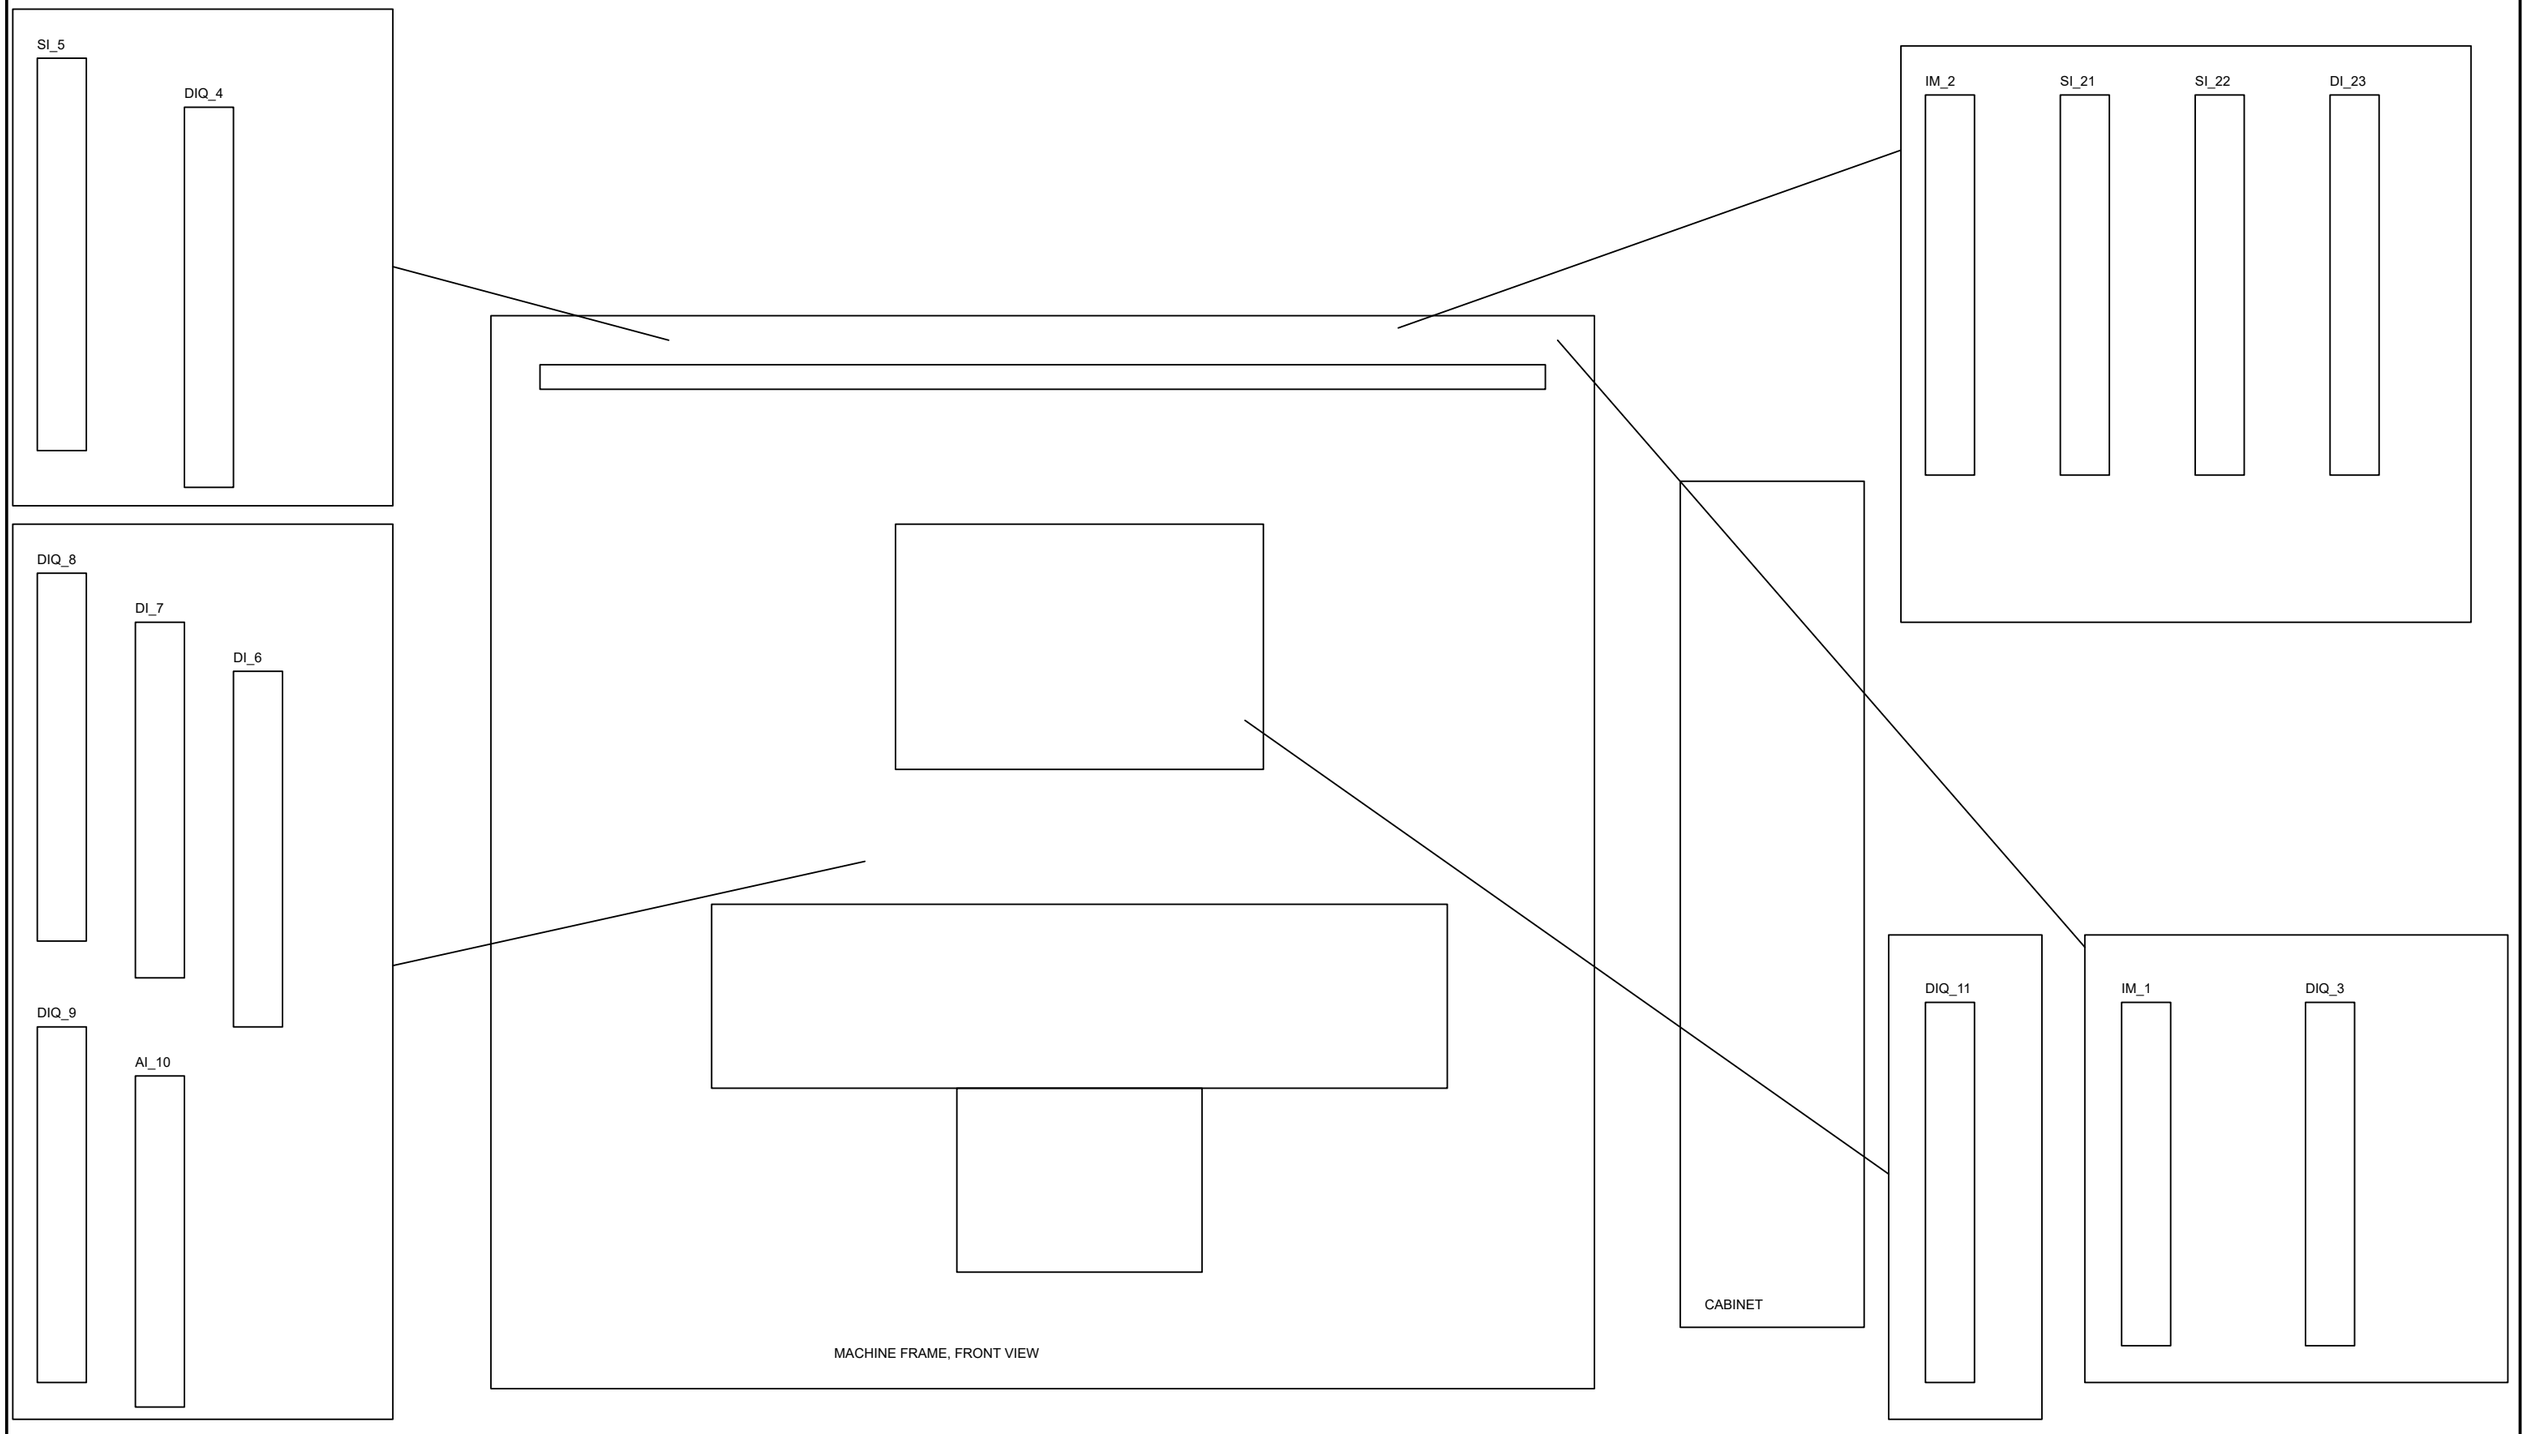

	Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **IO-Modules** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +ATM Revision 0	Drawing no. DOC-0001 Page **M2** Sheet 18 / 51

POWER SUPPLY CP TO I/O-STATIONS AND TERMINAL BOX TB1

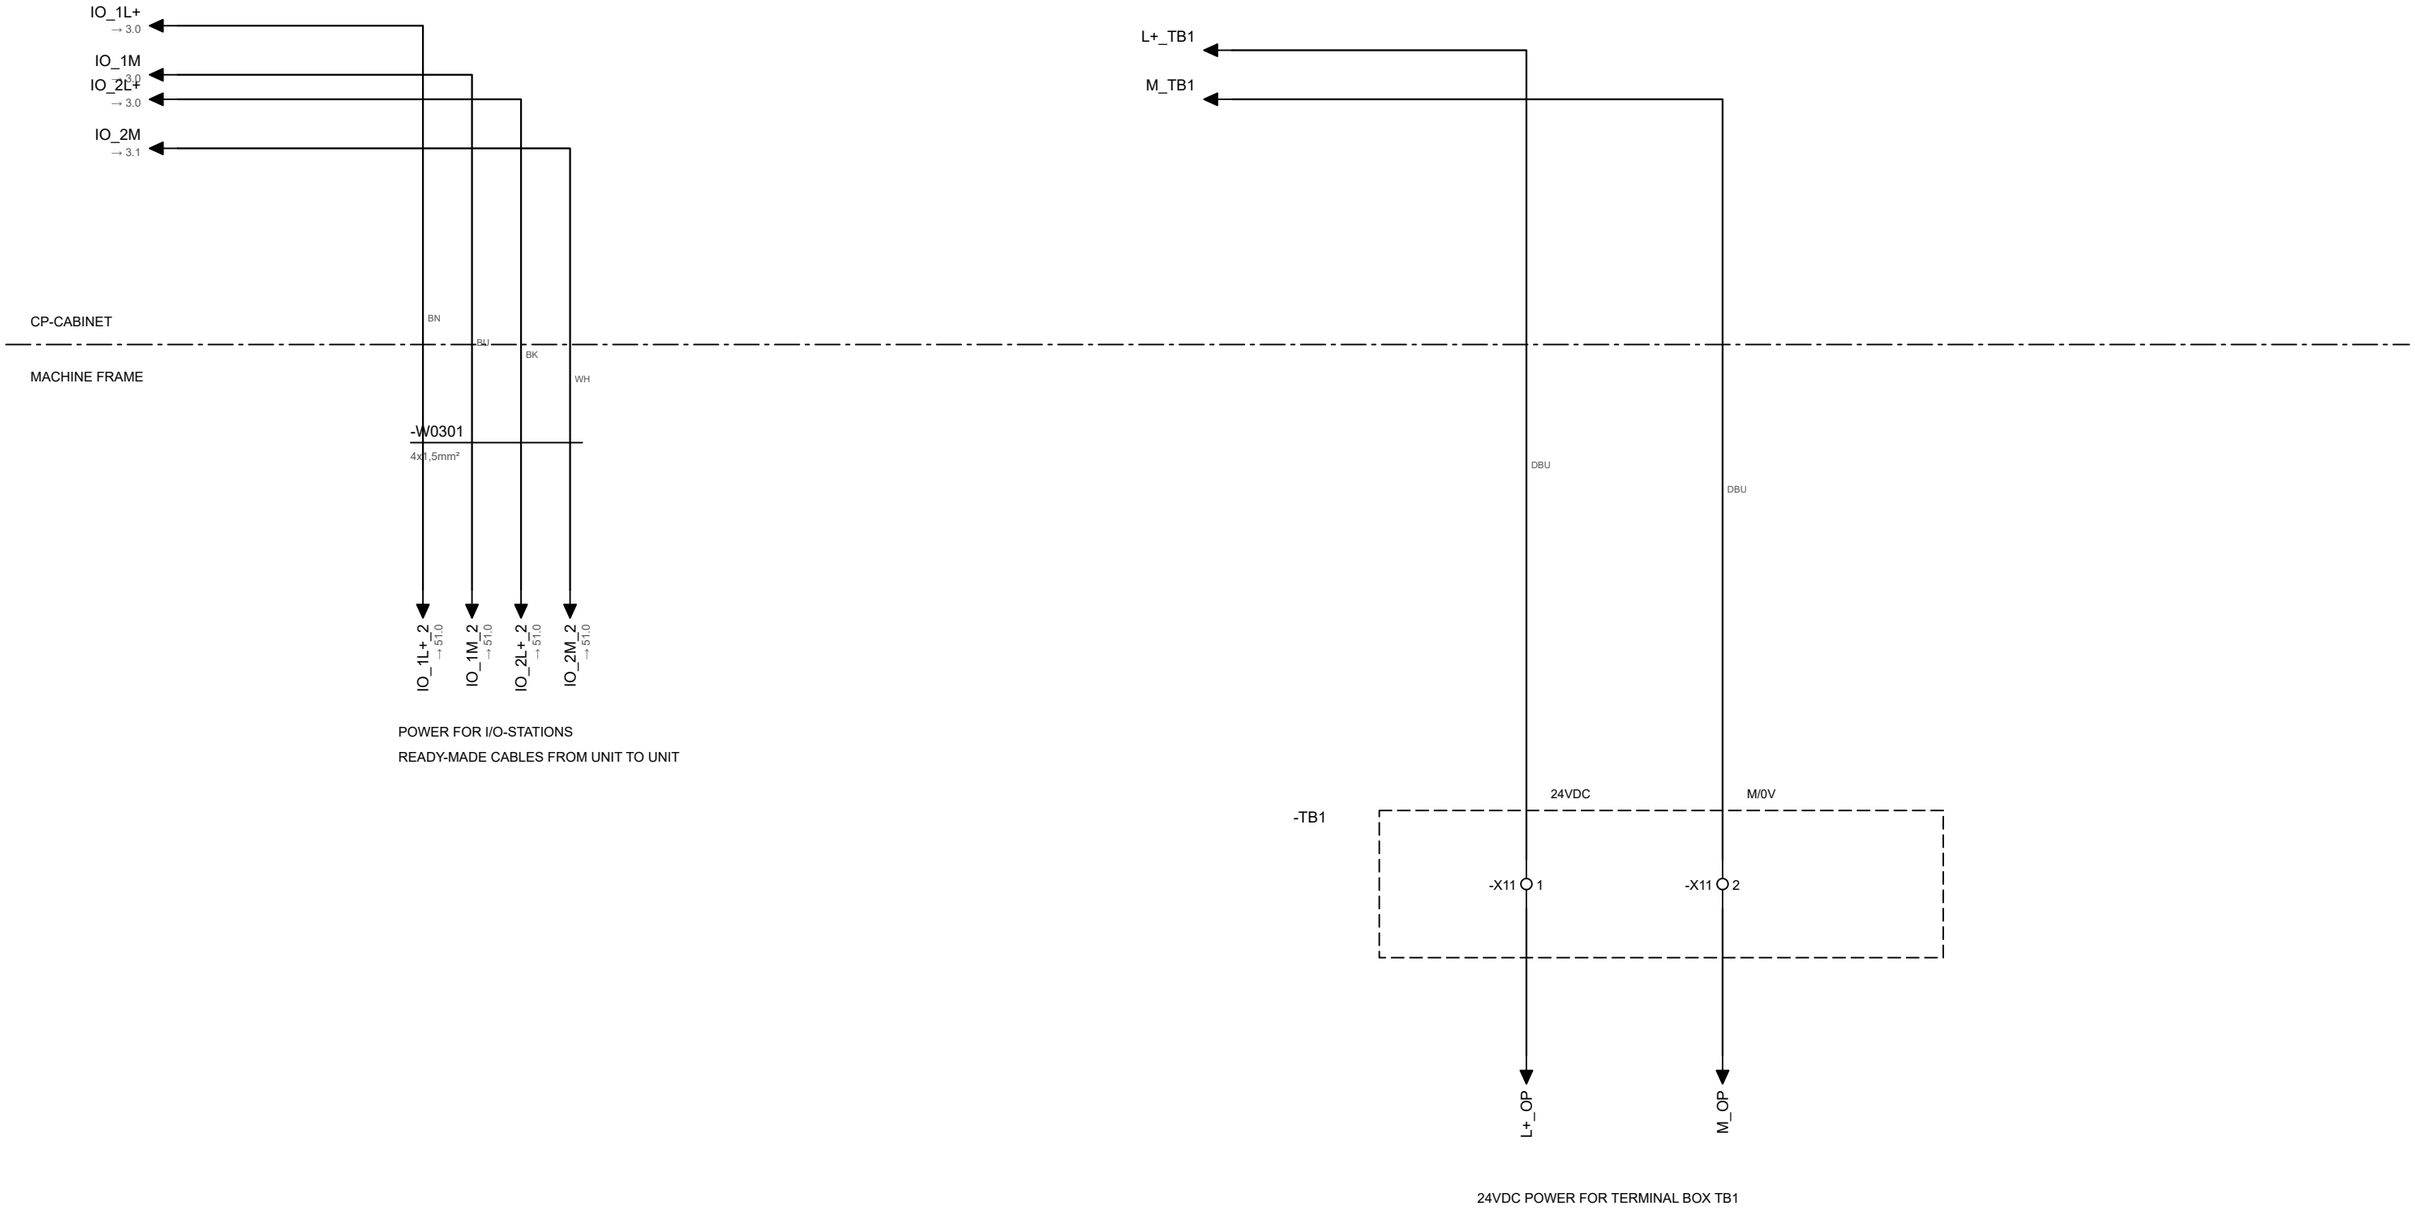



POWER FOR I/O-STATIONS
READY-MADE CABLES FROM UNIT TO UNIT


24VDC POWER FOR TERMINAL BOX TB1

Company **Company name** Street 1, City	Project **Machine control system**	Page title **IO-station power supply**	Date 10/31/2026	Function = =AT	Drawing no. DOC-0001
	Description Automation cell with servo axes, camera and field I/O	Customer Customer name	Drawn XX	Location + +IO	Page **50**
			Approved YY	Revision 0	Sheet 19 / 51

POWER SUPPLY FOR I/O-STATIONS

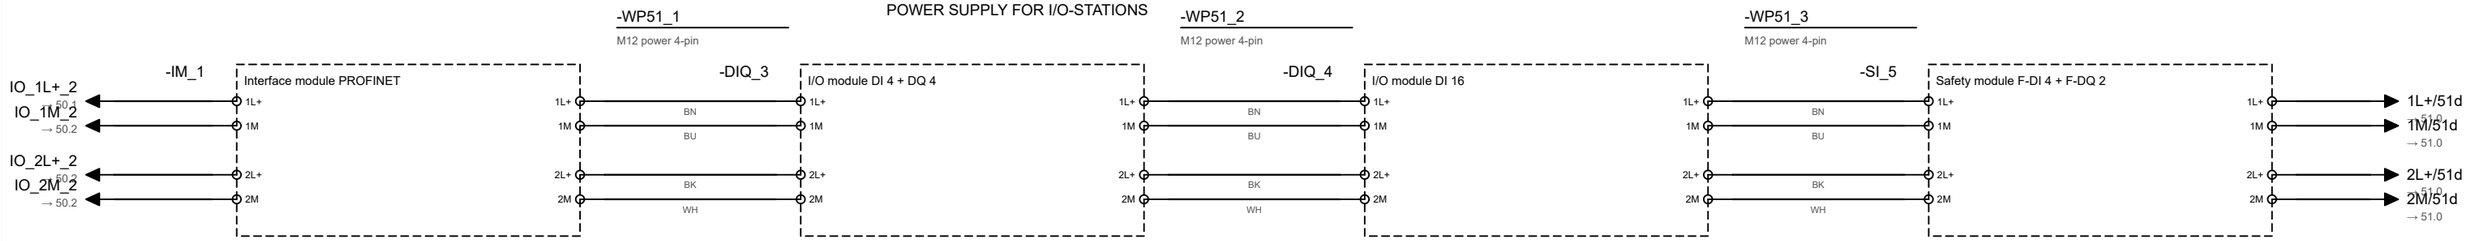

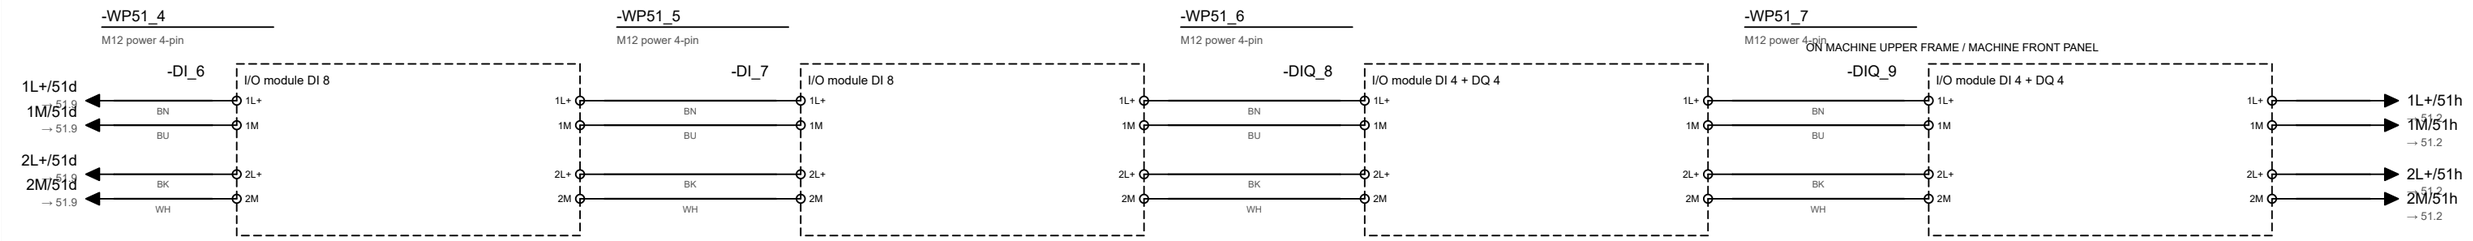


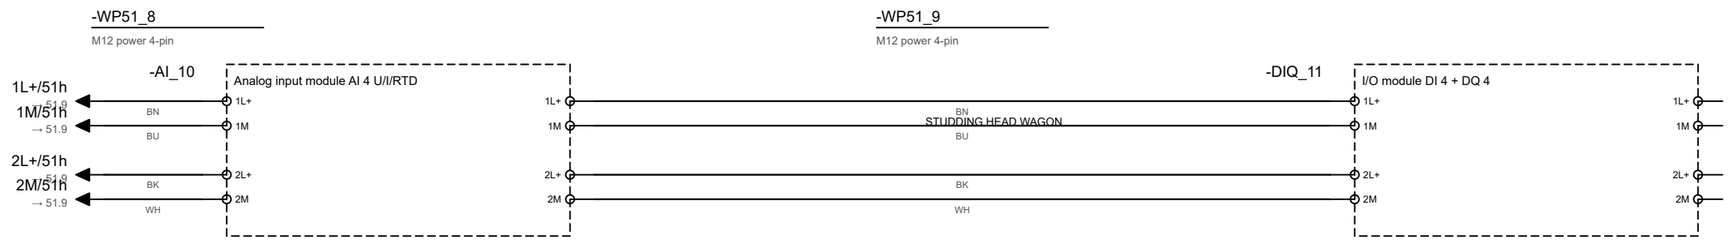

Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **IO-station power distribution** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **51** Sheet 20 / 51


0	1	2	3	4	5	6	7	8	9


I/O-MODULES FOR EXTERNAL SAFETY SYSTEM

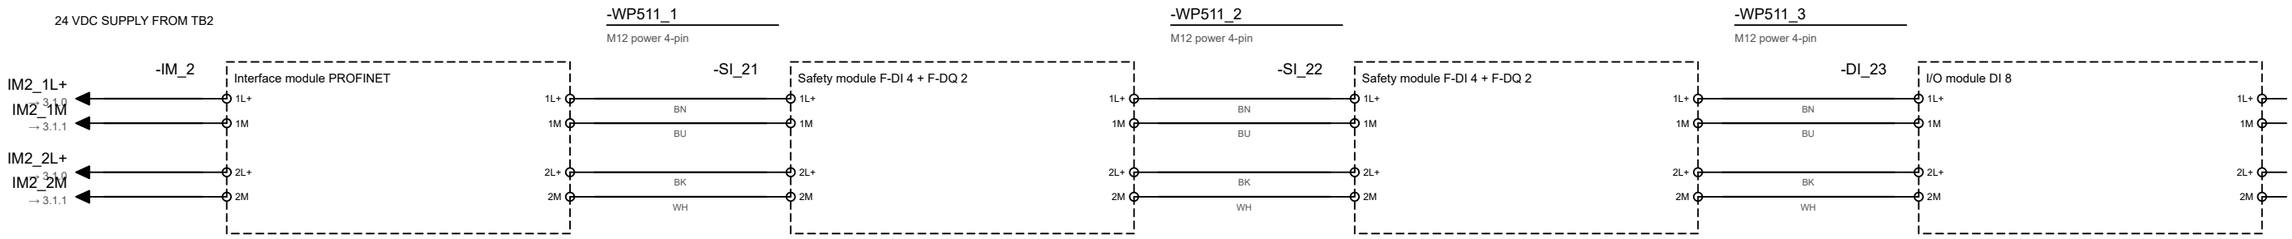


	Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **IO-station power EXT safety** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **51.1** Sheet 21 / 51

PROFINET FOR I/O-STATIONS

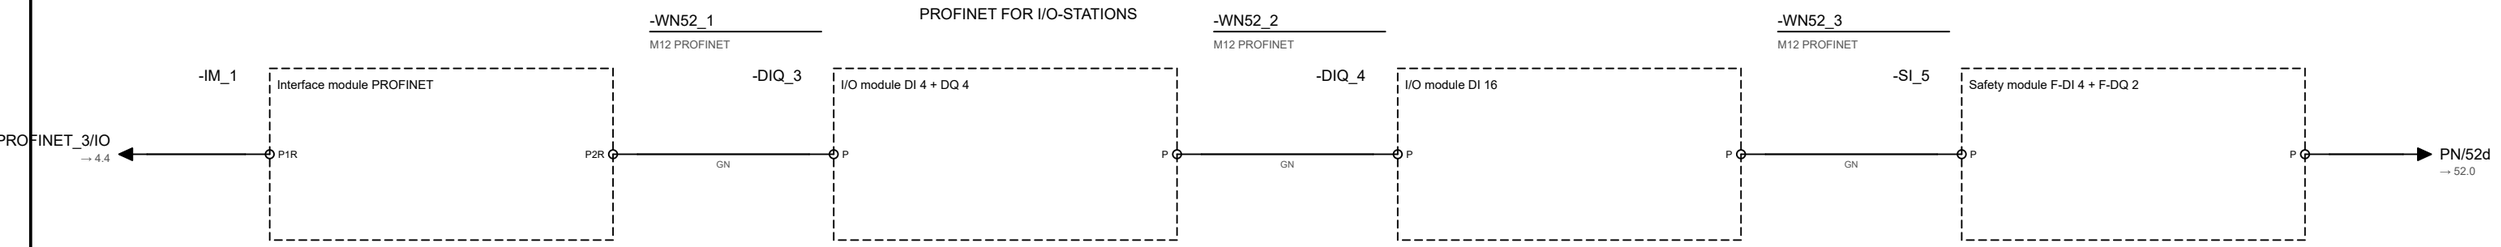


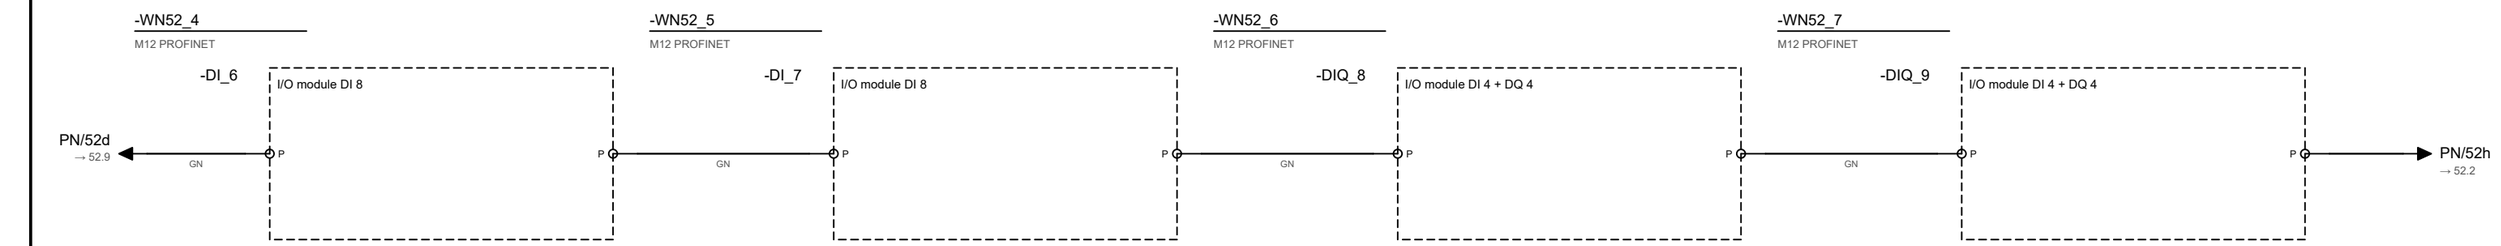

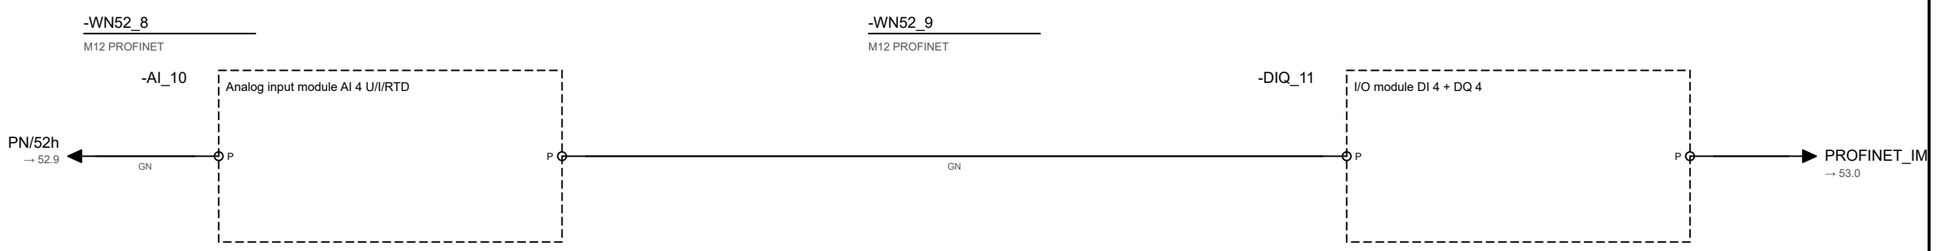


	Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Profinet** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **52** Sheet 22 / 51

PROFINET FOR EXTERNAL SAFETY SYSTEM

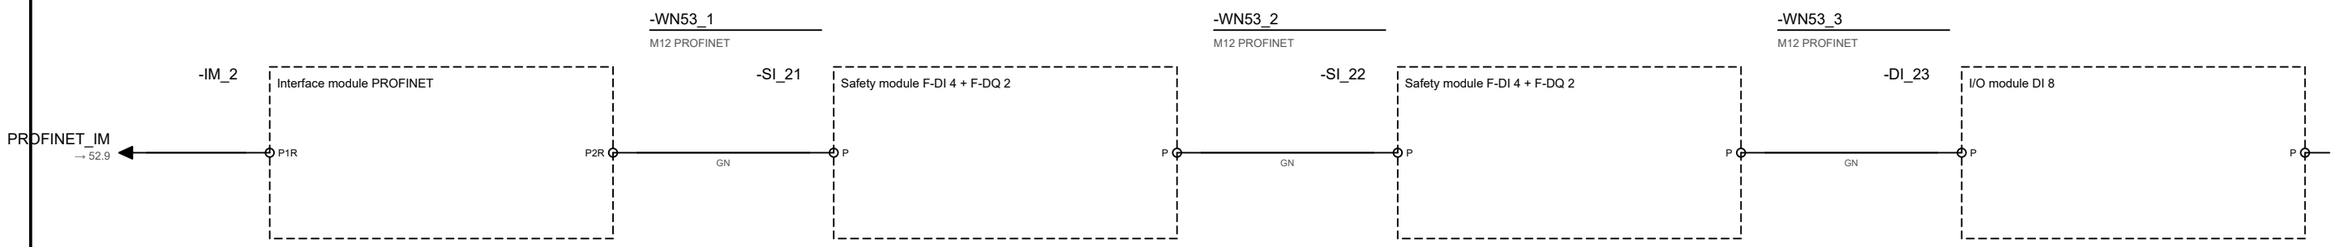


	Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Profinet EXT safety** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **53** Sheet 23 / 51

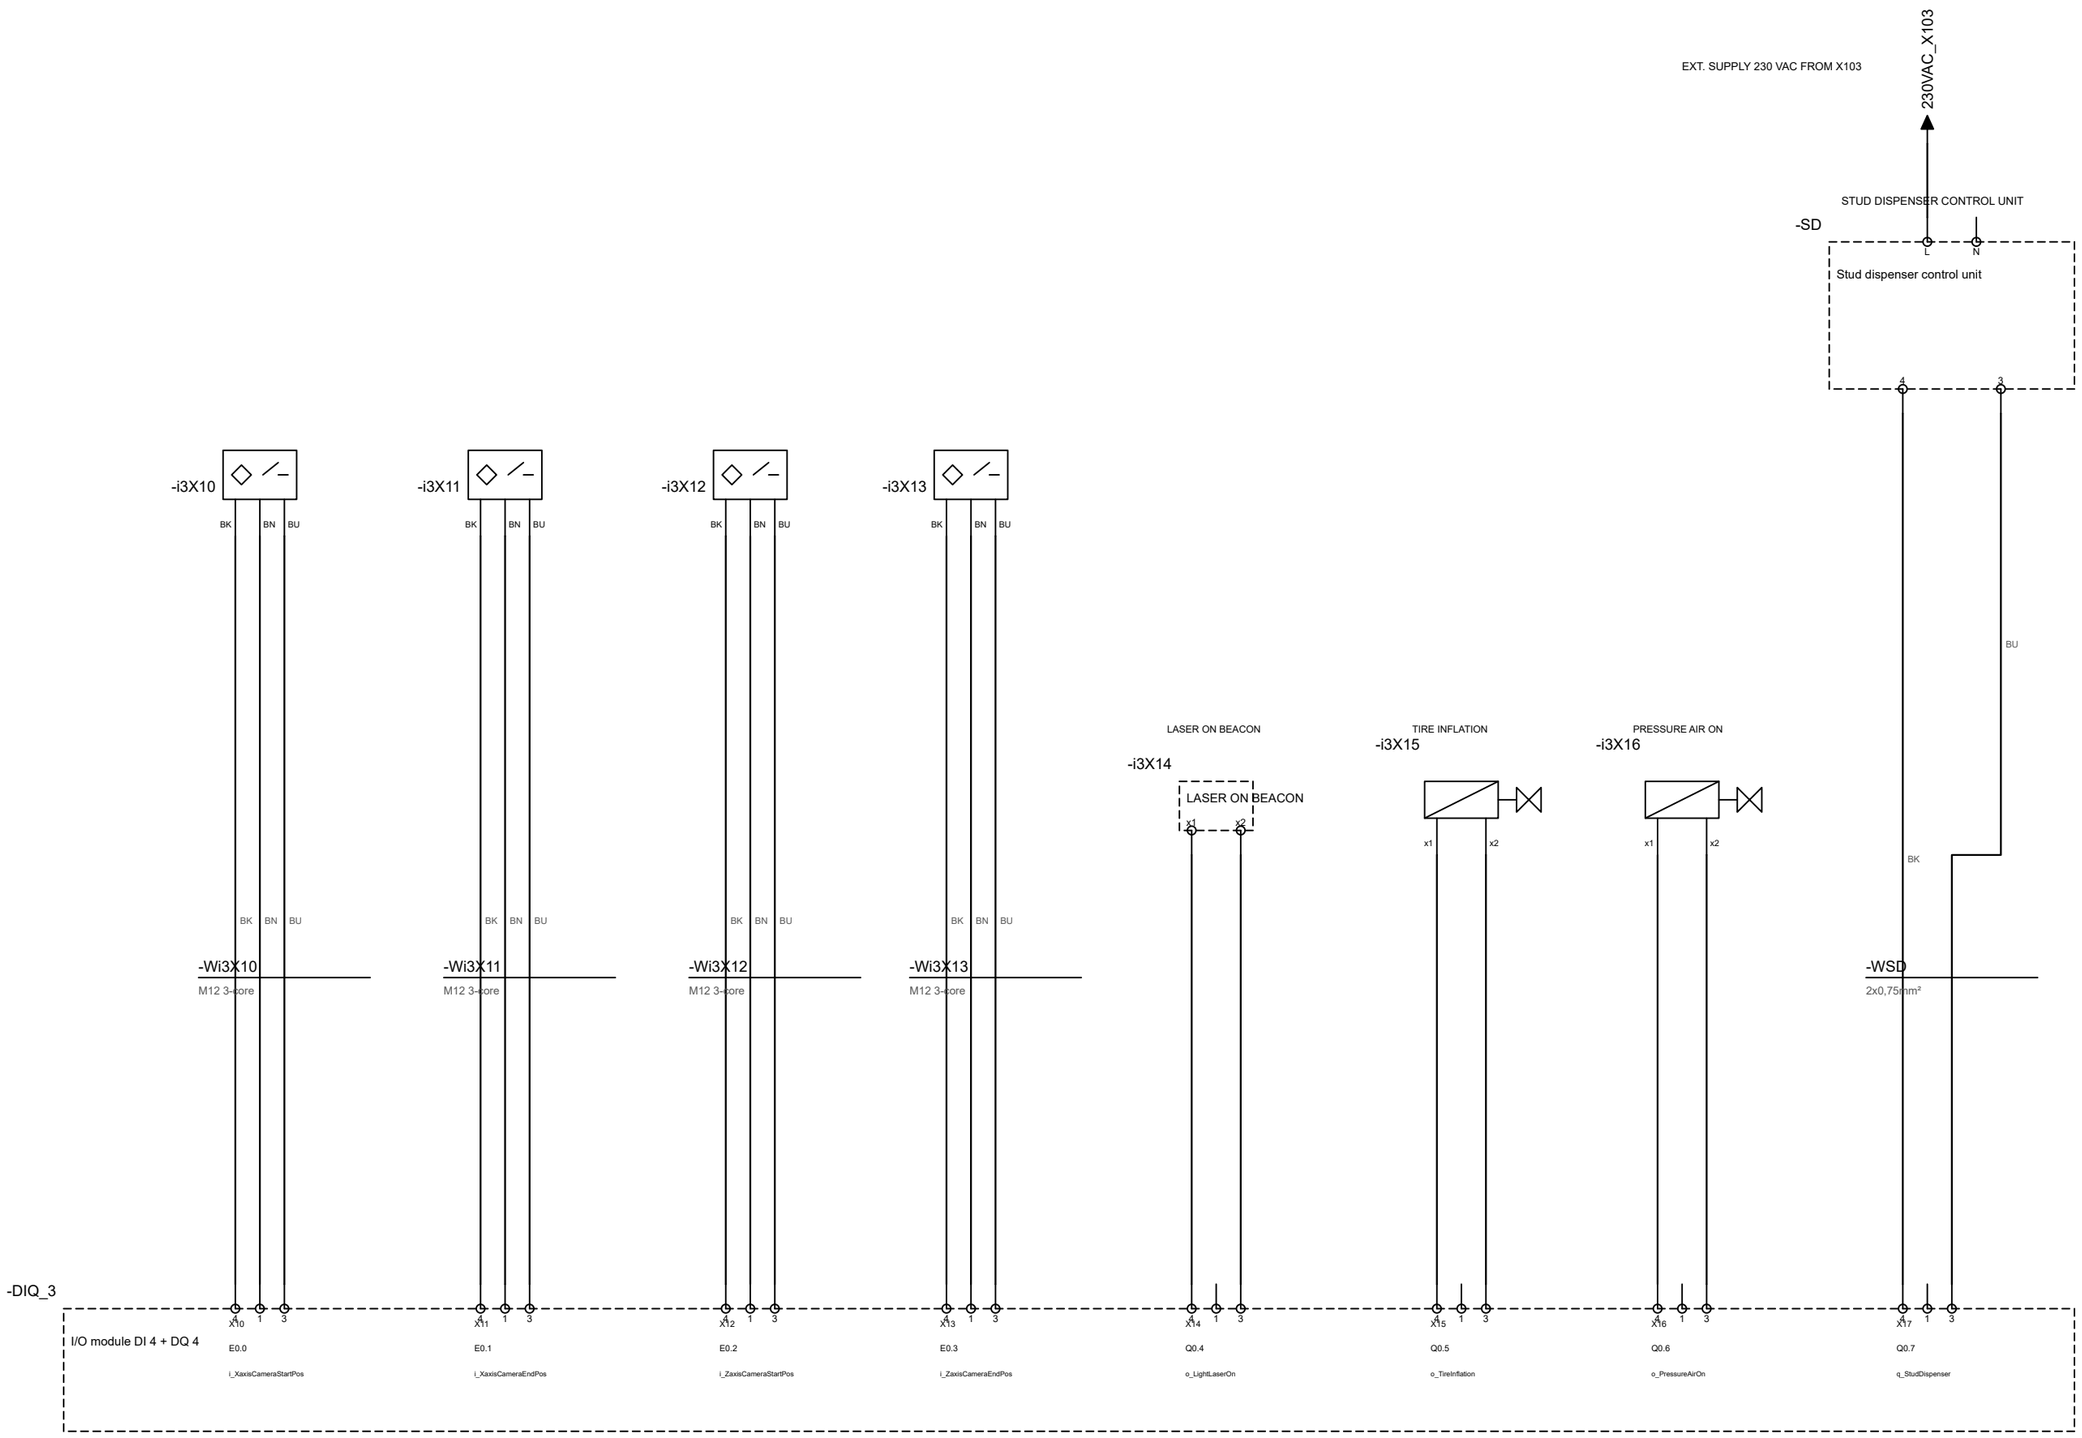

Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Module 3** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **54** Sheet 24 / 51

BUTTONS ON OPERATOR PANEL OP1

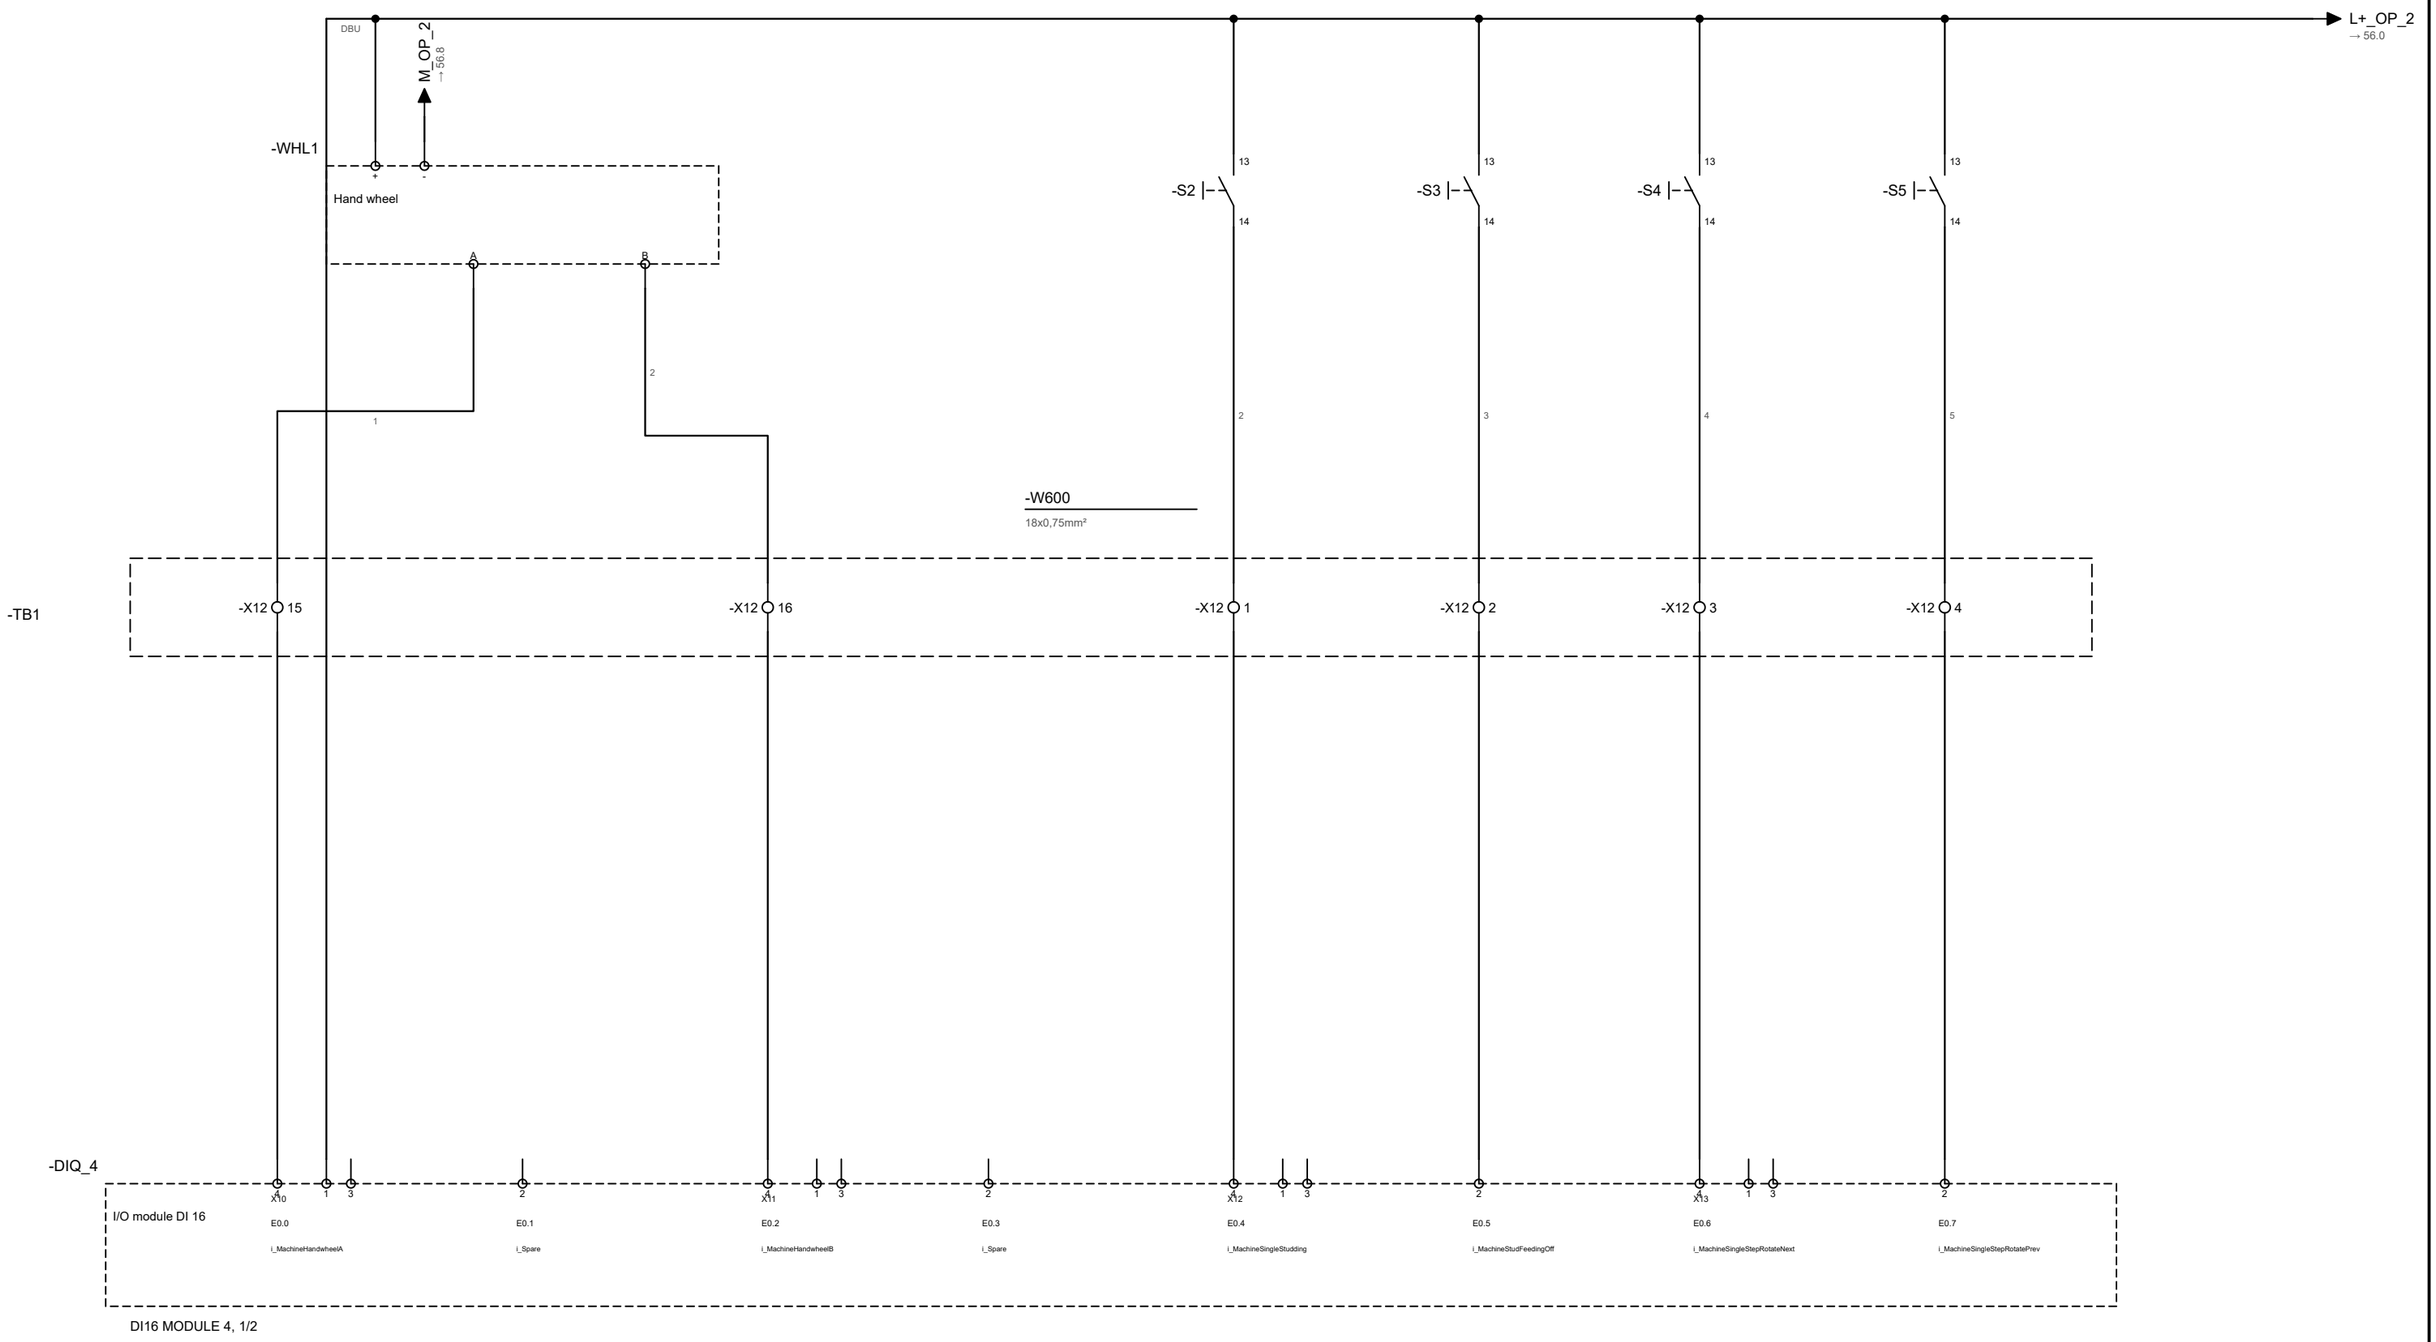


DI16 MODULE 4, 1/2

Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Module 4/1** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **55** Sheet 25 / 51

0	1	2	3	4	5	6	7	8	9

BUTTONS ON OPERATOR PANEL OP1

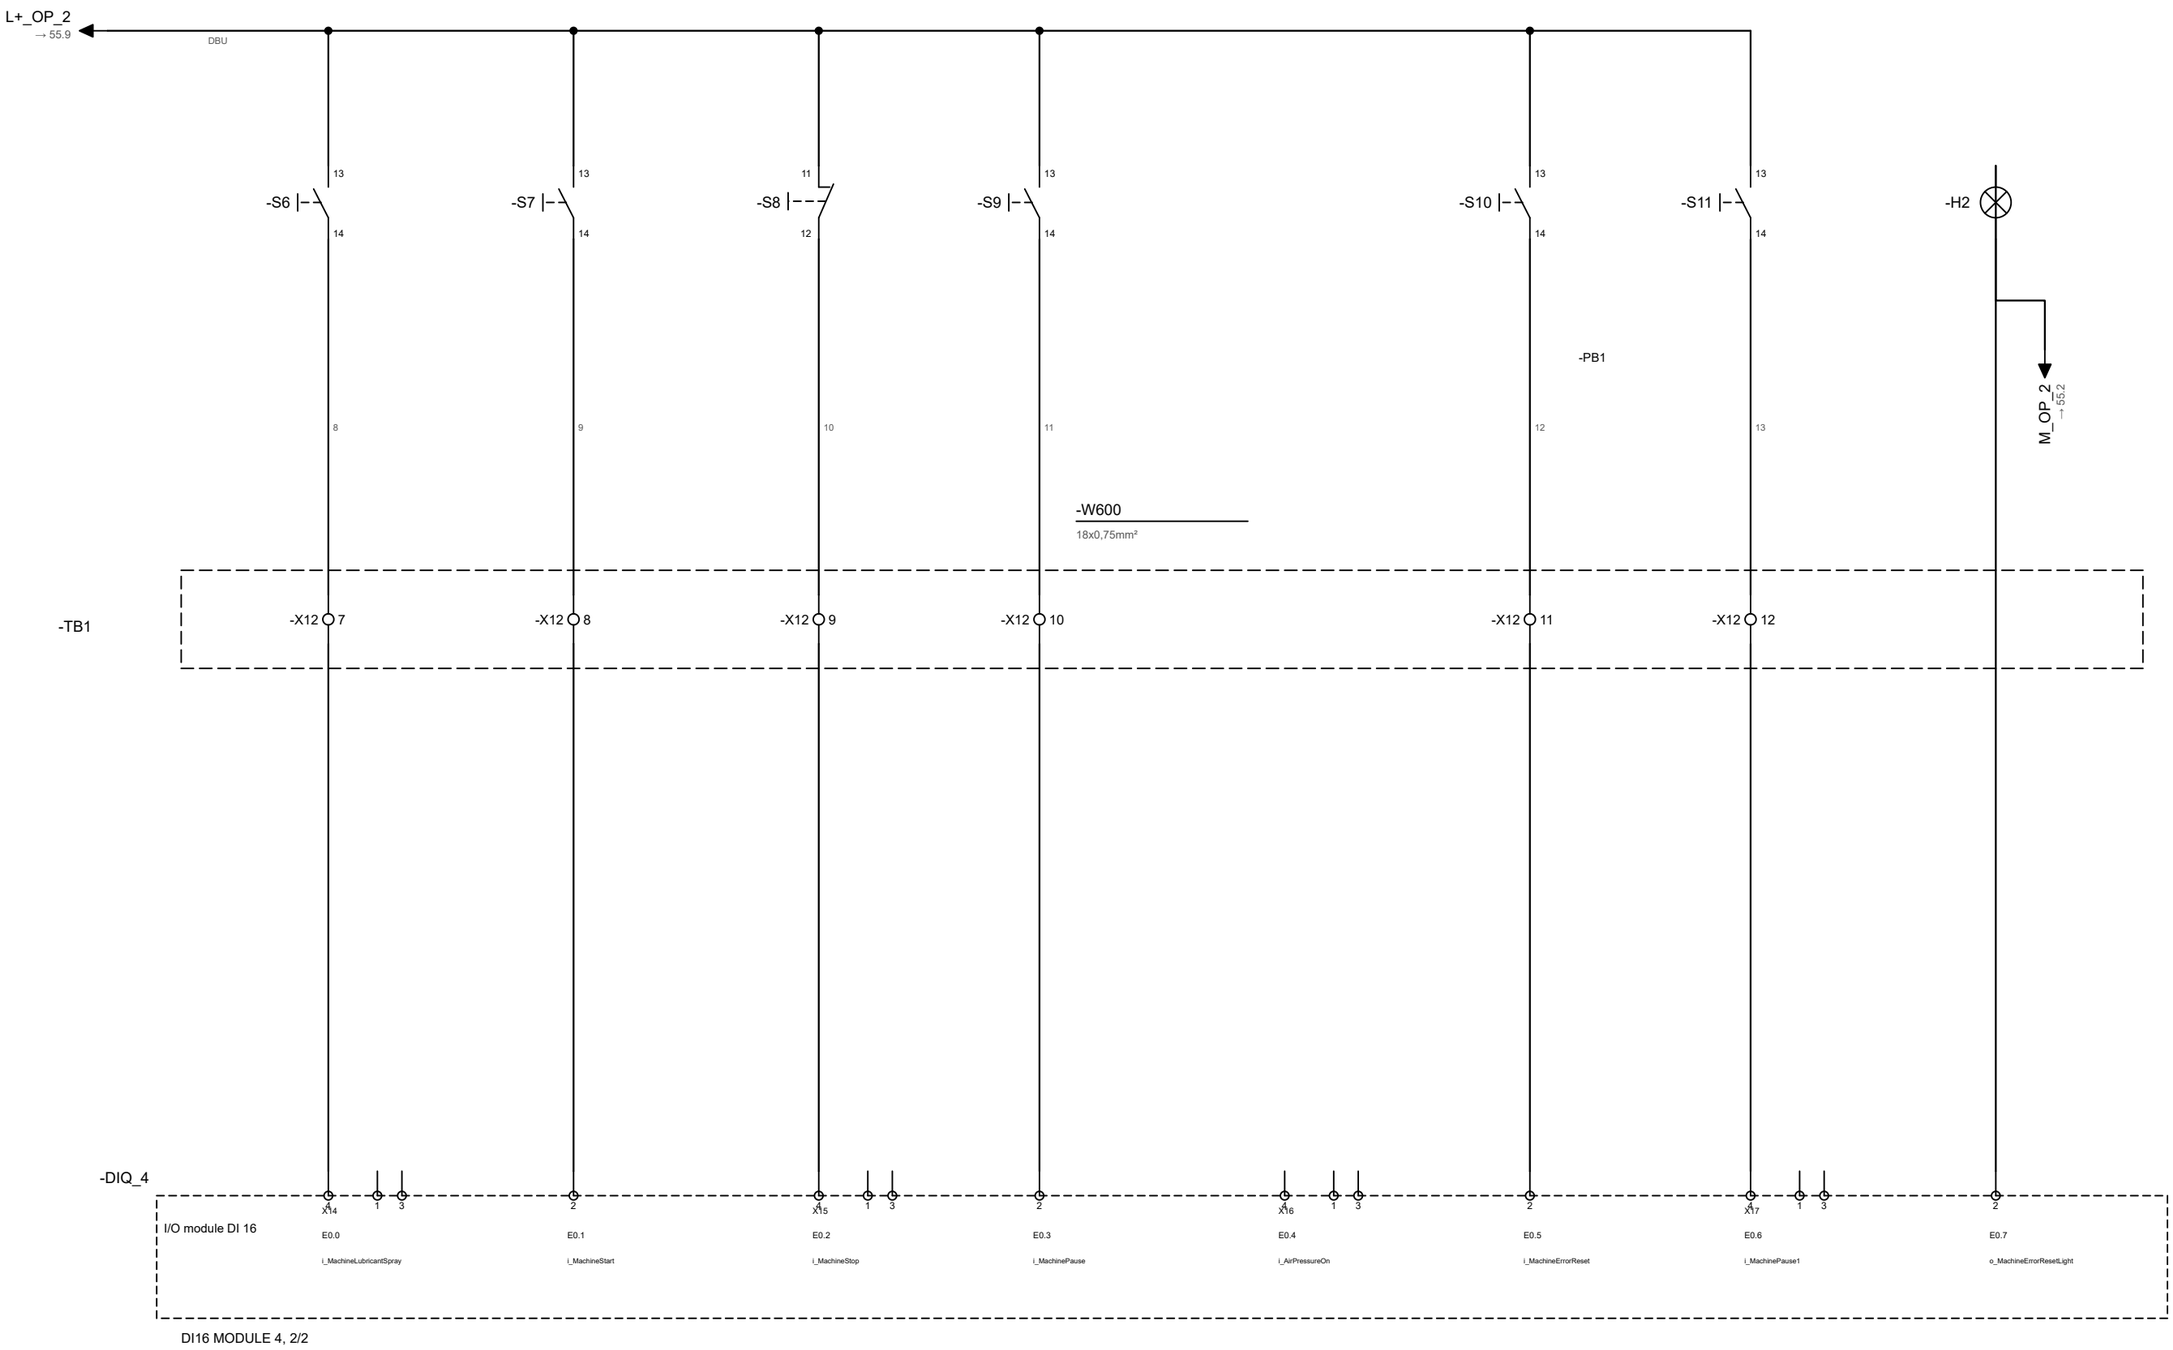


DI16 MODULE 4, 2/2

	Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Module 4/2** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **56** Sheet 26 / 51

0	1	2	3	4	5	6	7	8	9


BUTTONS ON OPERATOR PANEL OP1

BUTTON BOX (TYRE INLET SIDE)

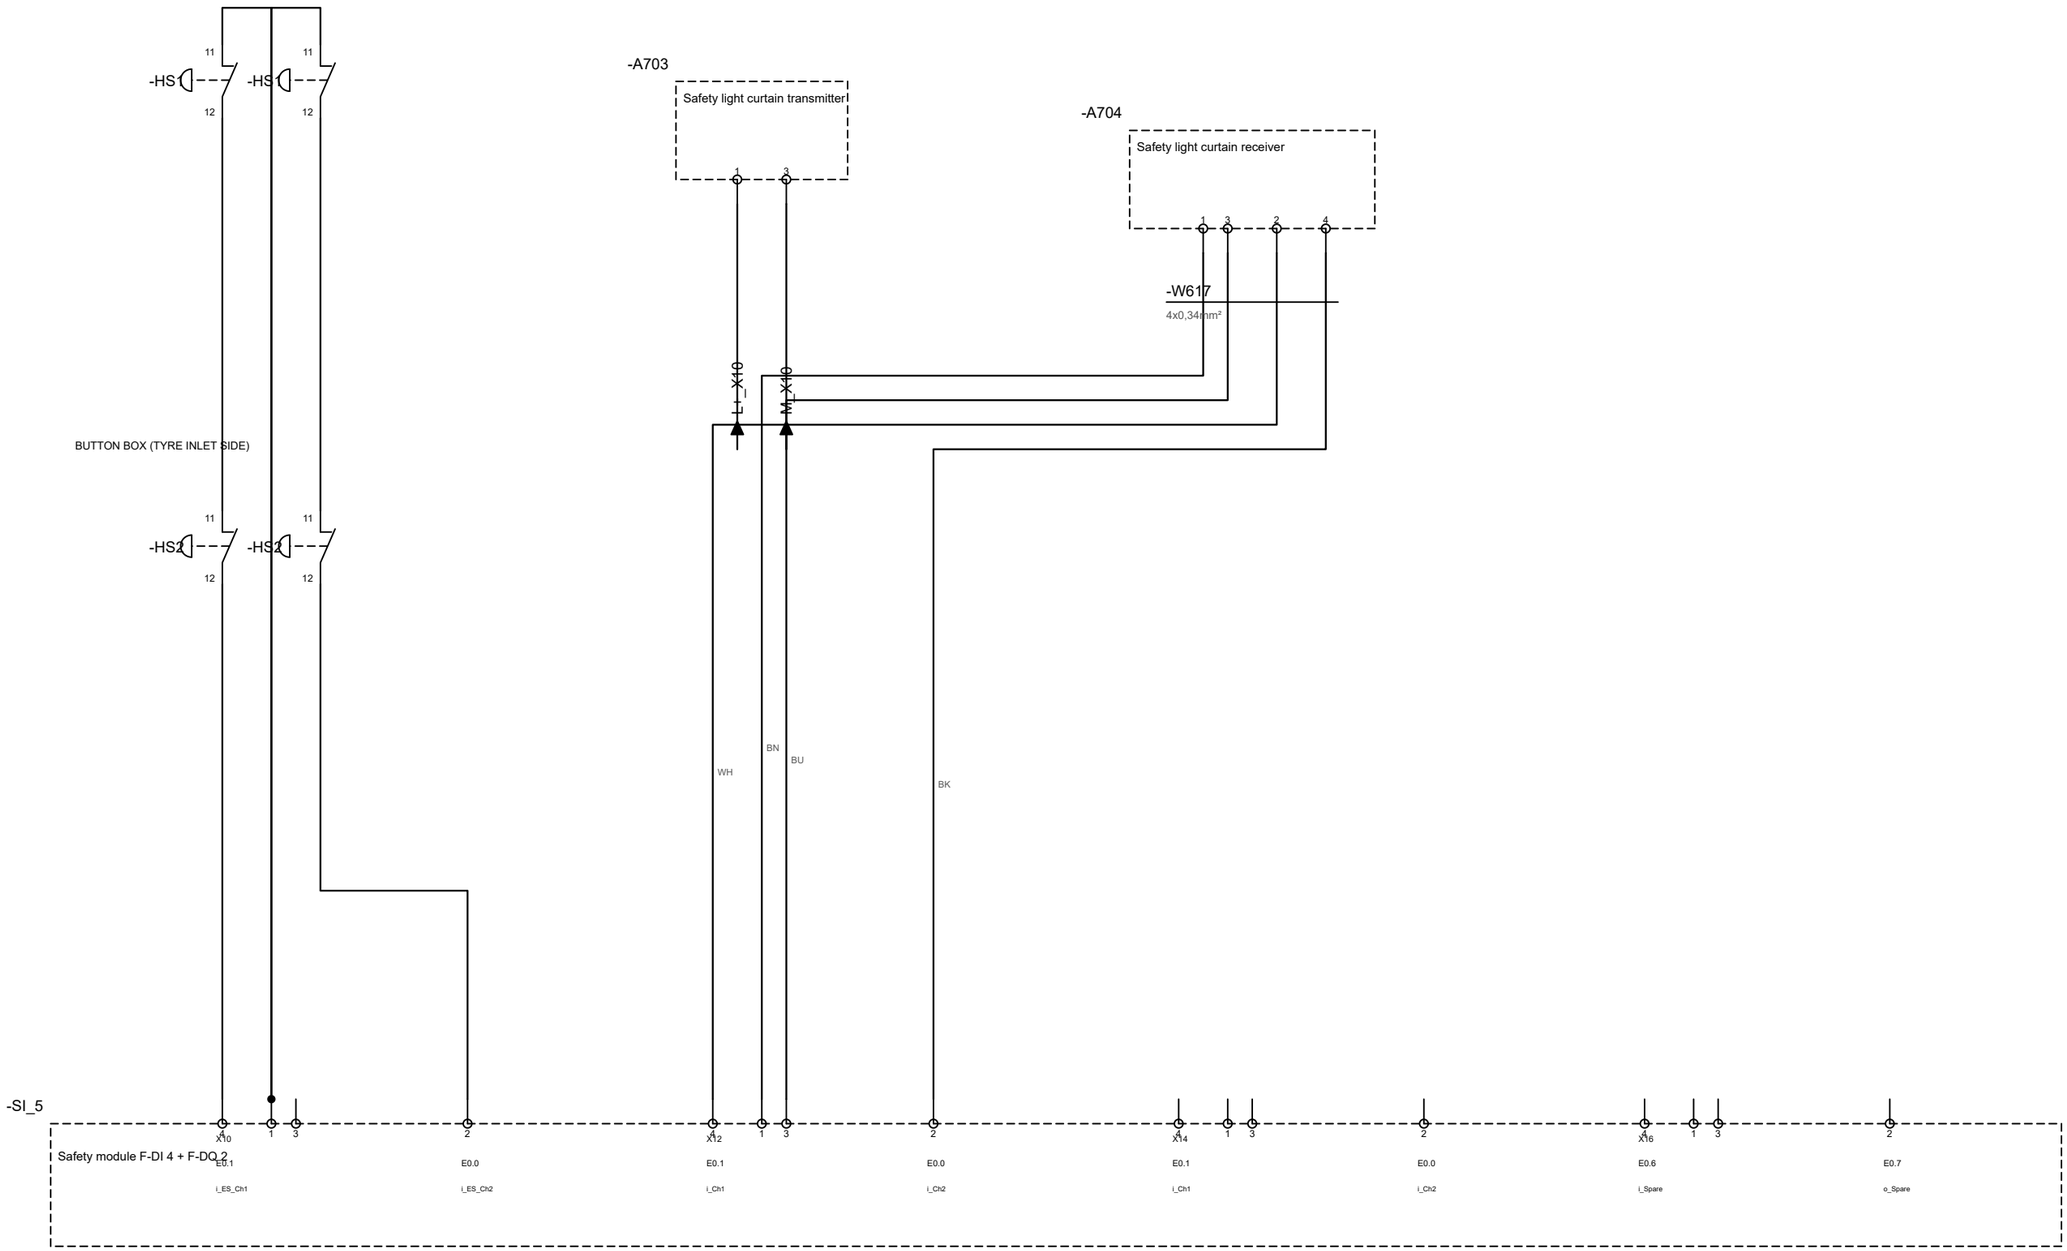


	Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Module 5** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **57** Sheet 27 / 51

0	1	2	3	4	5	6	7	8	9

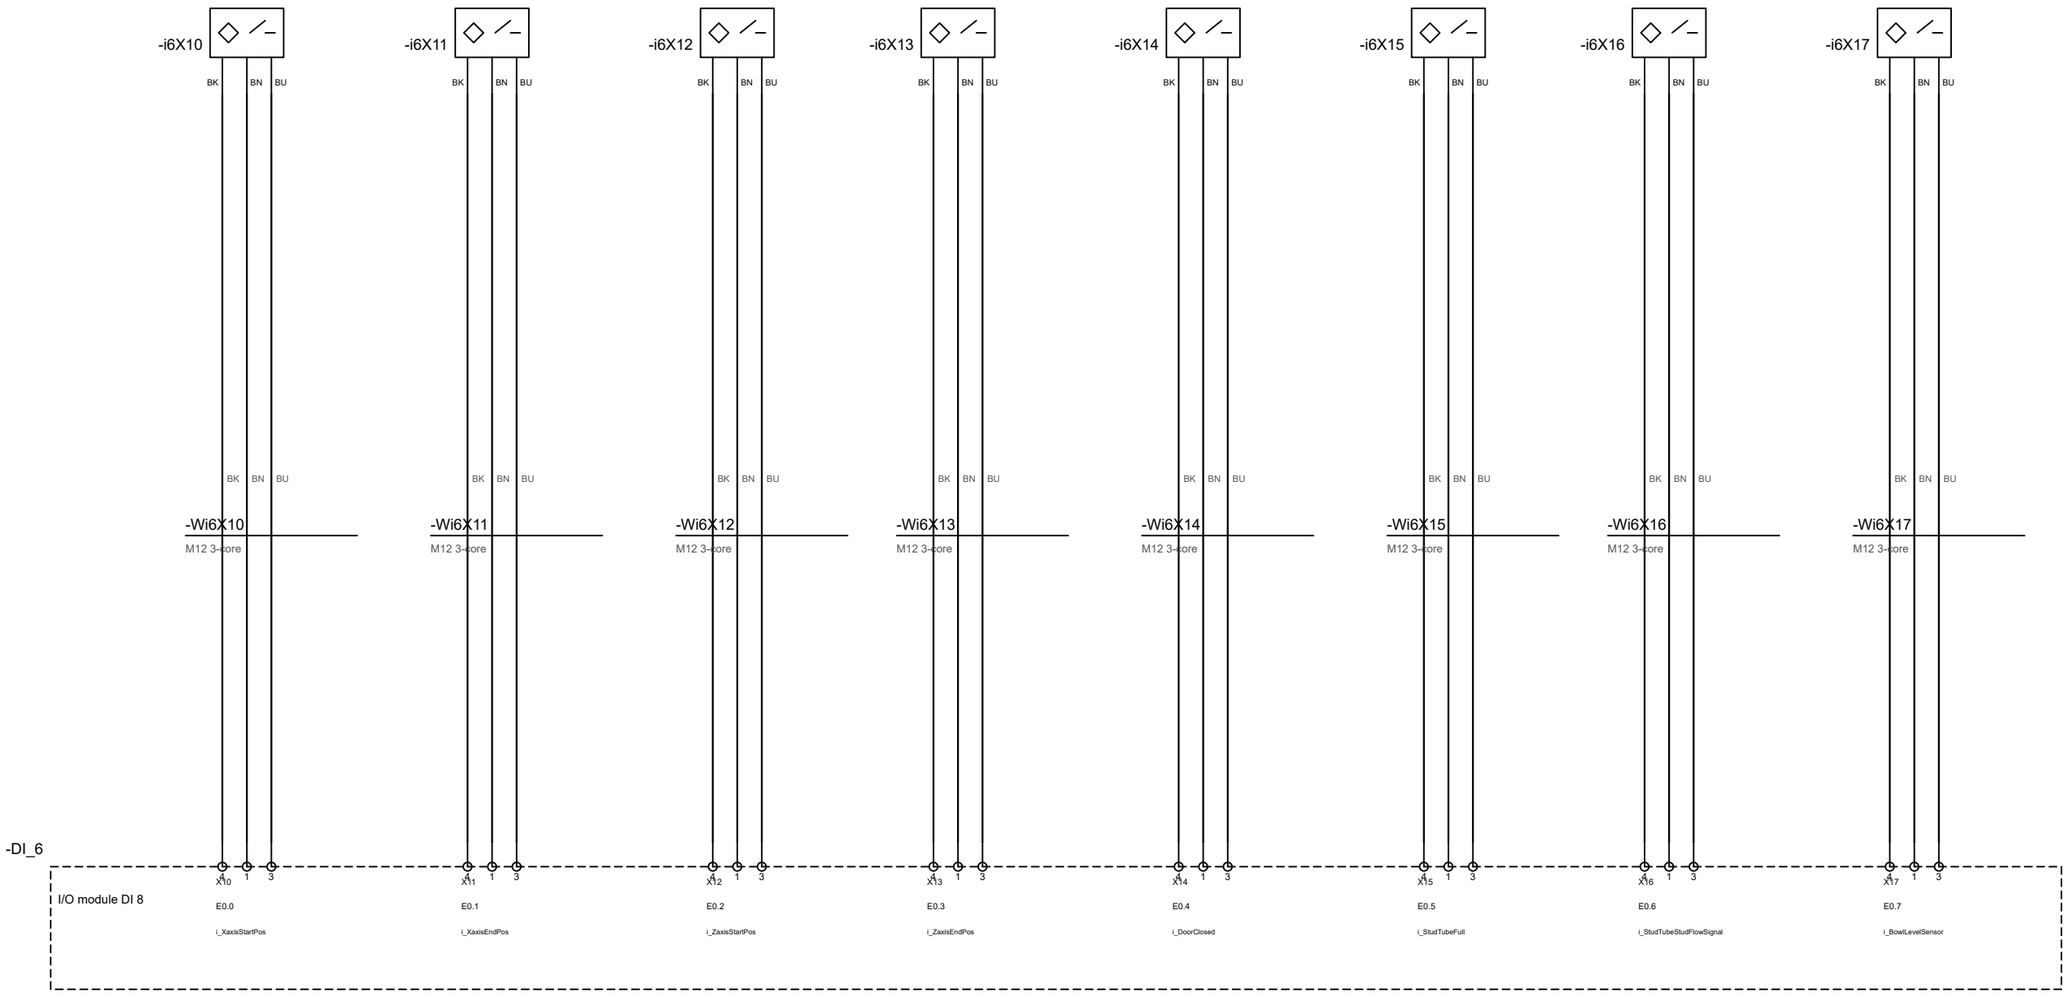


	Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Module 6** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **58** Sheet 28 / 51


0	1	2	3	4	5	6	7	8	9

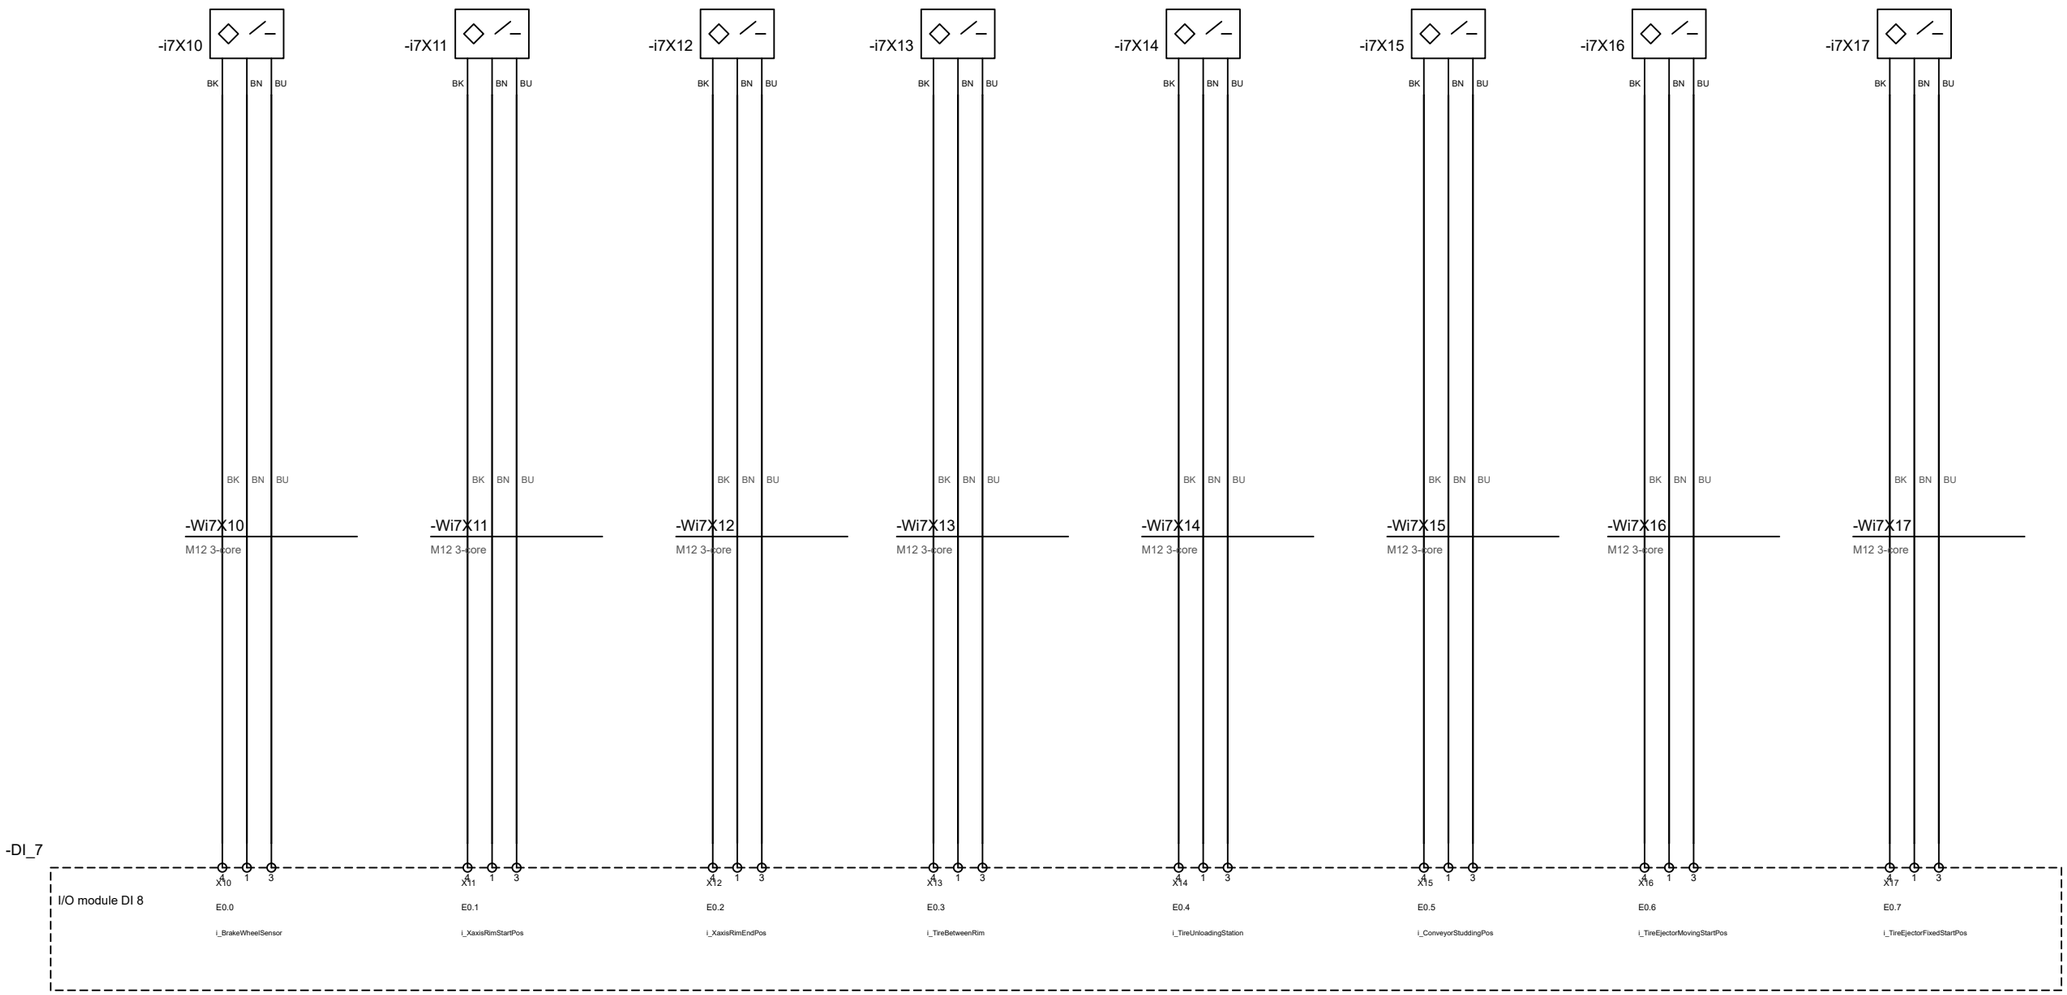

Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Module 7** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **59** Sheet 29 / 51

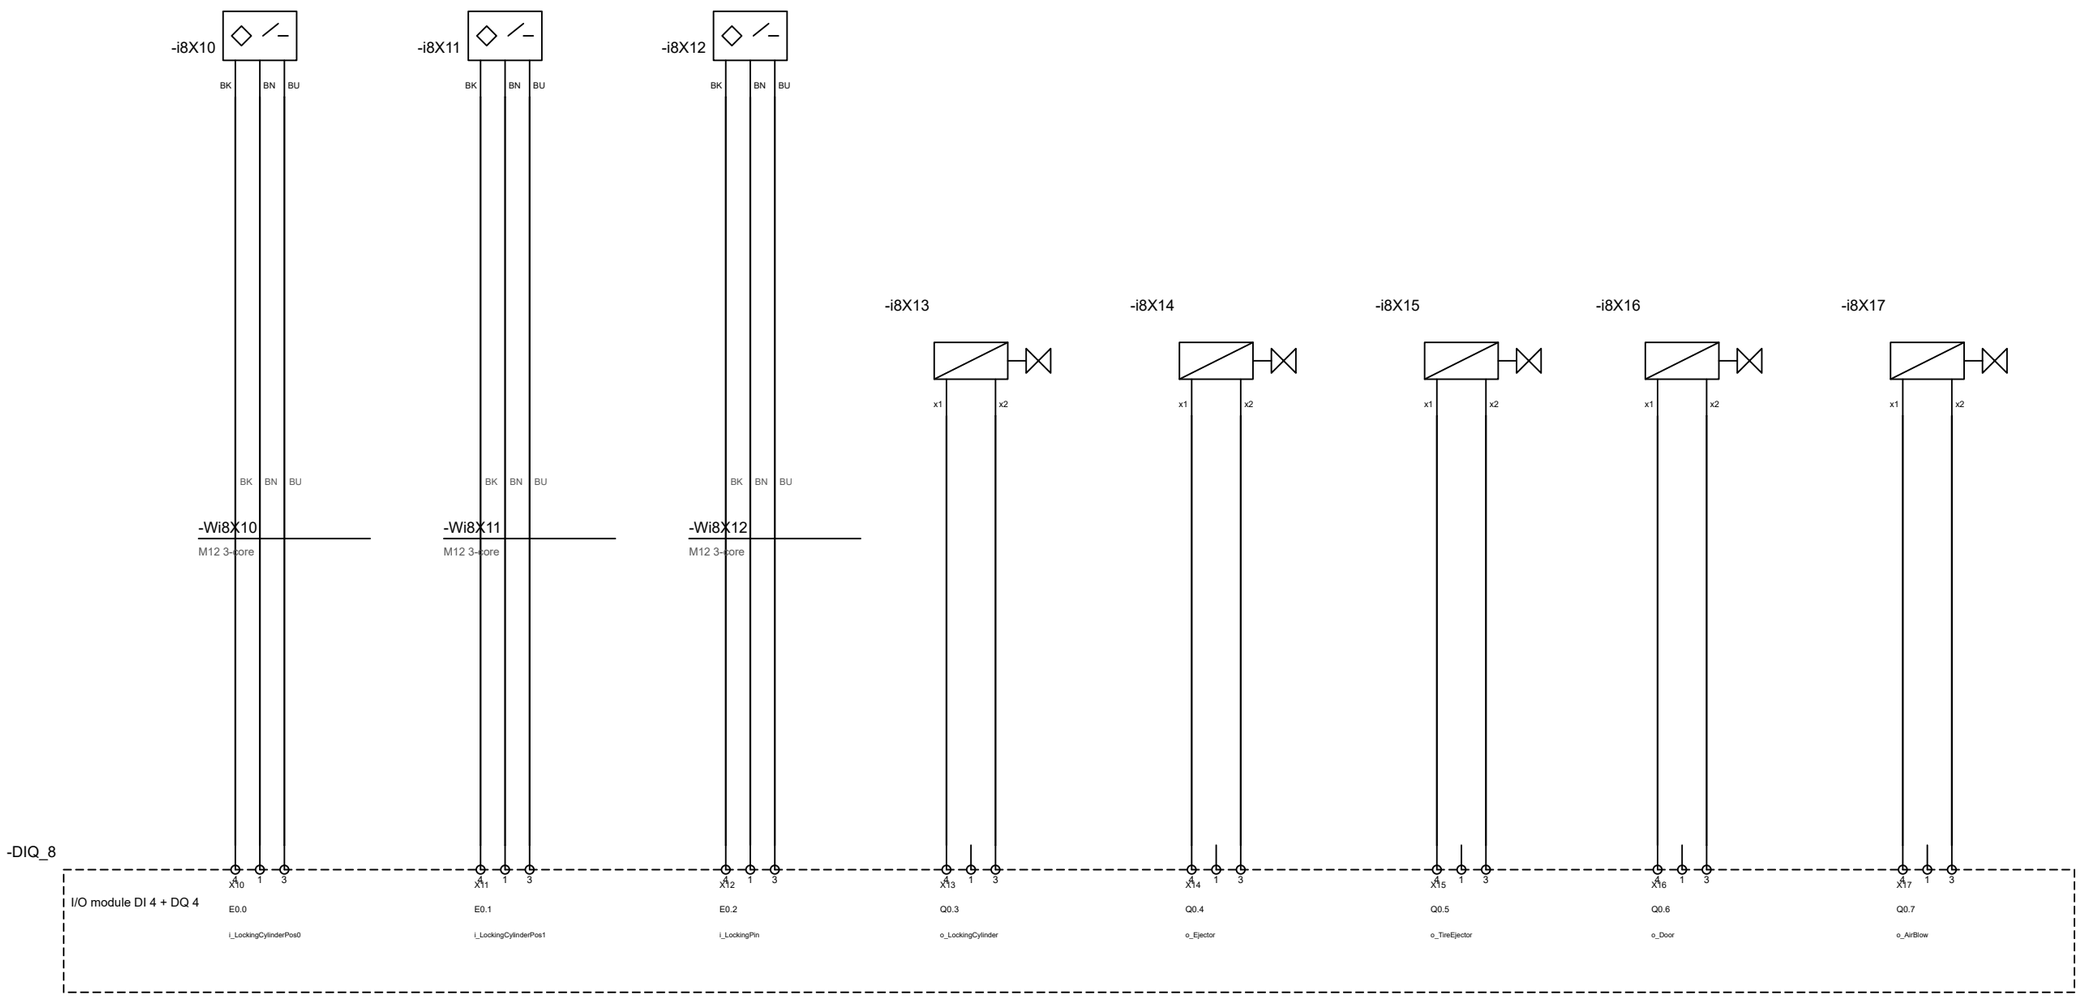

	Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Module 8** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **60** Sheet 30 / 51

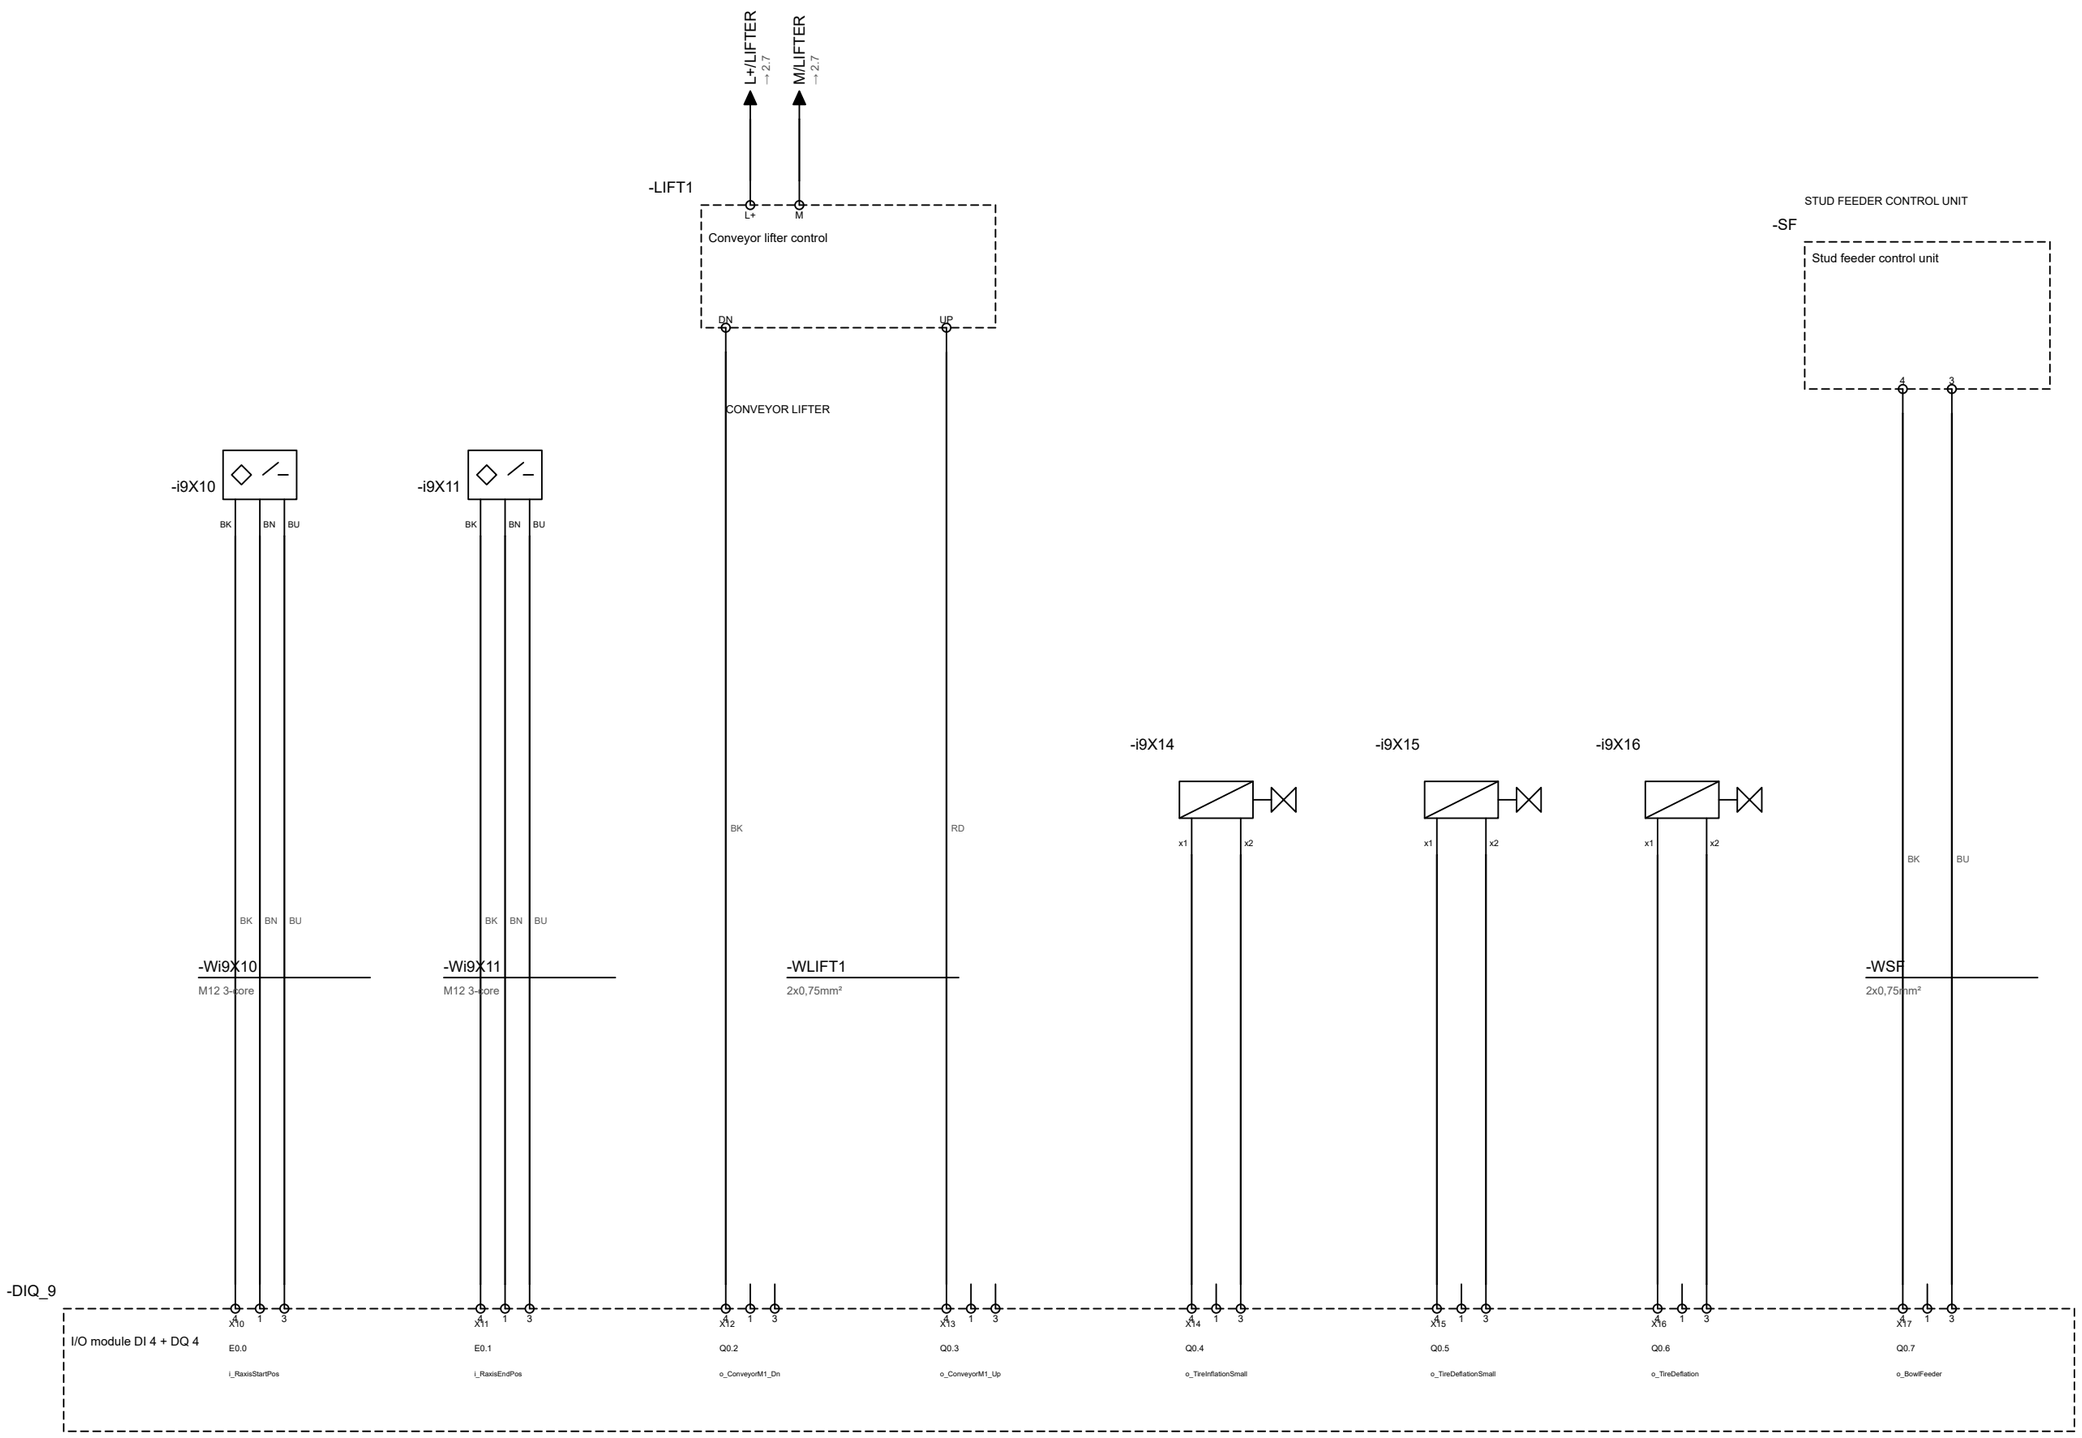

	Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Module 9** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **61** Sheet 31 / 51

0	1	2	3	4	5	6	7	8	9

TIRE PRESSURE TRANSMITTER

-PT1

Tire pressure transmitter 0–10 V

\+ OUT -

LIFTER POSITION FROM CONVEYOR LIFTER

LIFTER_POS1


LIFTER_POS2

-AI_10

Analog input module AI 4 U/I/RTD

X10	X11	X12	X13
4	4	4	4
1	1	1	1
3	3	3	3
2	2	2	2
E0.0	E0.2	E0.4	E0.6
i_aiV	i_aiV	i_aiV	i_aiV
E0.1	E0.3	E0.5	E0.7
ia_Raw_TirePressure1	ia_Raw_ConveyorM1_1_Height	ia_Raw_ConveyorM1_2_Height	i_Spare

Company **Company name** Street 1, City	Project **Machine control system**	Page title **Module 10**	Date 10/31/2026	Function = =AT	Drawing no. DOC-0001
	Description Automation cell with servo axes, camera and field I/O	Customer Customer name	Drawn XX	Location + +IO	Page **63**
			Approved YY	Revision 0	Sheet 32 / 51

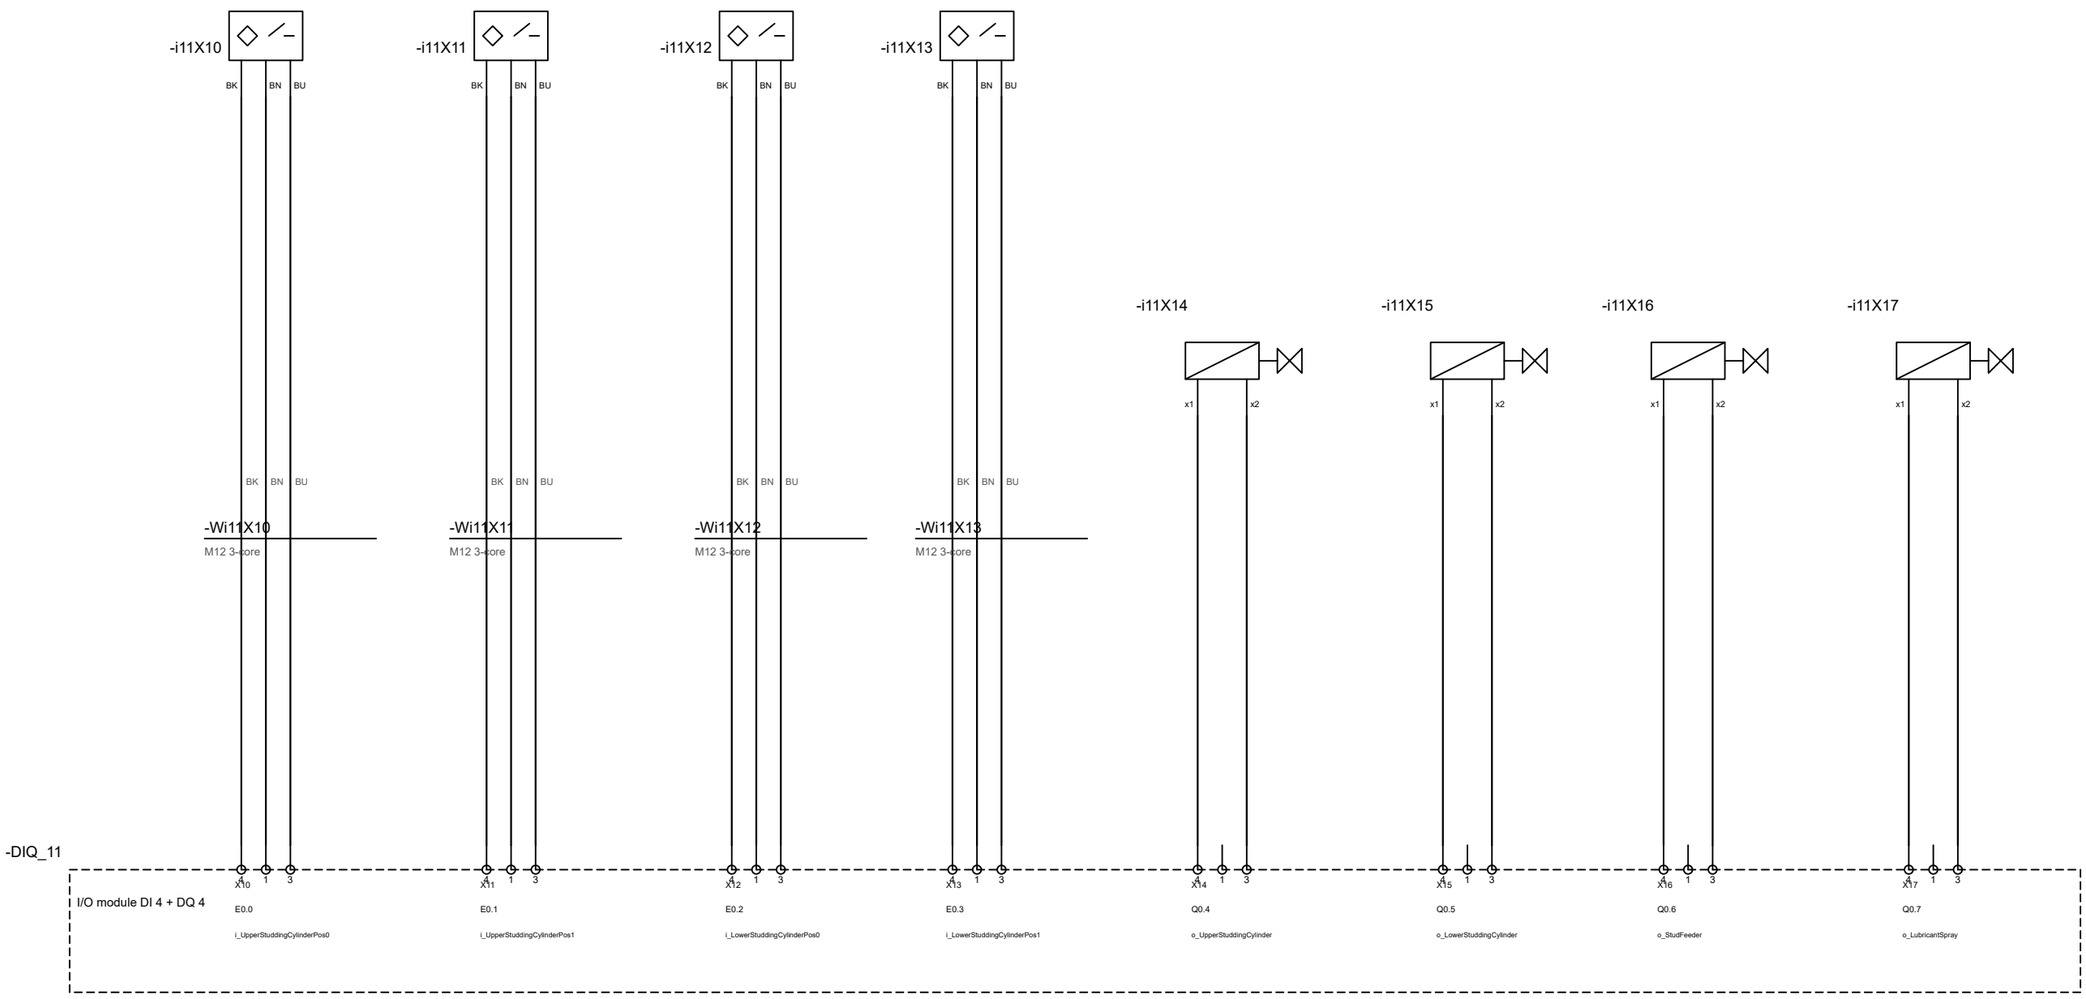

Company **Company name** Street 1, City	Project **Machine control system**	Page title **Module 11**	Date 10/31/2026	Function = =AT	Drawing no. DOC-0001
	Description Automation cell with servo axes, camera and field I/O	Customer Customer name	Drawn XX	Location + +IO	Page **70**
			Approved YY	Revision 0	Sheet 33 / 51


0	1	2	3	4	5	6	7	8	9

SAFETY CURTAIN RECEIVER

SAFETY CURTAIN RECEIVER + MUTING

RESET INDICATOR FRONT


RESET INDICATOR BACK

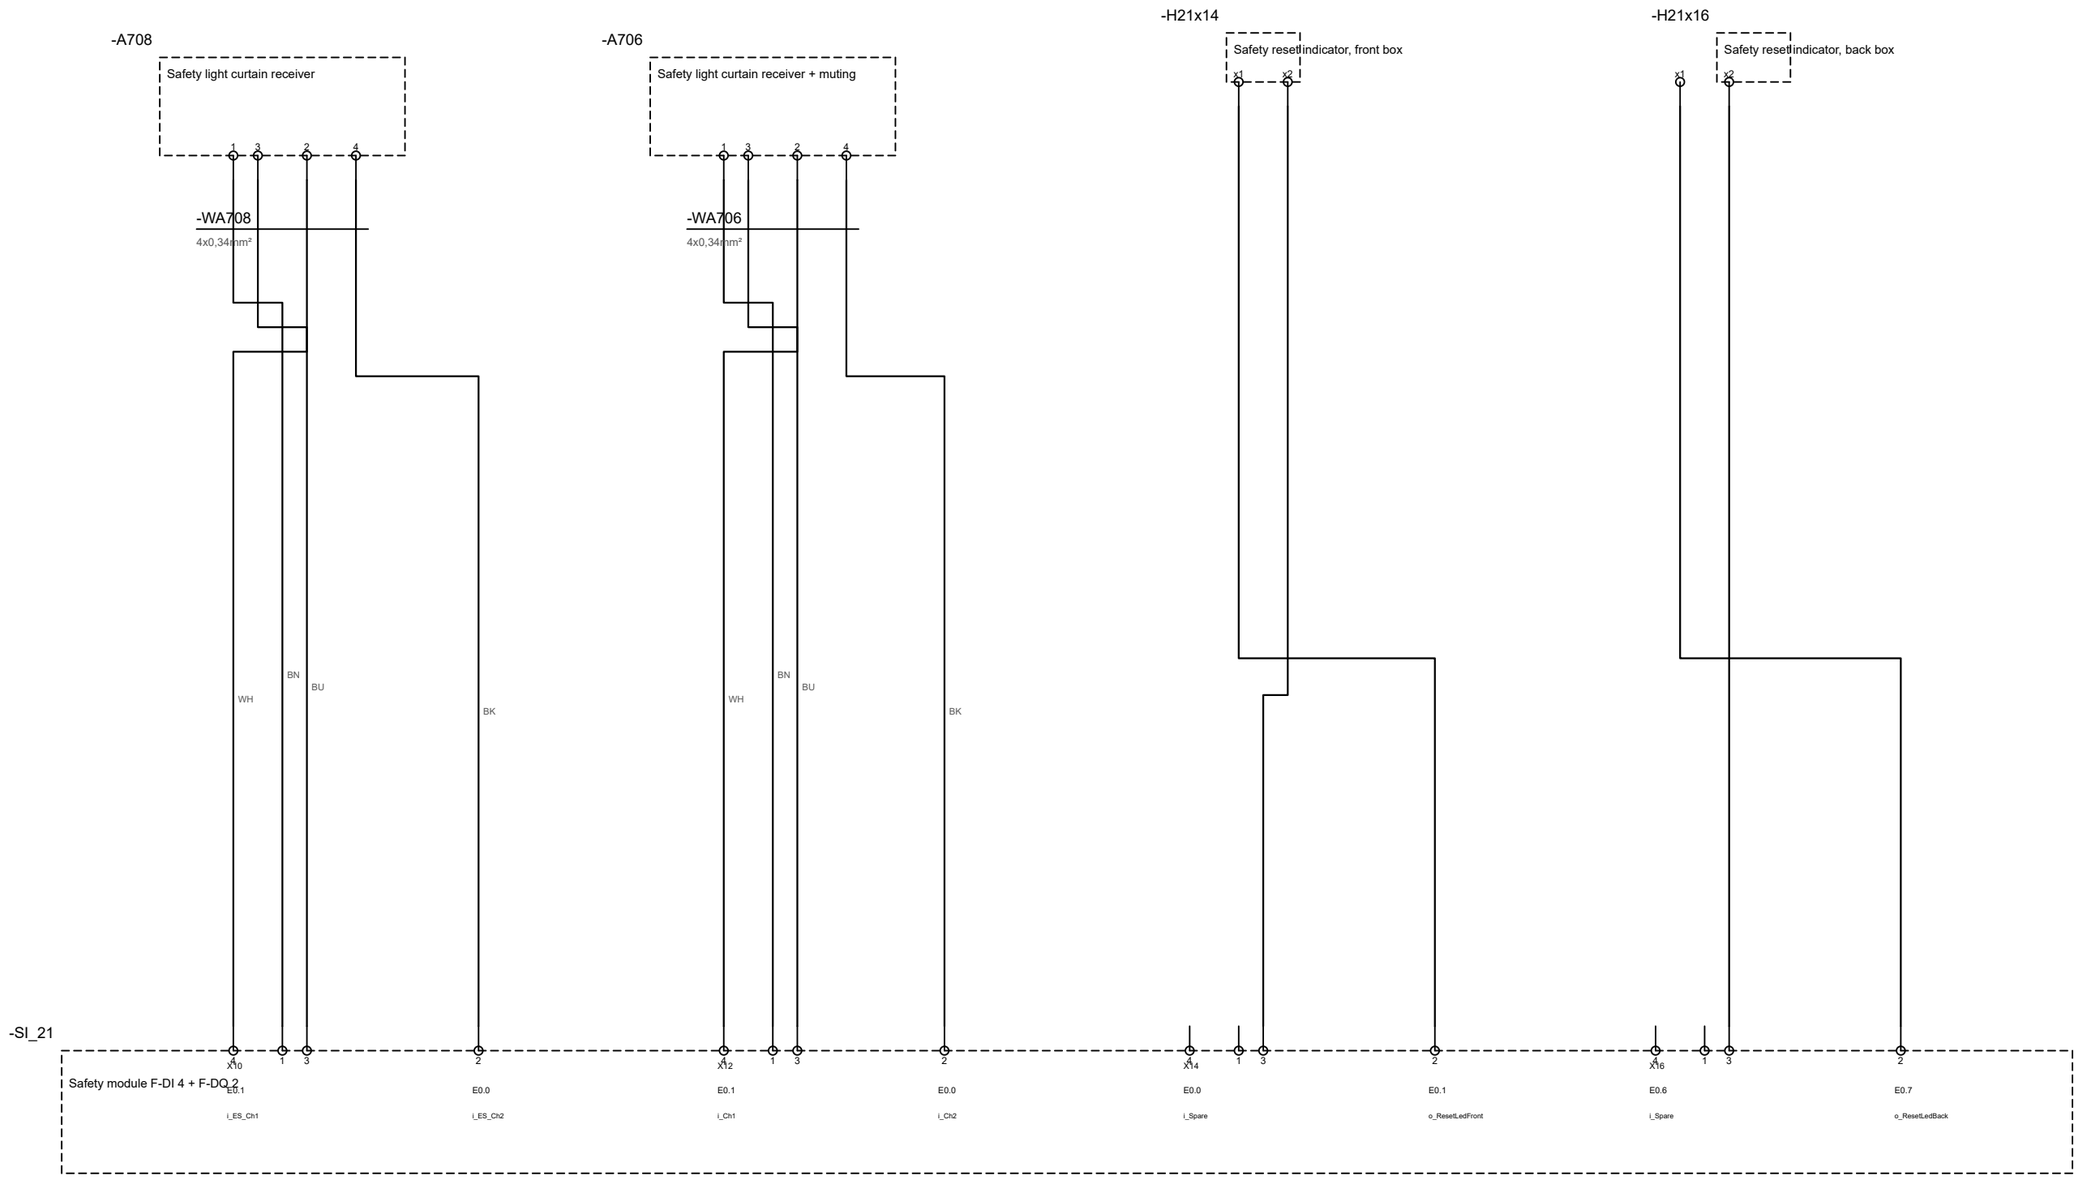


Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Module 21** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **80** Sheet 34 / 51

0	1	2	3	4	5	6	7	8	9

SAFETY CURTAIN RECEIVER

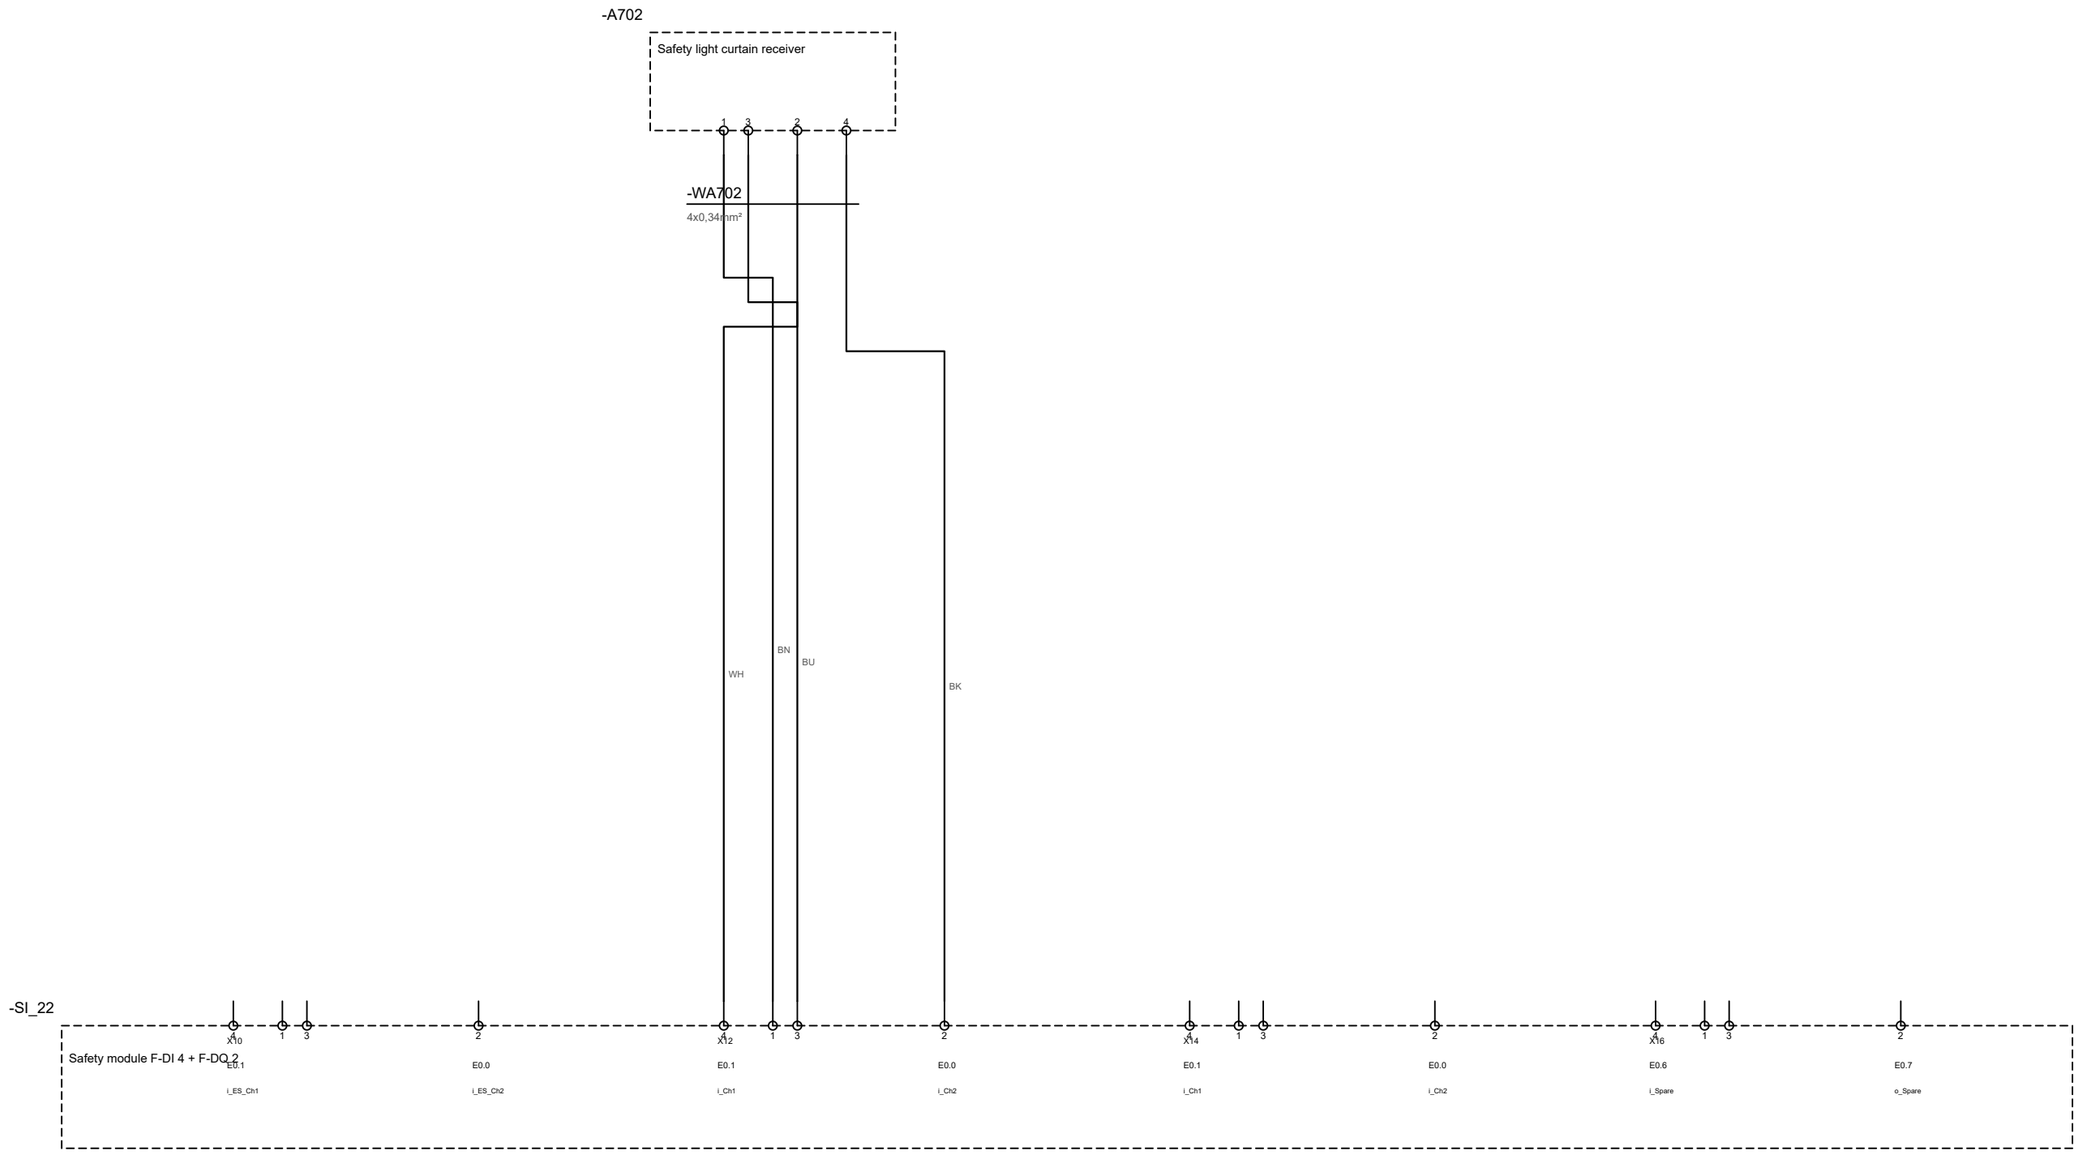

Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Module 22** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **81** Sheet 35 / 51

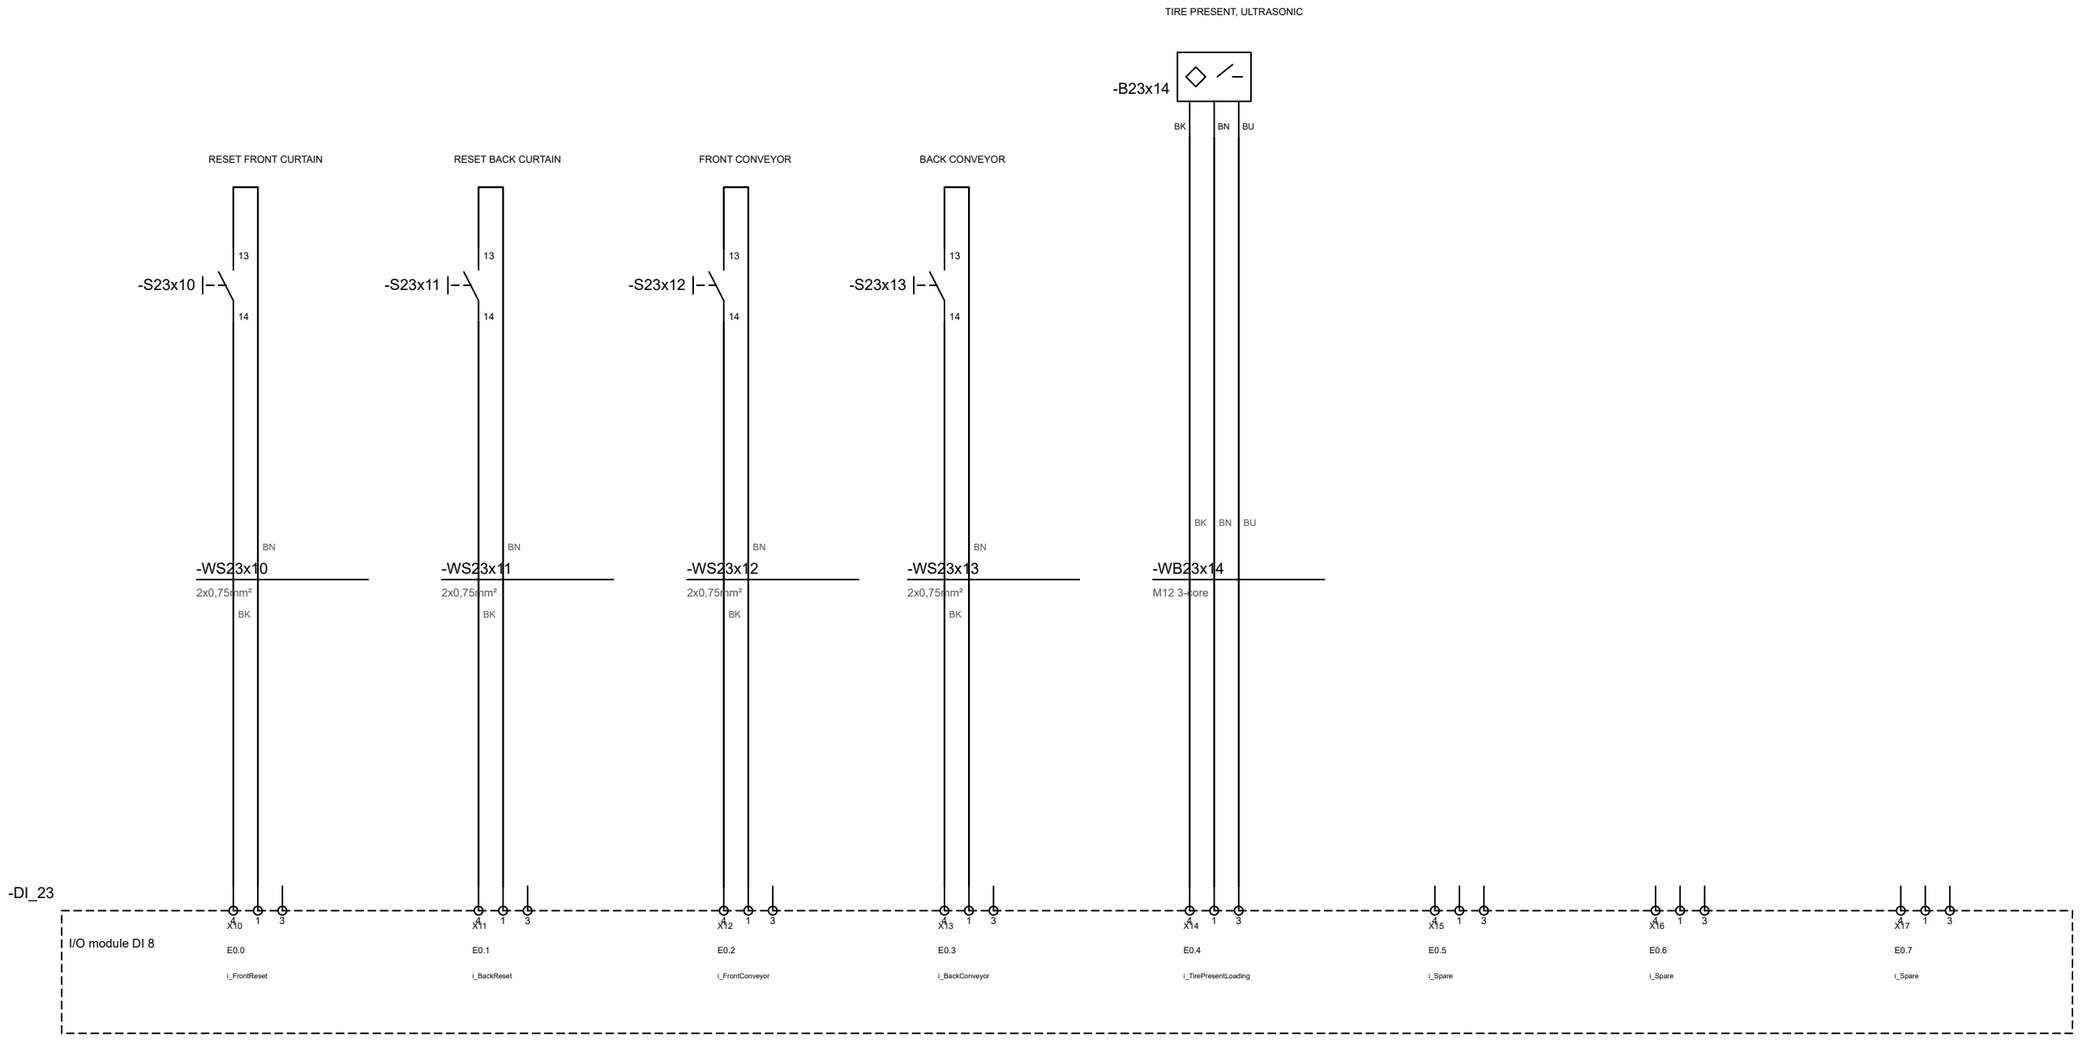

Company **Company name** Street 1, City	Project **Machine control system** Description Automation cell with servo axes, camera and field I/O	Page title **Module 23** Customer Customer name	Date 10/31/2026 Drawn XX Approved YY	Function = =AT Location + +IO Revision 0	Drawing no. DOC-0001 Page **82** Sheet 36 / 51

0	1	2	3	4	5	6	7	8	9

Table of contents

Page	Title	Function =	Location +	Date
0	Title page	AT	CP	2026-10-31
1	Power supply	AT	CP	2026-10-31
2	24VDC Supply	AT	CP	2026-10-31
3	24VDC Distribution	AT	CP	2026-10-31
3.1	24VDC Distribution 2	AT	CP	2026-10-31
4	24VDC Distribution PLC	AT	CP	2026-10-31
5	IPC	AT	CP	2026-10-31
6	CPU Internal I/O	AT	CP	2026-10-31
7	Camera Control	AT	CP	2026-10-31
20	Servo U10 X-camera	AT	CP	2026-10-31
21	Servo U11 Z-camera	AT	CP	2026-10-31
22	Servo power Z, Xrim	AT	CP	2026-10-31
23	X, R servos	AT	CP	2026-10-31
24	Y servo	AT	CP	2026-10-31
27	Conveyor inverter INV	AT	CP	2026-10-31
28	Cabinet cooling fan	AT	CP	2026-10-31
M1	Enclosure +CP	AT	ATM	2026-10-31
M2	IO-Modules	AT	ATM	2026-10-31
50	IO-station power supply	AT	IO	2026-10-31
51	IO-station power distribution	AT	IO	2026-10-31
51.1	IO-station power EXT safety	AT	IO	2026-10-31
52	Profinet	AT	IO	2026-10-31
53	Profinet EXT safety	AT	IO	2026-10-31
54	Module 3	AT	IO	2026-10-31
55	Module 4/1	AT	IO	2026-10-31
56	Module 4/2	AT	IO	2026-10-31
57	Module 5	AT	IO	2026-10-31
58	Module 6	AT	IO	2026-10-31
59	Module 7	AT	IO	2026-10-31
60	Module 8	AT	IO	2026-10-31
61	Module 9	AT	IO	2026-10-31
63	Module 10	AT	IO	2026-10-31
70	Module 11	AT	IO	2026-10-31
80	Module 21	AT	IO	2026-10-31
81	Module 22	AT	IO	2026-10-31
82	Module 23	AT	IO	2026-10-31
83	Table of contents	AT	CP	2026-10-31
84	Terminal diagram -N1	AT	CP	2026-10-31
85	Terminal diagram -N2	AT	CP	2026-10-31
86	Terminal diagram -N3	AT	CP	2026-10-31
87	Terminal diagram -PE	AT	CP	2026-10-31
88	Terminal diagram -X0	AT	CP	2026-10-31
89	Terminal diagram -X1	AT	CP	2026-10-31
90	Terminal diagram -X5	AT	CP	2026-10-31
91	Terminal diagram -X11	AT	CP	2026-10-31

Terminal diagram -N1

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
		-X0:1	1		-N2:1	BU	1.1
		-F6.1:3	2		-N2:1, -N1:1	BU	1.5
		→ N_F8	3		-N1:1, -N1:1, → N	BU	1.6
		-X1023:1	4		→ N	BU	1.8

Terminal diagram -N2

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
		→ N_F2	1		-N1:1, -N1:1	BU	1.4

Terminal diagram -N3

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
		-U10:X1/N	1		→ N	BU	20.1
		-U11:X1/N	2		→ N	BU	21.1
		-INV:N	3		→ N	BU	27.2

Terminal diagram -PE

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
		-X0:1	1		Protective earth:1	GNYE	1.1

Terminal diagram -X0

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
		-SUPPLY_1:L1	L1		-Q1:2	6 mm² BK	1.0
		-SUPPLY_1:L2	L2		-Q1:4	6 mm² BK	1.1
		-SUPPLY_1:L3	L3		-Q1:6	6 mm² BK	1.1
		-SUPPLY_1:N	N		-N1:2	BK	1.1
		-SUPPLY_1:PE	PE		-PE:2	6 mm² GNYE	1.1

Terminal diagram -X1

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
-W0311	BN	→ IM2_1L+	1		-X1:1		3.1.0
-W0311	BK	→ IM2_2L+	2		-X1:1, -X1:1		3.1.0
-W0311	BU	→ IM2_1M	3		-X1:1		3.1.1
-W0311	WH	→ IM2_2M	4		-X1:1, -X1:1		3.1.1
-WA701	BN	-A701:1	5		-X1:1, -F24V3:F28		3.1.2
-WA701	BU	-A701:3	6		-X1:1, -X1:1		3.1.2
-WA705	BN	-A705:1	7		-F24V3:F28, -X1:1		3.1.3
-WA705	BU	-A705:3	8		-X1:1, -X1:1		3.1.3
-WA707	BN	-A707:1	9		-X1:1		3.1.4
-WA707	BU	-A707:3	10		-X1:1, -X1:1		3.1.5
-WBAR_1	BN	-BAR_1:1	11		-F24V3:F29		3.1.6
-WBAR_1	BU	-BAR_1:3	12		-X1:1, -X1:1		3.1.6
		→ SPARE_F30	13		-F24V3:F30		3.1.7
-WPC2	RD	-PC2:L+24VDC	14		-F24V3:F31		3.1.8
-WPC2	BU	-PC2:M(0V)	15		-X1:1, → M_G2		3.1.8

Terminal diagram -X5

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
		→ L+_G2	1		-G2:OUT:+	2,5 mm² DBU	2.2
		→ M_G2	2		-G2:OUT:-		2.2
		→ -L+/ETH	10		-F24V2:F27		3.7
		→ -L+/PSWITCH	11		-F24V2:F27, -X5:1, -X5:1		3.7
		→ -L+/SCANNER	12		-X5:1, -X5:1		3.7
		→ -L+/FAN	13		-X5:1, -X5:1		3.7
		→ -L+/DC_U	14		-X5:1, -X5:1		3.7
		→ L+/TM41	15		-X5:1, -X5:1		3.8
		→ -INV/L+	16		-X5:1		3.8
		-X5:2	20		→ IO_1M		3.0
		-X5:2, -X5:2	21		→ IO_2M		3.1
		-X5:2, -X5:2	22		→ M_0V_SPLC		3.2
		-X5:2, -X5:2	23		→ M_0V_IPC		3.2
		-X5:2, -X5:2	24		→ M_0V_DISPLAY		3.3
		-X5:2, -X5:2	25		→ M_0V_INPUTS		3.5
		-X5:2, -X5:2	26		→ M_BOB		3.6
		-X5:2, -X5:2	27		→ M_0V_SERVOS		3.6
		-X5:2, -X5:2	28		→ -M/ETH		3.7
		-X5:2, -X5:2	29		→ -M/PSWITCH		3.7
		-X5:2, -X5:2	30		→ -M/SCANNER		3.7
		-X5:2, -X5:2	31		→ -M/FAN		3.7
		-X5:2, -X5:2	32		→ -M/DC_U		3.8
		-X5:2, -X5:2	33		→ M/TM41		3.8
		-X5:2	34		→ -M/CAMERA_RELAY		3.8

Terminal diagram -X11

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
		→ L+_OP	1		→ L+_TB1	DBU	50.6
		→ M_OP	2		→ M_TB1	DBU	50.7

Terminal diagram -X12

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
		-DIQ_4:X12/4	1		-S2:14		55.5
		-DIQ_4:X12/2	2		-S3:14		55.6
		-DIQ_4:X13/4	3		-S4:14		55.7
		-DIQ_4:X13/2	4		-S5:14		55.8
		-DIQ_4:X14/4	7		-S6:14		56.1
		-DIQ_4:X14/2	8		-S7:14		56.2
		-DIQ_4:X15/4	9		-S8:12		56.3
		-DIQ_4:X15/2	10		-S9:14		56.4
		-DIQ_4:X16/2	11		-S10:14		56.6
		-DIQ_4:X17/4	12		-S11:14		56.7
		-DIQ_4:X10/4	15		-WHL1:A		55.1
		-DIQ_4:X11/4	16		-WHL1:B		55.3

Terminal diagram -X101

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
-W0101	1	-VB:L	L		-F6.1:2, -X100:L		1.6
-W0101	2	-VB:N	N		-F6.1:4, -X100:N	BU	1.6
-W0101	GNYE	-VB:PE	PE		Protective earth:1	GNYE	1.6

Terminal diagram -X1023

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
-W0102.1	1	-X102:L(1), -X103:L(1)	L		-F9:2		1.7
-W0102.1	2	-X102:N(2), -X103:N(2)	N		-N1:2	BU	1.8
-W0102.1	GNYE	-X102:PE, -X103:PE	PE		Protective earth:1	GNYE	1.8

Cable list

Cable	Type	From	To	Cores used	Length (m)	Description
-M10A	Ready-made encoder cable			ENC		
-M11A	Ready-made encoder cable			ENC		
-M12A	Ready-made encoder cable			ENC		
-M13A	Ready-made encoder cable			ENC		
-M14A	Ready-made encoder cable			ENC		
-M15A	Ready-made encoder cable			ENC		
-M16A	Ready-made encoder cable			ENC		
-W9	4G0,75mm²			1, 2, 3, GNYE		
-W0101	3x1,5mm²			1, 2, GNYE		
-W0102	3x1,5mm²			1, 2, GNYE		
-W0102.1	3x1,5mm²			1, 2, GNYE		
-W0103	3x1,5mm²			1, 2, GNYE		
-W0301	4x1,5mm²			BK, BN, BU, WH		
-W0311	4x1,5mm²			BK, BN, BU, WH		
-W0401	3x1mm²			1, 2		
-W0402	2x0,75mm²					
-W0403	2x0,75mm²					
-W0501	3x1mm²			1, 2		
-W600	18x0,75mm²			1, 2, 3, 4, 5, 8, 9, 10, 11, 12, 13		
-W617	4x0,34mm²			BK, BN, BU, WH		
-WA701	4x0,34mm²			BN, BU		
-WA702	4x0,34mm²			BK, BN, BU, WH		
-WA705	4x0,34mm²			BN, BU		
-WA706	4x0,34mm²			BK, BN, BU, WH		
-WA707	4x0,34mm²			BN, BU		
-WA708	4x0,34mm²			BK, BN, BU, WH		
-WB23x14	M12 3-core			BK, BN, BU		
-WBAR_1	4x0,34mm²			BN, BU		
-Wi3X10	M12 3-core			BK, BN, BU		
-Wi3X11	M12 3-core			BK, BN, BU		
-Wi3X12	M12 3-core			BK, BN, BU		
-Wi3X13	M12 3-core			BK, BN, BU		
-Wi6X10	M12 3-core			BK, BN, BU		
-Wi6X11	M12 3-core			BK, BN, BU		
-Wi6X12	M12 3-core			BK, BN, BU		
-Wi6X13	M12 3-core			BK, BN, BU		
-Wi6X14	M12 3-core			BK, BN, BU		
-Wi6X15	M12 3-core			BK, BN, BU		
-Wi6X16	M12 3-core			BK, BN, BU		
-Wi6X17	M12 3-core			BK, BN, BU		
-Wi7X10	M12 3-core			BK, BN, BU		
-Wi7X11	M12 3-core			BK, BN, BU		
-Wi7X12	M12 3-core			BK, BN, BU		
-Wi7X13	M12 3-core			BK, BN, BU		
-Wi7X14	M12 3-core			BK, BN, BU		

Cable list (2)

Cable	Type	From	To	Cores used	Length (m)	Description
-Wi7X15	M12 3-core			BK, BN, BU		
-Wi7X16	M12 3-core			BK, BN, BU		
-Wi7X17	M12 3-core			BK, BN, BU		
-Wi8X10	M12 3-core			BK, BN, BU		
-Wi8X11	M12 3-core			BK, BN, BU		
-Wi8X12	M12 3-core			BK, BN, BU		
-Wi9X10	M12 3-core			BK, BN, BU		
-Wi9X11	M12 3-core			BK, BN, BU		
-Wi11X10	M12 3-core			BK, BN, BU		
-Wi11X11	M12 3-core			BK, BN, BU		
-Wi11X12	M12 3-core			BK, BN, BU		
-Wi11X13	M12 3-core			BK, BN, BU		
-WLIFT1	2x0,75mm²			BK, RD		
-WM10	Ready-made motor cable			BK, BN, GY, YEGR		
-WM11	Ready-made motor cable			BK, BN, GY, YEGR		
-WM12	Ready-made motor cable			BK, BN, GY, YEGR		
-WM13	Ready-made motor cable			BK, BN, GY, YEGR		
-WM14	Ready-made motor cable			BK, BN, GY, YEGR		
-WM15	Ready-made motor cable			BK, BN, GY, YEGR		
-WM16	Ready-made motor cable			BK, BN, GY, YEGR		
-WN52_1	M12 PROFINET			GN		
-WN52_2	M12 PROFINET			GN		
-WN52_3	M12 PROFINET			GN		
-WN52_4	M12 PROFINET			GN		
-WN52_5	M12 PROFINET			GN		
-WN52_6	M12 PROFINET			GN		
-WN52_7	M12 PROFINET			GN		
-WN52_8	M12 PROFINET			GN		
-WN52_9	M12 PROFINET			GN		
-WN53_1	M12 PROFINET			GN		
-WN53_2	M12 PROFINET			GN		
-WN53_3	M12 PROFINET			GN		
-WP51_1	M12 power 4-pin			BK, BN, BU, WH		
-WP51_2	M12 power 4-pin			BK, BN, BU, WH		
-WP51_3	M12 power 4-pin			BK, BN, BU, WH		
-WP51_4	M12 power 4-pin			BK, BN, BU, WH		
-WP51_5	M12 power 4-pin			BK, BN, BU, WH		
-WP51_6	M12 power 4-pin			BK, BN, BU, WH		
-WP51_7	M12 power 4-pin			BK, BN, BU, WH		
-WP51_8	M12 power 4-pin			BK, BN, BU, WH		
-WP51_9	M12 power 4-pin			BK, BN, BU, WH		
-WP511_1	M12 power 4-pin			BK, BN, BU, WH		
-WP511_2	M12 power 4-pin			BK, BN, BU, WH		
-WP511_3	M12 power 4-pin			BK, BN, BU, WH		
-WPC2	2x0,75mm²			BU, RD		

Cable list (3)

Cable	Type	From	To	Cores used	Length (m)	Description
-WS23x10	2x0,75mm²			BK, BN		
-WS23x11	2x0,75mm²			BK, BN		
-WS23x12	2x0,75mm²			BK, BN		
-WS23x13	2x0,75mm²			BK, BN		
-WSD	2x0,75mm²			BK, BU		
-WSF	2x0,75mm²			BK, BU		