

J3

No.	Quantity	Comment	Designator	Footprint	Value	Manufacturer Part	Manufacturer	Supplier Part	Supplier	LCSC Stock	Mounting Type
1	4	100nF	C1,C2,C4,C5	C0402	100nF	CL05B104KB54PNC	SAMSUNG(三星)	C307331	LCSC		
2	5	1uF	C3,C6,C7,C8,C9	C0603	1uF	CL10B105KB8NQNC	SAMSUNG(三星)	C5199872	LCSC		
3	2	GG0402052R542P	D1,D2	D0402-BI		GG0402052R542P	Kyocera AVX	C1973257	LCSC		
4	1	TYPE-C 16PIN 2MD(073)	J1	USB-C-SMD TYPE-C-16 PIN-2MD-073		TYPE-C 16PIN 2MD(073)	SHOUHAN(首韩)	C2765186	LCSC		Surface Mount, Right Angle
5	1	MKDSN 1,5/2-5,08	J2	CONN-TH_2 P-P5.08_1729128		MKDSN 1,5/2-5,08	Phoenix Contact(菲尼克斯)	C5183989	LCSC		Through Hole
6	1	KT-0805R	LED1	LED0805-R-RD		KT-0805R	KENTO	C2295	LCSC		
7	5	KT-0805G	LED2,LED3,LED4,LED5,LED6	LED0805-R-RD		KT-0805G	KENTO	C2297	LCSC		
8	1	2N7002T-7-F	Q1	SOT-523-3 L1.6-W0.8-P1.00-LS1.6-BR		2N7002T-7-F	DIODES(美台)	C139445	LCSC		
9	6	1kΩ	R1,R9,R11,R12,R13,R14	R0402	1kΩ	0402WGF1001TCE	UNI-ROYAL(厚声)	C11702	LCSC		
10	4	10kΩ	R2,R4,R5,R6	R0402	10kΩ	0402WGF1002TCE	UNI-ROYAL(厚声)	C25744	LCSC		
11	1	DSHP03TS-S	SW1	SW-SMD_DSHP03TS-S		DSHP03TS-S	XKB Connection(中国星坤)	C319051	LCSC		
12	1	CH224Q	U1	DFN-10 L2.0-W2.0-P0.40-BL-EP		CH224Q	WCH(南京沁恒)	C46061833	LCSC		
13	1	TPS70933D BVR	U2	SOT-23-5 L3.0-W1.7-P0.95-LS2.8-BR		TPS70933D BVR	TI(德州仪器)	C89347	LCSC		
14	1	MC14051BD R2G	U3	SOIC-16 L9.9-W3.9-P1.27-LS6.0-BL		MC14051BD R2G	onsemi(安森美)	C7284	LCSC		

OUTPUT VOLTAGE

5V

9V

12V

20V

28V



J1

S1

S2

S3

VOUT

J2

0	0	0
1	1	1
1	1	0
1	0	0
1	0	1

5V
9V
12V
20V
28V




INPUT

ERROR CHECK IF YOUR
USB-C ADAPTER
SUPPORTS PD

OUTPUT

SWITCHES



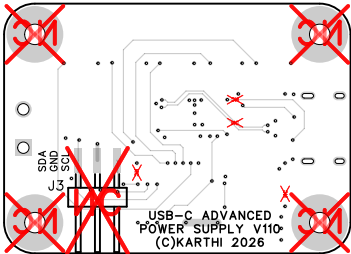

$\mathbb{H}$ $\mathbb{H}$ 