

mspm33c321a_derivative Compute Subsystem Datasheet

Top: mspm33c321a_derivative_compute_ss

CPU: hazard3_2port_swd

SRAM: 0x20000000 size 0x00020000

XiP: 0x00000000 size 0x00080000

APB buses: 2


Peripherals: 26

Infra control bus: apb1

Pinmux routes: 129

Pinmux defaults: 9

Pinmux conflict pins: 9

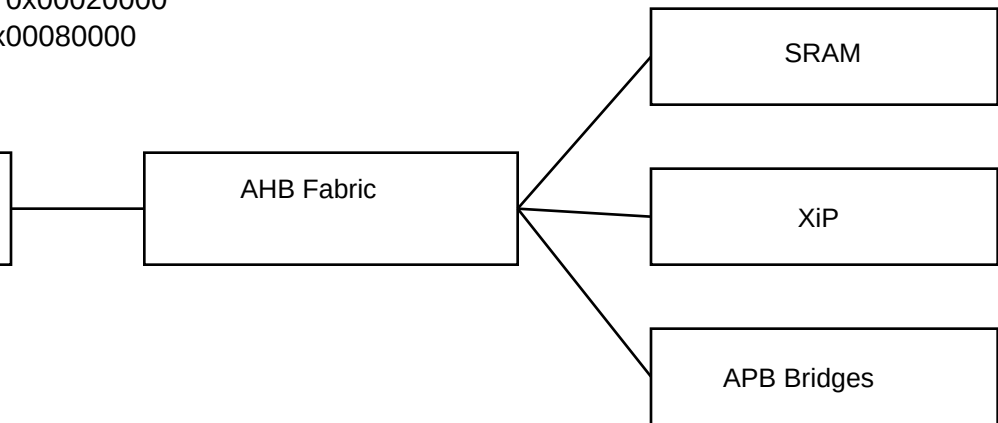

apb0: base 0x40000000 window 0x00010000

apb1: base 0x40010000 window 0x00010000

gpio0	apb0[00] 0x40000000 irq=0 dma=-
gpio1	apb0[01] 0x40001000 irq=1 dma=-
gpio2	apb0[02] 0x40002000 irq=2 dma=-
uart0	apb0[03] 0x40003000 irq=3 dma=0,1
uart1	apb0[04] 0x40004000 irq=4 dma=2,3
uart2	apb0[05] 0x40005000 irq=5 dma=4,5
uart3	apb0[06] 0x40006000 irq=6 dma=6,7
spi0	apb0[07] 0x40007000 irq=7 dma=8,9
spi1	apb0[08] 0x40008000 irq=8 dma=10,11
i2c0	apb0[09] 0x40009000 irq=9 dma=-
i2c1	apb0[10] 0x4000A000 irq=10 dma=-
i2c2	apb0[11] 0x4000B000 irq=11 dma=-
tmr0	apb0[12] 0x4000C000 irq=12 dma=-
tmr1	apb0[13] 0x4000D000 irq=13 dma=-
tmr2	apb0[14] 0x4000E000 irq=14 dma=-
tmr3	apb0[15] 0x4000F000 irq=15 dma=-
tmr4	apb1[00] 0x40010000 irq=16 dma=-
tmr5	apb1[01] 0x40011000 irq=17 dma=-