

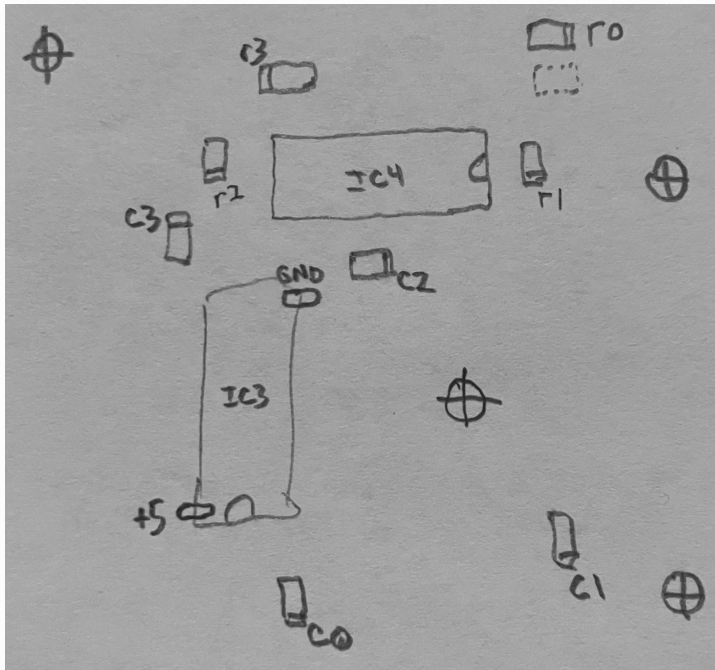
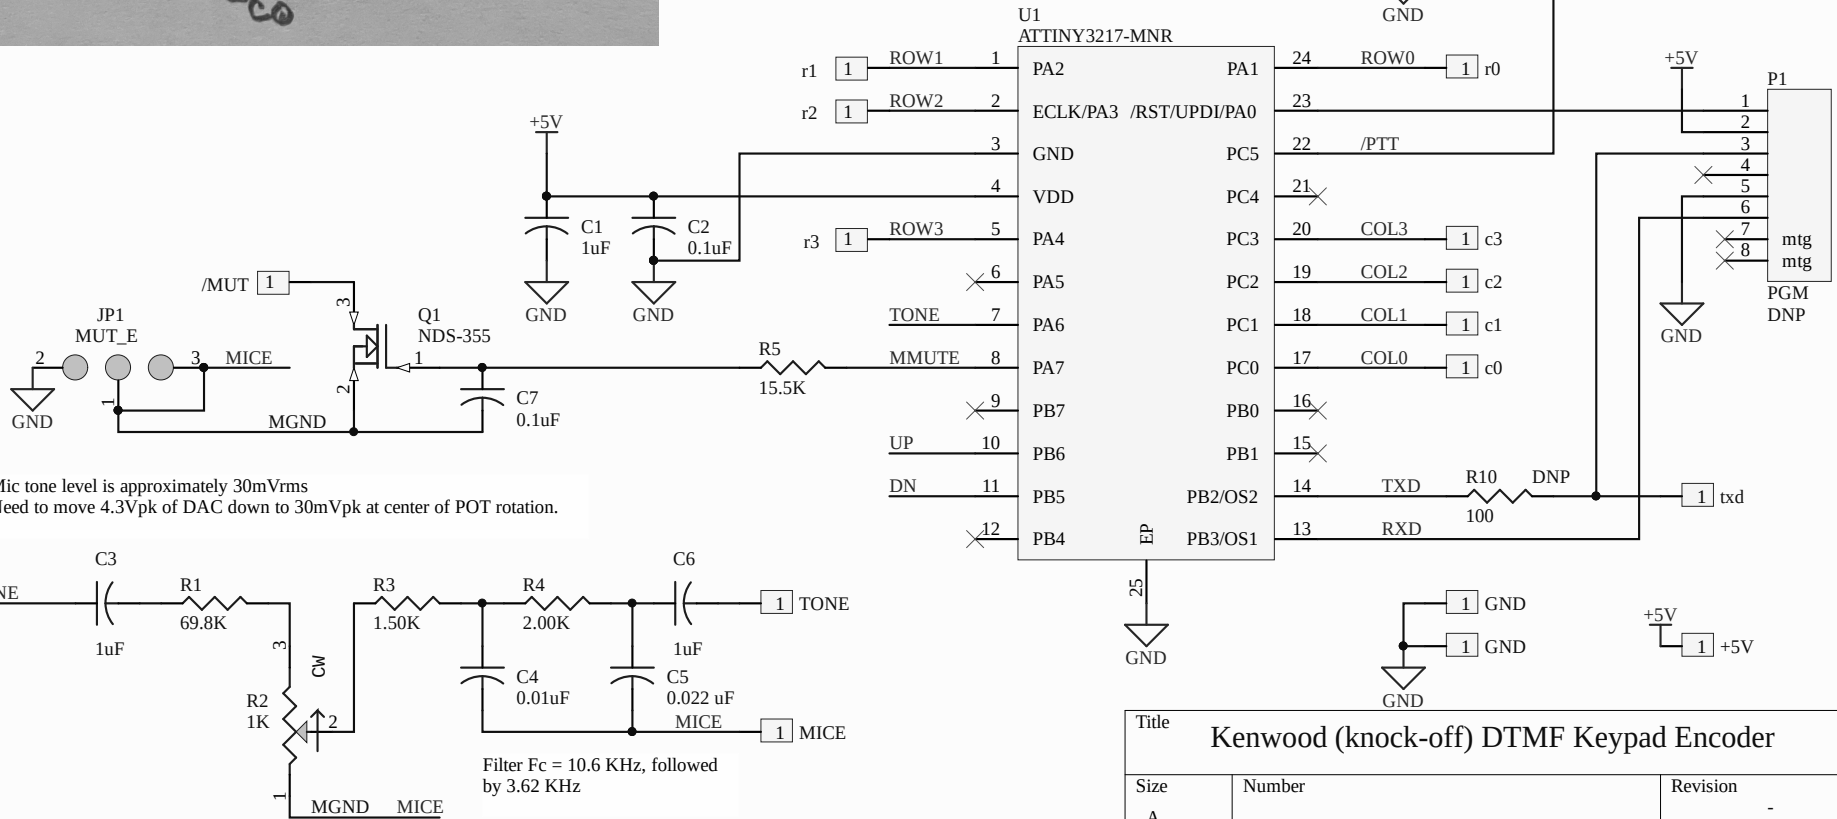


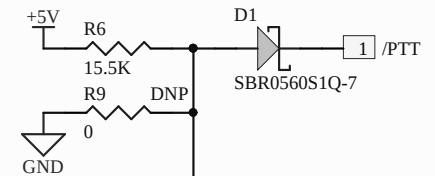

Kenwood knock-off microphone keypad-PCB parts locator for ROW, COL, and PWR connections. Remove IC3 and IC4. 1.5K resistors may remain. Connect ROW/COL wires to indicated side of each corresponding resistor pad.

TONE, MICE (tone gnd), and /MUT route to connector/MIC PCB.

If UP/DN/PTT are not needed, install R9, DNP R6 and D1.

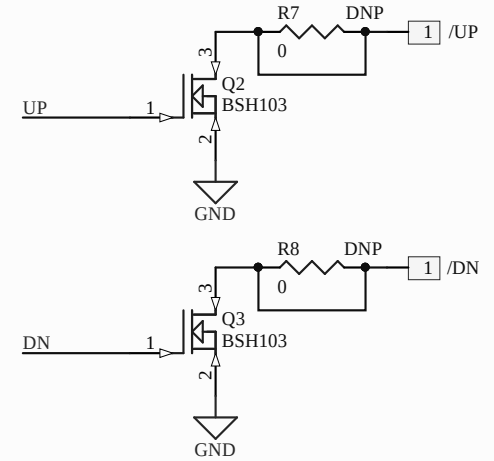

Mic tone level is approximately 30mVrms
Need to move 4.3Vpk of DAC down to 30mVpk at center of POT rotation.

Title		
Kenwood (knock-off) DTMF Keypad Encoder		
Size	Number	Revision
A		-
Date:	11/1/2025	Sheet of
File:	C:\Users\...KW_DTMFE.SchDoc	Drawn By: