Board7 Compact B - Lower plate (FFC-only cutout)

PROTOTYPE / FOR QUOTATION - hardware and cable access fit check required

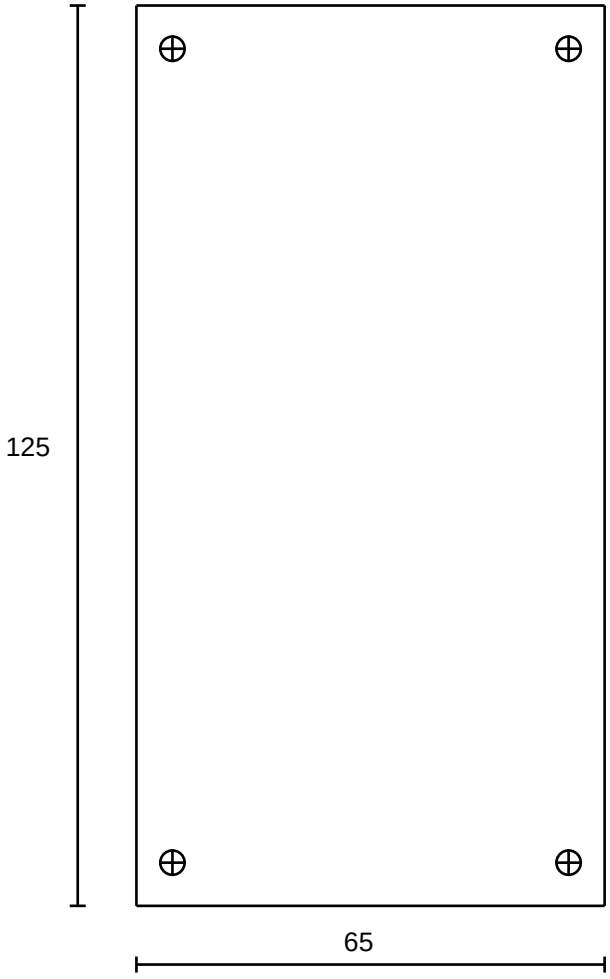

TOP VIEW - projected from STEP geometry

Material: T2 copper; thickness 2 mm

Quantity: 1 upper + 1 lower per assembly

Outer size: 65 x 125 mm

4 x DIA 3.4 THRU (M3 clearance, NOT tapped)

Datum: lower-left corner of outer rectangle

Hole centres (X,Y), mm:

(5,6), (60,6), (5,119), (60,119)

Hole pitch: 55 horizontal x 113 vertical

Full rectangular plate; no side access cutouts.

Proposed tolerances: hole centres +/-0.1 mm;

outline +/-0.2 mm; thickness per stock supplier.

Deburr edges; maintain conductive mounting contact.

Provisional gaps: upper 25 mm above PCB top;

lower 8 mm below PCB bottom. PCB thickness 1.6 mm.

Bond plates to PGND mounting pads only. Keep plates/hardware clear of SGND LEMO shells and live conductors.

Board7 Compact B - Upper plate (FFC-only cutout)

PROTOTYPE / FOR QUOTATION - hardware and cable access fit check required

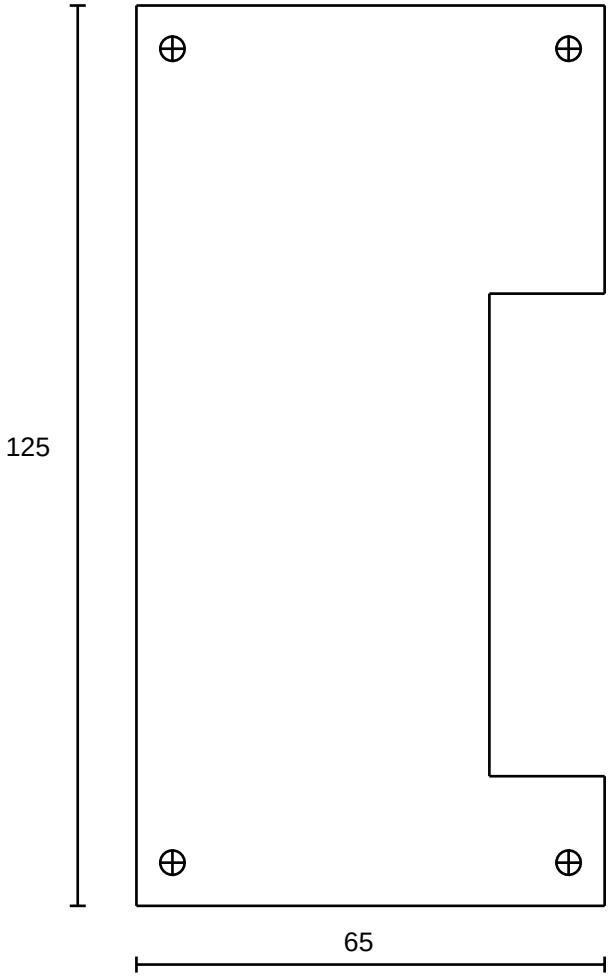

TOP VIEW - projected from STEP geometry

Material: T2 copper; thickness 2 mm

Quantity: 1 upper + 1 lower per assembly

Outer size: 65 x 125 mm

4 x DIA 3.4 THRU (M3 clearance, NOT tapped)

Datum: lower-left corner of outer rectangle

Hole centres (X,Y), mm:

(5,6), (60,6), (5,119), (60,119)

Hole pitch: 55 horizontal x 113 vertical

FFC access cutout only, through full thickness:

Right: X = 49 to 65; Y = 18 to 85

Cutout depth 16; height 67 mm

Left / LEMO side remains uncut

Proposed tolerances: hole centres +/-0.1 mm;

outline +/-0.2 mm; thickness per stock supplier.

Deburr edges; maintain conductive mounting contact.

Provisional gaps: upper 25 mm above PCB top;

lower 8 mm below PCB bottom. PCB thickness 1.6 mm.

Bond plates to PGND mounting pads only. Keep plates/hardware clear of SGND LEMO shells and live conductors.