

(bars: lengths by R , gain by a_{nom} ; hats on estimates; $e_\theta = \theta - \hat{\theta}$; posterior quantities unless marked $-$; $\bar{w}_d[k]$ commanded height, $\Delta\bar{w}_d[k] = \bar{w}_d[k+1] - \bar{w}_d[k]$; $\bar{a}' := \bar{a}'_{\text{true}}(\bar{w}_d[k] - \delta\hat{w}_3[k])$, $\bar{a}'' := \bar{a}''_{\text{true}}(\bar{w}_d[k] - \delta\hat{w}_3[k])$, both exogenous; $\Delta\bar{w}[k] := \bar{w}[k+1] - \bar{w}[k]$; $\Delta\hat{w}[k] := \Delta\bar{w}_d[k] + (1 - \lambda_c)[\delta\hat{w}_3[k] + y_1[k] - \delta\hat{w}_1[k]]$; $e_{\Delta\bar{w}} := \Delta\bar{w} - \Delta\hat{w}$; $\mathbb{E}[\cdot]$ mean over noise realizations conditional on the data up to k ; $P_{ij} = \mathbb{E}[e_i e_j]$; $d = 2$)

1 True dynamics

$$\begin{aligned}
\bar{w}[k] &= \bar{w}_d[k] - \delta\bar{w}_3[k] \\
\delta\bar{w}_3[k+1] &= \lambda_c \delta\bar{w}_3[k] - F_{dw}[k] e_{\bar{a}_w}[k] - \varepsilon_w[k] \\
\Delta\bar{w}[k] &= \Delta\bar{w}_d[k] + (1 - \lambda_c) \delta\bar{w}_3[k] + F_{dw}[k] e_{\bar{a}_w}[k] + \varepsilon_w[k] \\
\bar{a}_w[k+1] &= \bar{a}_w[k] + \bar{a}'_{\text{true}}(\bar{w}[k]) \Delta\bar{w}[k] + \frac{1}{2} \bar{a}''_{\text{true}}(\bar{w}[k]) \Delta\bar{w}[k]^2 + \mathcal{O}(\Delta\bar{w}^3) \\
\bar{a}'_{\text{true}}(\bar{w}[k]) &= \bar{a}'_{\text{true}}(\bar{w}_d[k] - \delta\hat{w}_3[k] - e_{\delta\bar{w}_3}[k]) = \bar{a}' - \bar{a}'' e_{\delta\bar{w}_3}[k] + \mathcal{O}(e^2) \\
\bar{a}''_{\text{true}}(\bar{w}[k]) &= \bar{a}'' + \mathcal{O}(e)
\end{aligned}$$

$$\bar{a}_w[k+1] = \bar{a}_w[k] + (\bar{a}' - \bar{a}'' e_{\delta\bar{w}_3}[k]) \Delta\bar{w}[k] + \frac{1}{2} \bar{a}'' \Delta\bar{w}[k]^2$$

$$\begin{aligned}
F_{dw}[k] &= \bar{f}_{dw}[k] + (1 - \lambda_c) \sum_{i=1}^d \bar{f}_{dw}[k-i] \\
\varepsilon_w[k] &= \bar{a}_w[k] \bar{f}_T[k] + (1 - \lambda_c) \sum_{i=1}^d \bar{a}_w[k-i] \bar{f}_T[k-i] + (1 - \lambda_c) n_w[k] \\
y_1[k] &= \delta\bar{w}_1[k] + n_w[k]
\end{aligned}$$

$$\begin{aligned}
\mathbb{E}[\varepsilon_w[k] n_w[k]] &= (1 - \lambda_c) R_1 \\
\tilde{\varepsilon}_w[k] &:= \varepsilon_w[k] - (1 - \lambda_c) n_w[k], \quad \mathbb{E}[\tilde{\varepsilon}_w n_w] = 0, \quad \mathbb{E}[\tilde{\varepsilon}_w^2] = Q_{33} - (1 - \lambda_c)^2 R_1 =: \tilde{Q}_{33} \\
\Delta\bar{w}[k] &= \Delta\bar{w}_d[k] + (1 - \lambda_c) [\delta\bar{w}_3[k] + n_w[k]] + F_{dw}[k] e_{\bar{a}_w}[k] + \tilde{\varepsilon}_w[k]
\end{aligned}$$

2 Estimator

$$\begin{aligned}
\delta\hat{w}_3[k+1] &= \lambda_c \delta\hat{w}_3[k] - (1 - \lambda_c) [y_1[k] - \delta\hat{w}_1[k]] \\
(\bar{w}_d[k+1] - \delta\hat{w}_3[k+1]) - (\bar{w}_d[k] - \delta\hat{w}_3[k]) &= \Delta\hat{w}[k] \\
\Delta\hat{w}[k] &= \Delta\bar{w}_d[k] + (1 - \lambda_c) [\delta\hat{w}_3[k] + y_1[k] - \delta\hat{w}_1[k]] \\
\hat{a}_w[k+1] &= \hat{a}_w[k] + \bar{a}' \Delta\hat{w}[k] + \frac{1}{2} \bar{a}'' \Delta\hat{w}[k]^2
\end{aligned}$$

3 Error increment

$$y_1[k] - \delta \hat{w}_1[k] = e_{\delta \bar{w}_1}[k] + n_w[k]$$

$$\Delta \bar{w}[k] = \Delta \hat{w}[k] + e_{\Delta \bar{w}}[k]$$

$$e_{\Delta \bar{w}}[k] = (1 - \lambda_c) [e_{\delta \bar{w}_3}[k] - e_{\delta \bar{w}_1}[k]] + F_{dw}[k] e_{\bar{a}_w}[k] + \tilde{\varepsilon}_w[k]$$

$$\begin{aligned} e_{\bar{a}_w}[k+1] &= e_{\bar{a}_w}[k] + (\bar{a}' - \bar{a}'' e_{\delta \bar{w}_3}) \Delta \bar{w} + \frac{1}{2} \bar{a}'' \Delta \bar{w}^2 - \bar{a}' \Delta \hat{w} - \frac{1}{2} \bar{a}'' \Delta \hat{w}^2 \\ (\bar{a}' - \bar{a}'' e_{\delta \bar{w}_3}) \Delta \bar{w} &= (\bar{a}' - \bar{a}'' e_{\delta \bar{w}_3}) (\Delta \hat{w} + e_{\Delta \bar{w}}) = \bar{a}' \Delta \hat{w} + \bar{a}' e_{\Delta \bar{w}} - \bar{a}'' e_{\delta \bar{w}_3} \Delta \hat{w} - \bar{a}'' e_{\delta \bar{w}_3} e_{\Delta \bar{w}} \\ \frac{1}{2} \bar{a}'' \Delta \bar{w}^2 &= \frac{1}{2} \bar{a}'' (\Delta \hat{w} + e_{\Delta \bar{w}})^2 = \frac{1}{2} \bar{a}'' \Delta \hat{w}^2 + \bar{a}'' \Delta \hat{w} e_{\Delta \bar{w}} + \frac{1}{2} \bar{a}'' e_{\Delta \bar{w}}^2 \end{aligned}$$

$$e_{\bar{a}_w}[k+1] = e_{\bar{a}_w}[k] + \bar{a}' e_{\Delta \bar{w}} \tag{1}$$

$$- \bar{a}'' e_{\delta \bar{w}_3} \Delta \hat{w} \tag{2}$$

$$- \bar{a}'' e_{\delta \bar{w}_3} e_{\Delta \bar{w}} \tag{3}$$

$$+ \bar{a}'' \Delta \hat{w} e_{\Delta \bar{w}} \tag{4}$$

$$+ \frac{1}{2} \bar{a}'' e_{\Delta \bar{w}}^2 + \mathcal{O}(3) \tag{5}$$

($\bar{a}' \Delta \hat{w}$ and $\frac{1}{2} \bar{a}'' \Delta \hat{w}^2$ cancel between the true and the estimated step; (1)–(5) name the five terms on those lines)

4 Mean

$$\mathbb{E}[e_{\delta \bar{w}_1}] = \mathbb{E}[e_{\delta \bar{w}_3}] = \mathbb{E}[e_{\bar{a}_w}] = \mathbb{E}[\tilde{\varepsilon}_w] = 0$$

$$\mathbb{E}[e_{\delta \bar{w}_3}^2] = P_{33}, \quad \mathbb{E}[e_{\delta \bar{w}_1}^2] = P_{11}, \quad \mathbb{E}[e_{\delta \bar{w}_1} e_{\delta \bar{w}_3}] = P_{13}$$

$$\mathbb{E}[e_{\delta \bar{w}_3} e_{\bar{a}_w}] = P_{34}, \quad \mathbb{E}[e_{\delta \bar{w}_1} e_{\bar{a}_w}] = P_{14}, \quad \mathbb{E}[e_{\bar{a}_w}^2] = P_{44}$$

$$\mathbb{E}[\tilde{\varepsilon}_w e_{\delta \bar{w}_1}] = \mathbb{E}[\tilde{\varepsilon}_w e_{\delta \bar{w}_3}] = \mathbb{E}[\tilde{\varepsilon}_w e_{\bar{a}_w}] = \mathbb{E}[\tilde{\varepsilon}_w n_w] = 0$$

$$\mathbb{E}[e_j \delta \hat{w}_i] = \mathbb{E}[e_j y_1] = 0 \quad (\text{posterior error} \perp \text{data})$$

$$\mathbb{E}[e_{\delta \bar{w}_3} e_{\Delta \bar{w}}] = (1 - \lambda_c)(P_{33} - P_{13}) + F_{dw} P_{34}$$

$$\mathbb{E}[e_{\Delta \bar{w}}^2] = (1 - \lambda_c)^2 (P_{33} + P_{11} - 2P_{13}) + 2(1 - \lambda_c) F_{dw} (P_{34} - P_{14}) + F_{dw}^2 P_{44} + \tilde{Q}_{33}$$

$$\begin{aligned}
\mathbb{E}[(1)] &= \bar{a}' \mathbb{E}[e_{\Delta\bar{w}}] = 0 \\
\mathbb{E}[(2)] &= -\bar{a}'' \Delta\hat{w} \mathbb{E}[e_{\delta\bar{w}_3}] = 0 \\
\mathbb{E}[(3)] &= -\bar{a}'' \mathbb{E}[e_{\delta\bar{w}_3} e_{\Delta\bar{w}}] = -\bar{a}'' [(1 - \lambda_c)(P_{33} - P_{13}) + F_{dw}P_{34}] \\
\mathbb{E}[(4)] &= \bar{a}'' \Delta\hat{w} \mathbb{E}[e_{\Delta\bar{w}}] = 0 \\
\mathbb{E}[(5)] &= \frac{1}{2} \bar{a}'' \mathbb{E}[e_{\Delta\bar{w}}^2] = \frac{1}{2} \bar{a}'' [(1 - \lambda_c)^2(P_{33} + P_{11} - 2P_{13}) + 2(1 - \lambda_c)F_{dw}(P_{34} - P_{14}) \\
&\quad + F_{dw}^2 P_{44} + \tilde{Q}_{33}]
\end{aligned}$$

$$\begin{aligned}
\mathbb{E}[e_{\bar{a}_w}[k+1]] &= \mathbb{E}[e_{\bar{a}_w}[k]] + \mathbb{E}[(3)] + \mathbb{E}[(5)] \\
&= \mathbb{E}[e_{\bar{a}_w}[k]] + \bar{a}'' \left\{ -(1 - \lambda_c)(P_{33} - P_{13}) - F_{dw}P_{34} \right. \\
&\quad \left. + \frac{1}{2}(1 - \lambda_c)^2(P_{33} + P_{11} - 2P_{13}) + (1 - \lambda_c)F_{dw}(P_{34} - P_{14}) \right. \\
&\quad \left. + \frac{1}{2}F_{dw}^2 P_{44} + \frac{1}{2}\tilde{Q}_{33} \right\}
\end{aligned}$$

((1), (2), (4): $\bar{a}'$ and $\Delta\hat{w}$ are functions of the data, $e_{\Delta\bar{w}}$ and $e_{\delta\bar{w}_3}$ are posterior errors, $\mathbb{E}[e \mid \text{data}] = 0$; without the $y_1 - \delta\bar{w}_1$ input $e_{\Delta\bar{w}}$ contains $(1 - \lambda_c)n_w$, which is correlated with the data, and these three means become the n_w feedthrough shares of 0902_formC_aptrue_4state.tex, Error dynamics, each $\propto \bar{a}''(1 - \lambda_c)\ell_{31}R_1$, whose sum was measured to vanish)

5 Estimator with the mean term

$$\begin{aligned}
\hat{\bar{a}}_w[k+1] &= \hat{\bar{a}}_w[k] + \bar{a}' \Delta\hat{w}[k] + \frac{1}{2} \bar{a}'' \Delta\hat{w}[k]^2 \\
&\quad + \bar{a}'' \left\{ -(1 - \lambda_c)(P_{33}[k] - P_{13}[k]) - F_{dw}[k] P_{34}[k] \right. \\
&\quad \left. + \frac{1}{2}(1 - \lambda_c)^2(P_{33}[k] + P_{11}[k] - 2P_{13}[k]) \right. \\
&\quad \left. + (1 - \lambda_c)F_{dw}[k](P_{34}[k] - P_{14}[k]) + \frac{1}{2}F_{dw}[k]^2 P_{44}[k] + \frac{1}{2}\tilde{Q}_{33}[k] \right\} \\
e_{\bar{a}_w}[k+1] &= e_{\bar{a}_w}[k] + (1) + (2) + (3) + (4) + (5) - \mathbb{E}[(3)] - \mathbb{E}[(5)] \\
\mathbb{E}[e_{\bar{a}_w}[k+1]] &= \mathbb{E}[e_{\bar{a}_w}[k]]
\end{aligned}$$

(the braced term is a deterministic input to the predict; it is not differentiated and does not enter F_e , H , Q)

6 Jacobians

$$\begin{aligned}
\frac{\partial \delta \hat{w}_3[k+1]}{\partial \delta \hat{w}_3[k]} &= \lambda_c, & \frac{\partial \delta \hat{w}_3[k+1]}{\partial \delta \hat{w}_1[k]} &= (1 - \lambda_c) \\
\frac{\partial \hat{a}_w[k+1]}{\partial \delta \hat{w}_3[k]} &= (1 - \lambda_c)(\bar{a}' + \bar{a}'' \Delta \hat{w}[k]) - \bar{a}'' \Delta \hat{w}[k] \rightarrow (1 - \lambda_c) \bar{a}' \\
\frac{\partial \hat{a}_w[k+1]}{\partial \delta \hat{w}_1[k]} &= -(1 - \lambda_c)(\bar{a}' + \bar{a}'' \Delta \hat{w}[k]) \rightarrow -(1 - \lambda_c) \bar{a}' \\
\frac{\partial \bar{a}_w[k+1]}{\partial \bar{a}_w[k]} &= 1 + F_{dw}[k](\bar{a}' + \bar{a}'' \Delta \hat{w}[k]) \rightarrow 1 + F_{dw}[k] \bar{a}'
\end{aligned}$$

(limits at $\Delta \hat{w} \rightarrow 0$, the tangent the code keeps; the $-\bar{a}'' \Delta \hat{w}$ in the first gain-row entry is $\partial \bar{a}' / \partial \delta \hat{w}_3 = -\bar{a}''$ of the 'est' reading; the last entry and $\partial \delta \bar{w}_3[k+1] / \partial \bar{a}_w[k] = -F_{dw}$ are entries of the TRUE transition, not of the estimator's lines (which do not contain $\hat{a}_w$): the truth's $F_{dw} e_{\bar{a}_w}$ inside $\Delta \bar{w}$, written as $F_{dw}(\bar{a}_w - \hat{a}_w)$)

7 Error dynamics

$$\begin{aligned}
e_{\delta \bar{w}_1}[k+1] &= e_{\delta \bar{w}_2}[k] \\
e_{\delta \bar{w}_2}[k+1] &= e_{\delta \bar{w}_3}[k] \\
e_{\delta \bar{w}_3}[k+1] &= \lambda_c e_{\delta \bar{w}_3}[k] + (1 - \lambda_c) e_{\delta \bar{w}_1}[k] - F_{dw}[k] e_{\bar{a}_w}[k] - \tilde{\varepsilon}_w[k] \\
(1) = \bar{a}' e_{\Delta \bar{w}}[k] &= -(1 - \lambda_c) \bar{a}' e_{\delta \bar{w}_1}[k] + (1 - \lambda_c) \bar{a}' e_{\delta \bar{w}_3}[k] + F_{dw}[k] \bar{a}' e_{\bar{a}_w}[k] + \bar{a}' \tilde{\varepsilon}_w[k] \\
e_{\bar{a}_w}[k+1] &= -(1 - \lambda_c) \bar{a}' e_{\delta \bar{w}_1}[k] + (1 - \lambda_c) \bar{a}' e_{\delta \bar{w}_3}[k] + (1 + F_{dw} \bar{a}') e_{\bar{a}_w}[k] + \bar{a}' \tilde{\varepsilon}_w[k] \\
&\quad + (2) + (3) + (4) + (5) - \mathbb{E}[(3)] - \mathbb{E}[(5)]
\end{aligned}$$

(third line: $\delta \bar{w}_3[k+1] - \delta \hat{w}_3[k+1]$ with $y_1 - \delta \hat{w}_1 = e_{\delta \bar{w}_1} + n_w$, the n_w of ε_w cancels; fifth line: $e_{\bar{a}_w}[k] + (1)$ gives the first-order coefficients of the matrix below, (2)–(5) minus their mean is the zero-mean remainder)

$$\mathbf{e}[k+1] = \tilde{F}_e[k] \mathbf{e}[k] + \tilde{\mathbf{q}}[k], \quad \tilde{F}_e[k] = \begin{bmatrix} 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ (1 - \lambda_c) & 0 & \lambda_c & -F_{dw} \\ -(1 - \lambda_c) \bar{a}' & 0 & (1 - \lambda_c) \bar{a}' & 1 + F_{dw} \bar{a}' \end{bmatrix} = F_e[k] - g_n[k] \mathbf{e}_1^\top$$

$$g_n[k] = (1 - \lambda_c) \begin{bmatrix} 0 \\ 0 \\ -1 \\ \bar{a}' \end{bmatrix}, \quad \tilde{\mathbf{q}}[k] = \tilde{\varepsilon}_w[k] \begin{bmatrix} 0 \\ 0 \\ -1 \\ \bar{a}' \end{bmatrix}, \quad \mathbb{E}[\tilde{\mathbf{q}}[k] n_w[k]] = 0$$

$$P^f[k+1] = \tilde{F}_e[k] P[k] \tilde{F}_e[k]^\top + \tilde{Q}[k]$$

8 Measurement and update

$$\begin{aligned}
\nabla_d \bar{w}_d[k] &= \bar{w}_d[k] - \bar{w}_d[k-d] \\
y_1[k] &= \delta \bar{w}_1[k] + n_w[k] \\
y_2[k] &= \bar{a}_w[k-d] + n_a[k], \quad \bar{a}_w[k-d] = \bar{a}_w[k] - \bar{a}' \nabla_d \bar{w}_d[k] \\
H &= \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \\
e_{y_1}[k] &= e_{\delta \bar{w}_1}^-[k] + n_w[k], \quad e_{y_2}[k] = e_{\bar{a}_w}^-[k] + n_a[k]
\end{aligned}$$







$$\begin{aligned}
L[k] &= P^f H^\top (H P^f H^\top + R)^{-1} \\
\hat{\mathbf{x}}[k] &= \hat{\mathbf{x}}^-[k] + L[k] \mathbf{e}_y[k] \\
P[k] &= (I - L[k] H) P^f[k] \\
y_1[k] - \delta \hat{w}_1[k] &= \frac{R_1}{P_{11}^f[k] + R_1} e_{y_1}[k] - \ell_{12}[k] (e_{y_2}[k] - \ell_{41}[k] e_{y_1}[k]) = \mathbb{E}[n_w[k] \mid y[1..k]]
\end{aligned}$$

(last line: the posterior residual the Estimator section feeds into the next step, written for the sequential update y_1 then y_2 as in the code; $e_{y_2} - \ell_{41} e_{y_1}$ is the y_2 innovation after the y_1 update, $\ell_{12} = H_{24} P_{14}^{(1)} / S_2$ equals the joint L_{12} ; exact in the linear-Gaussian model, approximate for the EKF)

9 Noise

$$\begin{aligned}
\kappa_T &= \frac{4k_B T a_o}{R}, \quad \sigma_{n_w}^2 = \frac{\sigma_n^2}{R^2} \\
\tilde{Q}_{33} &= \kappa_T \left(\hat{a}_w[k] + (1 - \lambda_c)^2 (\hat{a}_w[k-1] + \hat{a}_w[k-2]) \right) \quad (= Q_{33} - (1 - \lambda_c)^2 \sigma_{n_w}^2) \\
\tilde{Q}_{34} &= \tilde{Q}_{43} = -\bar{a}' \tilde{Q}_{33} \\
\tilde{Q}_{44} &= \bar{a}'^2 \tilde{Q}_{33} \\
R &= \text{diag}(R_1, R_2), \quad R_1 = \sigma_{n_w}^2, \quad R_2 = 2a_{\text{cov}}^2 IF_{\text{var}}(\hat{a}_w)(\hat{a}_w + \xi)^2
\end{aligned}$$

(IF_{var} , ξ as in 0902_formC_aptrue_4state.tex; the n_w share $(1 - \lambda_c)^2 \sigma_{n_w}^2$ has left Q and entered the Estimator section as the input $g_n(y_1 - \delta \hat{w}_1)$)

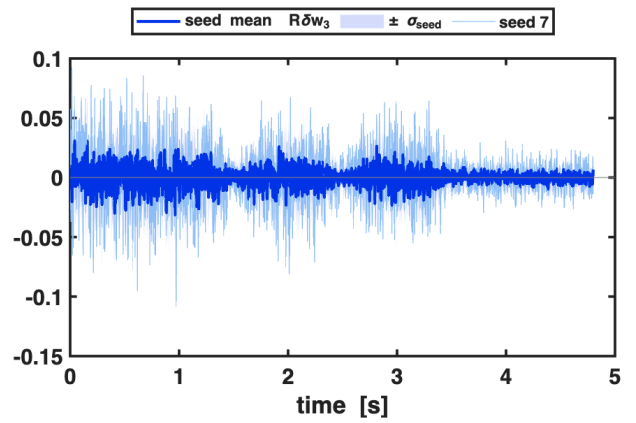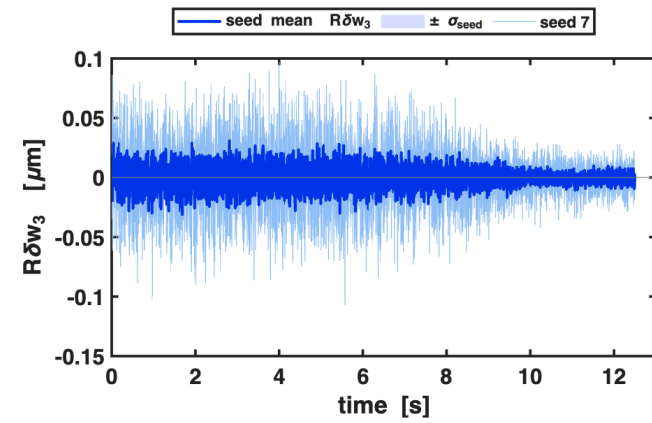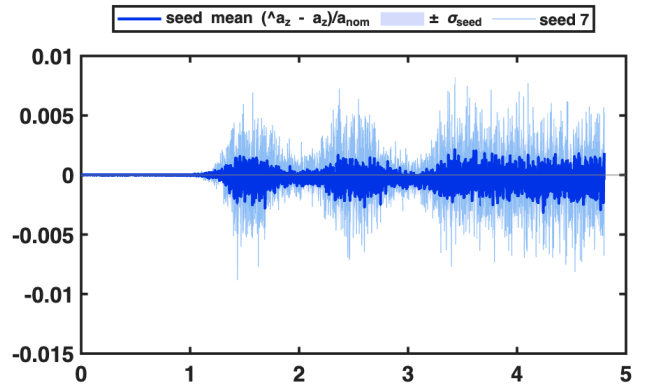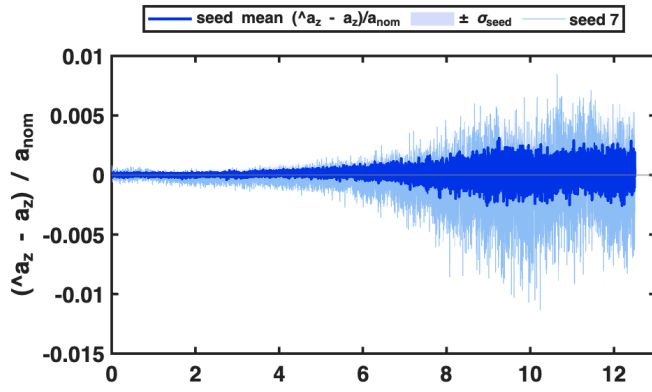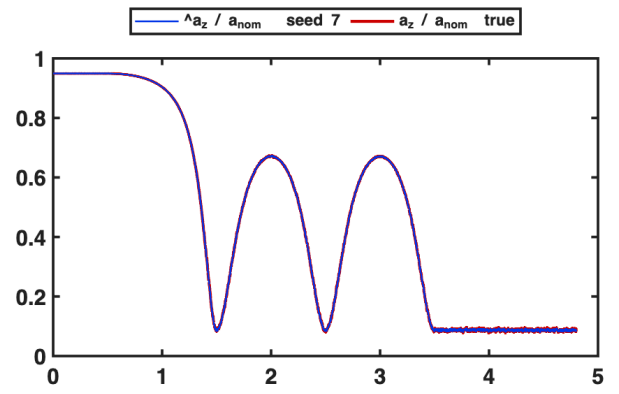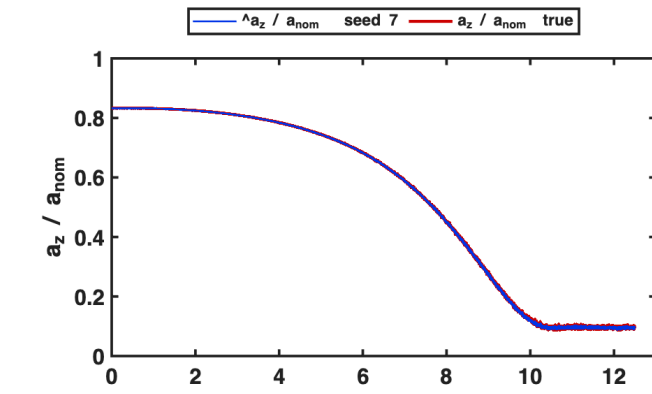

Correlated-noise predict, one step

$$\begin{aligned}\bar{f}_d[k] = \hat{a}_w[k]^{-1} & \left\{ \bar{w}_d[k+1] - \lambda_c \bar{w}_d[k] - (1 - \lambda_c) \bar{w}_d[k-d] \right. \\ & \left. + (1 - \lambda_c) \left[y_1[k] - \sum_{i=1}^d \hat{a}_w[k-i] \bar{f}_d[k-i] \right] \right\}\end{aligned}$$

$$y_1[k] = \delta \bar{w}_1[k] + n_w[k]$$

$$\delta \bar{w}_3[k+1] = \lambda_c \delta \bar{w}_3[k] - F_{dw}[k] e_{\bar{a}_w}[k] - \tilde{\varepsilon}_w[k] - (1 - \lambda_c) n_w[k]$$

$$e_{y_1}[k] = y_1[k] - \delta \hat{w}_1^-[k] = e_{\delta \bar{w}_1}^-[k] + n_w[k]$$

$$\ell_{11}[k] = \frac{P_{11}^f[k]}{P_{11}^f[k] + R_1}$$

$$\delta \hat{w}_1[k] = \delta \hat{w}_1^-[k] + \ell_{11}[k] e_{y_1}[k]$$

$$y_1[k] - \delta \hat{w}_1[k] = (1 - \ell_{11}[k]) e_{y_1}[k] = \mathbb{E}[n_w[k] \mid y[1..k]]$$

$$n_w[k] = (y_1[k] - \delta \hat{w}_1[k]) - e_{\delta \bar{w}_1}[k]$$

$$\delta \bar{w}_3[k+1] = \lambda_c \delta \bar{w}_3[k] - (1 - \lambda_c) (y_1[k] - \delta \hat{w}_1[k]) + (1 - \lambda_c) e_{\delta \bar{w}_1}[k] - F_{dw}[k] e_{\bar{a}_w}[k] - \tilde{\varepsilon}_w[k]$$

$$\delta \hat{w}_3[k+1] = \lambda_c \delta \hat{w}_3[k] - (1 - \lambda_c) (y_1[k] - \delta \hat{w}_1[k])$$

$$e_{\delta \bar{w}_3}[k+1] = \lambda_c e_{\delta \bar{w}_3}[k] + (1 - \lambda_c) e_{\delta \bar{w}_1}[k] - F_{dw}[k] e_{\bar{a}_w}[k] - \tilde{\varepsilon}_w[k]$$

$$\Delta \hat{w}[k] = \Delta \bar{w}_d[k] + (1 - \lambda_c) [\delta \hat{w}_3[k] + y_1[k] - \delta \hat{w}_1[k]]$$

$$\hat{a}_w[k+1] = \hat{a}_w[k] + \bar{a}' \Delta \hat{w}[k] + \frac{1}{2} \bar{a}'' \Delta \hat{w}[k]^2$$

$$\tilde{F}_e(3, 1) = (1 - \lambda_c), \quad \tilde{F}_e(4, 1) = -(1 - \lambda_c) \bar{a}'$$

$$\tilde{Q}_{33} = Q_{33} - (1 - \lambda_c)^2 R_1$$

$$P^f[k+1] = \tilde{F}_e[k] P[k] \tilde{F}_e[k]^\top + \tilde{Q}[k]$$