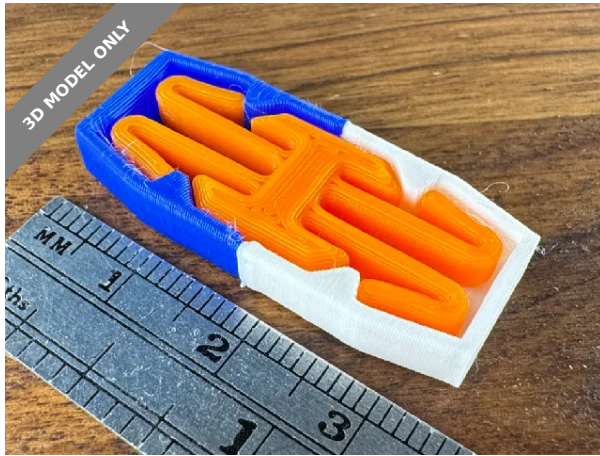




Connector1, Slim



DexTech

[VIEW IN BROWSER](#)

updated 12. 1. 2025 | published 12. 1. 2025

Summary

Clips to join two 3D printed parts without glue.

[Hobby & Makers](#) > [Mechanical Parts](#)

Clips to join two 3D printed parts without glue.

These clips index (locate) two parts together and hold them firmly together with a clamping force.

This is a slim version of the full size clips. These can be used in smaller or thinner models, where the full size clips will not fit.

The full size clips can be found here:

<https://www.printables.com/model/1133096-connector1>

Here is how they work:

How to use the files:

How to Use

1. Bring the model you want to have joined into PrusaSlicer.
2. Add as a negative volume modifier, Pocket 0 DOF.
3. Ensure that the negative volume modifier is at the Z height where you want to split your model.

4. If your print will need more than one connector, add an additional negative volume modifier. Consider using Pocket 1 DOF, which has additional clearance on one side of the pocket, so as to not over-constrain the connectors. Be sure to align this pocket with the first one.
5. Use the PrusaSlicer Cut command to split your model at the desired Z height - this should be the same as your Pocket negative volume modifiers. Orient both resultant parts on their cut face.

Settings: 0.4 mm nozzle, 0.2 mm layer height

Tested with PLA and PETG, but other similar plastics will likely work as well.

Files

Clip, Slim (0.0 Clearance).stl

Clip, Slim (0.1 Clearance).stl

Only one of these is needed. I recommend starting with the 0.0 clearance version. If the fit feels too tight, try the 0.1 clearance version.

Clip Stud, Slim (0.0 Clearance).stl

Clip Stud, Slim (0.1 Clearance).stl

Use Clip Stud to temporarily join parts for fit checks if desired. Only one of these is needed. I recommend starting with the 0.0 clearance version. If the fit feels too tight, try the 0.1 clearance version.

Pocket 0 DOF, Slim.stl

Pocket 1 DOF, Slim.stl

The Pocket models are used as negative volume modifiers to create the cut-out for the connector clips. Use Pocket 0 DOF first. If additional connectors are required, consider using Pocket 1 DOF for the second one, which has additional clearance on one side of the pocket, so as to not over-constrain the connectors.

Min Size Part.stl

To use as a reference model for your designs. This model represents the volume required for the clip plus a minimum surrounding wall thickness.



Demo Part X, Slim.stl

These are demo and testing parts for the connector.

Connector1.f3d

Editable Fusion 360 file to remix your own versions. For the “Slim” version, set the "PocketHeight" parameter to 4mm.

Model files

 Demo Parts		5 files
	demo-part-2-slim-r1.stl	
	demo-part-1-slim-r1.stl	
	demo-part-5-slim-r1.stl	
	demo-part-3-slim-r1.stl	
	demo-part-4-slim-r1.stl	

 **clip-slim-00-clearance-r2.stl**

 **clip-slim-01-clearance-r2.stl**



clip-stud-slim-00-clearance-r2.stl



clip-stud-slim-01-clearance-r2.stl



pocket-0-dof-slim-r1.stl



pocket-1-dof-slim-r1.stl



connector1-r1.f3d

License

This work is licensed under a
[Creative Commons \(4.0 International License\)](https://creativecommons.org/licenses/by-nc-sa/4.0/)



Attribution—Noncommercial—Share Alike

- ✗ | Sharing without ATTRIBUTION
- ✓ | Remix Culture allowed
- ✗ | Commercial Use
- ✗ | Free Cultural Works
- ✗ | Meets Open Definition