


- Notes:
- 1. All dimensions in mm, unless noted
  - 2. Tolerances are +/- 0.5mm, unless noted
  - 3. General Application: Heater for 3D Printer Bed
  - 4. Material to be Heated: MIC6 Aluminum
  - 5. Supply Voltage: 110V and 220V AC mixed voltage heater
  - 6. Ideal Wattage: 300W
  - 7. Start Temperature: 30C
  - 8. Operation Temperature: 80C to 150C
  - 9. Heater Dimensions: See below
  - 10. Integrated Components: Standard Beta 3950 Thermistor - Center of Heater
  - 11. Mounting Method: High Temperature RTV (DOW CORNING 736)
  - 12. Insulation: Silicone 3mm or equivalent bonded to heater



K1 and K2 Bed Heater - Release 3.0 - 450mm Build Bed  
Scale: 1:3

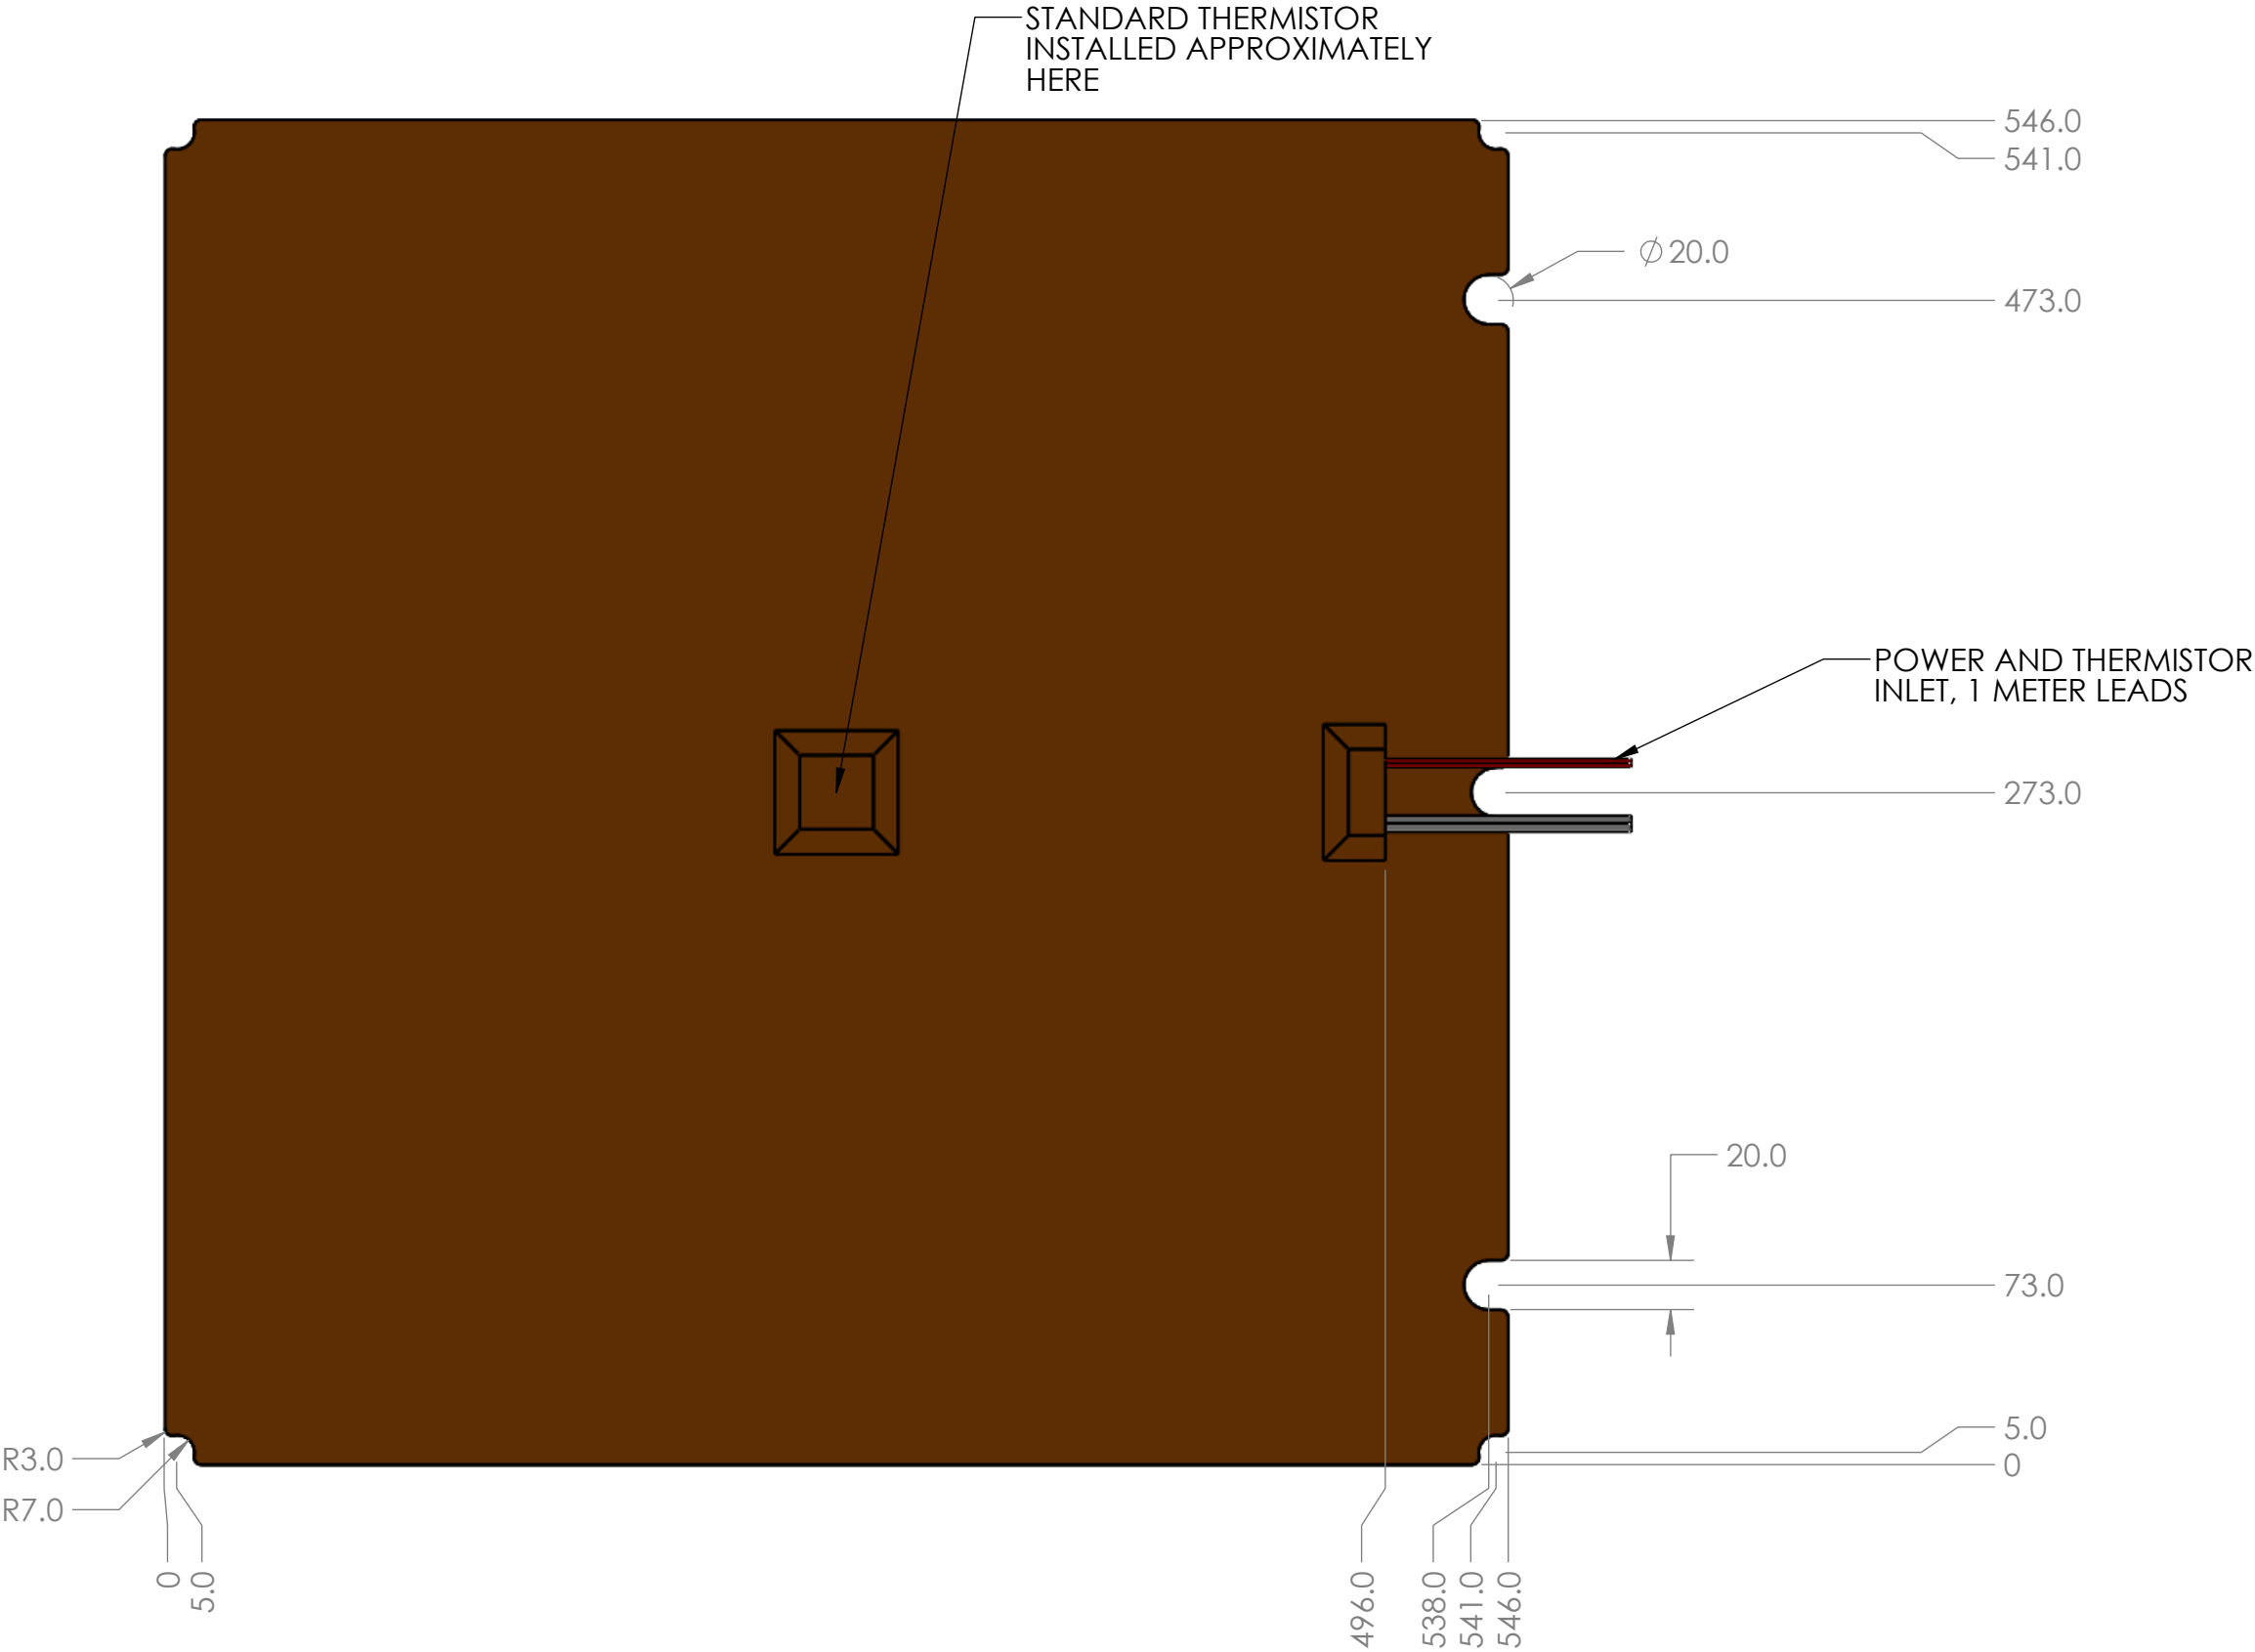