


Notes:

- 1. All dimensions in mm, unless noted
- 2. Tolerances are +/- 0.5mm, unless noted
- 3. General Application: Heater for 3D Printer Bed
- 4. Material to be Heated: MIC6 Aluminum
- 5. Supply Voltage: 110V and 220V AC mixed voltage heater
- 6. Ideal Wattage: 400W
- 7. Start Temperature: 30C
- 8. Operation Temperature: 80C to 150C
- 9. Heater Dimensions: See below
- 10. Integrated Components: Standard Keenovo Thermistor - Center of Heater
- 11. Mounting Method: High Temperature RTV (DOW CORNING 736)
- 12. Insulation: Silicone 3mm or equivalent bonded to heater



ANNEX

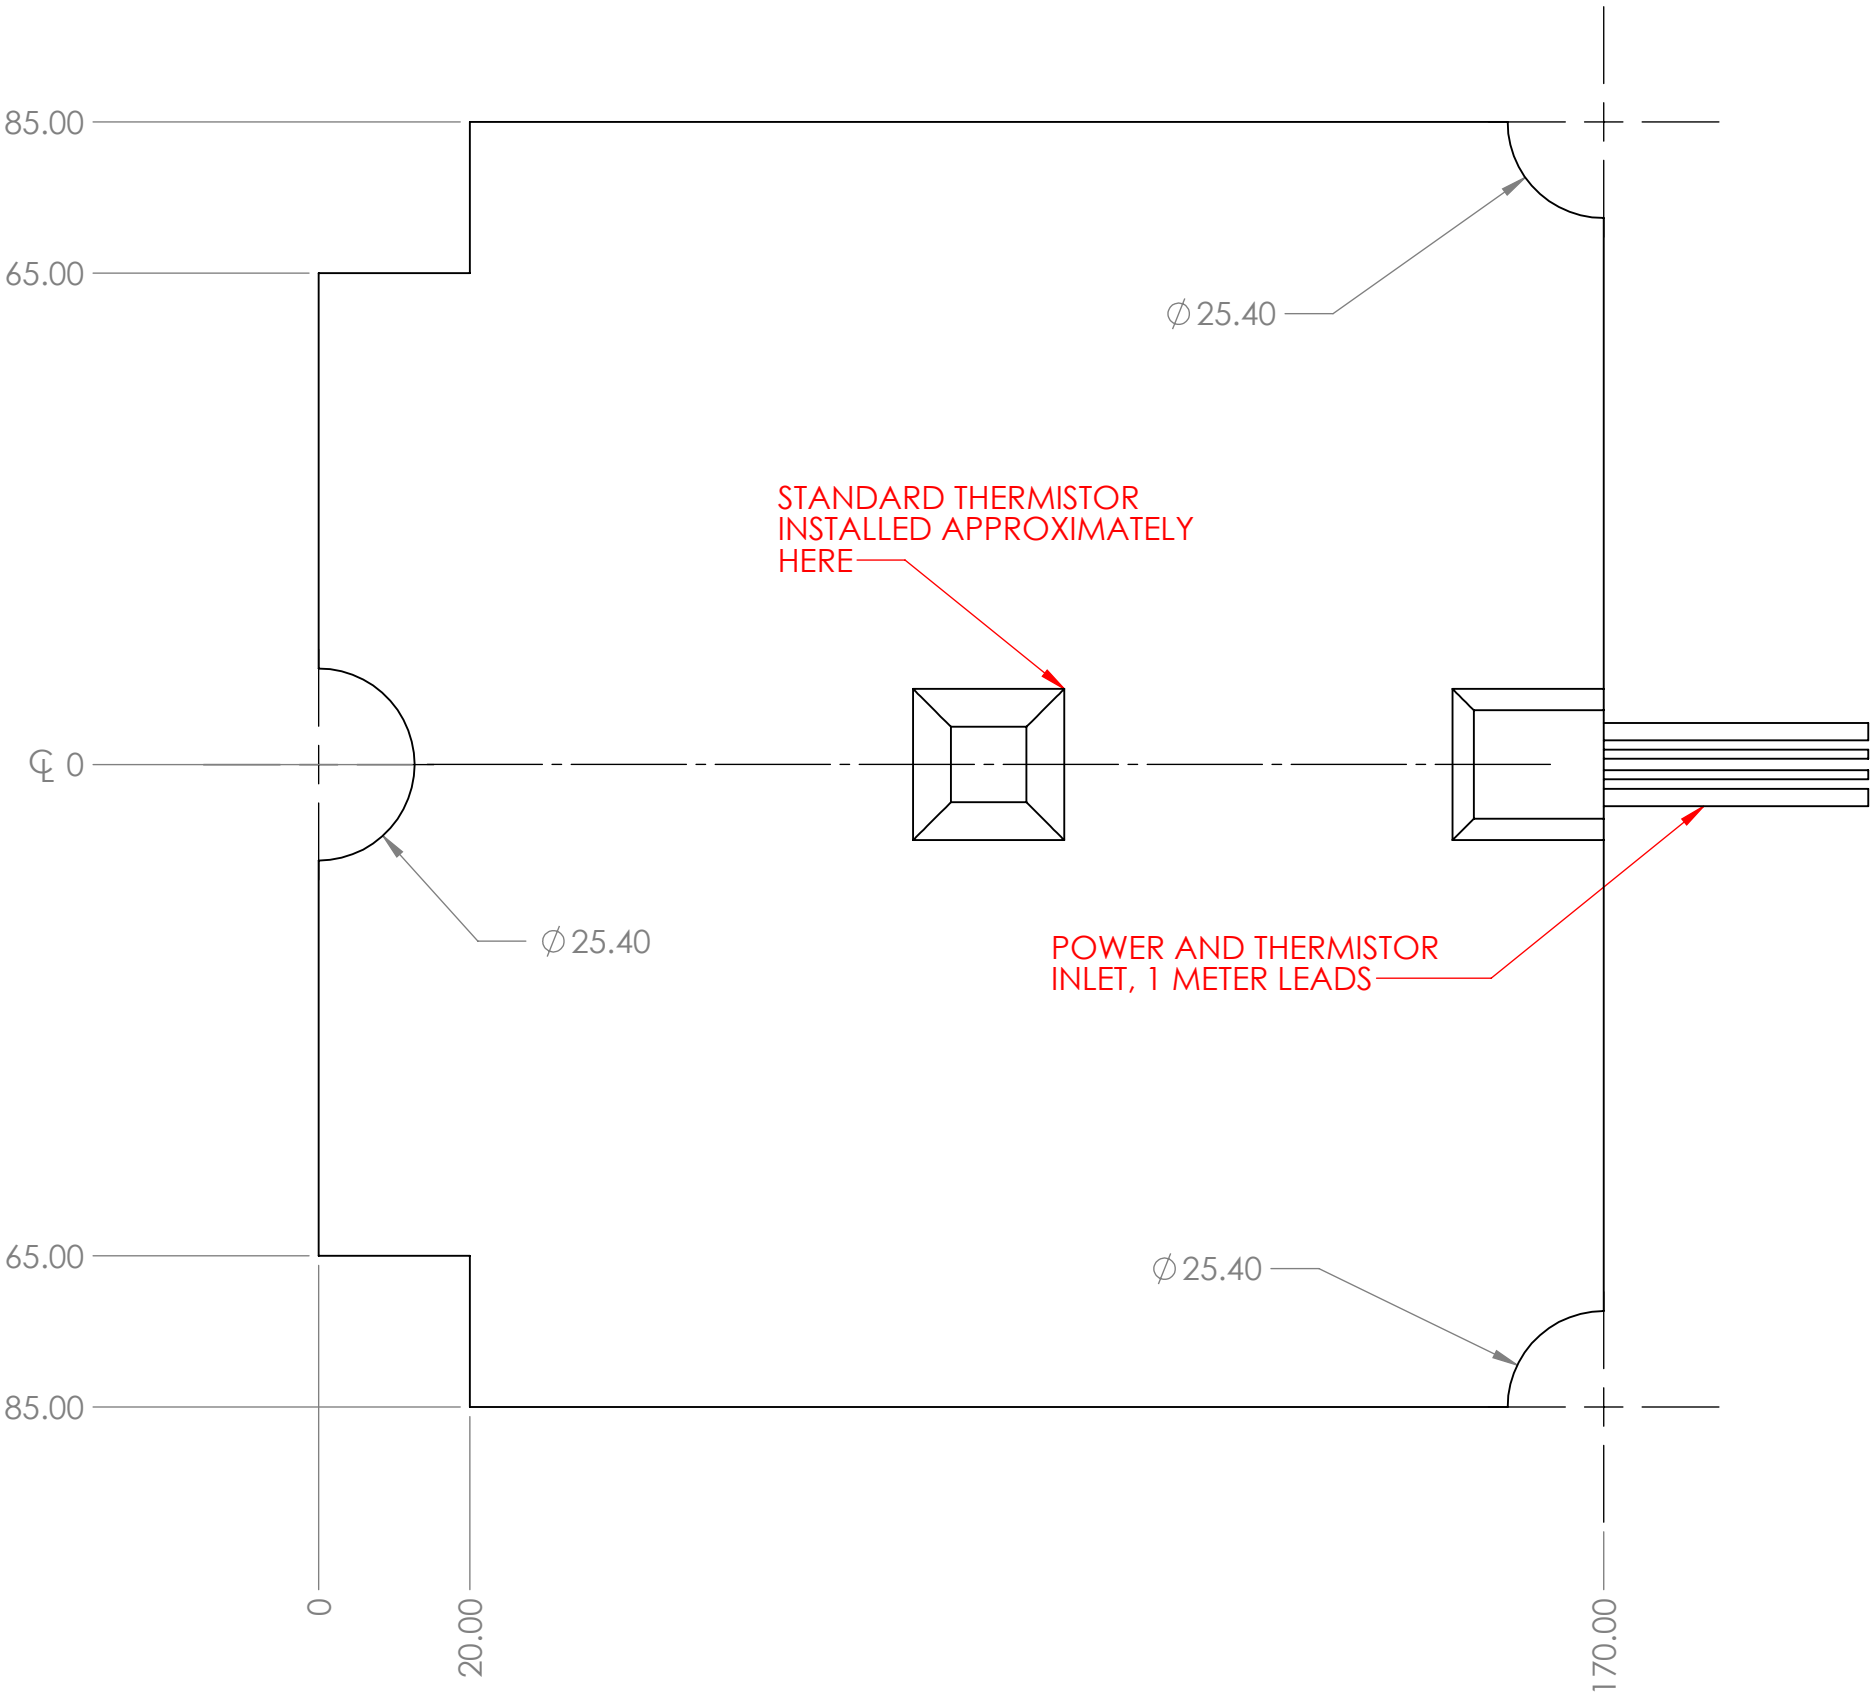

ANNEX Engineering - 180mm Silicone Heater

Scale: 1:1