


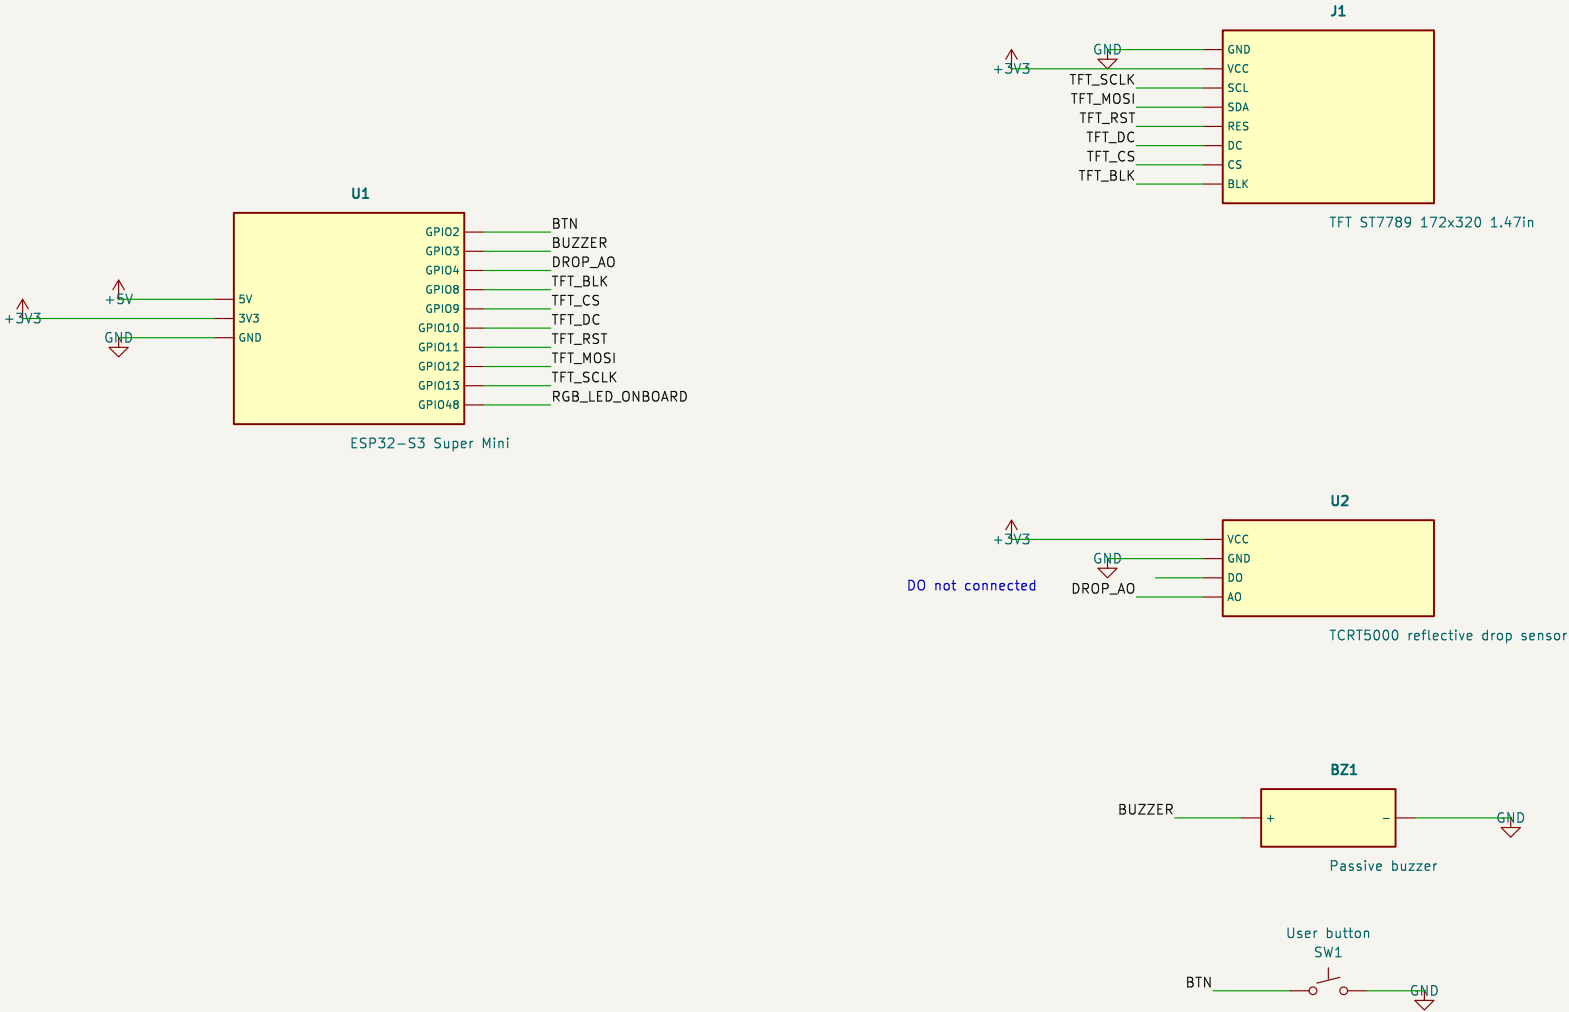

ASSEMBLY NOTES

1. All GPIO numbers are read directly from firmware v7.7.3 by the generator script;
they are never typed in by hand. Re-run tools/kicad-gen/gen_schematics.py after a pin change.
2. SW1 uses pinMode(INPUT_PULLUP), so it wires straight to GND. No external pull-up resistor.
3. RGB_LED (GPIO48) is the WS2812 already fitted on the ESP32-S3 Super Mini board.
Nothing is wired externally – the net is shown for reference only.
4. TCRT5000 DO pin is unused. The firmware reads the analog AO pin only.
5. Power the sensor and the display from 3V3, never 5V: ESP32-S3 GPIO pins are 3.3V only.
6. BZ1 is a PASSIVE buzzer driven by tone(). A magnetic buzzer needs an NPN driver stage.
7. Station battery sensing is disabled in firmware (STATION_BAT_ADC_PIN = -1), so it is not drawn.

Boromarajonani College of Nursing Phrae / Sung Men Hospital

Sheet: /
File: Station-BedNode.kicad_sch

Title: Smart IV Alert – Bed Station Node v7.7.3

Size: A3 Date: 2026-09-21
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4

Rev: 1.0
Id: 1/1