
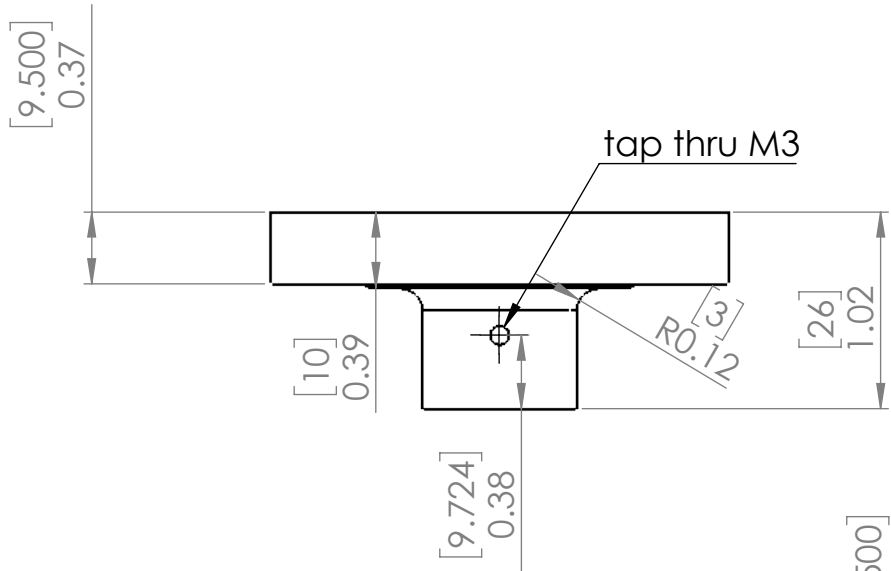
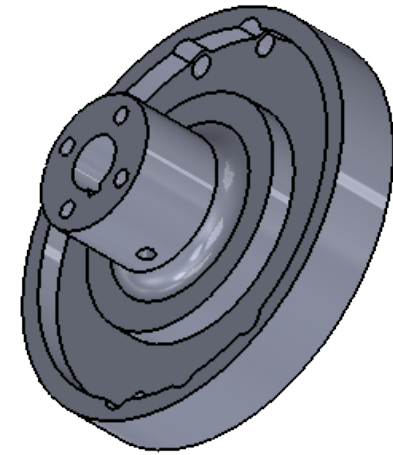
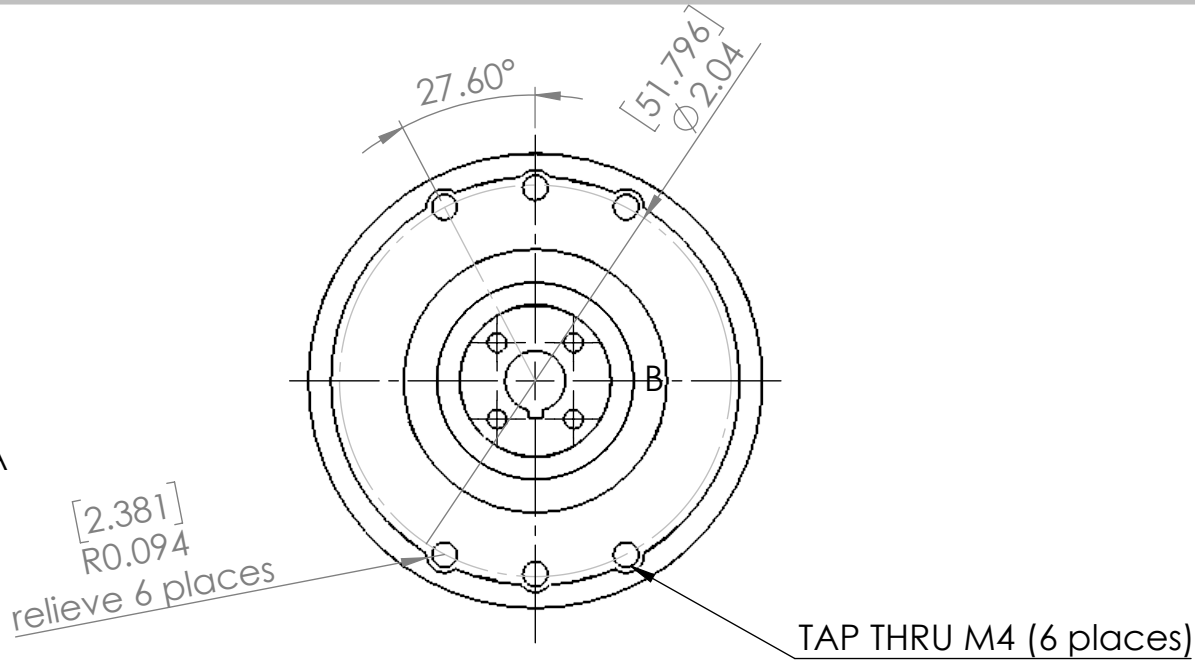


B


A

B


A

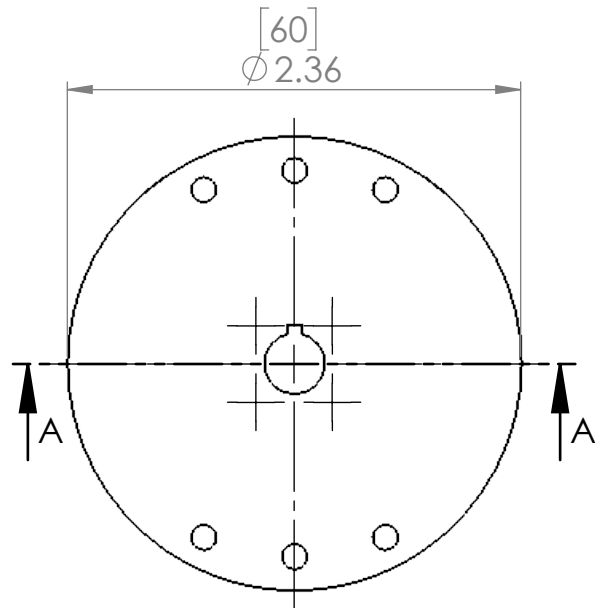

R0.16 [4] THRU
tight fit for 8mm keyed shaft

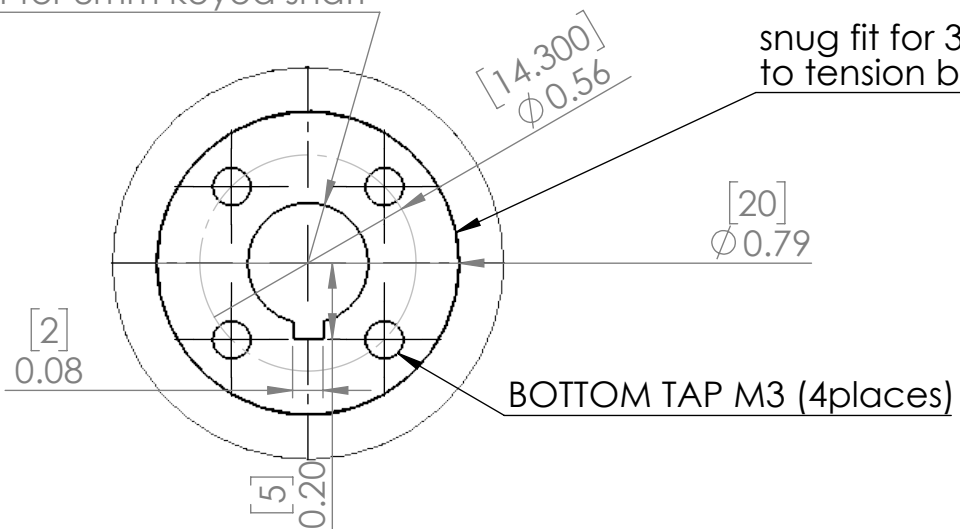

snug fit for 30204 taper bearing - needs to be loose enough
to tension bearing with M3 screws

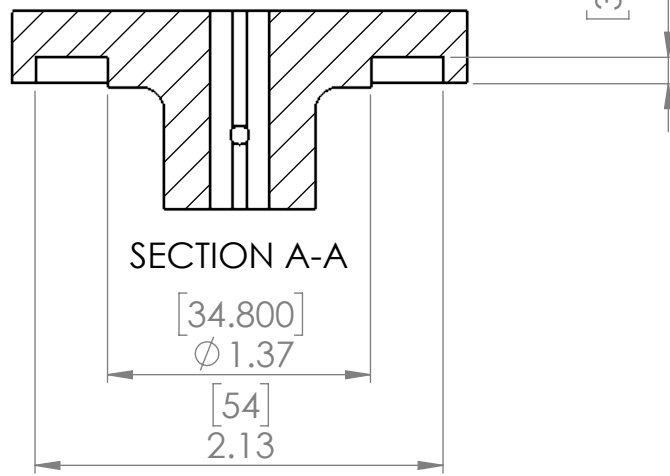

DETAIL B
SCALE 2 : 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
<INSERT COMPANY NAME HERE>. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
<INSERT COMPANY NAME HERE> IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE:					
		DIMENSIONS ARE IN INCHES	DRAWN								
		TOLERANCES:	CHECKED								
		FRACTIONAL ±	ENG APPR.								
		ANGULAR: MACH ± BEND ±	MFG APPR.								
		TWO PLACE DECIMAL ±	COMMENTS:			SIZE		DWG. NO.	REV		
		THREE PLACE DECIMAL ±				B			J3 spindle		
		INTERPRET GEOMETRIC TOLERANCING PER:									
		MATERIAL									
		FINISH									
NEXT ASSY	USED ON					SCALE: 1:1		WEIGHT:	SHEET 1 OF 1		
APPLICATION		DO NOT SCALE DRAWING									