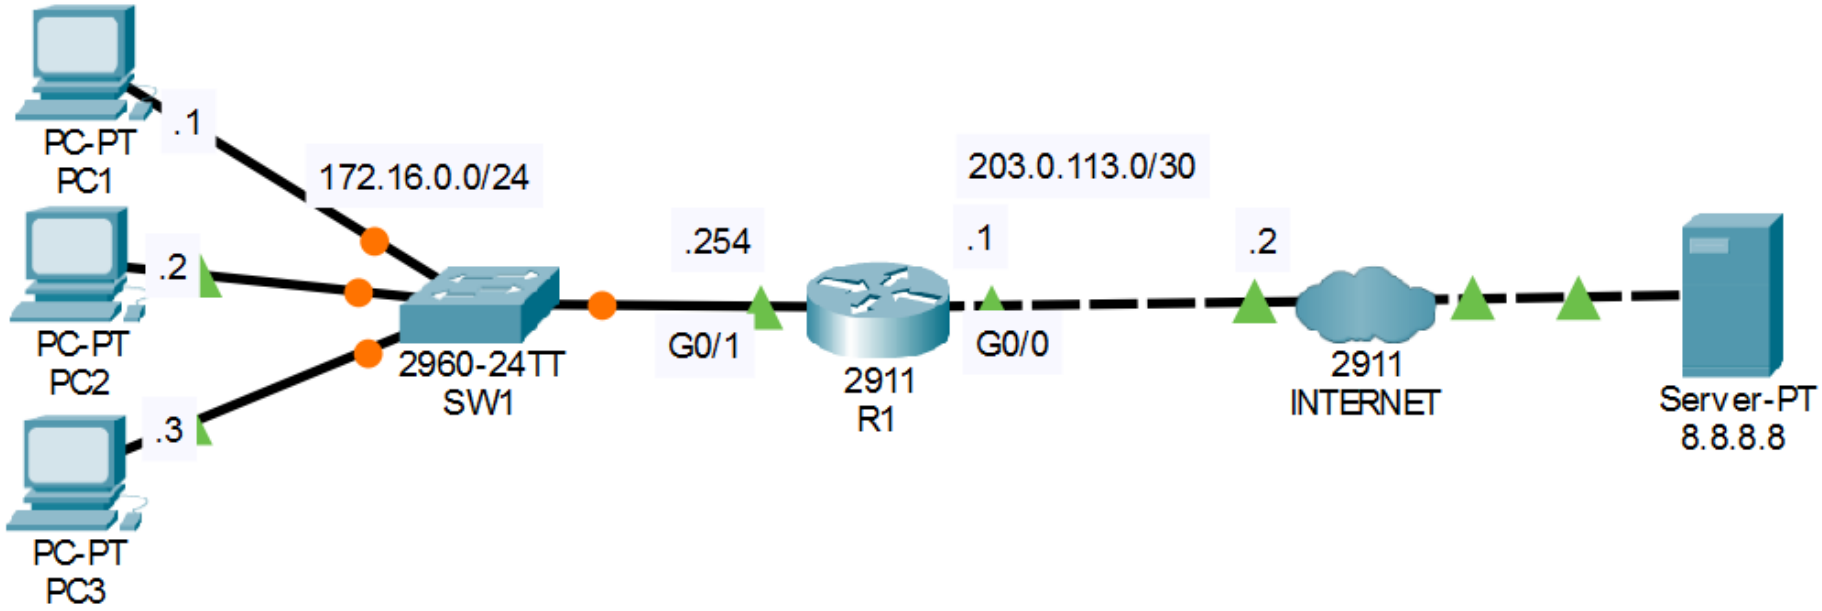



1. Attempt to ping from PC1 to 8.8.8.8. Does the ping w ork?

2. Configure static NAT on R1.
   > Configure the appropriate inside/outside interfaces
   > Map the IP addresses of PC1, PC2, and PC3 to 100.0.0.x/24

3. Ping 8.8.8.8 from PC1 again. Does the ping w ork?

4. Ping google.com from each PC, and then check the NAT translations on R1.

5. Clear the NAT translations on R1. Which entries remain?

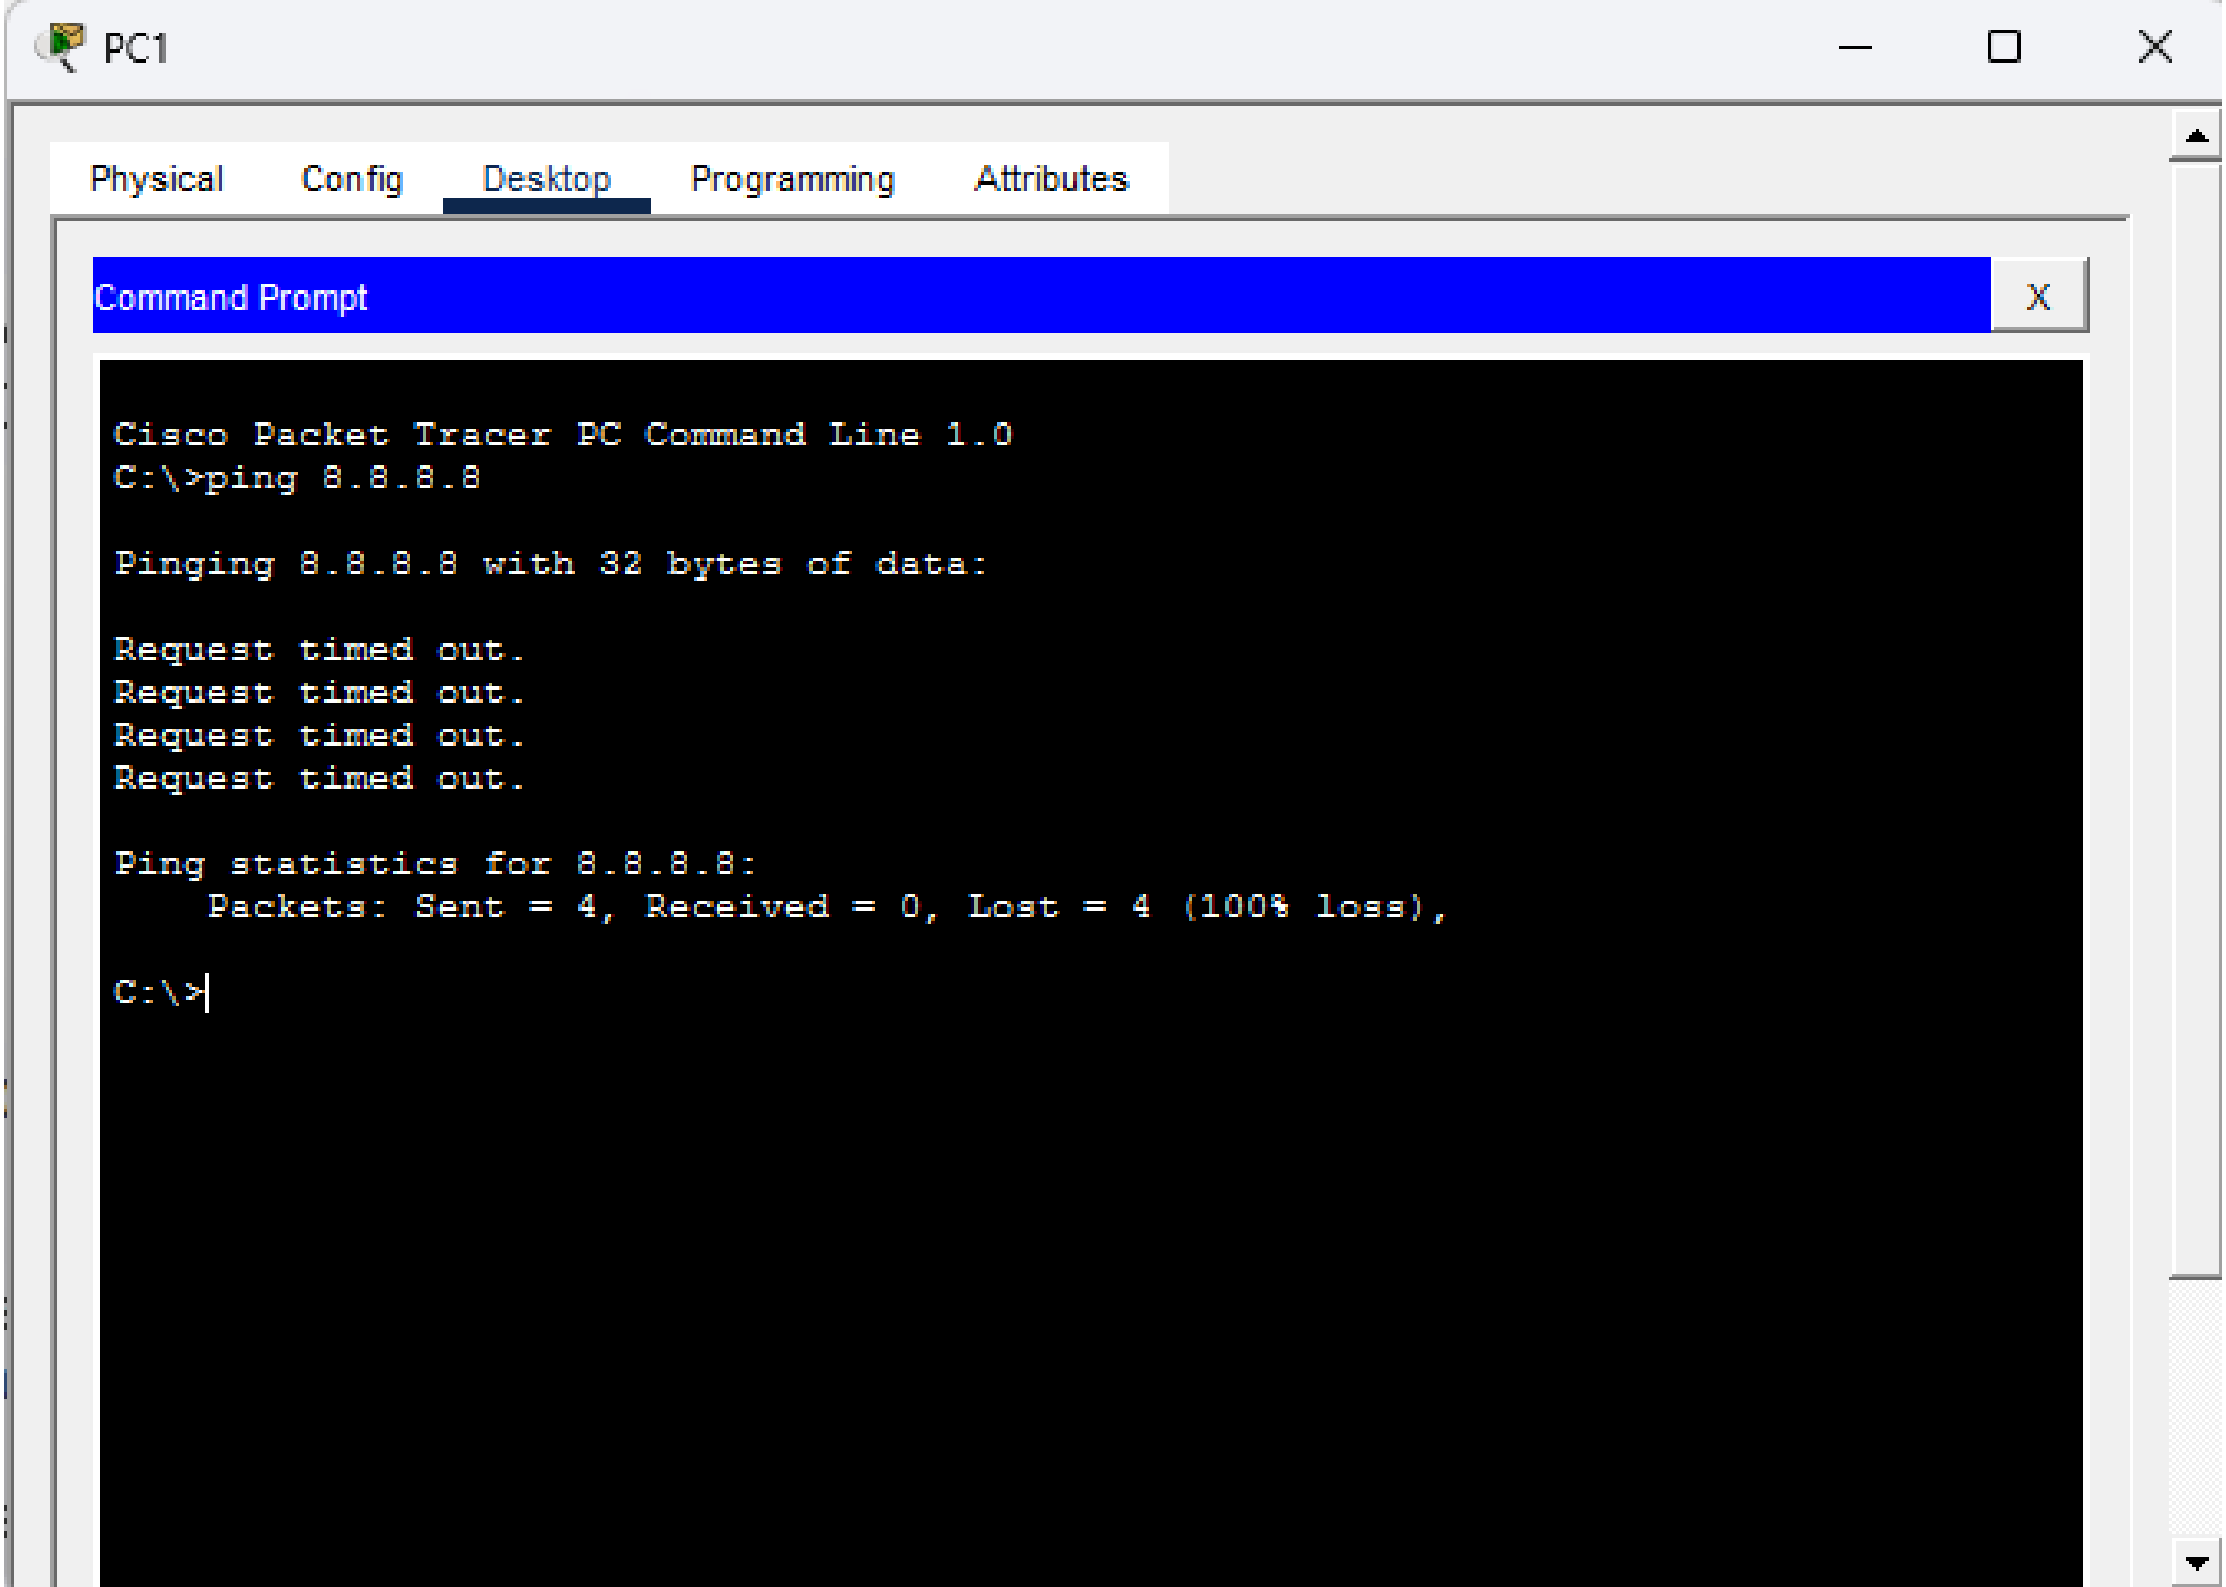
PC1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 8.8.8.8
Pinging 8.8.8.8 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 8.8.8.8:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>

R1

```
3 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!


%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state
to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state
to up


R1>
R1>
R1>en
R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#int g0/0
R1(config-if)#ip nat outside
R1(config-if)#int g0/1
R1(config-if)#ip nat inside
R1(config-if)#
R1(config-if)#exit
R1(config)#
```

Copy Paste

Top

```
R1(config-if)#
R1(config-if)#exit
R1(config)#
R1(config)#
R1(config)#
R1(config)#ip nat inside source static 172.16.0.1 100.0.0.1
R1(config)#ip nat inside source static 172.16.0.2 100.0.0.2
R1(config)#ip nat inside source static 172.16.0.3 100.0.0.3
R1(config)#
```

Copy Pa

```
%SYS-5-CONFIG_I: Configured from console by console

R1#
R1#show ip nat translation
Pro  Inside global     Inside local       Outside local      Outside global
---  100.0.0.1         172.16.0.1         ---                ---
---  100.0.0.2         172.16.0.2         ---                ---
---  100.0.0.3         172.16.0.3         ---                ---

R1#
```

Copy Paste

```
R1#show ip nat statistics
Total translations: 3 (3 static, 0 dynamic, 0 extended)
Outside Interfaces: GigabitEthernet0/0
Inside Interfaces: GigabitEthernet0/1
Hits: 0  Misses: 0
Expired translations: 0
Dynamic mappings:
R1#
```

PC1

```
C:\>ping 8.8.8.8

Pinging 8.8.8.8 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 8.8.8.8:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 8.8.8.8

Pinging 8.8.8.8 with 32 bytes of data:

Reply from 8.8.8.8: bytes=32 time<1ms TTL=126
Reply from 8.8.8.8: bytes=32 time<1ms TTL=126
Reply from 8.8.8.8: bytes=32 time<1ms TTL=126
Reply from 8.8.8.8: bytes=32 time<1ms TTL=126

Ping statistics for 8.8.8.8:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Top

```
C:\>ping google.com

Pinging 172.217.175.238 with 32 bytes of data:

Reply from 172.217.175.238: bytes=32 time<1ms TTL=254
Reply from 172.217.175.238: bytes=32 time<1ms TTL=254
Reply from 172.217.175.238: bytes=32 time<1ms TTL=254
Reply from 172.217.175.238: bytes=32 time<1ms TTL=254

Ping statistics for 172.217.175.238:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Top