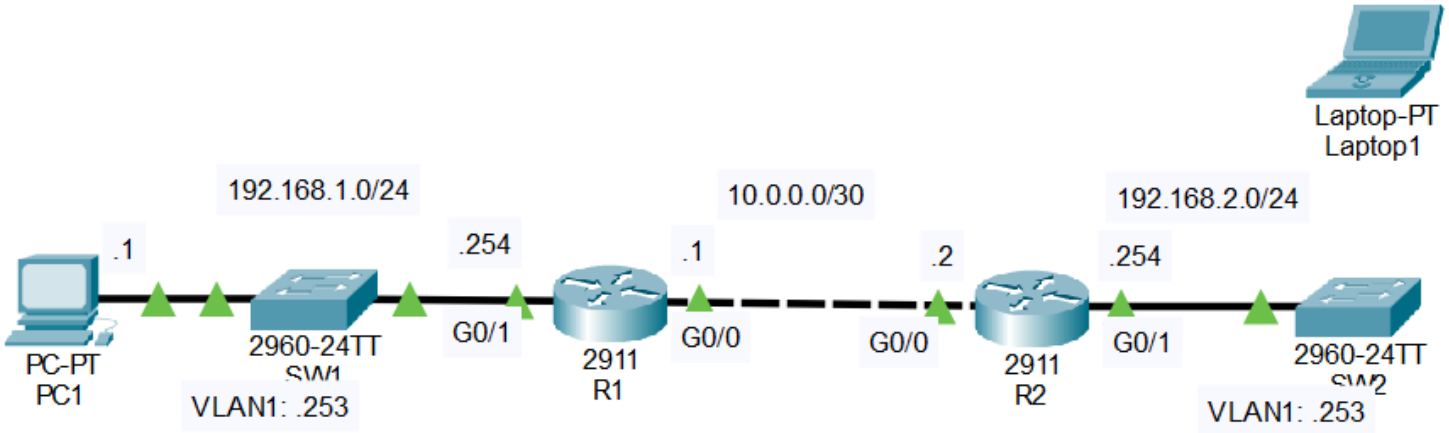
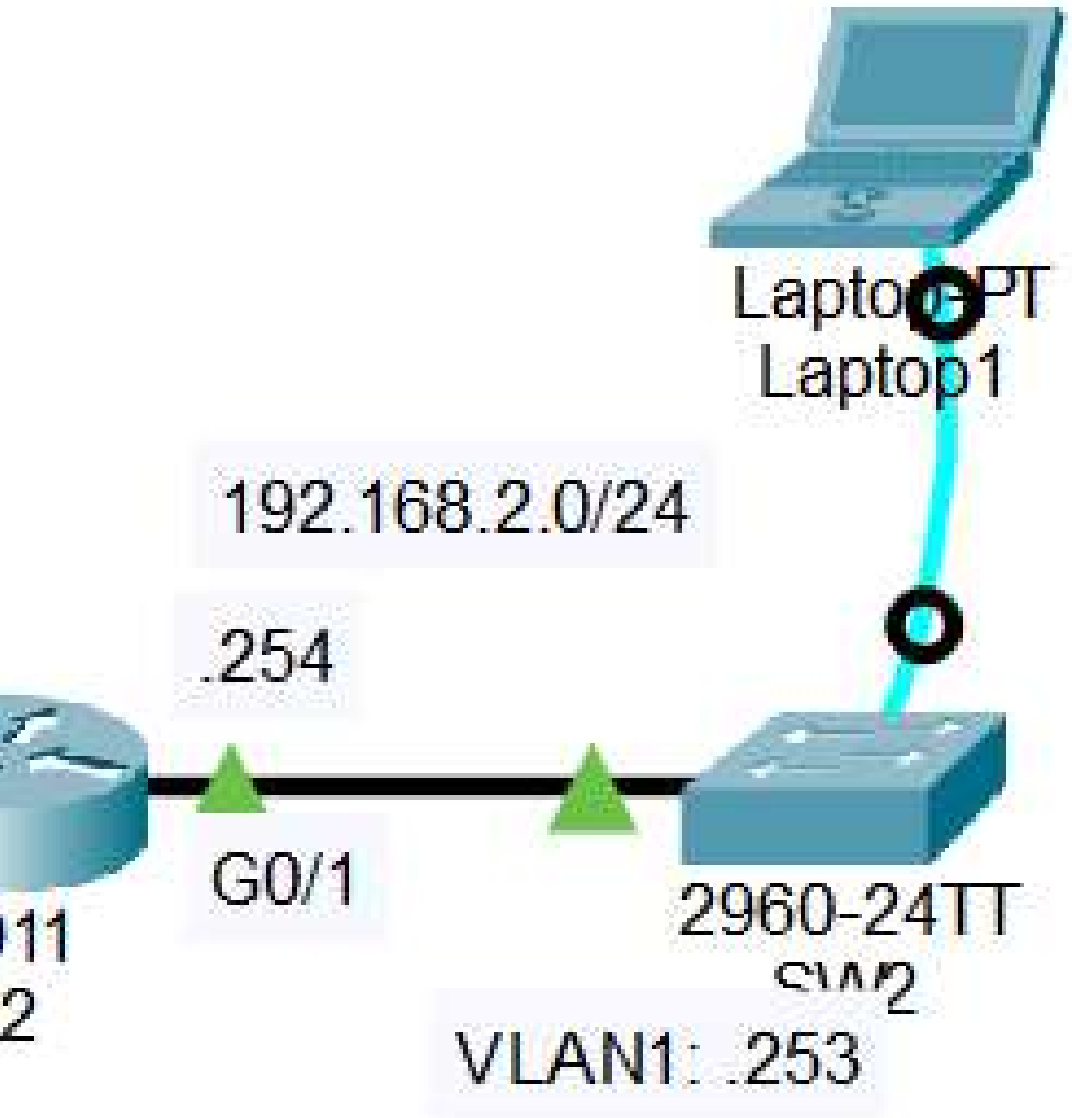


*SW2 has been new ly added to the netw ork, but has not yet been configured.
1.Connect Laptop1 to SW2's console port to perform the follow ing configurations:
Host name: SW2
Enable secret: ccna
Username/PW: anoj/ccna
VLAN1 SVI: 192.168.2.253/24
Default gatew ay: R2

2. Configure the follow ing console line security settings on SW2:
Authentication: Local user
Exec timeout: 5 minutes

3. Configure SW2 for remote access via SSH:
Domain name: anojlab.com
RSA key size: 2048 bits
Authentication: Local user
Exec timeout: 5 minutes
Protocols: SSH only
+Limit access to PC1 ONLY


Laptop-PT
Laptop1
192.168.2.0/24
.254
G0/1
2960-24TT
VLAN1: .253

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up


Switch>
Switch>
Switch>en
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#hostname SW2
SW2(config)#enable secret ccna
SW2(config)#
SW2(config)#username anoj secret ccna
SW2(config)#
SW2(config)#int vlan 1
SW2(config-if)#ip add 192,168.2.253 255.255.255.0
                       ^
% Invalid input detected at '^' marker.

SW2(config-if)#ip add 192.168.2.253 255.255.255.0
SW2(config-if)#no shutdown

SW2(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up

SW2(config-if)#exit
SW2(config)#ip default-gateway 192.168.2.254
```

```
SW2(config)#ip default-gateway 192.168.2.254
SW2(config)#
SW2(config)#line console 0
SW2(config-line)#
SW2(config-line)#
SW2(config-line)#login local
SW2(config-line)#exec-timeout 5
SW2(config-line)#end
SW2#
%SYS-5-CONFIG_I: Configured from console by console

SW2#exit
```

```
User Access Verification

Username: anoj
Password:

SW2>en
Password:
SW2#
SW2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
SW2(config)#crypto key gen rsa
% Please define a domain-name first.
SW2(config)#
SW2(config)#ip domain name anojlab.com
SW2(config)#
SW2(config)#crypto key gen rsa
The name for the keys will be: SW2.anojlab.com
Choose the size of the key modulus in the range of 360 to 4096 for your
  General Purpose Keys. Choosing a key modulus greater than 512 may take
  a few minutes.

How many bits in the modulus [512]: 2048
% Generating 2048 bit RSA keys, keys will be non-exportable...[OK]

SW2(config)#
```

```
  a few minutes.

How many bits in the modulus [512]: 2048
% Generating 2048 bit RSA keys, keys will be non-exportable...[OK]

SW2(config)#
*Feb 28 10:9:33.137: %SSH-5-ENABLED: SSH 1.99 has been enabled
SW2(config)#
SW2(config)#
SW2(config)#access-list 1 permit host 192.168.1.1
SW2(config)#line vty 0 15
SW2(config-line)#login local
SW2(config-line)#exec-timeout 5
SW2(config-line)#
SW2(config-line)#transport input ssh
SW2(config-line)#
SW2(config-line)#access-class 1 in
SW2(config-line)#
```

```
R2>
R2>
R2>en
R2#ping 192.168.2.253

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.2.253, timeout is 2 seconds:
..!!!
Success rate is 60 percent (3/5), round-trip min/avg/max = 0/1/4 ms

R2#
```

Copy Paste

R2

```
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!


%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state
to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state
to up


R2>
R2>
R2>en
R2#ping 192.168.2.253

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.2.253, timeout is 2 seconds:
..!!!
Success rate is 60 percent (3/5), round-trip min/avg/max = 0/1/4 ms

R2#ssh -l anoj 192.168.2.253

% Connection refused by remote host
R2#
```

Copy Paste

Top

PC1

Physical | Config | Desktop | Programming | Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.253

Pinging 192.168.2.253 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.253: bytes=32 time<1ms TTL=253
Reply from 192.168.2.253: bytes=32 time<1ms TTL=253
Reply from 192.168.2.253: bytes=32 time<1ms TTL=253

Ping statistics for 192.168.2.253:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

```
C:\>
C:\>
C:\>
C:\>ssh -l anoj 192.168.2.253

Password:



SW2>
SW2>
SW2>Yipee it works
```