Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang
Chiang Rai 57100, Thailand
Tel 063 151 6694, 089 632 5829
www.solaress.org · LINE: solaress1

SOLAR ESS MONTHLY REPORT · OCTOBER 2026 · SOLISCLOUD · PLANT REPORT


Fix now

Car workshop, Vientiane (Laos)


Battery idle · 50 kWp at 1.3 kWh/kWp

50 kWp · 50 kW 3-phase hybrid inverter · battery

1517	1.26	63%	35.3	14	0.0
kWh solar	kWh/kWp/day	solar share of use	kWh/day bought	kWh exported	kWh/day from battery

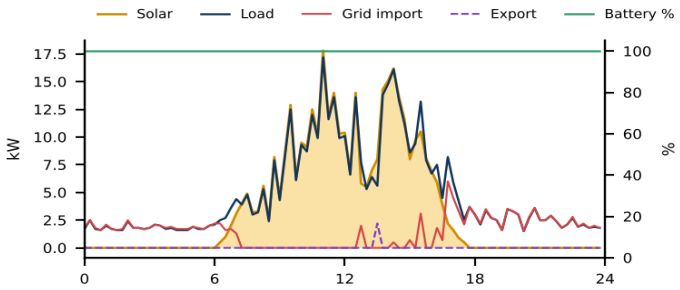

24 October, 5-minute data

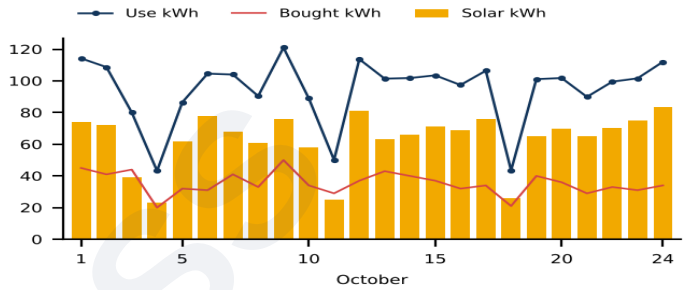

Daily totals, 1–24 October


What we found

• Lowest real yield in the fleet: 1.26 kWh/kWp/day (63 kWh/day from 50 kWp). Peak only 17.8 kW on a clear day.
• The battery shows 100% all day and never charges or discharges.
• Solar follows the workshop load (zero export), so most of the array is switched off at midday; at night the site buys 2–6 kW.

What to do

• Check whether the battery is actually connected and communicating (BMS cable, battery breaker, battery model setting).
• If the battery cannot work, either fix it or remove it from the configuration; then size the system for the load.
• Ask the owner whether export to the grid (EDL) is allowed – if yes, set an export limit instead of zero export.
• Potential: 100+ kWh/day more solar if storage or export is available.

How this plant compares with the other SolisCloud plants (kWh per kWp per day, 1–24 Oct)

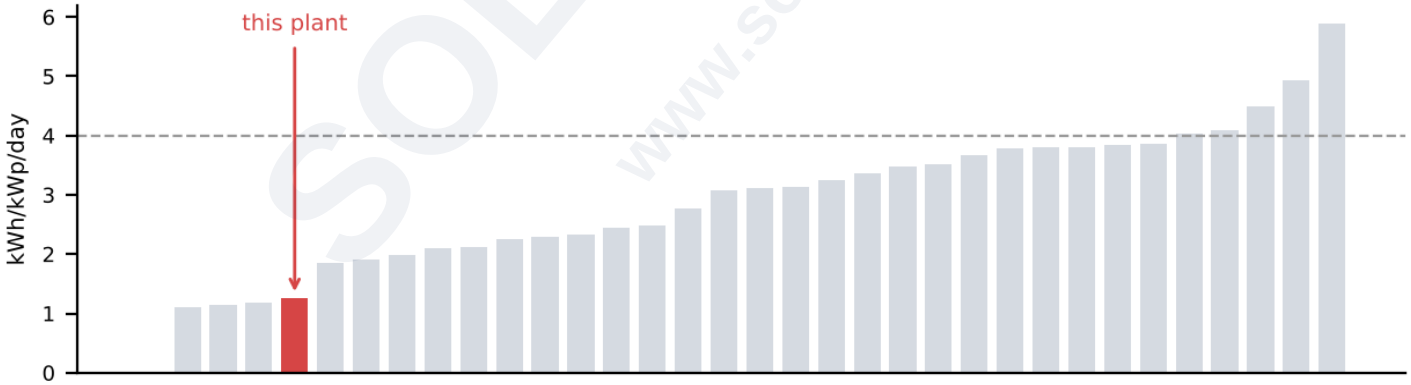

Rank 30 of 34 for yield per kWp. Dashed line ≈ 4.0, a typical clear month in the north and centre. A low yield is not always a fault – a full battery or little daytime load makes the inverter throttle the panels.

This plant report is part of the October 2026 SolisCloud fleet review on www.solaress.org (Technical → Monthly Report), which also lists the recommended standard settings. Figures are estimates from monitoring data; site name removed.