
บริษัท โซลาร์ เอสส์ จำกัด · Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang, Chiang Rai 57100
Tel 063 151 6694, 089 632 5829
www.solaress.org

Crypto miner on solar: how much PEA power will it use?

System: 8 kW hybrid inverter · 13 kWp solar · 48 kWh battery (48 V) · PEA grid connected · miner running 24 hours a day


Miner power, nonstop	Solar per sunny day	PEA per sunny day (60 A)	PEA bill per month
3.75 kW	**≈ 68 kWh**	**35 kWh**	**≈ 6,200 ฿**
≈ 90 kWh/day · 2,700 kWh/ month	daytime only, 09:00–16:00 peak	27 kWh if battery set to 150 A	vs ≈ 12,200 ฿ without solar

A sunny day hour by hour, battery limited to 60 A

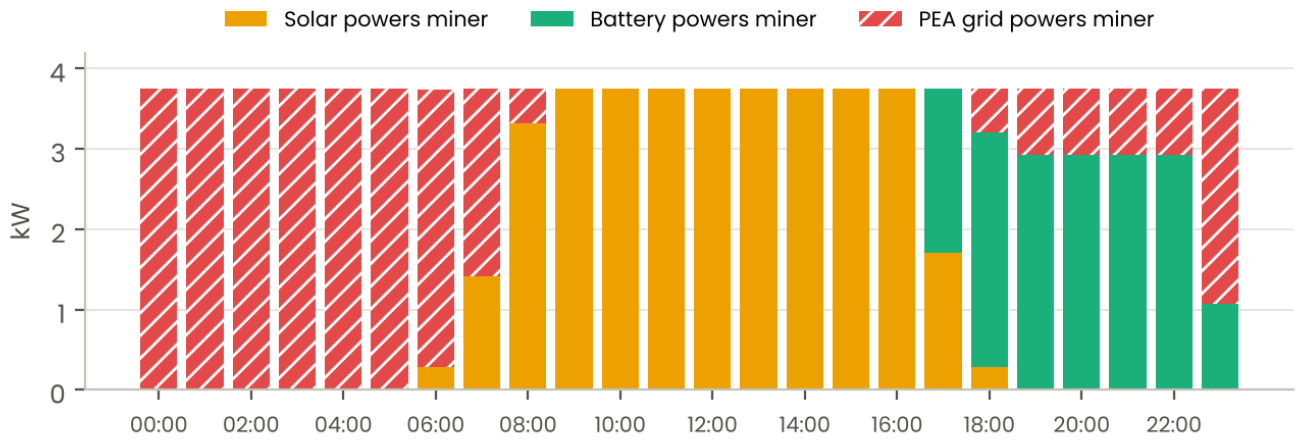

At 60 A the 48 V battery gives at most ≈ 2.9 kW, less than the miner's 3.75 kW, so PEA tops up every evening hour. The battery can also charge at only ≈ 3 kW, so it stores ≈ 20 kWh and is empty by about 23:00. From then until 08:00 the miner runs fully on PEA.

Same day with the battery limit raised to 150 A

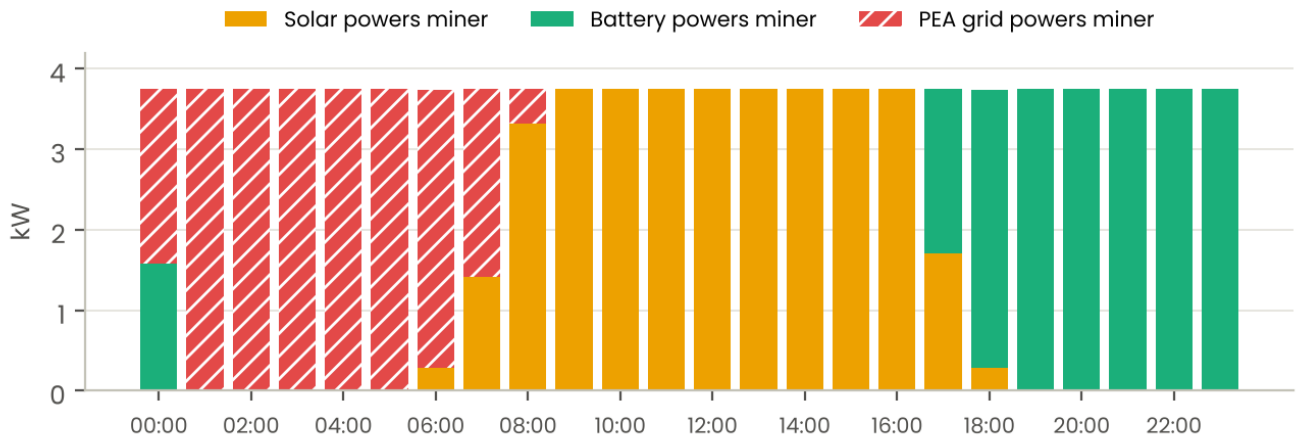


At 150 A the battery covers the whole miner from 18:00 until about midnight and stores ≈ 29 kWh from the sun, with no solar wasted. PEA use drops from 35 to 27 kWh on a sunny day.

บริษัท โซลาร์ เอสส์ จำกัด · **Solar ESS Co. Ltd.**
53 Moo 2 Tambon Nanglae, Amphoe Muang, Chiang Rai 57100
Tel 063 151 6694, 089 632 5829
www.solaress.org

PEA use per day

Day type	Battery limit	PEA daytime 06–18	PEA night 18–06	PEA total	Solar wasted
Sunny	60 A	6.2 kWh	29.0 kWh	**35.3 kWh**	9 kWh
Sunny	150 A	6.2 kWh	20.9 kWh	**27.1 kWh**	0
Cloudy	60 or 150 A	22.6 kWh	44.9 kWh	**67.5 kWh**	0
No solar	–	45 kWh	45 kWh	**90 kWh**	–

PEA energy and cost per month

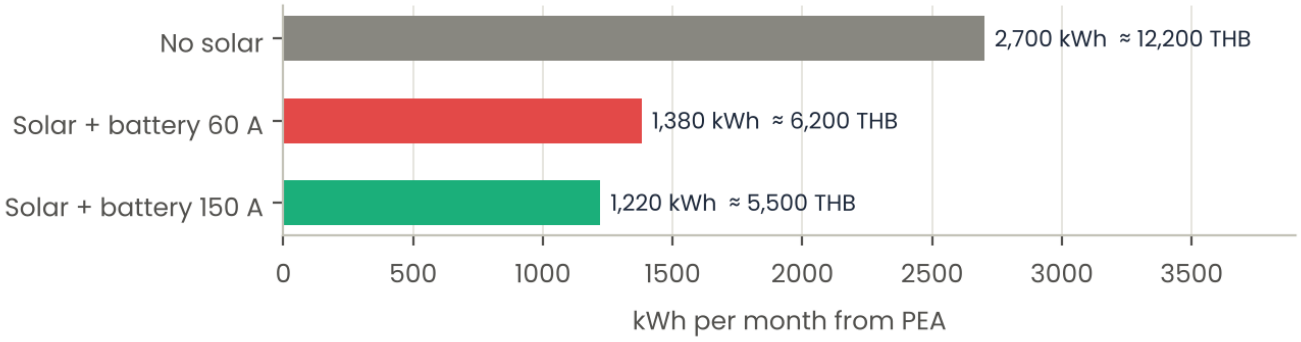

Based on 20 sunny and 10 cloudy days a month and ≈ 4.5 THB/kWh. The actual PEA rate (tiers + Ft) may differ, so check the bill.

What to do

1. Raise the battery current
Set charge/discharge toward 150 A (≈ 7.7 kW), within the inverter and battery BMS limits. Saves ≈ 700 THB/month on top of solar.

2. Put the miner on the grid side
Not on the backup/EPS output. Miner 3.75 kW + house peak can pass 8 kW and would overload the inverter or drain the battery in a power cut.

3. Wire it for 24-hour load
Dedicated 25 A breaker, THW 4 mm² (6 mm² for long runs). IEC C19/C20 is rated 16 A: use a 20 A-rated cord or hard-wire, and check for heat.

If the miner shares the system with the house load (≈ 69 kWh/day), PEA use rises to ≈ 95 kWh/day sunny and ≈ 136 kWh/day cloudy, almost all at night. Running the miner from the battery every night uses one full battery cycle a day.