**Solar ESS Co. Ltd.**
53 Moo 2 Tambon Nanglae, Amphoe Muang
Chiang Rai 57100, Thailand
Tel 063 151 6694, 089 632 5829
www.solaress.org · LINE: solaress1

## SOLAR ESS MONTHLY REPORT · OCTOBER 2026 · SOLISCLOUD · PLANT REPORT


Change settings

# Home S5, Songkhla


Battery only used 50–98% · export

15 kWp · 15 kW 3-phase hybrid inverter · battery

| 713 | 1.98 | 69% | 10.4 | 223 | 21.3 |
|---|---|---|---|---|---|
| kWh solar | kWh/kWp/day | solar share of use | kWh/day bought | kWh exported | kWh/day from battery |

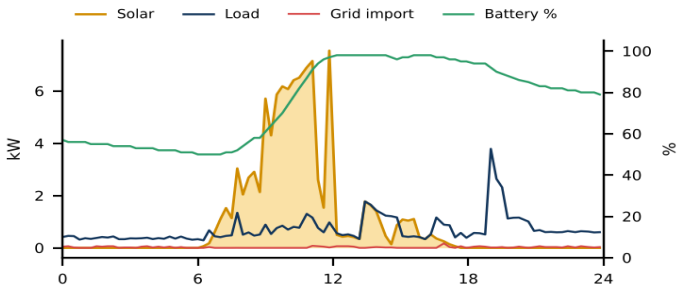


24 October, 5-minute data

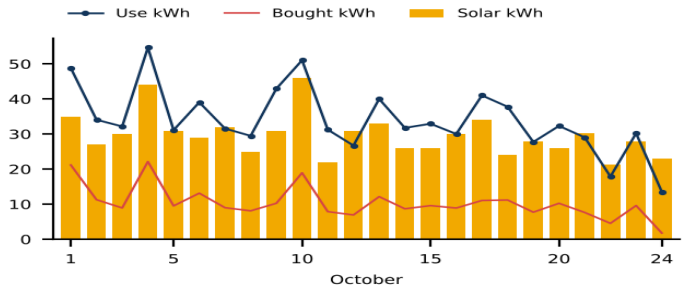


Daily totals, 1–24 October


### What we found

- Battery never goes below 50% – about half of it is never used.
- Sells 223 kWh to the grid while buying 251 kWh (unpaid export).
- Battery full by noon, then solar is throttled; 29 alarms.

### What to do

- Lower battery low/overdischarge SOC to 20%.
- Set export limit to 0 W (Solar Sell off) unless the owner has a sell-back contract.
- Expected: 6–9 kWh/day less grid.

## How this plant compares with the other SolisCloud plants (kWh per kWp per day, 1–24 Oct)

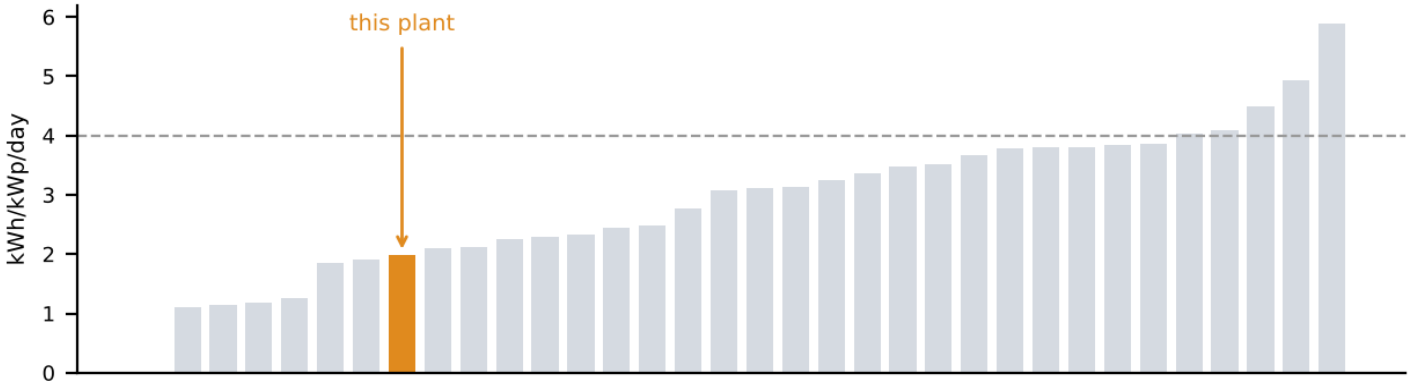


Rank 27 of 34 for yield per kWp. Dashed line ≈ 4.0, a typical clear month in the north and centre. A low yield is not always a fault – a full battery or little daytime load makes the inverter throttle the panels.

This plant report is part of the October 2026 SolisCloud fleet review on www.solaress.org (Technical → Monthly Report), which also lists the recommended standard settings. Figures are estimates from monitoring data; site name removed.