Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang
Chiang Rai 57100, Thailand
Tel 063 151 6694, 089 632 5829
www.solaress.org · LINE: solaress1

SOLAR ESS MONTHLY REPORT · OCTOBER 2026 · SOLISCLOUD · PLANT REPORT


Fix now

School, Tak


Battery not working · offline

30.96 kWp · 50 kW 3-phase hybrid inverter · no battery

1726	2.32	42%	84.8	13	0.0
kWh solar	kWh/kWp/day	solar share of use	kWh/day bought	kWh exported	kWh/day from battery

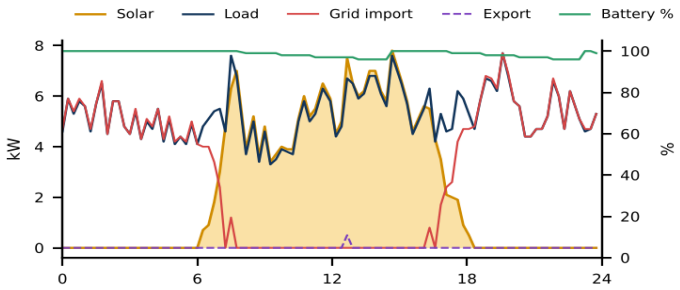

24 October, 5-minute data

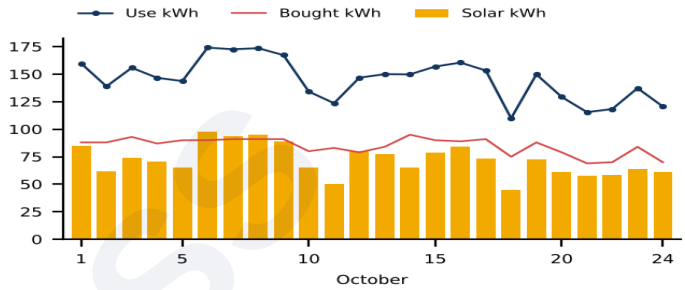

Daily totals, 1–24 October


What we found

- Went offline at 01:01 on 25 Oct.
- Battery reads 96–100% all day and never charges or discharges; 34 battery-management (BMS) alarms in October.
- Without the battery the inverter limits solar to the school's load: only 7.8 kW peak from 31 kWp, 2.3 kWh/kWp/day.
- Buys about 85 kWh a day from the grid.

What to do

- Restore the datalogger connection.
- Check the battery: BMS communication cable (CAN/RS485), battery breaker and the battery model selected in the inverter; clear the BMS alarms.
- With the battery working, midday surplus can be stored for the afternoon – expected 30–40 kWh/day more solar used.

How this plant compares with the other SolisCloud plants (kWh per kWp per day, 1–24 Oct)

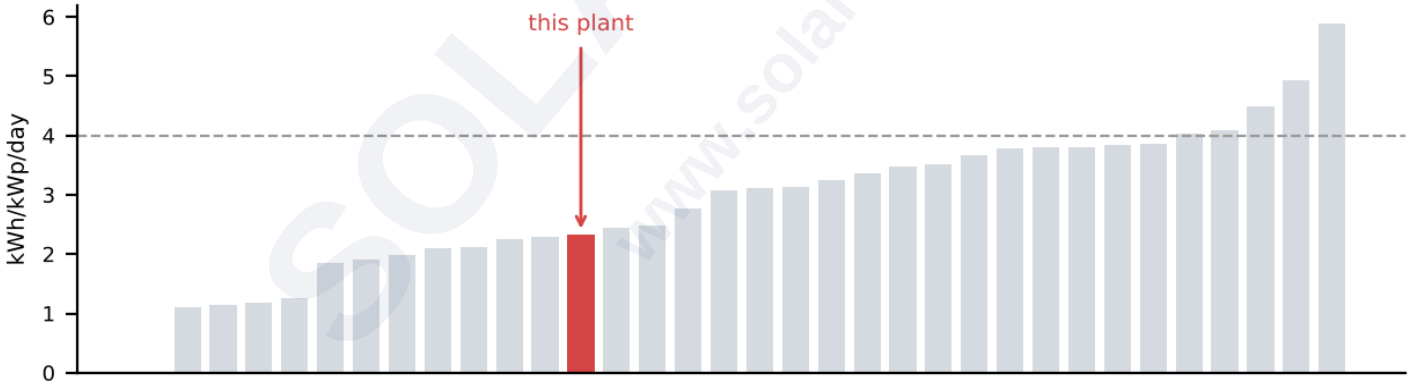

Rank 22 of 34 for yield per kWp. Dashed line ≈ 4.0, a typical clear month in the north and centre. A low yield is not always a fault – a full battery or little daytime load makes the inverter throttle the panels.

This plant report is part of the October 2026 SolisCloud fleet review on www.solaress.org (Technical → Monthly Report), which also lists the recommended standard settings. Figures are estimates from monitoring data; site name removed.