AOG · Nano carrier / Rev A

Assembly drawing · top view · components on TOP · 80 × 80 mm

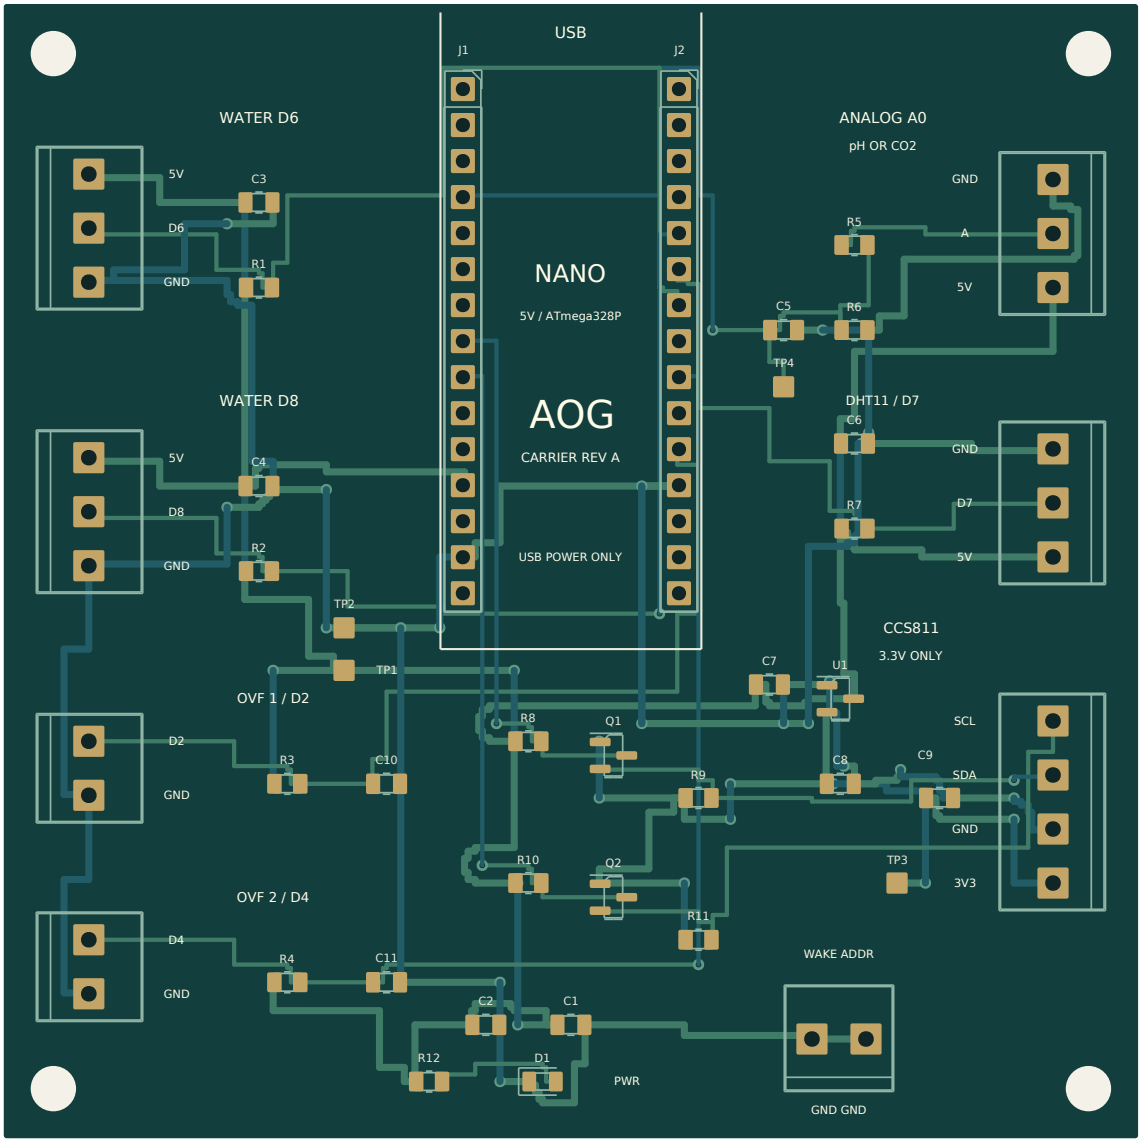

Populate all BOM parts

J1 + J2: FEMALE sockets, 15 pins each.

2.54 mm pitch; rows 15.24 mm apart.

Nano is user supplied; do not solder it.

Orientation checks

Nano USB points toward the top edge.

J3/4/7/8 wire entries face LEFT.

J5/6/9 wire entries face RIGHT.

J10 wire entries face BOTTOM.

SOT-23 / LED pin identities

U1: 1 GND, 2 OUT, 3 IN.

Q1/Q2: 1 gate, 2 source, 3 drain.

D1: pad 1 cathode; pad 2 anode.

TP1–TP4: copper pads, no fitted parts.

H1–H4: 3.2 mm non-plated holes.

Prototype design. Use the BOM, centroid file and Gerbers from the same release. See ASSEMBLY.md for testing.