

Assembly Instructions

- Instructions for carrying out the process of assembly, testing, finishing, repair and final control:
- All used additional materials and procedures in the process must comply with REACH and RoHS EU directives.
 - All processes must be carried out in accordance with J-STD-001 and IPC-7711/IPC-7721 Class 2, IEC 61340-5.
 - The final result of all processes must meet IPC-A-610 Class 2.
 - The standards, norms, directives, procedures that are mentioned must be used in the latest valid edition.

Surface protection:

- General instructions for applying additional surface protection - a layer of coating, valid for both sides of the PCB:
- The module must necessarily undergo a washing process, i.e. removal of flux residues, grease, etc. before coating.
 - The module must necessarily undergo a drying process before coating, at approximately the following temperature/duration: 60°C/6h or 40°C/12h.
 - It is necessary to coat masked and unmasked traces, exposed parts of the PCB, component solder joints or exposed contacts.
 - If the component is not mounted, it is necessary to coat the empty solder joints of the component.
 - Coating of the module is possible manually and mechanically.
 - The final result must meet IPC-A-610 Class 2, the thickness of the coating must be within the limits of 0.03-0.13mm.

Remark:

- Sheets 3 and 4 show the assembly of components.
- Sheets 5 and 6 show the surface protection.

4	4	PromjeneAss	4	Ovaj dokument ostaje u isključivom vlasništvu KONČAR - INSTITUT ZA ELEKTROTEHNIKU. Pretisak i upotreba izvan namjene nisu dozvoljeni.		Date: 29.5.2025.		UV SENSOR	Number: A00ZONE		
3	3	PromjeneAss	3			Author: K.Stepančić			Revision: 00		
2	2	PromjeneAss	2			This document remains the exclusive property of the KONČAR - ELECTRICAL ENGINEERING INSTITUTE. Reproduction or any use not in conformity with the intended application is not permissible.	Checked By: M.Babić			Sheet: 1	Sheets: 6
1	1	PromjeneAss	1				Approved By: D.Babić				
Ed.	Version	Date	Name				fiet 40422a/2		File: A00ZONE_UV SENSOR_R00.Pdf		

A

B


C

D


E

Module dimensions and height

View from Top side (Scale 2:1)

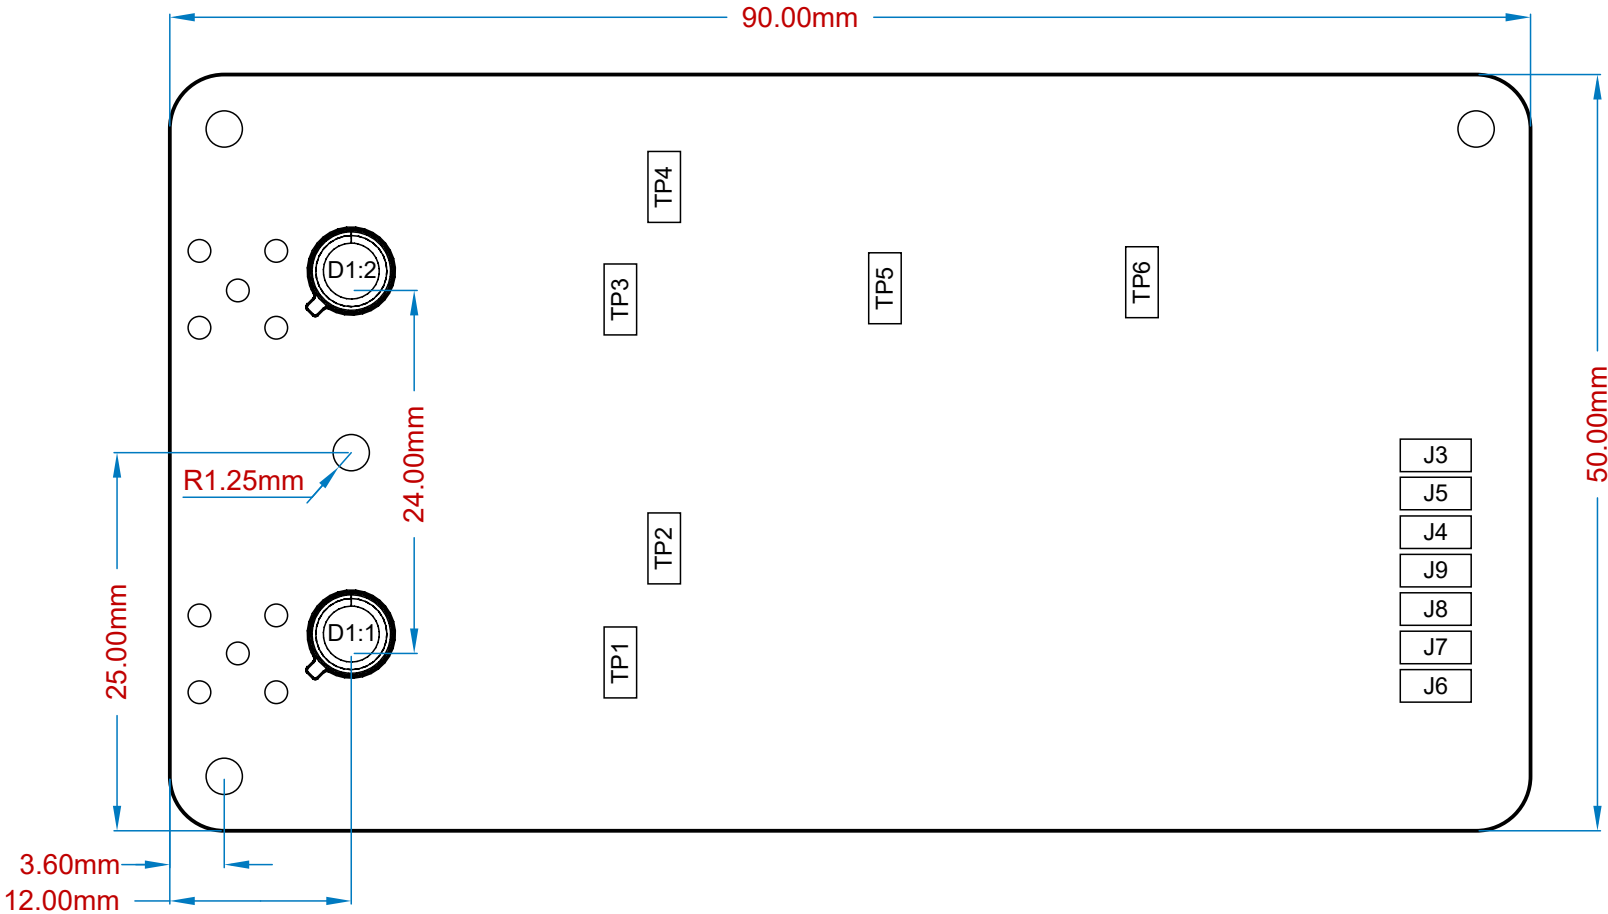

View from Left side (Scale 2:1)

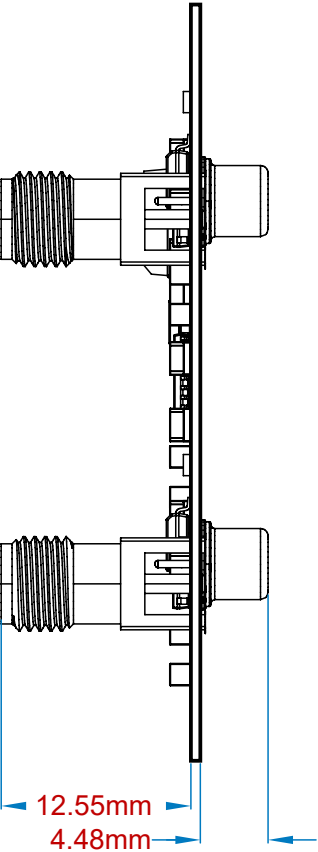

4	4	PromjeneAss	4	Ovaj dokument ostaje u isključivom vlasništvu KONČAR - INSTITUT ZA ELEKTROTEHNIKU. Pretisak i upotreba izvan namjene nisu dozvoljeni.		Title:	A00Z0NE		
3	3	PromjeneAss	3				00		
2	2	PromjeneAss	2			This document remains the exclusive property of the KONČAR - ELECTRICAL ENGINEERING INSTITUTE. Reproduction or any use not in conformity with the intended application is not permissible.	File: A00Z0NE_UV SENSOR_R00.Pdf	Sheet:	2
1	1	PromjeneAss	1					Sheets:	6
Ed.	Version	Date	Name	fiet 40422a/2					

A

B

C

D


E

Assembly of components: "Top Side"

Remark:

- Install the components shown in the drawing
- Do not install components marked with a red cross

View from Top side (Scale 2:1)

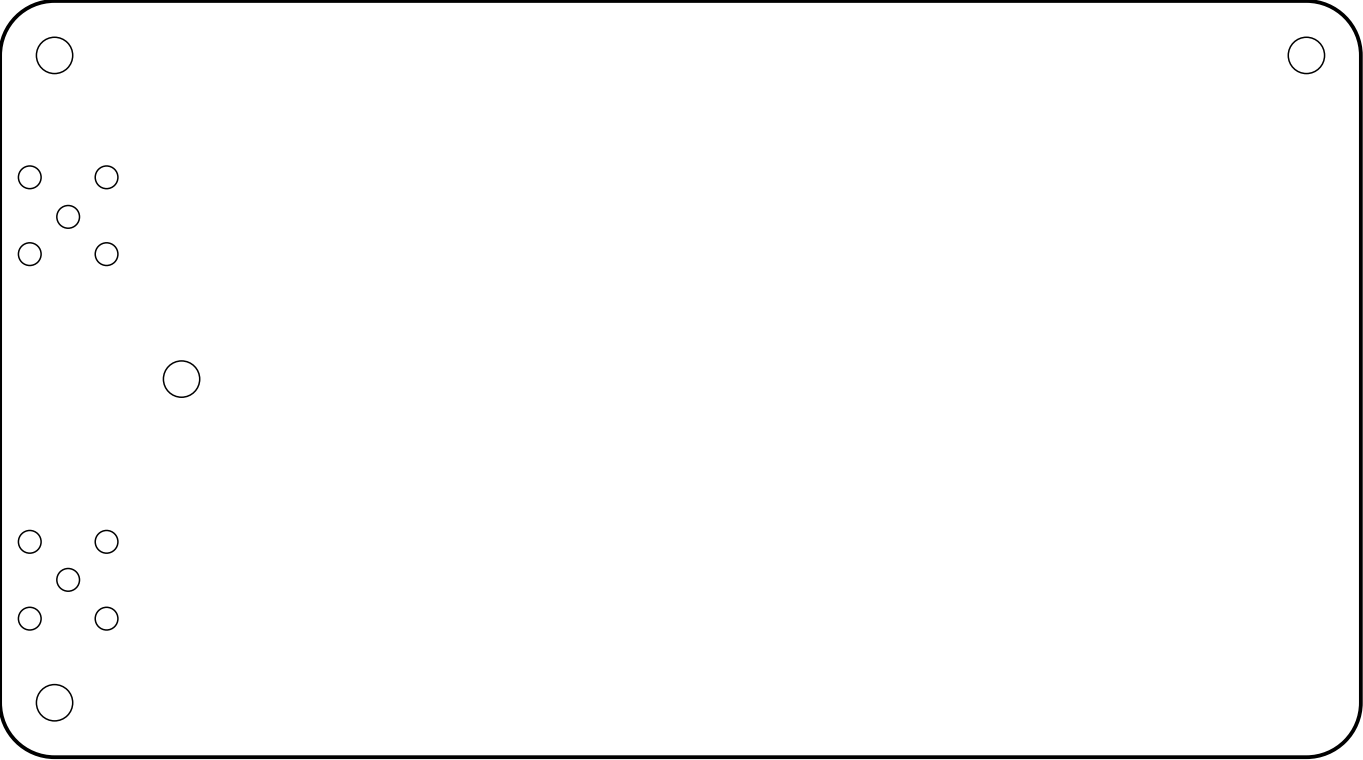

4	4	PromjeneAss	4	Ovaj dokument ostaje u isključivom vlasništvu KONČAR - INSTITUT ZA ELEKTROTEHNIKU. Pretisak i upotreba izvan namjene nisu dozvoljeni.		Title: UV SENSOR	A00Z0NE	
3	3	PromjeneAss	3				00	
2	2	PromjeneAss	2				Sheet:	3
1	1	PromjeneAss	1			This document remains the exclusive property of the KONČAR - ELECTRICAL ENGINEERING INSTITUTE. Reproduction or any use not in conformity with the intended application is not permissible.	File: A00Z0NE_UV SENSOR_R00.Pdf	Sheets:
Ed.	Version	Date	Name	fiet 40422a/2				

A

B

C

D


E

Assembly of components: "Bottom Side"

Remark:

- Install the components shown in the drawing
- Do not install components marked with a red cross

View from Bottom side (Scale 2:1)

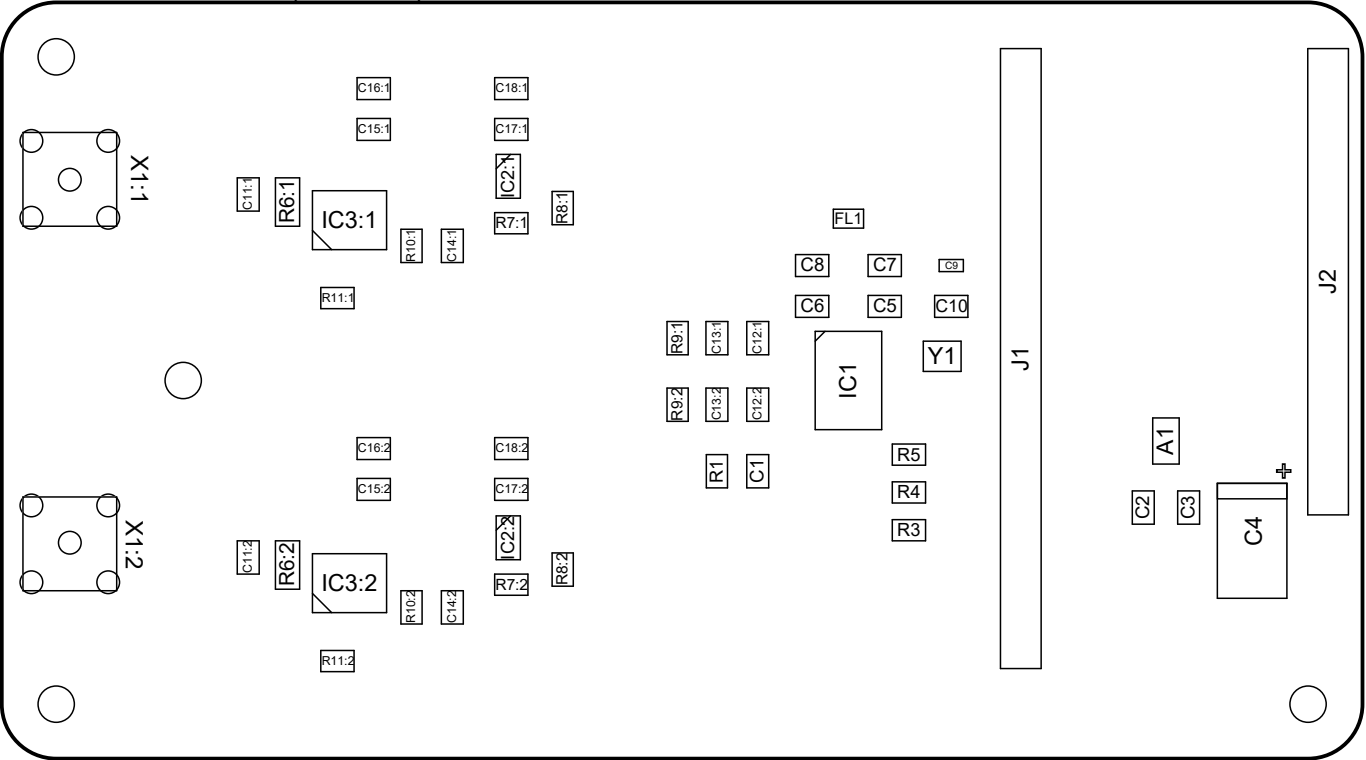

4	4	PromjeneAss	4	Ovaj dokument ostaje u isključivom vlasništvu KONČAR - INSTITUT ZA ELEKTROTEHNIKU. Pretisak i upotreba izvan namjene nisu dozvoljeni.		Title: UV SENSOR	A00Z0NE	
3	3	PromjeneAss	3				00	
2	2	PromjeneAss	2				Sheet:	4
1	1	PromjeneAss	1			This document remains the exclusive property of the KONČAR - ELECTRICAL ENGINEERING INSTITUTE. Reproduction or any use not in conformity with the intended application is not permissible.	File: A00Z0NE_UV SENSOR_R00.Pdf	Sheets:
Ed.	Version	Date	Name	fiet 40422a/2				

A

B

C

D

E

A

B

C

D

E

Surface protection: Top Side

Remark:

- Before applying coating (e.g. AVR80 BA) it is necessary to apply gel coating (e.g. AVR80 BA gel) to the areas marked with: 
- Do not apply coating to the areas marked with:  
- Coating not necessary

4	4	PromjeneAss	4	Ovaj dokument ostaje u isključivom vlasništvu KONČAR - INSTITUT ZA ELEKTROTEHNIKU. Pretisak i upotreba izvan namjene nisu dozvoljeni.		Title: UV SENSOR	A00Z0NE	
3	3	PromjeneAss	3				00	
2	2	PromjeneAss	2				Sheet:	5
1	1	PromjeneAss	1			This document remains the exclusive property of the KONČAR - ELECTRICAL ENGINEERING INSTITUTE. Reproduction or any use not in conformity with the intended application is not permissible.	File: A00Z0NE_UV SENSOR_R00.Pdf	Sheets:
Ed.	Version	Date	Name	fiet 40422a/2				

A

B

C

D

E

A

B

C

D

E

Surface protection: Bottom Side

Remark:

- Before applying coating (e.g. AVR80 BA) it is necessary to apply gel coating (e.g. AVR80 BA gel) to the areas marked with: 
- Do not apply coating to the areas marked with:  
- Coating not necessary

4	4	PromjeneAss	4	Ovaj dokument ostaje u isključivom vlasništvu KONČAR - INSTITUT ZA ELEKTROTEHNIKU. Pretisak i upotreba izvan namjene nisu dozvoljeni.		Title: UV SENSOR	A00Z0NE	
3	3	PromjeneAss	3				00	
2	2	PromjeneAss	2				Sheet:	6
1	1	PromjeneAss	1			Sheets: 6		
Ed.	Version	Date	Name	This document remains the exclusive property of the KONČAR - ELECTRICAL ENGINEERING INSTITUTE. Reproduction or any use not in conformity with the intended application is not permissible.		fiet 40422a/2	File: A00Z0NE_UV SENSOR_R00.Pdf	


A

B

C

D


E

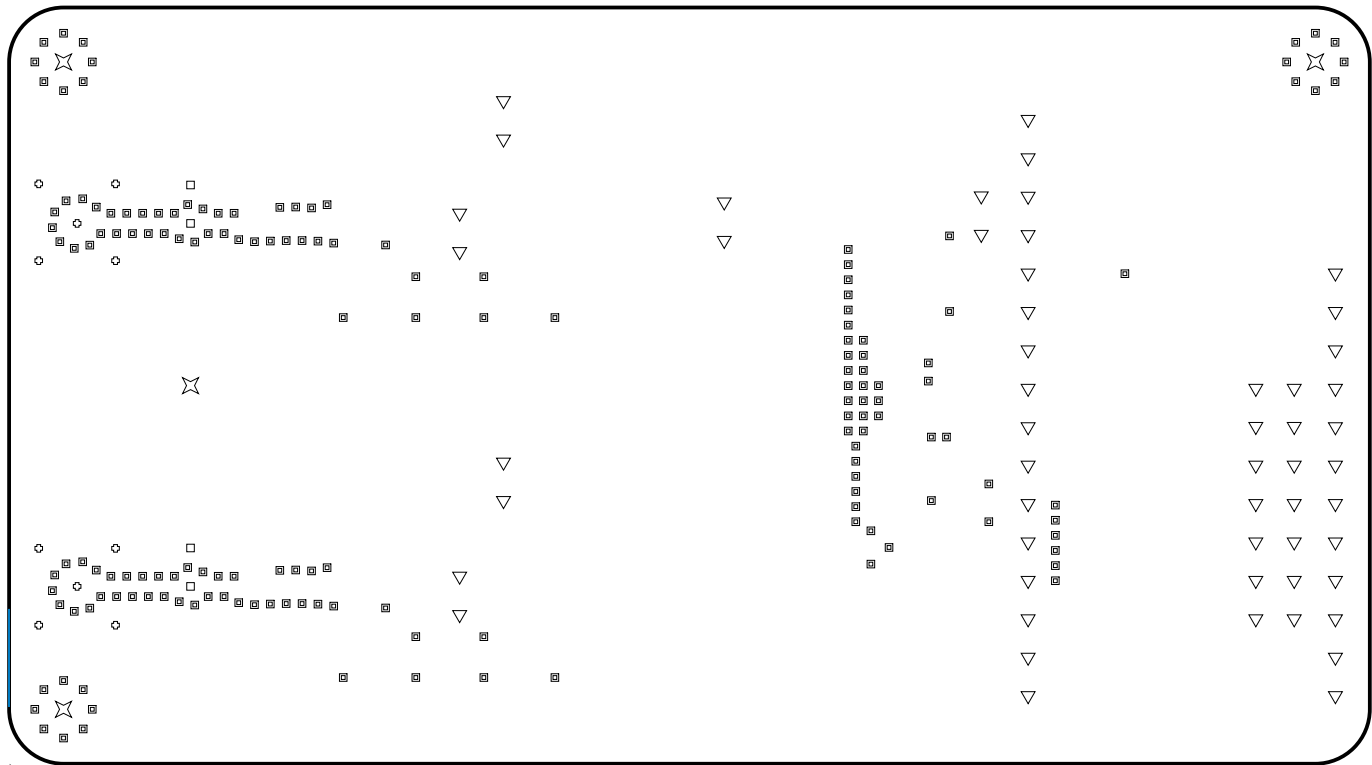

Reference point for NC drill

PCB layer configuration

LAYER	DESCRIPTION	GERBER FILE
L7	Top Silk	PB00TIA_UV SENSOR_R00.GTO
L5	Top Mask	PB00TIA_UV SENSOR_R00.GTS
L1	Top	PB00TIA_UV SENSOR_R00.GTL
L2	GND	PB00TIA_UV SENSOR_R00.G1
L3	PWR	PB00TIA_UV SENSOR_R00.G2
L4	Bottom	PB00TIA_UV SENSOR_R00.GBL
L6	Bottom Mask	PB00TIA_UV SENSOR_R00.GBS
L8	Bottom Silk	PB00TIA_UV SENSOR_R00.GBO

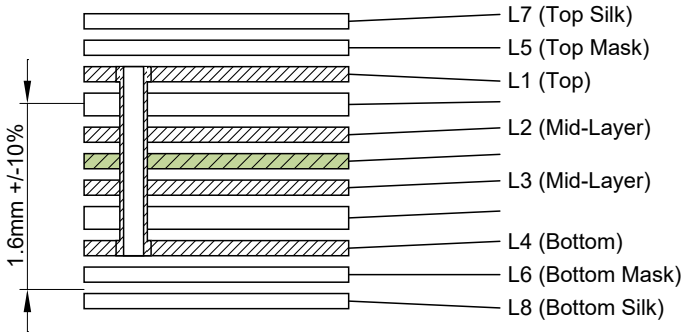

4	4	PromjeneAss	4
3	3	PromjeneAss	3
2	2	PromjeneAss	2
1	1	PromjeneAss	1
Izd.	Promjena	Datum	Proveo

Ovaj dokument ostaje u isključivom vlasništvu KONČAR - INSTITUT ZA ELEKTROTEHNIKU. Pretisak i upotreba izvan namjene nisu dozvoljeni.

This document remains the exclusive property of the KONČAR - ELECTRICAL ENGINEERING INSTITUTE. Reproduction or any use not in conformity with the intended application is not permissible.

KONČAR
INSTITUT ZA ELEKTROTEHNIKU

fiet 40422a/2

Datum: 29.5.2025.

Izradio: K.Stepančić

Pregledao: N.I.Hudin

Odobrio: D.Babić

Datoteka: A00Z0NE_UV SENSOR_R00.PDF

PCB
FABRICATION DRAWING

P B 0 0 Z 0 N E

Broj: A00Z0NE

Revizija: 00

List: 1 Listova: 1